

Materials Testing Equipment




AGGREGATE

ASPHALT

CONCRETE

SOIL





NEW Products



p.43

SILENT TESTING SCREEN, TS-4

- Integrated digital LED timer for precise test time repeatability
- Sound dampening enclosure reduces operational noise by 8–10dB
- Lid and door include wear-resistant seals to prevent airborne particles from escaping
- Fully-enclosed drive mechanism for improved safety during operation
- Processes large samples, up to 1ft³ (0.028m³) of aggregate, slag, ores, and other coarse materials



p.116

PYROLYTIC OVEN, MO-39

- Fast, safe, and efficient cleaning of laboratory equipment and glassware
- Automatic cleaning cycles with oxidizer assures odorless, smoke-free emissions
- Replaces obsolete Pyro-Clean model



p.87

ASPHALT TACK COAT/ INTERLAYER SHEAR STRENGTH, MS-43

- Quickly and efficiently determines shear strength of tack coat
- Compatible with Gilson Load Frames and most Marshall Load Frames
- Roller bearings minimize drag



p.68

L.A. ABRASION MACHINE, HM-70A

- Electronic safety interlocks allow operation only with doors secured
- Powerful 1hp motor rotates drum through a slip-clutch protected chain drive
- Enclosed cabinet with sound-attenuating foam reduces noise during operation
- Jog button allows for easy loading and unloading of sample



p. 26 **8IN/12IN SIEVE SHAKER, SS-14D**

- Features Gilson's exclusive EZ-Clamp system to lock sieve stack in place with the push of a button and twist of a knob
- Features Gilson's Digital LED Timer
- Accurately separates 1/2in - No.200 materials




p. 178 **CONCRETE TEST HAMMER, HM-705**

- Quick and reliable concrete strength assessments in 1,450 - 10,152 psi (10 - 70mPa) range
- Nondestructively evaluates large areas and identifies potential problem boundaries
- Meets requirements of ASTM C805/C805M
- Durable aluminum housing



p. 29 **SILENT SIFTER II, SS-22**

- Reduces operational noise level by 16-18dB
- Confines and controls airborne nuisance dusts
- Advanced design and materials for better performance and longer life
- DOT preferred particle sizing method

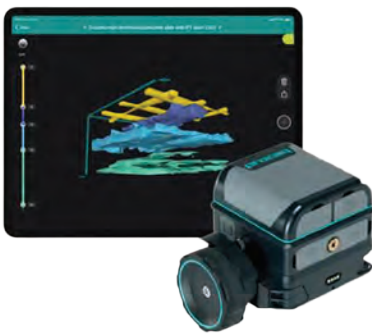


p. 186 **PROCEQ GP8800 GROUND PENETRATING RADAR, CT-154**

- Handheld, wireless unit easily scans in tight spaces, on curved surfaces, and overhead
- One-year subscription to Pro software included
- Instant uploading, sharing, and collaboration capabilities through the cloud
- 2D, 3D, and Augmented Reality (AR) imagery



p. 157 **STATIC SEGREGATION COLUMN, HM-597**

- One-person operation without loss of sample material
- Quick determination of static segregation of SSC concrete materials
- Easy cleanup and corrosion-free
- Unique, innovative design

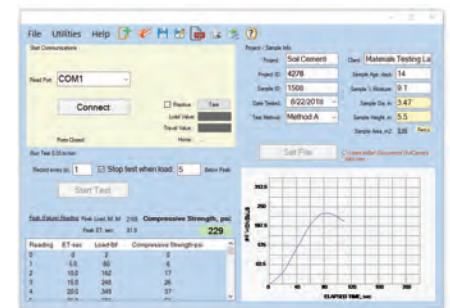

p. 235 **GEOTECHNICAL DATA ACQUISITION SOFTWARE**

- Free 30-day trial available for each of the following modules
- HMA-609 CBR/LBR
- HMA-610 Direct Shear
- HMA-611 Unconfined Compressive Strength
- HMA-612 Soil-Cement
- HMA-613 Triaxial Compression
- HMA-608 Consolidation



NEW Products



p. 238

MECHANICAL SOIL COMPACTOR, HM-580

- Safety interlocks and emergency stop button
- Digital Controller with drop down menu to select Standard, Modified Compaction, or CBR/LBR test procedures with pre-programmed parameters for each
- Also allows for input of custom compaction test parameters
- Easy adjustment of drop height from 12 to 18in
- Detachable hammer mass for switching between Standard or Modified compaction operations



p. 132

AUTOMATIC COMPRESSION MACHINE, AC-325

- Fully-automatic operation eliminates variations in load rates and improves accuracy and repeatability of results
- Windows-based interface controller eliminates data errors
- Perform strength tests for a variety of concrete sample types



p. 174

WIRELESS CONCRETE CRACK DATA LOGGING SYSTEMS, HM-654

- Dynamically records movement of cracks, joints, and linear displacements
- Records up to 51,062 displacement and temperature measurements at user-defined intervals from 1 minute to 91 hours.
- Collected data transferred wirelessly within range of 492ft (150m)



p. 228

HIGH-CAPACITY GEOSYNTHETIC DIRECT SHEAR MACHINE, HM-384

- Horizontal shear measurement of soil, geosynthetic, or soil/geosynthetic interface sample up to 12x12in (305x305mm)
- Vertical load capacities of 10,000lbf (90kN) controlled using pneumatic pistons, up to 45,000lbf (90kN) capacity for HM-385
- Built-in four-channel digital display



p. 124 **ANTON PAAR DYNAMIC SHEAR RHEOMETER, HM-91**

- Rotational speed range of 10^{-3} - 1,500rpm
- LED lighting allows for a clear view of the sample and measuring surface
- Peltier temperature control for improved uniformity above and below the sample
- SmartPave 92 for QC and routine measurements in asphalt labs



p. 122 **ANTON PAAR ROTATIONAL VISCOMETER, LP-84**

- Provides rapid, reproduceable, high-temperature viscosity measurements automatically
- Wide viscosity range: 100 to 40 million cP or mPa/s
- Includes V-Collect software for data export and direct printing of test results
- All data and programming functions displayed on the 7in color touchscreen



p. 87 **SEMI-CIRCULAR BEND (SCB) TEST FIXTURE, MS-45**

- Determines fracture energy and toughness of asphalt mixtures
- Easily mounts in Marshall Stability Load Frames
- Semi-circular samples are prepared from Superpave Gyrotory samples or from 150mm field cores



p. 170 **PERFA-CURE ELITE XTREME CURING BOX, HM-496**

- Protected storage and reliable temperature control of test specimens in the field
- Compliant with ASTM C31 and AASHTO T 23 specifications
- Convenient, durable carrying handles for easy handling of the empty unit
- Max/min thermometer monitors temperature inside the curing box



p. 242 **AUTOMATIC SOIL PROCESSOR, HM-540**

- Pneumatic operation reduces the amount of time required to prepare samples for testing
- Processes up to 40lb of cohesive soil in fifteen minutes
- Reliable and easy to maintain
- Simple operation with no special training required



p. 207 **TRIAXIAL/PERMEABILITY CONTROL PANEL, HM-350M**

- Provides accurate regulation of air and fluid pressures for triaxial or flexible-wall permeability test cell
- Combines precise control with logical layout of components for accuracy
- Add auxiliary panels to allow testing of multiple samples
- Equipped with digital readout



About Gilson

Experience

Gilson Company, Inc.'s journey to becoming the industry leader in construction materials testing equipment began in 1939 with the "The Gilson". Introduced in response to the demand for greater control of aggregate quality during the construction of the Pennsylvania Turnpike, the Gilson Testing Screen's unprecedented speed, productivity, and durability impressed many and quickly gained widespread name recognition. Construction of other turnpike systems across the United States, and the passage of the Federal Aid Highway Act of 1956 followed, and the need for Gilson Testing Screens and related construction materials testing products increased significantly.

Gilson was poised to meet industry demands then and remains committed to providing rugged and efficient products that deliver accurate and reliable test results today. After more than 80 years of responding to the needs of the construction professional and a commitment to industry involvement, Gilson has solidified itself as a worldwide authority and trusted source for materials testing equipment. And after the completion of our nearly 16,000 square foot expansion, our design, engineering, and manufacturing capabilities grew significantly, allowing us to be even more responsive to your growing needs. Combined with our existing facilities, experienced staff, and already comprehensive product offerings, Gilson is poised to be the source for materials testing equipment well into the future.

Expertise

Our highly trained Customer Service Representatives and experienced Technical Staff have allowed us to expand and support one of the largest selections of material testing equipment for aggregates, asphalt, concrete, and soils in addition to our core products. Our lineup of ovens, balances, and general lab equipment rounds out our product offerings and lets you find everything you need in one place. More importantly, we understand the value of industry involvement and we actively participate in creating and reviewing AASHTO and ASTM standards. There is no better way to understand an industry than to help it move forward.

Proudly in our third generation of family ownership, we have continually grown and adapted to shifts in the industry, but our core values have never changed. We still treat our customers as we always have, helping them to



"Always here for you"

Contents

Excellence

find the best solutions to their problems. While we constantly develop and seek out new products, our philosophy remains the same; we offer high-quality products at competitive prices and backup our great customer service with dedicated technical support.



Remember... whatever your materials testing needs, Gilson is passionate about contributing to your success.



globalgilson.com

CONNECT WITH GILSON!



Find and follow Gilson Company, Inc. on our social media accounts for expert tips, product videos, and more.

1 SIEVING

Sieves	2
Wash Sieves	12
Accessories	14
Sieve Shakers.....	24

2 SCREENING

Testing Screens	42
Screen Trays & Accessories	46
Continuous Flow Screen	50

3 SAMPLE SPLITTERS

Universal Splitters	52
Fixed Chute	54
Enclosed.....	55
Quartermaster	56
1/16 Sample Reducer.....	57
Micro	58
Spinning Riffles	60
Bulk Splitters	62
Accessories	64
Sampling Probes	65

4 AGGREGATE TESTING

Durability	68
Sand Equivalent	72
Characterization	74
Skid Resistance.....	79
Specific Gravity	80

5 ASPHALT TESTING

Marshall Mix Design	86
Mix Design	92
Specific Gravity	98
Binder Extraction.....	104
Pavement Quality	110
Binder Testing.....	116
Sample Preparation.....	130

6 CONCRETE & CEMENT TESTING

Strength.....	132
Fresh Concrete Testing.....	146
Cement / Grout Testing	162
Curing	170
Nondestructive Testing.....	173
Mixing.....	194
Core Drilling / Sawing.....	196

7 SOIL TESTING

CBR/LBR.....	200
Triaxial	205

7 SOIL TESTING continued

Permeability.....	212
Unconfined Compressive Strength	220
Soil-Cement Compressive Strength.....	222
Direct Shear.....	224
Consolidation	230
Software	235
Load and Displacement	236
Proctor Density.....	238
Calcium Carbonate / Pinhole	246
Durability	247
Atterberg Limits / Grain Size	248
Specific Gravity	252
Field Testing	254

8 OVENS

Selection Guide	268
Bench Ovens	269
High-Capacity Ovens	274
Muffle Furnaces.....	276

9 SCALES & BALANCES

Selection Guide	280
Bench	281
Field	286
Precision.....	288
Calibration Weights	290
Specific Gravity	291
Scoops and Brushes.....	292

10 CRUSHING & PULVERIZING

Crushers	294
Pulverizers.....	297
Ball Mills	300

11 THERMOMETERS & TIMERS

Thermometers	302
Timers.....	317

12 GENERAL LAB

Sample Pans and Containers.....	320
Brushes, Glassware, and Tools	322
Hot Plates / Driers	326
Safety Equipment	327
Reference Library	328

13 INDEX

Test Standard	329
Estimated Ship Weight	331
Model Number.....	337
Alphabetical.....	347



Customer Service

Customer service is a key part of the Gilson Way, and we strive to exceed your expectations. We aspire to treat customers like family and keep your best interest in mind as we work to find the best solution for your needs.


Our Customer Service Specialists are a highly qualified, dedicated team with more than 120 years combined experience, trained to help advise you of the best testing equipment options for your needs. Gilson's Specialists in Returns, International Sales, and Quotations are equipped to provide answers on products, pricing, ordering, and delivery.

Gilson's Technical Support team is ready and willing to answer any questions you may have. Utilizing more than 115 years combined experience and industry expertise, our team is prepared to support you in navigating product recommendations, troubleshooting, calibration and repair, and testing standards. More importantly, we understand the value of industry involvement and are active on many ASTM and AASHTO committees and contribute to the creation and review of standards.

Gilson prides itself on excellence in customer service and technical support. In addition to our excellent team, our website is available 24/7, where you can


find educational videos, blogs, pictures, detailed descriptions, manuals, and pricing information. You can also access live chats and contact information, including phone numbers and emails for the specific department you need to reach.

Thank you for being a valued Gilson customer. We look forward to continuing to provide you with exceptional Customer Service and Technical Support.

 **by phone**


800.444.1508

740.548.7298

 **by email**

customerservice@gilsonco.com

techsupport@gilsonco.com

 **by livechat**

globalgilson.com



GILSON
COMPANY, INC.
www.globalgilson.com
800-644-1506 / 740-548-7298

POWER SOURCE:
CABLE CONTROL SYSTEM
12:05
GILSON
NO. 548-7298
1000 W. 10TH ST.
MILWAUKEE, WI 53233





Gilson Test Sieves

GILSON TEST SIEVES

ASTM E11; ISO 565, 3310-1

Throughout this catalog you will find many references to ASTM and ISO testing methods and specifications. ASTM International (American Society for Testing and Materials) and ISO (International Organization for Standardization) are two different groups with similar goals of establishing standardized methods and criteria for testing material. ASTM is the predominant specifying organization in the United States and North America, and in recent years has sought to expand their effectiveness around the world. With its global influence, ISO has standards already in place in many countries. In recent years, the two organizations have actively pursued a “Harmonization” program to ensure that documents governing similar procedures are more compatible.

Gilson offers test sieves meeting the most widely used specifications:

- ASTM E11, Standard Specification for Woven Wire Test Sieve Cloth and Test Sieves
- ISO 565 Test Sieves—Metal Wire Cloth, Perforated Metal Plate and Electroformed Sheet—Nominal Sizes of Openings
- ISO-3310-1 Test Sieves—Technical Requirements and Testing—Part 1: Test Sieves of Metal Wire Cloth

ASTM and ISO Test Sieves are constructed to specifications and tolerances that are very similar, in some cases identical. For example, an ASTM No.30 test sieve uses exactly the same cloth as an ISO 600µm sieve, and the mesh used in both ASTM 3/8in and ISO 9.5mm is the same. ASTM test sieve frames have 8in (203mm) or 12in (305mm) diameters and most ISO sieves are constructed with either 200mm or 300mm frames, so ASTM and ISO sieves will not nest together in a stack. Gilson 8in or 12in Sieve Shakers are designed to accept stacks of 8in, 12in, 200mm, or 300mm test sieves with no difference in performance. Gilson also stocks all popular sizes of both ASTM and ISO test sieves, so you can be confident that your order will be shipped right away.

Immediate shipment is available for all popular sizes. ASTM and ISO Test Sieves are categorized in three different classes, all serial numbered and supplied with a certificate.

- **Compliance Test Sieves** are manufactured with wire cloth that has been inspected and measured in roll or sheet quantities prior to being cut and mounted in the individual sieve frames. Opening sizes are not measured in individual sieves. Each Compliance sieve is supplied with a certificate of manufacturing compliance, but no statistical documentation is given. Compliance sieves are designed for applications where a basic, reliable degree of accuracy and repeatability are sufficient.

- **Inspection Test Sieves** have the specified number of individual openings measured with a National Institute of Standards and Technology NIST traceable optical comparator after the wire cloth has been mounted in the frame. These Test Sieves, with Inspection Level Verification, are a good choice in applications where accuracy and repeatability are critical. Each Inspection Test Sieve includes a certificate which documents the sieve’s serial number, maximum and minimum opening sizes, range and standard deviation of openings, and wire diameter. This level of verification gives a 99% confidence level that the standard deviation of the sieve’s openings is within the maximum allowed by ASTM or ISO.

- **Calibration Test Sieves** have the specified number (about twice that of Inspection Level Test Sieves) of individual openings measured with a NIST traceable optical comparator after the wire cloth has been mounted in the frame. These Test Sieves, with Calibration Level Verification, are a good choice in applications where a very high degree of accuracy is required. Each Calibration Test Sieve includes a certificate which documents the sieve’s serial number, maximum and minimum opening sizes, range and standard deviation of openings, and wire diameter. This level of verification gives a 99.73% confidence level that the standard deviation of the sieve’s openings is within the maximum allowed by ASTM or ISO.

Mesh Opening

Opening Sizes are listed in millimeter (mm) or micrometer (µm) units and ASTM sieves include traditional inch and number designations. Gilson offers all mesh sizes, but not all sizes are available in every frame diameter or height. Common coarse sizes are also listed. Normally, every second or fourth size is used in a sieve stack, although precision testing may require consecutive sizes. Additional sieves are often inserted into the sequence to avoid overloading of individual sieves or to better define a particular size range. ASTM metric supplemental sieves add many ISO opening sizes, filling in gaps of the traditional ASTM system while allowing convenient use of 3in, 8in, and 12in frame diameters.

Frame and Cloth Material

- Stainless Steel Frame with Stainless Steel Cloth is a popular choice and assures a sieve with the longest possible service life. This is the best choice where extreme wear, contamination, or sanitation is an issue.
- Combination Brass Frame with Stainless Steel Cloth offers adequate service life. The frames of these sieves feature a stainless steel skirt for added durability.
- Brass Frame with Brass Cloth is acceptable for light-duty applications. Coarse-series sieves are not available with brass cloth.



Brass Frame/Stainless Steel Cloth Test Sieve



Stainless Steel Test Sieves



Stainless Steel Pan

Frame Diameter

Frames should accommodate the entire sample volume with enough surface area to avoid overloading individual sieves. The diameter selected must also fit the sieve shaker being used.

Frame Height

Sieve frames are designated as Full-Height or Half-Height. Intermediate-Height sieves are also available for 12in diameters. Half- or Intermediate-Height frames allow a greater number of sieves to be used when stack height is limited. Large particles require Full-Height frames for free movement during agitation for more efficient separation as an accessory. Black rubber O-Rings are included with ISO Test Sieves and are available as an accessory for ASTM sieves.

Sieve Frame Heights				
Sieve		Frame Height Measurements		
Diameter	Frame Designation	Stacked, in (mm)	Overall, in (mm)	Above Cloth, in (mm)
3in (76mm)	FH	1-1/8 (28.6)	1-3/4 (44.5)	1-1/4 (31.8)
	HH	5/8 (15.9)	1-1/4 (31.8)	5/8 (15.9)
6in (152mm)	FH	1-7/8 (47.6)	2-5/8 (66.7)	1-3/4 (44.5)
	HH	1-1/8 (28.6)	1-7/8 (47.6)	1 (25.4)
8in (203mm)	FH	2-1/8 (54)	2-5/8 (66.7)	2 (50.8)
	HH	1-1/8 (28.6)	1-5/8 (41.3)	1 (25.4)
200mm	FH	2-1/8 (54)	2-5/8 (66.7)	1.96 (50)
	HH	1-1/8 (28.6)	1-5/8 (41.3)	0.98 (25)
10in (254mm)	FH	3-1/8 (79.4)	4 (101.6)	3 (76.2)
12in (305mm)	FH	3-3/8 (85.7)	4-1/4 (108)	3-1/4 (82.6)
	IH	2-1/8 (54)	3 (76.2)	2 (50.8)
	HH	1-3/4 (44.5)	2-5/8 (66.7)	1-5/8 (41.3)
300mm	FH	2-1/2 (63.5)	3 (76.2)	1.96 (50)
	HH	1-1/2 (38.1)	2 (50.8)	.98 (25)
18in (457mm)	FH	4-1/4 (108)	5-1/2 (139.7)	4-1/2 (114.3)

Backing Cloth

Backing Cloth prevents sagging and tearing and improves service life for finer mesh sieves. No.30 stainless steel mesh reinforcement is located below the primary sieve cloth, increasing the strength of the primary sieve cloth and reducing distortion of the openings during use. Backing Cloth is available at extra cost for sieves with stainless steel mesh finer than ASTM No.70 or ISO 212µm on 8in, 200mm, or 12in diameter frames. To order, add the suffix "BU" to the model number of the sieve. These sieves are made to order and are nonreturnable.

Pans and Covers

► Pans are positioned at the bottom of the sieve stack to collect fines.

Extended Rim Pans insert into the middle of a stack, allowing two samples to be tested at once.

- Covers are not necessary with some sieve shakers, but are needed for rotary sifters or for shaking by hand. The Cover with Ring model has a wire finger loop in the center to facilitate easy removal.

Gilson Sieve Verification Services

Gilson Verification Services can be performed on any test sieve or Gilson screen tray, used or new. An optical comparator with NIST traceable calibration measures opening sizes and wire diameters on each sieve and a statistical analysis ensures the standard deviations are within ASTM or ISO requirements for Inspection or Calibration grades. Sieves, trays, or wire cloth units are not included in the purchase price of the verification services. These services are ordered separately by specifying the appropriate model number given in our Test Sieve and Screen Tray Verification and Services listing. Because wire cloth stretches, sags, or tears and abrasive materials can reduce wire diameters, a verification process should also be set up to regularly verify that working sieves still meet desired specifications. To reverify used sieves, contact a customer service representative for Reverification Services. Sieves with backing cloth installed cannot be reverified.

Standard Reference Materials (SRMs)

Standard Reference Materials are precisely sized glass beads or powders for performance testing of sieves. They are traceable to NIST or the European Community Bureau of Reference (BCR). SRMs fit easily into internal quality programs following guidelines in ASTM E2427, *Sieve Acceptance by Performance Testing*. User-prepared reference materials can also be utilized under E2427 in the same manner as SRMs. Because user materials are nonstandard, they are not traceable and require more handling. In addition, the user must determine acceptable tolerances for statistical analysis.

Master-Matched Sieves

Master-Matched services are available for 8in diameter stainless steel or combination sieves from No.8 through No.325 (2.36mm through 45µm). Each sieve is verified as ASTM E11 Inspection Grade, then matched by performance testing to a master sieve kept at Gilson's reference laboratory. Sieves that have been master-matched will yield results within a narrow and consistent range when compared with other matched sieves and replacement sieves.

Sieve Shakers

Mechanical sieve shakers save considerable time and effort and yield superior accuracy, consistency, and repeatability compared to manual shaking or hand sieving methods for particle sizing. Effective mechanical agitation lifts particles off the sieve cloth, reorients them, and allows them to be repeatedly "tried" to different openings at different angles. Careful review of Gilson's extensive line of sieve shakers details optimal choices for different materials and applications. Greater sample volumes and large particle topsize may require selection of Gilson Testing Screen, Test-Master®, or Porta-Screen® models for efficient particle size determinations.

1 SIEVING / SIEVES



Brass Frame/Stainless Steel Cloth Test Sieve



Stainless Steel Test Sieves



SS-8R shown with Stainless Steel Test Sieves

8in Diameter ASTM E11 Test Sieves

	Sieve Designation		Stainless Steel Cloth Stainless Steel Frame		Stainless Steel Cloth Brass Frame		Brass Cloth Brass Frame	
	Alt.	Std.	Full-Ht.	Half-Ht.	Full-Ht.	Half-Ht.	Full-Ht.	Half-Ht.
C O A R S E S E R I E S	4in	100.0mm	V8SF 4"	V8SH 4"	V8CF 4"	—	—	—
	3-1/2in	90.0mm	V8SF 3-1/2"	V8SH 3-1/2"	V8CF 3-1/2"	—	—	—
	3in	75.0mm	V8SF 3"	V8SH 3"	V8CF 3"	—	—	—
	2-1/2in	63.0mm	V8SF 2-1/2"	V8SH 2-1/2"	V8CF 2-1/2"	—	—	—
	2.12in	53.0mm	V8SF 2.12"	V8SH 2.12"	V8CF 2.12"	—	—	—
	2in	50.0mm	V8SF 2"	V8SH 2"	V8CF 2"	—	—	—
	1-3/4in	45.0mm	V8SF 1-3/4"	V8SH 1-3/4"	V8CF 1-3/4"	—	—	—
	1-1/2in	37.5mm	V8SF 1-1/2"	V8SH 1-1/2"	V8CF 1-1/2"	—	—	—
	1-1/4in	31.5mm	V8SF 1-1/4"	V8SH 1-1/4"	V8CF 1-1/4"	—	—	—
	1.06in	26.5mm	V8SF 1.06"	V8SH 1.06"	V8CF 1.06"	—	—	—
	1in	25.0mm	V8SF 1"	V8SH 1"	V8CF 1"	—	—	—
	7/8in	22.4mm	V8SF 7/8"	V8SH 7/8"	V8CF 7/8"	V8CH 7/8"	—	—
	3/4in	19.0mm	V8SF 3/4"	V8SH 3/4"	V8CF 3/4"	V8CH 3/4"	—	—
	5/8in	16.0mm	V8SF 5/8"	V8SH 5/8"	V8CF 5/8"	V8CH 5/8"	—	—
F I N E S E R I E S	0.530in	13.2mm	V8SF .530"	V8SH .530"	V8CF .530"	V8CH .530"	—	—
	1/2in	12.5mm	V8SF 1/2"	V8SH 1/2"	V8CF 1/2"	V8CH 1/2"	—	—
	7/16in	11.2mm	V8SF 7/16"	V8SH 7/16"	V8CF 7/16"	V8CH 7/16"	—	—
	3/8in	9.5mm	V8SF 3/8"	V8SH 3/8"	V8CF 3/8"	V8CH 3/8"	—	—
	5/16in	8.0mm	V8SF 5/16"	V8SH 5/16"	V8CF 5/16"	V8CH 5/16"	—	—
	0.265in	6.7mm	V8SF .265"	V8SH .265"	V8CF .265"	V8CH .265"	—	—
	1/4in	6.3mm	V8SF 1/4"	V8SH 1/4"	V8CF 1/4"	V8CH 1/4"	—	—
	No.3-1/2	5.6mm	V8SF #3-1/2	V8SH #3-1/2	V8CF #3-1/2	V8CH #3-1/2	—	—
	No.4	4.75mm	V8SF #4	V8SH #4	V8CF #4	V8CH #4	—	—
	No.5	4.0mm	V8SF #5	V8SH #5	V8CF #5	V8CH #5	—	—
	No.6	3.35mm	V8SF #6	V8SH #6	V8CF #6	V8CH #6	—	—
	1/8in ¹	3.18mm	V8SF 1/8"	V8SH 1/8"	V8CF 1/8"	V8CH 1/8"	—	—
	No.7	2.8mm	V8SF #7	V8SH #7	V8CF #7	V8CH #7	—	—
	No.8	2.36mm	V8SF #8	V8SH #8	V8CF #8	V8CH #8	V8BF #8	V8BH #8
No.10	2.0mm	V8SF #10	V8SH #10	V8CF #10	V8CH #10	V8BF #10	V8BH #10	
No.12	1.7mm	V8SF #12	V8SH #12	V8CF #12	V8CH #12	V8BF #12	V8BH #12	
No.14	1.4mm	V8SF #14	V8SH #14	V8CF #14	V8CH #14	V8BF #14	V8BH #14	
No.16	1.18mm	V8SF #16	V8SH #16	V8CF #16	V8CH #16	V8BF #16	V8BH #16	
No.18	1.0mm	V8SF #18	V8SH #18	V8CF #18	V8CH #18	V8BF #18	V8BH #18	
No.20	850µm	V8SF #20	V8SH #20	V8CF #20	V8CH #20	V8BF #20	V8BH #20	
No.25	710µm	V8SF #25	V8SH #25	V8CF #25	V8CH #25	V8BF #25	V8BH #25	
No.30	600µm	V8SF #30	V8SH #30	V8CF #30	V8CH #30	V8BF #30	V8BH #30	
No.35	500µm	V8SF #35	V8SH #35	V8CF #35	V8CH #35	V8BF #35	V8BH #35	
No.40	425µm	V8SF #40	V8SH #40	V8CF #40	V8CH #40	V8BF #40	V8BH #40	
No.45	355µm	V8SF #45	V8SH #45	V8CF #45	V8CH #45	V8BF #45	V8BH #45	
No.50	300µm	V8SF #50	V8SH #50	V8CF #50	V8CH #50	V8BF #50	V8BH #50	
No.60	250µm	V8SF #60	V8SH #60	V8CF #60	V8CH #60	V8BF #60	V8BH #60	
No.70	212µm	V8SF #70	V8SH #70	V8CF #70	V8CH #70	V8BF #70	V8BH #70	
No.80	180µm	V8SF #80	V8SH #80	V8CF #80	V8CH #80	V8BF #80	V8BH #80	
No.100	150µm	V8SF #100	V8SH #100	V8CF #100	V8CH #100	V8BF #100	V8BH #100	
No.120	125µm	V8SF #120	V8SH #120	V8CF #120	V8CH #120	V8BF #120	V8BH #120	
No.140	106µm	V8SF #140	V8SH #140	V8CF #140	V8CH #140	V8BF #140	V8BH #140	
No.170	90µm	V8SF #170	V8SH #170	V8CF #170	V8CH #170	V8BF #170	V8BH #170	
No.200	75µm	V8SF #200	V8SH #200	V8CF #200	V8CH #200	V8BF #200	V8BH #200	
No.230	63µm	V8SF #230	V8SH #230	V8CF #230	V8CH #230	V8BF #230	V8BH #230	
No.270	53µm	V8SF #270	V8SH #270	V8CF #270	V8CH #270	V8BF #270	V8BH #270	
No.325	45µm	V8SF #325	V8SH #325	V8CF #325	V8CH #325	V8BF #325	V8BH #325	
No.400	38µm	V8SF #400	V8SH #400	V8CF #400	V8CH #400	—	—	
No.450	32µm	V8SF #450	V8SH #450	V8CF #450	V8CH #450	—	—	
No.500	25µm	V8SF #500	V8SH #500	V8CF #500	V8CH #500	—	—	
No.635	20µm	V8SF #635	V8SH #635	V8CF #635	V8CH #635	—	—	
Regular Pan			V8SFXPN	V8SHXPN	V8BFXPN	V8BHXPN	V8BFXPN	V8BHXPN
Extended Rim Pan			V8SFXPE	V8SHXPE	V8BFXPE	V8BHXPE	V8BFXPE	V8BHXPE
Regular Cover			V8SFXCV		V8BFXCV			
Cover with Ring			V8SFXCR		V8BFXCR			

¹Not a standard ASTM size.



12in Diameter ASTM E11 Test Sieves

	Sieve Designation		Stainless Steel Cloth Stainless Steel Frame			Stainless Steel Cloth Brass Frame			Brass Cloth Brass Frame		
	Alt.	Std.	Full-Ht.	Inter.-Ht.	Half-Ht.	Full-Ht.	Inter.-Ht.	Half-Ht.	Full-Ht.	Inter.-Ht.	Half-Ht.
C O A R S E	4in	100.0mm	V12SF 4"	V12SI 4"	—	V12CF 4"	V12CI 4"	—	—	—	—
	3-1/2in	90.0mm	V12SF 3-1/2"	V12SI 3-1/2"	—	V12CF 3-1/2"	V12CI 3-1/2"	—	—	—	—
	3in	75.0mm	V12SF 3"	V12SI 3"	—	V12CF 3"	V12CI 3"	—	—	—	—
	2-1/2in	63.0mm	V12SF 2-1/2"	V12SI 2-1/2"	—	V12CF 2-1/2"	V12CI 2-1/2"	—	—	—	—
	2.12in	53.0mm	V12SF 2.12"	V12SI 2.12"	—	V12CF 2.12"	V12CI 2.12"	—	—	—	—
	2in	50.0mm	V12SF 2"	V12SI 2"	—	V12CF 2"	V12CI 2"	—	—	—	—
	1-3/4in	45.0mm	V12SF 1-3/4"	V12SI 1-3/4"	—	V12CF 1-3/4"	V12CI 1-3/4"	—	—	—	—
	1-1/2in	37.5mm	V12SF 1-1/2"	V12SI 1-1/2"	—	V12CF 1-1/2"	V12CI 1-1/2"	—	—	—	—
	1-1/4in	31.5mm	V12SF 1-1/4"	V12SI 1-1/4"	—	V12CF 1-1/4"	V12CI 1-1/4"	—	—	—	—
	1.06in	26.5mm	V12SF 1.06"	V12SI 1.06"	—	V12CF 1.06"	V12CI 1.06"	—	—	—	—
S E R I E S	1in	25.0mm	V12SF 1"	V12SI 1"	V12SH 1"	V12CF 1"	V12CI 1"	V12CH 1"	—	—	—
	7/8in	22.4mm	V12SF 7/8"	V12SI 7/8"	V12SH 7/8"	V12CF 7/8"	V12CI 7/8"	V12CH 7/8"	—	—	—
	3/4in	19.0mm	V12SF 3/4"	V12SI 3/4"	V12SH 3/4"	V12CF 3/4"	V12CI 3/4"	V12CH 3/4"	—	—	—
	5/8in	16.0mm	V12SF 5/8"	V12SI 5/8"	V12SH 5/8"	V12CF 5/8"	V12CI 5/8"	V12CH 5/8"	—	—	—
	0.530in	13.2mm	V12SF .530"	V12SI .530"	V12SH .530"	V12CF .530"	V12CI .530"	V12CH .530"	—	—	—
	1/2in	12.5mm	V12SF 1/2"	V12SI 1/2"	V12SH 1/2"	V12CF 1/2"	V12CI 1/2"	V12CH 1/2"	—	—	—
	7/16in	11.2mm	V12SF 7/16"	V12SI 7/16"	V12SH 7/16"	V12CF 7/16"	V12CI 7/16"	V12CH 7/16"	—	—	—
	3/8in	9.5mm	V12SF 3/8"	V12SI 3/8"	V12SH 3/8"	V12CF 3/8"	V12CI 3/8"	V12CH 3/8"	—	—	—
	5/16in	8.0mm	V12SF 5/16"	V12SI 5/16"	V12SH 5/16"	V12CF 5/16"	V12CI 5/16"	V12CH 5/16"	—	—	—
	0.265in	6.7mm	V12SF .265"	V12SI .265"	V12SH .265"	V12CF .265"	V12CI .265"	V12CH .265"	—	—	—
F I N E	1/4in	6.3mm	V12SF 1/4"	V12SI 1/4"	V12SH 1/4"	V12CF 1/4"	V12CI 1/4"	V12CH 1/4"	—	—	—
	No.3-1/2	5.6mm	V12SF #3-1/2	V12SI #3-1/2	V12SH #3-1/2	V12CF #3-1/2	V12CI #3-1/2	V12CH #3-1/2	—	—	—
	No.4	4.75mm	V12SF #4	V12SI #4	V12SH #4	V12CF #4	V12CI #4	V12CH #4	—	—	—
	No.5	4.0mm	V12SF #5	V12SI #5	V12SH #5	V12CF #5	V12CI #5	V12CH #5	—	—	—
	No.6	3.35mm	V12SF #6	V12SI #6	V12SH #6	V12CF #6	V12CI #6	V12CH #6	—	—	—
	1/8in ¹	3.18mm	V12SF 1/8"	V12SI 1/8"	V12SH 1/8"	V12CF 1/8"	V12CI 1/8"	V12CH 1/8"	—	—	—
	No.7	2.8mm	V12SF #7	V12SI #7	V12SH #7	V12CF #7	V12CI #7	V12CH #7	—	—	—
	No.8	2.36mm	V12SF #8	V12SI #8	V12SH #8	V12CF #8	V12CI #8	V12CH #8	V12BF #8	V12BI #8	V12BH #8
	No.10	2.0mm	V12SF #10	V12SI #10	V12SH #10	V12CF #10	V12CI #10	V12CH #10	V12BF #10	V12BI #10	V12BH #10
	No.12	1.7mm	V12SF #12	V12SI #12	V12SH #12	V12CF #12	V12CI #12	V12CH #12	V12BF #12	V12BI #12	V12BH #12
No.14	1.4mm	V12SF #14	V12SI #14	V12SH #14	V12CF #14	V12CI #14	V12CH #14	V12BF #14	V12BI #14	V12BH #14	
S E R I E S	No.16	1.18mm	V12SF #16	V12SI #16	V12SH #16	V12CF #16	V12CI #16	V12CH #16	V12BF #16	V12BI #16	V12BH #16
	No.18	1.0mm	V12SF #18	V12SI #18	V12SH #18	V12CF #18	V12CI #18	V12CH #18	V12BF #18	V12BI #18	V12BH #18
	No.20	850µm	V12SF #20	V12SI #20	V12SH #20	V12CF #20	V12CI #20	V12CH #20	V12BF #20	V12BI #20	V12BH #20
	No.25	710µm	V12SF #25	V12SI #25	V12SH #25	V12CF #25	V12CI #25	V12CH #25	V12BF #25	V12BI #25	V12BH #25
	No.30	600µm	V12SF #30	V12SI #30	V12SH #30	V12CF #30	V12CI #30	V12CH #30	V12BF #30	V12BI #30	V12BH #30
	No.35	500µm	V12SF #35	V12SI #35	V12SH #35	V12CF #35	V12CI #35	V12CH #35	V12BF #35	V12BI #35	V12BH #35
	No.40	425µm	V12SF #40	V12SI #40	V12SH #40	V12CF #40	V12CI #40	V12CH #40	V12BF #40	V12BI #40	V12BH #40
	No.45	355µm	V12SF #45	V12SI #45	V12SH #45	V12CF #45	V12CI #45	V12CH #45	V12BF #45	V12BI #45	V12BH #45
	No.50	300µm	V12SF #50	V12SI #50	V12SH #50	V12CF #50	V12CI #50	V12CH #50	V12BF #50	V12BI #50	V12BH #50
	No.60	250µm	V12SF #60	V12SI #60	V12SH #60	V12CF #60	V12CI #60	V12CH #60	V12BF #60	V12BI #60	V12BH #60
No.70	212µm	V12SF #70	V12SI #70	V12SH #70	V12CF #70	V12CI #70	V12CH #70	V12BF #70	V12BI #70	V12BH #70	
No.80	180µm	V12SF #80	V12SI #80	V12SH #80	V12CF #80	V12CI #80	V12CH #80	V12BF #80	V12BI #80	V12BH #80	
No.100	150µm	V12SF #100	V12SI #100	V12SH #100	V12CF #100	V12CI #100	V12CH #100	V12BF #100	V12BI #100	V12BH #100	
No.120	125µm	V12SF #120	V12SI #120	V12SH #120	V12CF #120	V12CI #120	V12CH #120	V12BF #120	V12BI #120	V12BH #120	
No.140	106µm	V12SF #140	V12SI #140	V12SH #140	V12CF #140	V12CI #140	V12CH #140	V12BF #140	V12BI #140	V12BH #140	
No.170	90µm	V12SF #170	V12SI #170	V12SH #170	V12CF #170	V12CI #170	V12CH #170	V12BF #170	V12BI #170	V12BH #170	
No.200	75µm	V12SF #200	V12SI #200	V12SH #200	V12CF #200	V12CI #200	V12CH #200	V12BF #200	V12BI #200	V12BH #200	
No.230	63µm	V12SF #230	V12SI #230	V12SH #230	V12CF #230	V12CI #230	V12CH #230	V12BF #230	V12BI #230	V12BH #230	
No.270	53µm	V12SF #270	V12SI #270	V12SH #270	V12CF #270	V12CI #270	V12CH #270	V12BF #270	V12BI #270	V12BH #270	
No.325	45µm	V12SF #325	V12SI #325	V12SH #325	V12CF #325	V12CI #325	V12CH #325	V12BF #325	V12BI #325	V12BH #325	
No.400	38µm	V12SF #400	V12SI #400	V12SH #400	V12CF #400	V12CI #400	V12CH #400	—	—	—	
No.450	32µm	V12SF #450	V12SI #450	V12SH #450	V12CF #450	V12CI #450	V12CH #450	—	—	—	
No.500	25µm	V12SF #500	V12SI #500	V12SH #500	V12CF #500	V12CI #500	V12CH #500	—	—	—	
No.635	20µm	V12SF #635	V12SI #635	V12SH #635	V12CF #635	V12CI #635	V12CH #635	—	—	—	
Regular Pan			V12SFXPN	—	V12SHXPN	V12BFXPN	V12BIXPN	V12BHXPN	V12BFXPN	V12BIXPN	V12BHXPN
Extended Rim Pan			V12SFXPE	V12SIXPE	V12SHXPE	V12BFXPE	V12BIXPE	V12BHXPE	V12BFXPE	V12BIXPE	V12BHXPE
Regular Cover			V12SFXCV			V12BFXCV			V12BFXCV		
Cover with Ring			V12SFXCR			V12BFXCR			V12BFXCR		

¹Not a standard ASTM size.



NEW



8in Stainless Steel Full-Height Test Sieve



8in Stainless Steel Half-Height Test Sieve



12in Stainless Steel Full-Height Test Sieve



12in Stainless Steel Half-Height Test Sieve

8IN & 12IN DIAMETER ASTM E11 SUPPLEMENTAL SIEVE SIZES

ASTM E11 incorporates a range of metric test sieves designed to supplement existing woven wire cloth sizes. Gilson is offering these supplemental test sieves with stainless steel cloth installed in conventional 8in and 12in diameter stainless steel frames.

8in & 12in Diameter ASTM E11 Supplemental Sieve Sizes

Metric Supplemental Sizes	8in Diameter		12in Diameter		
	Stainless Steel Cloth Stainless Steel Frame		Stainless Steel Cloth Stainless Steel Frame		
	Full-Ht.	Half-Ht.	Full-Ht.	Inter.-Ht.	Half-Ht.
56.0mm	V8SF 56M	V8SH 56M	V12SF 56M	V12SI 56M	V12SH 56M
40.0mm	V8SF 40M	V8SH 40M	V12SF 40M	V12SI 40M	V12SH 40M
35.5mm	V8SF 35.5M	V8SH 35.5M	V12SF 35.5M	V12SI 35.5M	V12SH 35.5M
28.0mm	V8SF 28M	V8SH 28M	V12SF 28M	V12SI 28M	V12SH 28M
20.0mm	V8SF 20M	V8SH 20M	V12SF 20M	V12SI 20M	V12SH 20M
18.0mm	V8SF 18M	V8SH 18M	V12SF 18M	V12SI 18M	V12SH 18M
14.0mm	V8SF 14M	V8SH 14M	V12SF 14M	V12SI 14M	V12SH 14M
10.0mm	V8SF 10M	V8SH 10M	V12SF 10M	V12SI 10M	V12SH 10M
9.0mm	V8SF 9M	V8SH 9M	V12SF 9M	V12SI 9M	V12SH 9M
7.1mm	V8SF 7.1M	V8SH 7.1M	V12SF 7.1M	V12SI 7.1M	V12SH 7.1M
5.0mm	V8SF 5M	V8SH 5M	V12SF 5M	V12SI 5M	V12SH 5M
4.5mm	V8SF 4.5M	V8SH 4.5M	V12SF 4.5M	V12SI 4.5M	V12SH 4.5M
3.55mm	V8SF 3.55M	V8SH 3.55M	V12SF 3.55M	V12SI 3.55M	V12SH 3.55M
3.15mm	V8SF 3.15M	V8SH 3.15M	V12SF 3.15M	V12SI 3.15M	V12SH 3.15M
2.5mm	V8SF 2.5M	V8SH 2.5M	V12SF 2.5M	V12SI 2.5M	V12SH 2.5M
2.24mm	V8SF 2.24M	V8SH 2.24M	V12SF 2.24M	V12SI 2.24M	V12SH 2.24M
1.80mm	V8SF 1.80M	V8SH 1.80M	V12SF 1.80M	V12SI 1.80M	V12SH 1.80M
1.60mm	V8SF 1.60M	V8SH 1.60M	V12SF 1.60M	V12SI 1.60M	V12SH 1.60M
1.25mm	V8SF 1.25M	V8SH 1.25M	V12SF 1.25M	V12SI 1.25M	V12SH 1.25M
1.12mm	V8SF 1.12M	V8SH 1.12M	V12SF 1.12M	V12SI 1.12M	V12SH 1.12M
900µm	V8SF 900U	V8SH 900U	V12SF 900U	V12SI 900U	V12SH 900U
800µm	V8SF 800U	V8SH 800U	V12SF 800U	V12SI 800U	V12SH 800U
630µm	V8SF 630U	V8SH 630U	V12SF 630U	V12SI 630U	V12SH 630U
560µm	V8SF 560U	V8SH 560U	V12SF 560U	V12SI 560U	V12SH 560U
450µm	V8SF 450U	V8SH 450U	V12SF 450U	V12SI 450U	V12SH 450U
400µm	V8SF 400U	V8SH 400U	V12SF 400U	V12SI 400U	V12SH 400U
315µm	V8SF 315U	V8SH 315U	V12SF 315U	V12SI 315U	V12SH 315U
280µm	V8SF 280U	V8SH 280U	V12SF 280U	V12SI 280U	V12SH 280U
224µm	V8SF 224U	V8SH 224U	V12SF 224U	V12SI 224U	V12SH 224U
200µm	V8SF 200U	V8SH 200U	V12SF 200U	V12SI 200U	V12SH 200U
160µm	V8SF 160U	V8SH 160U	V12SF 160U	V12SI 160U	V12SH 160U
140µm	V8SF 140U	V8SH 140U	V12SF 140U	V12SI 140U	V12SH 140U
112µm	V8SF 112U	V8SH 112U	V12SF 112U	V12SI 112U	V12SH 112U
100µm	V8SF 100U	V8SH 100U	V12SF 100U	V12SI 100U	V12SH 100U
80µm	V8SF 80U	V8SH 80U	V12SF 80U	V12SI 80U	V12SH 80U
71µm	V8SF 71U	V8SH 71U	V12SF 71U	V12SI 71U	V12SH 71U
56µm	V8SF 56U	V8SH 56U	V12SF 56U	V12SI 56U	V12SH 56U
50µm	V8SF 50U	V8SH 50U	V12SF 50U	V12SI 50U	V12SH 50U
40µm	V8SF 40U	V8SH 40U	V12SF 40U	V12SI 40U	V12SH 40U
36µm	V8SF 36U	V8SH 36U	V12SF 36U	V12SI 36U	V12SH 36U



12in Stainless Steel Intermediate-Height Test Sieve



GLOBALGILSON.COM
SALES • SERVICE • SUPPORT



6in Stainless Steel Test Sieves



10in Stainless Steel Test Sieves



18in Stainless Steel Test Sieve

6in, 10in, & 18in Diameter ASTM E11 Test Sieves

COARSE SERIES	Sieve Designation		6in Diameter		10in Diameter	18in Diameter
			Stainless Steel Cloth Stainless Steel Frame		Stainless Steel Cloth Stainless Steel Frame	Stainless Steel Cloth Stainless Steel Frame
	Alt.	Std.	Full-Ht.	Half-Ht.	Full-Ht.	Full-Ht.
COARSE SERIES	4in	100.0mm	—	—	V10SF 4"	V18SF 4"
	3-1/2in	90.0mm	—	—	V10SF 3-1/2"	V18SF 3-1/2"
	3in	75.0mm	—	—	V10SF 3"	V18SF 3"
	2-1/2in	63.0mm	—	—	V10SF 2-1/2"	V18SF 2-1/2"
	2.12in	53.0mm	—	—	V10SF 2.12"	V18SF 2.12"
	2in	50.0mm	—	—	V10SF 2"	V18SF 2"
	1-3/4in	45.0mm	—	—	V10SF 1-3/4"	V18SF 1-3/4"
	1-1/2in	37.5mm	—	—	V10SF 1-1/2"	V18SF 1-1/2"
	1-1/4in	31.5mm	—	—	V10SF 1-1/4"	V18SF 1-1/4"
	1.06in	26.5mm	—	—	V10SF 1.06"	V18SF 1.06"
	1in	25.0mm	V6SF 1"	—	V10SF 1"	V18SF 1"
	7/8in	22.4mm	V6SF 7/8"	—	V10SF 7/8"	V18SF 7/8"
	3/4in	19.0mm	V6SF 3/4"	—	V10SF 3/4"	V18SF 3/4"
	5/8in	16.0mm	V6SF 5/8"	—	V10SF 5/8"	V18SF 5/8"
0.530in	13.2mm	V6SF .530"	—	V10SF .530"	V18SF .530"	
1/2in	12.5mm	V6SF 1/2"	—	V10SF 1/2"	V18SF 1/2"	
7/16in	11.2mm	V6SF 7/16"	—	V10SF 7/16"	V18SF 7/16"	
FINE SERIES	3/8in	9.5mm	V6SF 3/8"	—	V10SF 3/8"	V18SF 3/8"
	5/16in	8.0mm	V6SF 5/16"	—	V10SF 5/16"	V18SF 5/16"
	0.265in	6.7mm	V6SF .265"	—	V10SF .265"	V18SF .265"
	1/4in	6.3mm	V6SF 1/4"	—	V10SF 1/4"	V18SF 1/4"
	No.3-1/2	5.6mm	V6SF #3-1/2	V6SH #3-1/2	V10SF #3-1/2	V18SF #3-1/2
	No.4	4.75mm	V6SF #4	V6SH #4	V10SF #4	V18SF #4
	No.5	4.0mm	V6SF #5	V6SH #5	V10SF #5	V18SF #5
	No.6	3.35mm	V6SF #6	V6SH #6	V10SF #6	V18SF #6
	1/8in ¹	3.18mm	V6SF 1/8"	V6SH 1/8"	V10SF 1/8"	V18SF 1/8"
	No.7	2.8mm	V6SF #7	V6SH #7	V10SF #7	V18SF #7
	No.8	2.36mm	V6SF #8	V6SH #8	V10SF #8	V18SF #8
	No.10	2.0mm	V6SF #10	V6SH #10	V10SF #10	V18SF #10
	No.12	1.7mm	V6SF #12	V6SH #12	V10SF #12	V18SF #12
	No.14	1.4mm	V6SF #14	V6SH #14	V10SF #14	V18SF #14
FINE SERIES	No.16	1.18mm	V6SF #16	V6SH #16	V10SF #16	V18SF #16
	No.18	1.0mm	V6SF #18	V6SH #18	V10SF #18	V18SF #18
	No.20	850µm	V6SF #20	V6SH #20	V10SF #20	V18SF #20
	No.25	710µm	V6SF #25	V6SH #25	V10SF #25	V18SF #25
	No.30	600µm	V6SF #30	V6SH #30	V10SF #30	V18SF #30
	No.35	500µm	V6SF #35	V6SH #35	V10SF #35	V18SF #35
	No.40	425µm	V6SF #40	V6SH #40	V10SF #40	V18SF #40
	No.45	355µm	V6SF #45	V6SH #45	V10SF #45	V18SF #45
	No.50	300µm	V6SF #50	V6SH #50	V10SF #50	V18SF #50
	No.60	250µm	V6SF #60	V6SH #60	V10SF #60	V18SF #60
	No.70	212µm	V6SF #70	V6SH #70	V10SF #70	V18SF #70
	No.80	180µm	V6SF #80	V6SH #80	V10SF #80	V18SF #80
	No.100	150µm	V6SF #100	V6SH #100	V10SF #100	V18SF #100
	No.120	125µm	V6SF #120	V6SH #120	V10SF #120	V18SF #120
No.140	106µm	V6SF #140	V6SH #140	V10SF #140	V18SF #140	
No.170	90µm	V6SF #170	V6SH #170	V10SF #170	V18SF #170	
No.200	75µm	V6SF #200	V6SH #200	V10SF #200	V18SF #200	
FINE SERIES	No.230	63µm	V6SF #230	V6SH #230	V10SF #230	V18SF #230
	No.270	53µm	V6SF #270	V6SH #270	V10SF #270	—
	No.325	45µm	V6SF #325	V6SH #325	V10SF #325	—
	No.400	38µm	V6SF #400	V6SH #400	V10SF #400	—
	No.450	32µm	V6SF #450	V6SH #450	V10SF #450	—
	No.500	25µm	V6SF #500	V6SH #500	V10SF #500	—
	No.635	20µm	V6SF #635	V6SH #635	V10SF #635	—
Regular Pan			V6SFXPN	V6SHXPN	V10SFXPN	V18SFXPN
Extended Rim Pan			V6SFXPE	V6SHXPE	V10SFXPE	—
Regular Cover			V6SFXCV	V6SHXCV	V10SFXCV	V18SFXCV
Cover with Ring			V6SFXCR	V6SHXCR	V10SFXCR	—

¹Not a standard ASTM Size

technote

Please note; 6in, 10in, and 18in frame diameter sieves are nonreturnable.



1 SIEVING / SIEVES



3in Stainless Steel Sieves



SS-3 shown with 3in Stainless Steel Test Sieves

also available.....

Test Sieves can be verified to Inspection or Calibration grades under ASTM E11 or ISO 565 and 3310-1 specifications. See our separate listings for Test Sieve and Screen Tray Verification and Services.

3in Diameter ASTM E11 Test Sieves

C O A R S E S E R I E S	Sieve Designation			Stainless Steel Cloth Stainless Steel Frame		Stainless Steel Cloth Brass Frame	
	US Alternative	Std.	Metric Supplemental	Full-Ht.	Half-Ht.	Full-Ht.	Half-Ht.
		3/8in	9.5mm	—	V3SF 3/8"	—	—
	—	—	9.0mm	V3SF 9M	—	—	—
	5/16in	8.0mm	—	V3SF 5/16"	—	—	—
	—	—	7.1mm	V3SF 7.1M	—	—	—
	0.265in	6.7mm	—	V3SF .265"	—	—	—
	1/4in	6.3mm	—	V3SF 1/4"	—	—	—
	No.3-1/2in	5.6mm	—	V3SF #3-1/2	V3SH #3-1/2	V3CF #3-1/2	V3CH #3-1/2
	—	—	5.0mm	V3SF 5M	V3SH 5M	V3CF 5M	V3CH 5M
	No.4	4.75mm	—	V3SF #4	V3SH #4	V3CF #4	V3CH #4
	—	—	4.5mm	V3SF 4.5M	V3SH 4.5M	V3CF 4.5M	V3CH 4.5M
	No.5	4.0mm	—	V3SF #5	V3SH #5	V3CF #5	V3CH #5
	—	—	3.55mm	V3SF 3.55M	V3SH 3.55M	V3CF 3.55M	V3CH 3.55M
	No.6	3.35mm	—	V3SF #6	V3SH #6	V3CF #6	V3CH #6
	—	—	3.15mm	V3SF 3.15M	V3SH 3.15M	V3CF 3.15M	V3CH 3.15M
	No.7	2.8mm	—	V3SF #7	V3SH #7	V3CF #7	V3CH #7
	—	—	2.5mm	V3SF 2.5M	V3SH 2.5M	V3CF 2.5M	V3CH 2.5M
	No.8	2.36mm	—	V3SF #8	V3SH #8	V3CF #8	V3CH #8
	—	—	2.24mm	V3SF 2.24M	V3SH 2.24M	V3CF 2.24M	V3CH 2.24M
	No.10	2.0mm	—	V3SF #10	V3SH #10	V3CF #10	V3CH #10
	—	—	1.80mm	V3SF 1.8M	V3SH 1.8M	V3CF 1.8M	V3CH 1.8M
	No.12	1.7mm	—	V3SF #12	V3SH #12	V3CF #12	V3CH #12
	—	—	1.60mm	V3SF 1.6M	V3SH 1.6M	V3CF 1.6M	V3CH 1.6M
	No.14	1.4mm	—	V3SF #14	V3SH #14	V3CF #14	V3CH #14
	—	—	1.25mm	V3SF 1.25M	V3SH 1.25M	V3CF 1.25M	V3CH 1.25M
	No.16	1.18mm	—	V3SF #16	V3SH #16	V3CF #16	V3CH #16
	—	—	1.12mm	V3SF 1.12M	V3SH 1.12M	V3CF 1.12M	V3CH 1.12M
	No.18	1.0mm	—	V3SF #18	V3SH #18	V3CF #18	V3CH #18
	—	—	900µm	V3SF 900U	V3SH 900U	V3CF 900U	V3CH 900U
	No.20	850µm	—	V3SF #20	V3SH #20	V3CF #20	V3CH #20
	—	—	800µm	V3SF 800U	V3SH 800U	V3CF 800U	V3CH 800U
	No.25	710µm	—	V3SF #25	V3SH #25	V3CF #25	V3CH #25
	—	—	630µm	V3SF 630U	V3SH 630U	V3CF 630U	V3CH 630U
	No.30	600µm	—	V3SF #30	V3SH #30	V3CF #30	V3CH #30
	—	—	560µm	V3SF 560U	V3SH 560U	V3CF 560U	V3CH 560U
	No.35	500µm	—	V3SF #35	V3SH #35	V3CF #35	V3CH #35
	—	—	450µm	V3SF 450U	V3SH 450U	V3CF 450U	V3CH 450U
	No.40	425µm	—	V3SF #40	V3SH #40	V3CF #40	V3CH #40
	—	—	400µm	V3SF 400U	V3SH 400U	V3CF 400U	V3CH 400U
	No.45	355µm	—	V3SF #45	V3SH #45	V3CF #45	V3CH #45
	—	—	315µm	V3SF 315U	V3SH 315U	V3CF 315U	V3CH 315U
	No.50	300µm	—	V3SF #50	V3SH #50	V3CF #50	V3CH #50
	—	—	280µm	V3SF 280U	V3SH 280U	V3CF 280U	V3CH 280U
	No.60	250µm	—	V3SF #60	V3SH #60	V3CF #60	V3CH #60
	—	—	224µm	V3SF 224U	V3SH 224U	V3CF 224U	V3CH 224U
	No.70	212µm	—	V3SF #70	V3SH #70	V3CF #70	V3CH #70
	—	—	200µm	V3SF 200U	V3SH 200U	V3CF 200U	V3CH 200U
	No.80	180µm	—	V3SF #80	V3SH #80	V3CF #80	V3CH #80
	—	—	160µm	V3SF 160U	V3SH 160U	V3CF 160U	V3CH 160U
	No.100	150µm	—	V3SF #100	V3SH #100	V3CF #100	V3CH #100
	—	—	140µm	V3SF 140U	V3SH 140U	V3CF 140U	V3CH 140U
	No.120	125µm	—	V3SF #120	V3SH #120	V3CF #120	V3CH #120
	—	—	112µm	V3SF 112U	V3SH 112U	V3CF 112U	V3CH 112U
	No.140	106µm	—	V3SF #140	V3SH #140	V3CF #140	V3CH #140
	—	—	100µm	V3SF 100U	V3SH 100U	V3CF 100U	V3CH 100U
	No.170	90µm	—	V3SF #170	V3SH #170	V3CF #170	V3CH #170
	—	—	80µm	V3SF 80U	V3SH 80U	V3CF 80U	V3CH 80U
	No.200	75µm	—	V3SF #200	V3SH #200	V3CF #200	V3CH #200
	—	—	71µm	V3SF 71U	V3SH 71U	V3CF 71U	V3CH 71U
	No.230	63µm	—	V3SF #230	V3SH #230	V3CF #230	V3CH #230
	—	—	56µm	V3SF 56U	V3SH 56U	V3CF 56U	V3CH 56U
	No.270	53µm	—	V3SF #270	V3SH #270	V3CF #270	V3CH #270
	—	—	50µm	V3SF 50U	V3SH 50U	V3CF 50U	V3CH 50U
	No.325	45µm	—	V3SF #325	V3SH #325	V3CF #325	V3CH #325
	—	—	40µm	V3SF 40U	V3SH 40U	V3CF 40U	V3CH 40U
	No.400	38µm	—	V3SF #400	V3SH #400	V3CF #400	V3CH #400
	—	—	36µm	V3SF 36U	V3SH 36U	V3CF 36U	V3CH 36U
	No.450	32µm	—	V3SF #450	V3SH #450	V3CF #450	V3CH #450
	No.500	25µm	—	V3SF #500	V3SH #500	V3CF #500	V3CH #500
	No.635	20µm	—	V3SF #635	V3SH #635	V3CF #635	V3CH #635
	Regular Pan			V3SFXPN	V3SHXPN	V3BFXPN	V3BHXPN
	Extended Rim Pan			V3SFXPE	V3SHXPE	V3BFXPE	V3BHXPE
	Regular Cover			V3SFXCV		V3BFXCV	
	Cover with Ring			V3SFXCVR		V3BFXCVR	





Acrylic Frame Sieves with Stainless Steel Wire Cloth



Acrylic Frame Precision Sieves with Electroformed Mesh

3IN ACRYLIC FRAME TEST SIEVES

ASTM E11, E161; ISO 565, 3310-1, 3310-3

3in (76mm) diameter sieves have clear acrylic frames for enhanced sample visibility during testing and are machined for improved fit and reduced sample loss. Frames fitted with conventional ASTM E11 stainless steel woven-wire cloth or ASTM E161 Precision Electroformed nickel mesh are available. Each sieve is supplied with a Certificate of Compliance to the appropriate ASTM Standard. GAA-88 Clear Acrylic Spacers are available if fewer sieves are used in the stack.

Wire cloth sieves are available in sizes from 5.60mm (No. 3-1/2) to 20 μ m (No. 635) in ASTM E11 Compliance Grade and can be Verified or Reverified to Inspection or Calibration grades using Gilson Verification Services. Stack height relative to metal frame sieves allows up to twice as many sieves in a stack. Acrylic frame woven-wire sieves are approximately 0.8in (20.3mm) in height.

3in Acrylic Frame Sieves are required for the GA-6 GilSonic AutoSiever Sonic Sifter and are a recommended alternative to metal frame sieves for the SS-3 Gilson 3in Vibratory Sieve Shaker, where the reduced height of the acrylic frames allows up to fourteen sieves in a stack. SSA-17 Acrylic Sieve Adapter allows 3in stainless steel sieve pans to be used with 3in Acrylic Sieves.

Precision Electroformed Sieves offer greater accuracy and opening size selection, making them a better solution for precision particle sizing operations. Opening sizes are available from 150 μ m (No. 100) to 5 μ m and include sizes meeting ASTM E161 and ISO 565 requirements. E161 Precision Electroformed Sieves have tolerances to $\pm 2\mu$ m, two to ten times more precise than ASTM E11 woven-wire sieves and some openings are equivalent to E11 sizes. When calibrated with Standard Reference Materials (SRMs), electroformed sieves can serve as a reliable reference standard. Their increased height limits the number that can be used in a stack. Acrylic frame electroformed sieves are approximately 1.4in (36.8mm) in height.

3in Diameter Acrylic Frame ASTM E11 Test Sieves¹

Sieve Designation		Stainless Steel Mesh	ASTM E161 Precision Electroformed
Alt.	Std.		
No. 3-1/2	5.60mm	GAA-20	—
No. 4	4.75mm	GAA-21	—
No. 5	4.00mm	GAA-22	—
No. 6	3.35mm	GAA-23	—
No. 7	2.80mm	GAA-24	—
No. 8	2.36mm	GAA-25	—
No. 10	2.00mm	GAA-26	—
No. 12	1.70mm	GAA-27	—
No. 14	1.40mm	GAA-28	—
No. 16	1.18mm	GAA-29	—
No. 18	1.00mm	GAA-30	—
No. 20	850 μ m	GAA-31	—
No. 25	710 μ m	GAA-32	—
No. 30	600 μ m	GAA-33	—
No. 35	500 μ m	GAA-34	—
No. 40	425 μ m	GAA-35	—
No. 45	355 μ m	GAA-36	—
No. 50	300 μ m	GAA-37	—
No. 60	250 μ m	GAA-38	—
No. 70	212 μ m	GAA-39	—
No. 80	180 μ m	GAA-40	—
No. 100	150 μ m	GAA-41	GAA-62
No. 120	125 μ m	GAA-42	GAA-63
No. 140	106 μ m	GAA-43	GAA-63A
—	105 μ m	—	GAA-64
—	100 μ m	—	GAA-65
—	95 μ m	—	GAA-66
No. 170	90 μ m	GAA-44	GAA-67
—	85 μ m	—	GAA-68
—	80 μ m	—	GAA-69
No. 200	75 μ m	GAA-45	GAA-70
—	70 μ m	—	GAA-71
—	65 μ m	—	GAA-72
No. 230	63 μ m	GAA-46	GAA-72A
—	60 μ m	—	GAA-73
—	55 μ m	—	GAA-74
No. 270	53 μ m	GAA-47	GAA-74A
—	50 μ m	—	GAA-75
No. 325	45 μ m	GAA-48	GAA-76
—	40 μ m	—	GAA-77
No. 400	38 μ m	GAA-49	GAA-77A
—	35 μ m	—	GAA-78
No. 450	32 μ m	GAA-50	GAA-78A
—	30 μ m	—	GAA-79
No. 500	25 μ m	GAA-51	GAA-80
No. 635	20 μ m	GAA-52	GAA-81
—	15 μ m	—	GAA-82
—	10 μ m	—	GAA-83
—	5 μ m	—	GAA-84

¹Inquire for sizes not listed.

also available

3in Acrylic Frame Stainless Steel Test Sieves can be verified to Inspection or Calibration grades under ASTM E11 or ISO 565 and 3310-1 specifications. See our separate listing for Test Sieve and Screen Tray Verification and other Services.





Micron Air Jet Sieve

MICRON AIR JET SIEVES

These 200mm diameter sieves are made exclusively for the old-style Micron Air Jet Sieve[®] instrument. They are supplied in ASTM E11 Compliance Grade, but can be upgraded to Inspection or Calibration Grade. See separate Gilson Test Sieve Verification Service listing for details. Sieves are constructed with stainless steel frame and mesh and fitted with special sealing gaskets.

Micron Air Jet Sieves [®]		
Sieve Designation		Stainless Steel Mesh
Alt.	Std.	
No.4	4.75mm	AJA-245
No.5	4.00mm	AJA-244
No.6	3.35mm	AJA-243
No.7	2.80mm	AJA-242
No.8	2.36mm	AJA-241
No.10	2.00mm	AJA-240
No.12	1.70mm	AJA-239
No.14	1.40mm	AJA-238
No.16	1.18mm	AJA-237
No.18	1.00mm	AJA-236
No.20	850µm	AJA-235
No.25	710µm	AJA-234
No.30	600µm	AJA-233
No.35	500µm	AJA-232
No.40	425µm	AJA-231
No.45	355µm	AJA-230
No.50	300µm	AJA-229
No.60	250µm	AJA-228
No.70	212µm	AJA-227
No.80	180µm	AJA-226
No.100	150µm	AJA-224
No.120	125µm	AJA-223
No.140	106µm	AJA-222
No.170	90µm	AJA-220
No.200	75µm	AJA-218
No.230	63µm	AJA-217
No.270	53µm	AJA-216
No.325	45µm	AJA-214
No.400	38µm	AJA-213
No.450	32µm	AJA-212
No.500	25µm	AJA-211
No.635	20µm	AJA-210

technote

The new-style AJ-103 and AJ-105 Mikro Air Jet do not require special Micron Air Jet Sieves with the large sealing gasket. They will accept either 200mm or standard 8in diameter sieves fitted with the SSA-10 Sieve Seal Gasket.



Precision Electroformed Sieves

ASTM PRECISION ELECTROFORMED SIEVES

ASTM E161; ISO 565, 3310-3

The $\pm 2\mu\text{m}$ opening tolerances of Precision Electroformed Sieves are consistently more accurate than woven-wire sieves, and sizes are available to $5\mu\text{m}$. Electroformed sieve cloth is formed using electrodeposition of nickel, producing a planar mesh with very consistent square openings. Each sieve is measured at over 100 random openings and supplied with a Certificate of Compliance to meet listed standards. The accuracy, efficiency, and size range of Electroformed Sieves make them a better solution for precision particle sizing operations below $75\mu\text{m}$. When used with precision vibratory or sonic shakers, Electroformed Sieves are often more productive than woven-wire sieves used in standard mechanical shakers. They perform well for dry or wet sieving conditions and can be used with dispersing or wetting agents. When calibrated with glass beads or other reference materials, Electroformed Sieves can serve as a reliable reference standard.

Electroformed Sieves have stainless steel 8in (203.2mm) or 3in (76.2mm) diameter full- or half-height frames. Stacking heights for eight inch diameter frames are 2in (50.8mm) and 1in (25.4mm). For three inch diameter frames, stacking heights are 3in (76.2mm) and 1in (25.4mm). The Lines Per Inch (LPI) value indicates the number of openings of the specified size occurring in one linear inch (25.4mm). Higher LPIs are more fragile while low LPIs have thicker metal, but fewer openings. Standard electroformed cloth has a support grid that increases strength and durability, but blocks some openings and reduces sieving efficiency. To order electroform sieves without this support grid, add a "U" suffix to model numbers. Cloth is bonded to the frame with an epoxy ring. Frames stack with ASTM E11 woven-wire sieves.

Electroformed Sieves are precision instruments and ultrasonic cleaning is recommended for normal maintenance. Gilson assumes no responsibility for damage in use and electroformed sieves are nonreturnable when supplied as ordered. Sieves with larger openings or other LPIs can be quoted on request. Special frames in 200mm or 12in (305mm) diameter ($20\mu\text{m}$ mesh and larger only) can also be quoted.

Precision Electroformed Sieves					
Sieve Designation		8in Diameter		3in Diameter	
Opening Size	LPI	Full-Ht.	Half-Ht.	Full-Ht.	Half-Ht.
75µm	150	V8EF-075	V8EH-075	V3EF-075	V3EH-075
70µm	181	V8EF-070	V8EH-070	V3EF-070	V3EH-070
63µm	181	V8EF-063	V8EH-063	V3EF-063	V3EH-063
60µm	181	V8EF-060	V8EH-060	V3EF-060	V3EH-060
53µm	250	V8EF-053	V8EH-053	V3EF-053	V3EH-053
50µm	250	V8EF-050	V8EH-050	V3EF-050	V3EH-050
45µm	250	V8EF-045	V8EH-045	V3EF-045	V3EH-045
40µm	300	V8EF-040	V8EH-040	V3EF-040	V3EH-040
38µm	300	V8EF-038	V8EH-038	V3EF-038	V3EH-038
32µm	300	V8EF-032	V8EH-032	V3EF-032	V3EH-032
30µm	300	V8EF-030	V8EH-030	V3EF-030	V3EH-030
25µm	400	V8EF-025	V8EH-025	V3EF-025	V3EH-025
20µm	400	V8EF-020	V8EH-020	V3EF-020	V3EH-020
15µm	400	V8EF-015	V8EH-015	V3EF-015	V3EH-015
10µm	500	V8EF-010	V8EH-010	V3EF-010	V3EH-010
5µm	500	V8EF-005	V8EH-005	V3EF-005	V3EH-005
Pan		V8SFXPN	V8SHXPN	V3SFXPN	V3SHXPN
Cover		V8SFXCV	V8SHXCV	V3SFXCV	V3SHXCV
Extended Rim Pan		V8SFXPE	V8SHXPE	V3SFXPE	V3SHXPE





WT-88C #200



WT-88S #200



WT-128S #200



WT-34S #200



WT-84C #200



VIDEO ONLINE

WET-WASH SIEVES

ASTM C117, D1140, E11; AASHTO T 11

Wet-Wash Sieves are used for fines content determinations, or to wash away excessive fines when preparing specimens for particle size testing. All Wet-Wash Sieves have extra-deep frames above the wire cloth to contain wash water, but will also nest with standard pans, covers, and other ASTM sieves. Gilson's all stainless steel Wet-Wash Sieves offer great value, better durability, and much longer service life than brass models. Popular models listed are in stock and feature stainless steel cloth in ASTM No.100 (150µm), No.200 (75µm), and No.325 (45µm) sizes, with stainless steel or brass frames in 12in (305mm), 8in (203mm), or 3in (76mm) diameters.

Inquire for additional mesh sizes. No.30 Backing Cloth is recommended to reinforce finer mesh sizes for longer service life. This can be specified by adding the suffix, "BU" to the model number. Sieves ordered with Backing Cloth are nonreturnable. Deep Frame Wet-Wash Sieves have holes in the lower flange for water drainage.

Sieves ship with ASTM E11 Compliance Grade certification. Gilson Sieve Verification Services are available for certification to Inspection or Calibration Grade requirements.


Wet-Wash Sieves			
Frame Diameter x Depth, in (mm)	Sieve Designation, Alt. (Std.)	Stainless Steel Cloth Stainless Steel Frame	Stainless Steel Cloth Brass Frame
12x8 (305x203)	No.100 (150µm)	WT-128S #100	WT-128C #100
	No.200 (75µm)	WT-128S #200	WT-128C #200
	No.325 (45µm)	WT-128S #325	WT-128C #325
8x8 (203x203)	No.100 (150µm)	WT-88S #100	WT-88C #100
	No.200 (75µm)	WT-88S #200	WT-88C #200
	No.325 (45µm)	WT-88S #325	WT-88C #325
8x6 (203x152)	No.100 (150µm)	WT-86S #100	—
	No.200 (75µm)	WT-86S #200	—
	No.325 (45µm)	WT-86S #325	—
8x4 (203x102)	No.100 (150µm)	WT-84S #100	WT-84C #100
	No.200 (75µm)	WT-84S #200	WT-84C #200
	No.325 (45µm)	WT-84S #325	WT-84C #325
3x4 (76x102)	No.100 (150µm)	WT-34S #100	WT-34C #100
	No.200 (75µm)	WT-34S #200	WT-34C #200
	No.325 (45µm)	WT-34S #325	WT-34C #325

technote

Extend the working life of your wet-wash sieves by adding Backing Cloth when you order! Add "BU" suffix to the model number when ordering. Verification services are not available for sieves with backing cloth.



REPLACEABLE MESH WET-WASH SIEVES

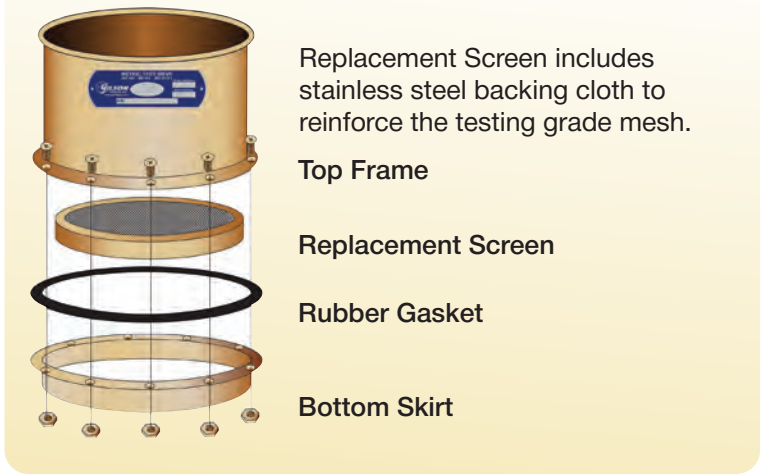

Replacement Screen includes stainless steel backing cloth to reinforce the testing grade mesh.

Top Frame

Replacement Screen

Rubber Gasket

Bottom Skirt



SV-125 shown with Polyester Cloth



SV8-2F shown with Nylon Cloth



SV8-2C



WT-206



WTA-54

REPLACEABLE MESH WET-WASH SIEVES

ASTM C117, D1140, E11; AASHTO T 11

Replaceable Mesh Wet-Wash Sieves save significant expense. Interchangeable screens change out quickly when worn beyond acceptable limits. Unique cartridge assemblies combine ASTM E11 testing-grade stainless steel wire cloth with sturdy backing cloth for long life and replacement convenience. Replacement screens are held securely in place using a rubber gasket and stainless steel fasteners. The 8in (203mm) diameter brass frames nest with conventional sieves and pans. Available in 4in (102mm) or 6in (152mm) heights. Replaceable Screens are available in No.200 (75µm) or No.325 (45µm) mesh and include rubber gasket and backing cloth.

Replaceable Mesh Wet-Wash Sieves	
No.200, 4in height	WT-204
No.200, 6in height	WT-206
No.325, 4in height	WT-324
No.325, 6in height	WT-326
Accessories	
No.200 Replacement Screen	WTA-53
No.325 Replacement Screen	WTA-54

TWO-PART REPLACEABLE MESH SIEVES

Nonmetallic Two-Part 8in (203mm) Transparent Polycarbonate Frames are designed for use with disposable polyester or nylon monofilament mesh sieves squares. Two-part frames have 1/4in (6.4mm) walls that press together to tension the mesh between them. Inexpensive mesh may be replaced when contaminated or blinded. Assembled sieves nest with each other but not with standard metallic sieves. Sieves have an approximately 2in (51mm) stacking height, 2.75in (70mm) overall height, and 2in (51mm) depth to cloth. Frames are not autoclavable.

Brass Two-Part 8in (203mm) Frames can be fitted with 10in (254mm) polyester or nylon monofilament mesh squares. Cloth is placed between the sieve frame and skirt and the two parts are pressed together. Using a fresh cloth eliminates sample contamination from previous tests. Frames are available for fine or coarse cloth. Frames nest with each other or with conventional 8in (203mm) diameter standard sieves.


Polyester or Nylon Mesh Sieve Squares are specially designed to fit in either a nonmetallic or brass two-part frame. Cloth of either nylon or polyester is cut into 10in squares. Polyester is recommended for most applications. Each square has a resilient material embedded in the mesh in a circular shape. This material helps the cloth to seal with the accompanying two-part frame.

Two-Part Replaceable Mesh Sieves		
Nonmetallic Sieve for No.100 and Finer Mesh		SV-125
Nonmetallic Sieve for No.20–80 Mesh		SV-126
Brass Sieve for No.100 and Finer Mesh		SV8-2F
Brass Sieve for No.20–80 Mesh		SV8-2C
Accessories		
Description	Polyester	Nylon
No.20–80 (850–180µm)	PM-1	NM-1
No.100–230 (150–63µm)	PM-2	NM-2
No.270, No.325, No.400 (53µm, 45µm, 38µm)	PM-3	NM-3
No.450, No.500, No.635 (32µm, 25µm, 20µm)	PM-4	NM-4
Nominal 15, 10, 7µm	PM-5	NM-5
Polyethylene Film Square for Pan	PM-10	—





3in Nonmetallic Sieves

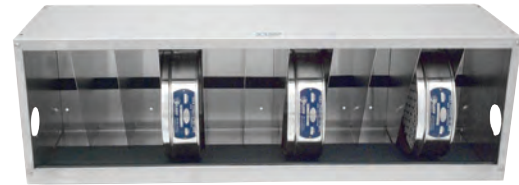

SSA-820 shown with 8in Full-Height Sieves



SSA-803 shown with 8in Full-Height Sieves



VIDEO ONLINE

3IN NONMETALLIC SIEVES

3in (76mm) diameter polycarbonate sieves are manufactured by Gilson for hand sieving small volumes of fine materials. The nonmetallic sieves are constructed using clear polycarbonate frames and polyester mesh. The clear frames make it easy to visually monitor particle action during separations. Mesh and frame are assembled with heat-cured acrylic cement and silicone sealant, and an elastic polyolefin band covers the frame joint and provides an effective seal when nesting. Mesh sizes with openings from 500 μ m to 20 μ m, as well as 15 μ m, 10 μ m, and 7 μ m sizes are available, specify opening size when ordering.

Sieves are 2.9in (73mm) inside diameter, overall height is 1.75in (45mm) and 1.25in (32mm) when stacked. These sieves nest with each other but not with 3in (75mm) acrylic or stainless steel sieve frames. The SV-217 Special Pan with Drain, designed for wet-sieving applications, is 2.5in (64mm) deep and includes a 3/8in (9.5mm) connection compatible with the WT-4 Vinyl Tubing. SV-218 Extended Rim Pan can be inserted in the middle of a sieve stack, allowing more than one specimen to be tested at a time.

3in Nonmetallic Sieves	
No.35-45 (500-355 μ m)	SV-135
No.50-80 (300-180 μ m)	SV-155
No.100-200 (150-75 μ m)	SV-165
No.230-400 (63-38 μ m)	SV-185
No.450-635 (32-20 μ m)	SV-205
Nominal 15, 10, 7 μ m	SV-206
Accessories	
Sieve Cover	SV-215
Regular Pan	SV-216
Special Pan with Drain	SV-217
Extended Rim Pan	SV-218
Clear Vinyl Tubing, 3/8in ID, per foot	WT-4

SIEVE STORAGE RACKS

Wall-Mount Sieve Racks feature all stainless steel construction. Compartment bottoms are neoprene lined and inclined to keep sieves in place. Holes are provided for mounting on 16in (406mm) centers and for bolting racks together vertically and/or horizontally. The bottom front flange has a 1.25in (32mm) high area to label slots for sieve sizes. Nonskid rubber feet allow for stable desk or countertop use.


SSA-820 Wall-Mount Sieve Rack is designed for 8in (203mm) or 200mm diameter sieves. Sieves are held on edge in eleven individual 3in (76mm) wide compartments, each holding one full-height or two half-height sieves. **Product Dimensions:** 34.25x9x11in (870x229x279mm), WxDxH.

SSA-822 Adjustable Wall-Mount Sieve Rack for 12in (305mm) or 300mm diameter sieves is similar in design to SSA-820, but has slots every 0.5in (13mm) for variable placement of the eight supplied dividers. Capacity is eight full-height or fourteen half-height sieves. Additional dividers are available in sets of five as SSA-823. Sieve Rack Units are shipped with instructions for simple assembly. **Product Dimensions:** 36.25x13x15.75in (921x330x400mm), WxDxH.

SSA-803 Adjustable Bench Sieve Rack holds all sieves up to 12in (305mm) diameter properly, preventing damage and optimizing organization and efficiency. Stainless steel rack has nonskid rubber feet and is supplied with two permanent and two adjustable rubber-coated sieve support rods. Unit accommodates twenty full-height (forty half-height) 8in or 200mm sieves, twelve full-height (twenty-four half-height) 12in or 300mm sieves, or forty full-height 3in sieves. SSA-804 Support Rod Set contains two rubber-covered rods and may be used to increase the capacity for 3in full-height sieves to eighty. **Product Dimensions:** 26x13x13in (660x330x330mm), WxDxH.

Sieve Storage Racks	
Wall-Mount Sieve Rack	SSA-820
Adjustable Wall-Mount Sieve Rack	SSA-822
Adjustable Bench Sieve Rack	SSA-803
Accessories	
Dividers for SSA-822	SSA-823
Support Rod Set for SSA-803	SSA-804



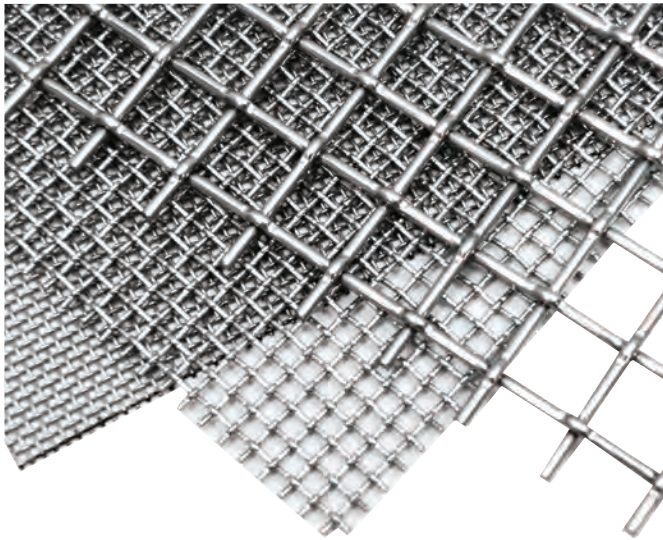

ASTM Testing Grade Wire Cloth


ASTM TESTING GRADE WIRE CLOTH

ASTM E11; AASHTO M 92

Quality stainless steel or brass ASTM woven-wire sieve cloth can be cut to order for special applications. Wire cloth meets ASTM E11 and AASHTO M 92 opening requirements and is the same quality used in Gilson Test Sieves and Screen Trays. Stainless steel cloth is available in all E11 openings, including metric supplemental sizes, and offers the longest possible service life. It's the recommended choice if contamination or wear are issues. Brass cloth is available in openings from 2.36mm to 45µm (No.8 to No.325) and is suitable for less demanding applications.

Most popular sizes are in stock in 36x36in (914x914mm) dimensions, and widths up to 52in (1,320mm) are available. Square or rectangular pieces are cut to customer's specified dimensions. Each cut piece is priced per whole square foot, so one 10x10in cut piece will be priced at one square foot. Inquire for pricing if multiple small pieces or special shapes are required. Wire Cloth cut to order is nonreturnable.

ASTM Testing Grade Wire Cloth		
Mesh Size	Stainless Steel	Brass
4-1/4in (100-6.3mm)	WC-3S	—
No.8-170 (2.36mm-90µm)	WC-5S	WC-5
No.200 (75µm)	WC-200S	WC-200
No.230 (63µm)	WC-230S	WC-230
No.270 (53µm)	WC-270S	WC-270
No.325 (45µm)	WC-325S	WC-325
No.400 (38µm)	WC-400S	WC-400
No.450 (32µm)	WC-450S	—
No.500 (25µm)	WC-500S	—
No.635 (20µm)	WC-635S	—

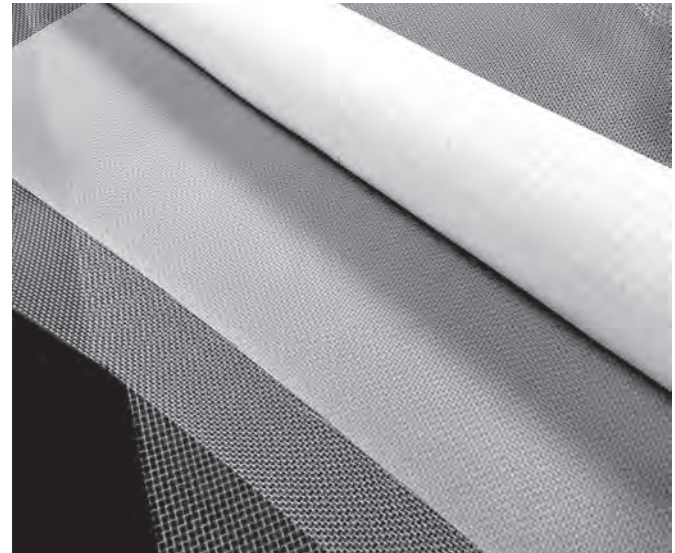


POLYESTER OR NYLON SCREEN CLOTH FABRIC

For special applications where metallic wire cloth cannot be used, choose polyester or nylon cloth fabric with openings equivalent to No.6 (3.35mm) through No.635 (20µm). Both materials have very consistent opening sizes, but average openings and thread diameter may vary substantially from ASTM E11 tolerances for metallic woven wire cloth.

Polyester has good abrasion resistance and is very resistant to most acids and alkalis up to pH of 9-10. It has very good stability when wet. Nylon has excellent abrasion resistance, high tensile strength, and is resistant at high pH conditions, but tends to stretch in water.

Screen Cloth Fabric is supplied cut within the limitations of standard 46in (1,168mm) roll width. Each piece of cloth cut is priced by full square foot, so one 10x10in cut piece will be priced as a full square foot. Inquire for pricing if multiple small pieces, special shapes, or wider pieces are required. Polyester or nylon cloth cut to order is nonreturnable.

Polyester or Nylon Screen Cloth Fabric		
Mesh Size	Polyester	Nylon
No.6-18 (3.35-1.00mm)	PM-A	NM-A
No.20-80 (850-180µm)	PM-B	NM-B
No.100-230 (150-63µm)	PM-C	NM-C
No.270-400 (53-38µm)	PM-D	NM-D
No.450-635 (32-20µm)	PM-E	NM-E
15, 10, or 7µm	PM-F	NM-F



SHIP WEIGHT INDEX

The estimated ship weight for every product is easy to find in the Ship Weight Index!

1 SIEVING / ACCESSORIES



TSA-168 TSA-170 TSA-179 TSA-173



TSA-172



TSA-171



TSA-174

TSA-176



WT-6

Brushes	
Description	Model
Small Fine Sieve Cleaning Brush has soft bristles tapered for use with No.50 and finer mesh sieves in round 0.75in (19mm) ferrule. Overall length is 5in (127mm) with wood handle.	TSA-168
Fine Sieve Cleaning Brush is ideal for cleaning No.16 and finer sieves. Soft bristles, nickered steel ferrule, lacquered wood handle, 1.25x5.75in (32x146mm), dia.xL	TSA-170
Nylon Sieve Cleaning Brush is a hardwood block brush with nylon bristles, optimal for cleaning No.120 and finer mesh sieves. 1.875x0.875in (48x22mm), dia.xThick with 3.75in (95.3mm) straight wood handle. Overall brush length is 5.88in (149mm).	TSA-179
Wire Loop Brush is a 1.25in (32mm) wide fan-type brush with 1.625in (41mm) long metal bristles and a wire loop handle. The 4.75in (121mm) long brush is designed for use on No.16 and coarser wire cloth.	TSA-173
Coarse Sieve Cleaning Brush has an 8.5in (216mm) curved plastic handle with a 1.5x1.75in (38x44mm) area of slanted brass wire bristles—perfect for No.30 and coarser wire cloth in round sieves.	TSA-172
Coarse Screen Tray Brush is recommended for No.30 and coarser wire cloth in screen trays. The 13in (330mm) long curved wooden handle has a 5.5x0.75in (140x19mm) area of fine (0.005) brass wire bristles, which slant toward the tip for cleaning corners of screen trays. Also useful for cleaning sample molds.	TSA-171
Table Brush has a 9x3in (229x76mm) area of horsehair bristles. This 14in (356mm) long brush comes with a plastic or wood handle, depending on availability. A general purpose brush suitable for clean up of lab equipment.	TSA-174
Wire Scratch Brush has flat wire bristles that are grouped in 5x10 rows. Sturdy wood block handle 7.75x2.625 (197x67mm), LxW. The 2in bristles are acceptable for use on soil-cement specimens to meet ASTM D559, D560, AASHTO T 135, and T 136.	TSA-176
Scrub Brushes are available in 20in (508mm) long-handled, or 8in (203mm) short-handled versions and stand up to heavy everyday use in the field. Both feature durable, solid plastic handles and sturdy, acid-resistant synthetic fibers.	Short Scrub Brush, 8in (203mm) Long Scrub Brush, 20in (508mm)
Camel Hair Brush Set for delicate sieve meshes includes two flat-tip and two round-tip brushes.	WT-6



TSA-232



TSA-233



TSA-177 & TSA-178

TSA-182 & TSA-183



TSA-184, TSA-186, & TSA-188

TSA-198

TSA-205, TSA-207, & TSA-208

Scoops					
Type	Model	Capacity, oz (L)	Bottom Type	Bowl LxW, in	Overall Length, in (mm)
Plastic	TSA-177	32 (0.95)	Flat	6.5x 5.0	11.5 (292)
	TSA-178	82 (2.4)	Flat	9.0x 6.0	14.5 (368)
Aluminum	TSA-182	35 (1.03)	Flat	9.0x4.75	13.5 (343)
	TSA-183	4 (0.12)	Flat	4.0x2.25	6.25 (159)
	TSA-193	2 (0.06)	Round	4.5x2.0	7.8 (198)
	TSA-184	5 (0.15)	Round	4.8x2.5	7.3 (185)
	TSA-185	12 (0.36)	Round	5.8x3.3	8.8 (223)
	TSA-186	24 (0.71)	Round	7.0x3.8	10.5 (267)
	TSA-187	85 (2.51)	Round	11.8x6.3	16.0 (406)
	TSA-188	38 (1.12)	Round	8.8x4.6	12.3 (312)
	TSA-189	58 (1.71)	Round	10.0x5.3	14.3 (363)
Stainless Steel	TSA-198	4 (0.12)	Round	3.0x5.0	9.0 (229)
	TSA-205	12 (0.36)	Flat	5.5x3.0	9.0 (229)
	TSA-206	24 (0.71)	Flat	7.0x4.5	12.0 (305)
	TSA-207	45 (1.33)	Flat	8.0x5.5	13.5 (343)
	TSA-208	63 (1.86)	Flat	10x7.0	15.0 (381)



SP-90



WT-7



GAA-19



WT-3S



WT-5




WT-13S



WT-10



WT-4

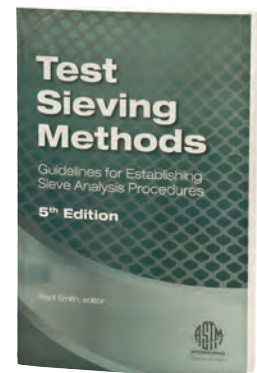


BK-447R

Wet Sieving Accessories	
Description	Model
Automagnet Separator with simple spring plunger has hold-and-release action and permits extraction of magnetic material dry or partially immersed in liquids. Powerful Sealed Alnico V-six Pole Permanent magnet in lightweight aluminum case. Product Dimensions: 2.5x6.5in (64x165mm), dia.xH.	SP-90
Clear Acrylic Spacers for test sieves take the place of one test sieve in any sieve shaker and allow observation of sample materials during wet or dry sieving operations. Visual observation of sieving action makes it easy to judge effectiveness and adjust settings of sieve shakers. Clear Acrylic Spacer for 8in (203mm) Test Sieves Clear Acrylic Spacer for 200mm Test Sieves Clear Acrylic Spacer for 3in (76mm) Test Sieves	GAA-19 GAA-19M SSA-15
Spray Fitting attaches to standard lab faucet with threaded fitting. Adapter for small, unthreaded faucets is included. Superfine conical spray pattern brass fitting is rated at 2gal (7.6L) per minute.	WT-7
Spray Bottle has a 32oz (946mL) capacity and an adjustable nozzle.	WT-5
Sieve Pans with Drains , designed for wet-sieving applications, are available in 3in, 8in, and 12in diameters and are made of brass or stainless steel. The 8in and 12in pans have a 3/8in (9.5mm) barbed fitting drain for connection to WT-4 Vinyl Tubing, and the 3in models have a 1/4in (6.4mm) barbed fitting drain for connection to WT-8 Vinyl Tubing.	WT-3 WT-3S WT-13 WT-13S WT-10 WT-10S
Sieve Seal Gaskets seal between stacked test sieves or pan to prevent loss of fines during wet or dry sieving operations.	SSA-14 SSA-10 SSA-11
Clear Vinyl Tubing is used with sieve pans with drains for wet sieving applications. The WT-4, 3/8in (9.5mm) ID Vinyl Tubing fits 8in (203mm) and 12in (305mm) pans, and the WT-8, 1/4in (6.4mm) tubing fits the 3in (76mm) diameter pans. Priced per foot, or can be purchased in 100ft (30.5m) roll.	WT-4 WT-4R WT-8 WT-8R
ASTM Manual on Test Sieving Methods new 5th edition ASTM publication supplements current ASTM sieving standards. Subject matter covers sieve types, sampling methods, sieving procedures, calculation, and graphing. Appendices include reference tables and charts. 66 pg. soft cover. Product Dimensions: 6x9in (152x229mm), WxH.	BK-447R


1 SIEVING / ACCESSORIES



TSA-271

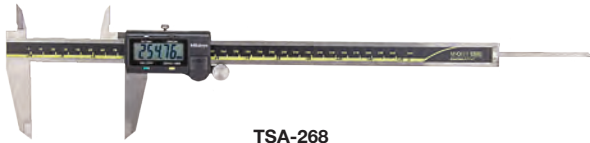

TSA-268

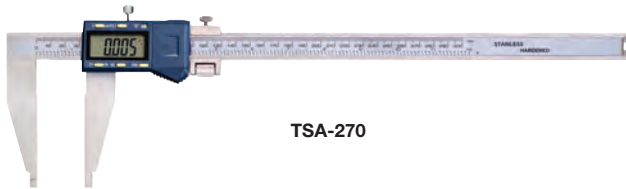

TSA-270



SSA-58



TSA-175



TSA-265


NEW



TSA-222

Sieving Accessories

Description	Model
6in (150mm) Digital Caliper provides accurate inside or outside measurements over a range of 0–6in (0–150mm) and with a readability of 0.0005in (0.01mm). The stainless steel caliper has a smooth-moving 1.5in (38mm) jaw with locking knob, is selectable inches or millimeters, includes zeroing button, and measurement values are displayed on an LCD screen. Protective carrying case and battery are included. Battery is a standard button type and easily replaceable. Product Dimensions: 9.5x3in (241x76mm), LxW.	TSA-271
12in (300mm) Digital Caliper provides accurate inside or outside measurements over a range of 0–12in (0–300mm) and with a readability of 0.0005in (0.01mm). The stainless steel caliper has a smooth-moving 2.5in (63.5mm) jaw with locking knob, is selectable inches or millimeters, includes zeroing button, and measurement values are displayed on an LCD screen. Protective carrying case and battery are included. Battery is a standard button type and easily replaceable. Product Dimensions: 16x4.25in (406x108mm), LxW.	TSA-268
12in (300mm) Heavy-Duty Digital Caliper provides accurate inside or outside measurements over a range of 0–12in (0–300mm) and with a readability of 0.0005in (0.01mm). The stainless steel caliper has a smooth-moving 3.5in (89mm) jaw with locking knob, is selectable inches or millimeters, includes zeroing button, and measurement values are displayed on an LCD screen. Protective carrying case and battery are included. Battery is a standard button type and easily replaceable. Product Dimensions: 17.75x4.25in (451x108mm), LxW.	TSA-270
Sieving Aid is a very fine (5–7 μ m), high purity silicon dioxide powder. When mixed with fine samples (2% by weight is typical), Sieving Aid keeps material free-flowing and prevents agglomeration from static attraction or high humidity. It also acts as a dehydrating agent for samples. Addition does not affect sieving results because of its extremely low bulk density of 7lb/ft ³ (112kg/m ³). 1L is sufficient for over 100 sieving tests. Typical dry purity is 99.6% SiO ₂ . Available as individual 1 liter bottles or convenient and economical 5 packs. Product Dimensions: 3x3.5x8in (76x89x203mm), WxDxH.	Sieving Aid, 1L Bottle SSA-58 Sieving Aid, 5-Pack of 1L Bottles SSA-58C
Pocket Magnifier is ten power (10x) and useful for examination of wire cloth for damage or to check approximate mesh opening size. Not for acceptance testing or verification. Viewing area is 0.5x0.5in (12.7x12.7mm). Product Dimensions: 1.25x1.375x0.95in (32x35x24mm), WxDxH. Open; folds flat to 0.375in (9.5mm) thickness.	TSA-175
Screen Opening Gauge is a useful tool when examining test sieves and screen trays as a quick check for wire cloth opening sizes. Marked from 0.125 to 1.125in on one side and 3 to 28mm on the other, the gauge is simply placed in an opening and read where the mesh contacts the side. Durable 22ga stainless steel body has laser-engraved graduations. Not used for acceptance or verification. Product Dimensions: 1.5x5.5in (38x140mm), WxH.	TSA-265
10x Optical Comparator helps in identification of sieve opening sizes and close examinations of wire cloth condition. Precision scales in inch and millimeter units are photo-etched on 1.2in (30.5mm) diameter interchangeable glass reticles with threaded mounting to eyepiece. Ten-power magnified images are sharp, undistorted, and free of aberrations. The Comparator is packed in a wooden case with nine reticles included to measure distance, radii, diameters, angles, hole sizes, pitch, and thicknesses. An illuminating attachment for low-light conditions is included and requires two C-size batteries for operation. Not effective for acceptance verification of wire cloth openings. Product Case Dimensions: 8.25x4.5x2.25in (210x114x57mm), WxDxH.	TSA-222

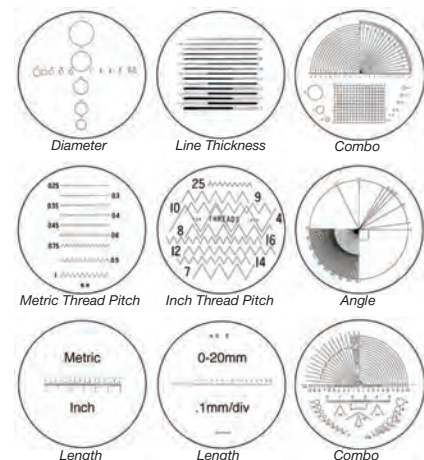

Interchangeable Glass Reticles





GV-65 C shown with Sieve



GV-66 shown with Screen Tray



E11 Certificate of Compliance for all Sieves



VIDEO ONLINE

TEST SIEVE & SCREEN TRAY VERIFICATION SERVICES

ASTM E11, E2427; ISO 565, 3310-1

The latest revisions to ASTM standard E11, *Specification for Wire Cloth and Sieves for Testing Purposes*, have changed the way mesh openings are evaluated by looking at the statistical distribution of aperture sizes, rather than just the average opening sizes. In addition to a more accurate and reliable system of evaluation, this allows greater compatibility with ISO 565 and 3310-1 requirements. There are now three grades, or classes, of ASTM or ISO test sieves available: Compliance, Inspection, and Calibration.

- ▶ **Compliance Test Sieves** are manufactured with wire cloth that has been inspected and measured in roll or sheet quantities prior to being cut and mounted in the individual sieve frames. Opening sizes are not measured in individual sieves. Each Compliance Sieve is supplied with a certificate of manufacturing compliance, but no statistical documentation is given. Compliance Sieves are designed for applications where a basic, reliable degree of accuracy and repeatability are sufficient.
- ▶ **Inspection Test Sieves** have a specified number of openings measured using an optical comparator with NIST traceable calibration in each sieve after the cloth is mounted in the frame. There is a 99% confidence level that the standard deviation of these openings is within the maximum allowed by ASTM or ISO. Inspection Sieves are a good choice in applications where accuracy and repeatability are critical. An Inspection Sieve includes documentation that Inspection Level Sieve Verification services were performed.
- ▶ **Calibration Test Sieves** have about twice as many openings measured as Inspection Sieves. The higher number of openings measured on each sieve increases the confidence level to 99.73% that the standard deviation of these openings is within the maximum allowed by ASTM or ISO. Calibration Sieves should be used in applications where a very high degree of accuracy is required. A Calibration Sieve includes documentation that Calibration Level Sieve Verification services were performed.

Verification of New Sieves by Gilson is guaranteed to meet the requirements of ASTM or ISO for Compliance, Inspection, or Calibration grades as ordered. For continued assurance of performance, procedures should be in place to regularly

check working sieves as they age. Wire cloth stretches, sags, or even tears and abrasive materials reduce wire diameter, causing increased opening sizes and loss of accuracy over time.

Gilson Reverification Services can be performed on used ASTM or ISO Test Sieves or Screen Trays. Simply add "R" suffix to the model number of the desired verification grade. An optical comparator with NIST traceable calibration measures opening and wire diameter sizes on each test sieve. Certification reports are produced for the appropriate grade. These services are available for all ASTM and ISO test sieve sizes and types and are ordered by specifying model numbers for Inspection Sieve Verification or Calibration Sieve Verification. Sieves are not included in the verification purchase price. When reverifying used sieves, contact a Gilson customer service representative.

Master-Matched Sieves are ASTM E11 8in diameter stainless steel or combination sieves from No.8 (2.36mm) to No.325 (45µm), selected for openings and performance closely matching a master set of sieves in Gilson's reference laboratory. Matched sieves ensure uniform results between multiple sieve stacks or test locations, and continuity when ordering replacement sieves.

Master-Matched Sieves or sieve sets are verified as ASTM E11 Inspection grade, and performance tested with NIST traceable Standard Reference Materials to confirm correlation with the master set. Each sieve yields ±2.5% by weight of the value of the master sieve. To order Master-Matched sieves, specify model number MM-70 in addition to each sieve purchased.

Test Sieve & Screen Tray Verification Services¹

Inspection Test Sieve Verification, ASTM E11	GV-60
Calibration Test Sieve Verification, ASTM E11	GV-65
Inspection Test Sieve Verification, ISO 565 and 3310-1	GV-62
Calibration Test Sieve Verification, ISO 565 and 3310-1	GV-63
Inspection Screen Tray Verification, ASTM E11	GV-61
Calibration Screen Tray Verification, ASTM E11	GV-66
Inspection Screen Tray Verification, ISO 565 and 3310-1	GV-64
Calibration Screen Tray Verification, ISO 565 and 3310-1	GV-67
Master-Matched Sieves	MM-70

¹To specify Reverified Sieves, add "R" suffix to model number of desired Verification grade.

HOW TO REVERIFY YOUR TEST SIEVES AND SCREEN TRAYS



EMAIL

Email sieveservices@gilsonco.com to obtain the necessary return authorization form.



CLEAN

Clean your sieves or screen trays, removing all debris or potentially hazardous materials.



PACK

Pack sieves or screen trays in a box with packing materials and authorization form inside.



SHIP

Ship sieves or screen trays to 7975 North Central Drive, Lewis Center, OH 43035.



EXPECT

Expect to receive reverified sieves or screen trays back within 2-3 weeks.



Whitehouse Sieve Standards



NIST Glass Beads

WHITEHOUSE SIEVE STANDARDS

Whitehouse Sieve Standards provide a unique method of verifying No.6 (3.35mm) and finer sieve openings with traceability to NIST. Periodic checks serve as an indicator of when to replace sieves. Each Whitehouse Standard comes as five single-use vials of glass beads for use with a single sieve size. A single vial is used for 8in or 200mm sieves, while two to five vials are used for sieves up to 18in or 450mm in diameter. After processing, the average aperture is quickly read from the calibration graph provided.

Whitehouse has been selected by the Community Bureau of Reference (BCR) to produce standards for the European Community. Whitehouse Sieve Standards are traceable to NIST and NPL as well as to BCR. The spherical beads are made from 2.45 specific gravity soda-lime glass and certified for size using electroformed sieves and image analysis.

Whitehouse Sieve Standards			
Sieve Size	Nominal Wt. per Vial, g	Number of Vials	Model
No.6 (3.35mm)	25.0	5	BS-420
No.7 (2.80mm)	25.0	5	BS-419
No.8 (2.36mm)	20.0	5	BS-418
No.10 (2.00mm)	20.0	5	BS-417
No.12 (1.70mm)	15.0	5	BS-416
No.14 (1.40mm)	15.0	5	BS-415
No.16 (1.18mm)	10.0	5	BS-414
No.18 (1.00mm)	7.0	5	BS-413
No.20 (850µm)	3.0	5	BS-412
No.25 (710µm)	2.5	5	BS-411
No.30 (600µm)	2.5	5	BS-410
No.35 (500µm)	2.5	5	BS-409
No.40 (425µm)	2.5	5	BS-408
No.45 (355µm)	2.5	5	BS-407
No.50 (300µm)	2.5	5	BS-406
No.60 (250µm)	2.5	5	BS-405
No.70 (212µm)	1.5	5	BS-404
No.80 (180µm)	1.5	5	BS-403
No.100 (150µm)	1.5	5	BS-402
No.120 (125µm)	1.0	5	BS-401
No.140 (106µm)	1.0	5	BS-400
No.170 (90µm)	1.0	5	BS-399
No.200 (75µm)	1.0	5	BS-398
No.230 (63µm)	1.0	5	BS-397
No.270 (53µm)	1.0	5	BS-396
No.325 (45µm)	1.0	5	BS-395
No.400 (38µm)	1.0	5	BS-394
No.450 (32µm)	1.0	5	BS-393
No.500 (25µm)	0.8	5	BS-392
No.635 (20µm)	0.8	5	BS-391

NIST REFERENCE MATERIALS

Gilson stocks Standard Reference Materials (SRMs) issued by the US National Institute of Standards and Technology (NIST) for calibration of sieves, sedimentation instruments, particle counters, and other instruments.

NIST Glass Beads are produced for determination of effective sieve opening sizes. They are also useful for calibration of electroformed sieves. The entire sample is placed on clean sieves and shaken in the same manner as a sample test. Percent of glass beads retained on each sieve is calculated and effective openings are determined from calibration data on the supplied NIST Certificate. NIST Glass Beads do not verify sieves to ASTM E11 or ISO certification.

BS-42 NIST Sand No.8010 is a set of three 130g bottles of different sands for use in sieving. Material A is for testing coarser sieves from No.30 to No.100. Material C is for No.70 to No.200 sieves, and Material D is for finer sieves, No.100 to No.325.

BS-46 NIST Portland Cement, No.46h validates sieve opening sizes for ASTM C430; AASHTO T 192 fineness test. It is also certified as an alternative to the BS-50 (NIST 114q) SRM for use in other applications. Supplied with NIST certificate of analysis in 10 sealed vials, each approximately 5g of cement.

BS-50 NIST Portland Cement No.114q is used in the verification and calibration of equipment for the ASTM C115 Wagner turbidimeter, C1891 fineness by air jet sieve, and C204 Blaine apparatus, as well as the C430 fineness by sieve test. (AASHTO T 98, T 153, and T 192 test methods). This standard reference material is supplied with NIST certificate of analysis in 20 vials of approximately 5g of cement each.

NIST Reference Materials					
Material	Model	NIST Model	Range	Qty.	Sample Size, ea.
NIST Glass Beads	BS-5	1019B	No.10–20 (2450–750µm)	1	200g
	BS-10	1018B	No.25–60 (750–220µm)	1	87g
	BS-20	1017B	No.45–140 (400–100µm)	1	70g
	BS-40B	1003C	No.325–635 (45–20µm)	1	28g
NIST Sand	BS-42	8010	No.30–325 (600–45µm)	3	130g
NIST Portland Cement ¹	BS-46	46H	-	10	5g
	BS-50	114Q	-	20	5g

¹Inquire for other NIST Portland cement SRMs for testing to ASTM C114/AASHTO T 105.



QUALITY CONTROL FOR SIEVING OPERATIONS


Establishing a “Master” set of new Inspection or Calibration grade test sieves is a good way to set up a sieving quality control program for ISO 9001 or other quality control/quality assurance plans. Each Verified Inspection or Calibration test sieve is supplied with documentation assuring compliance with ASTM or ISO requirements and can be used to correlate accuracy and ongoing performance of working sieves. Percent retained values from any number of working sieves are periodically compared to the equivalent Master sieve to check for loss of accuracy and results are tracked over time. Acceptable tolerances are established by the user, but quality control programs looking for the highest accuracy accept up to a 1% variation. It is important to maintain the verification status of the Master set, preferably by periodically returning the sieves for reverification

Frequent use and abrasive materials eventually reduce wire diameters and cause an increase in opening sizes that cannot be detected visually. Scheduled correlation testing ensures working test sieves are used to their maximum service life,


yet removed from use as soon as accuracy has degraded further than standards allow. Disruption caused by sending test sieves off-site for verification is minimized.

Materials with known properties are required for correlation testing. Standard Reference Materials (SRMs) are prepared in specific size ranges under carefully controlled manufacturing processes. These precisely sized glass beads or powders are supplied with certificates of compliance traceable to established standards, such as National Institute of Standards and Technology (NIST) or the European Community Bureau of Reference (BCR). User-prepared reference materials can also be formulated from actual production materials using methods in ASTM E2427. User materials are nonstandard, are not traceable, and require more effort to prepare. The correlation tests should be performed on a scheduled basis and results for each serial numbered test sieve should be recorded and filed.

INITIAL SETUP

Master Sieves	Master Sieves % Retained	Sieve	Working Sieves % Retained	Working Sieves
	15.0	Sieve 1	15.5	✓
	8.7	Sieve 2	9.0	✓
	32.2	Sieve 3	31.6	✓
	17.1	Sieve 4	16.7	✓
	25.2	Sieve 5	24.6	✓
	1.8	Pan	2.6	

SCHEDULED RECHECK

Master Sieves	Master Sieves % Retained	Sieve	Working Sieves % Retained	Working Sieves
	15.0	Sieve 1	15.2	✓
	8.7	Sieve 2	7.6	✗
	32.2	Sieve 3	31.4	✓
	17.1	Sieve 4	15.8	✗
	25.2	Sieve 5	24.2	✓
	1.8	Pan	5.8	



UB-1 shown with 8in Sieves



UB-5



UB-18 shown with 8in Sieves



UBA-4

ULTRASONIC SIEVE CLEANERS

Gilson Ultrasonic Sieve Cleaners are ideal for safe and efficient cleaning of fine-mesh sieves with 3–12in (75–305mm) diameters, including electroformed cloth sieves. Ultrasonic energy waves create rapid cavitation, agitating and freeing lodged particles. Most meshes are cleaned in one to five minutes.

Ultrasonic Sieve Cleaners				
Description	Model	Tank Capacity, qt (L)	Tank Dimensions, WxDxH, in (mm)	External Dimensions, WxDxH, in (mm)
<p>Ultrasonic 8in Sieve Cleaner is sized for full immersion cleaning of up to four 8in (203mm) full-height sieves. Generating unit is housed separately from the stainless steel liquid tank for safe and convenient use. Threaded inlet and outlet drain connections are provided. Generator has On/Off push button. Ultrasonic frequency is 80kHz. A UBA-1 Sieve Holder Rack is included. Extra Racks can be ordered separately to increase productivity.</p> <p>Ultrasonic 8in Sieve Cleaner 115V,60Hz Ultrasonic 8in Sieve Cleaner 220V,50/60Hz Sieve Holder Rack for 8in Sieves</p>	UB-1 UB-1A UBA-1	16 (15.1)	9x10x12 (229x254x305)	13x13x15 (330x330x381)
<p>Ultrasonic 12in Sieve Cleaner has identical performance features to UB-1, but the tank is sized for full immersion of two 12in (305mm) diameter full-height sieves.</p> <p>Ultrasonic 12in Sieve Cleaner 115V,50/60Hz Ultrasonic 12in Sieve Cleaner 220V,50/60Hz</p>	UB-5 UB-5A	55 (52)	14x12x20 (356x305x508)	20.5x14x22 (521x356x559)
<p>Ultrasonic Multi-Sieve Cleaner can perform full-immersion cleaning of four full-height, or six half-height 8in (203mm) sieves, or partial-immersion cleaning of two full- or intermediate-height or three half-height 12in (305mm) sieves. 1,500 Watt output, microprocessor circuitry, 0–30min timer, and cooling fan. Vinyl clad stainless steel tank is equipped with drain valve. Sieve Rack is included.</p> <p>Ultrasonic Multi-Sieve Cleaner 120V,50/60Hz Ultrasonic Multi-Sieve Cleaner 220V,50/60Hz Ultrasonic Multi-Sieve Cleaner 240V,50/60Hz</p>	UB-18 UB-18A UB-18B	40 (37.9)	10x16x14 (254x406x356)	19x17x20 (406x330x381)
<p>Special Detergent Concentrate liquid expedites cleaning for all sizes of sieves. A small amount in each tank cleans quickly and effectively and is safe for all meshes. The one gallon (3.8L) bottle of concentrate yields 16 gallons (60.6L) of cleaning solution.</p>	UBA-4	—	—	—



CONNECT WITH US!

Follow us on Facebook, Twitter, YouTube, Instagram, and LinkedIn.





UB-8 shown with 8in Sieves



UB-12 shown with 3in Sieves and UBA-121



UB-15

Ultrasonic Sieve Cleaners

Description	Model	Tank Capacity, qt (L)	Tank Dimensions, WxDxH, in (mm)	External Dimensions, WxDxH, in (mm)
<p>Ultrasonic Rotating Sieve Cleaner cleans four full-height 8in (203mm) fine or coarse sieves with powerful 37kHz ultrasonic frequency at temperatures from 86° to 176°F (30° to 80°C). Sieves are rotated at an angle during cleaning, allowing contaminants to fall to the bottom of the tank. Two operating modes ensure thorough cleaning. Pulse mode produces intermittent bursts of power for intense cleaning. Sweep mode creates small variations in frequency for more uniform and thorough cleaning. LED displays illuminate when Pulse mode is activated and when the set temperature is reached. Operation is controlled through a 30-minute timer with automatic shutdown or can be run continuously until shut off manually. Automatic shutdown occurs at 194°F (90°C) or after 8 hours of continuous operation. A drain valve for the stainless steel tank is located on the side for easy access. Two-year manufacturer's warranty. Operates on 115V, 60Hz power.</p>	UB-8	30 (28)	19.9x11.8x7.9 (505x300x201)	22.4x13.4x12.6 (569x340x320)
<p>Ultrasonic Cleaner for 3in to 8in Sieves features a 5.2qt (5L) tank for full-immersion cleaning of one full-height 8in (203mm) sieve or four full-height 3in (76mm) sieves with powerful 37kHz ultrasonic frequency. Three operating modes include sieve cleaning using alternating pulses to remove stubborn sieve residue, sample prep to clean tools and instruments, and degas for removing gasses from cleaning solutions. The unit features a 30-minute timer and microprocessor-controlled transducer for reliable operation. Set time and time remaining is shown on the LED display, or unit can operate continuously with manual shutoff. The UBA-123 Sieve Holder and UBA-121 Basket provide convenient insertion and removal of sieves or laboratory instruments and are purchased separately.</p> <p>Ultrasonic Cleaner for 3in to 8in Sieves 115V, 60Hz Ultrasonic Cleaner for 3in to 8in Sieves 220V, 50Hz Ultrasonic Sieve Cleaner Basket Sieve Holder</p>	UB-12 UB-12F UBA-121 UBA-123	5.2 (5)	dia.xH 9.45x5.5 (240x140)	dia.xH 11.97x13.2 (304x335)
<p>Ultrasonic 3in Sieve Cleaner is ideal for full-immersion cleaning of 3in (76mm) diameter sieves, including electroformed meshes as fine as 5µm. It is recommended for Gilson 3in Acrylic Frame Sieves. The 320 Watt output generator features microprocessor circuitry and 0–30min timer. Stainless steel tank is equipped with drain valve. 120V, 50/60Hz, 1 amp. UBA-100 stainless steel Sieve Holder is purchased separately.</p> <p>Ultrasonic 3in Sieve Cleaner 120V, 50/60Hz Sieve Holder Rack for 3in Sieves</p>	UB-15 UBA-100	3.4 (3.2)	4x5.4x9.4 (102x137x239)	9x8.1x12.5 (229x206x318)

360° PRODUCT VIEWS
 See more details from all angles with hi-res 360° images at globalgilson.com

1 SIEVING / SIEVE SHAKERS



SS-12R
shown with Sieves



SS-20



SS-3
shown with Sieves

Sieve Shaker Comparison

Model	Description	Test Sieve Capacity, Full-Height/Half-Height					Type	Particle Size Range													
		3in	8in	12in	200mm	300mm		2in (50mm)	1in (25mm)	1/2in (12.5mm)	No.4 (4.75mm)	No.10 (2.0mm)	No.20 (850µm)	No.40 (425µm)	No.100 (150µm)	No.200 (75µm)	No.325 (45µm)	No.500 (25µm)	No.635 (20µm)	5µm	
SS-8R	Gilson 8in Tapping Shaker	—	10/20	—	10/20	—	Circular/Tapping														
SS-12R	Gilson 12in Tapping Shaker	—	10/20	6/13	10/20	6/13	Circular/Tapping														
SS-30	W.S. Tyler® Ro-Tap® 8in Sieve Shaker	—	6/13	—	6/13	—	Circular/Tapping														
SS-31	W.S. Tyler® Ro-Tap® 12in Sieve Shaker	—	—	4/8	—	4/8	Circular/Tapping														
SS-33	W.S. Tyler® Ro-Tap® II 8in Sieve Shaker	—	6x2/ 13x2	—	6x2/ 13x2	—	Circular/Tapping														
SS-20	Gilson Rotary Sifter	—	10/20	6/13	10/20	6/13	Rotary/Tapping														
SS-21	Gilson Silent Sifter®	—	10/20	6/13	10/20	6/13	Rotary/Tapping														
SS-22	Gilson Silent Sifter® II	—	10/20	6/13	10/20	6/13	Rotary/Tapping														
SS-15	Gilson 8in Sieve Shaker	—	6/12	—	6/12	—	Orbital														
SS-15D	Gilson 8in Sieve Shaker, Digital	—	6/12	—	6/12	—	Orbital														
SS-14	Gilson 8in/12in Sieve Shaker	—	10/21	6/14	10/21	6/14	Orbital														
SS-14D	Gilson 8in/12in Sieve Shaker, Digital	—	10/21	6/14	10/21	6/14	Orbital														
SS-3	Gilson 3in Vibratory Sieve Shaker	7/14	—	—	—	—	Vibratory/Tapping														
SS-10	Gilson Vibratory Sieve Shaker	—	8/16	—	8/16	—	Vibratory/Tapping														
SS-34	W.S. Tyler® Ro-Tap® E, 8in Sieve Shaker	—	8/16	—	8/16	—	Vibratory														
SS-36	W.S. Tyler® Ro-Tap® E, 12in Sieve Shaker	—	—	7/14	—	7/14	Vibratory														
GA-6	GilSonic AutoSiever Sonic Sifter	7	—	—	—	—	Sonic/Tapping														
GA-8	GilSonic UltraSiever® Sonic Sifter	—	7	—	7	—	Sonic/Tapping														
AJ-103	Mikro Air Jet, Basic	—	1	—	1	—	Air Jet														
AJ-105	Mikro Air Jet, Advanced	—	1	—	1	—	Air Jet														
SS-82	W. S. Tyler® Coarse Sieve Shaker	—	6/13	4/8	6/13	4/8	Circular														
SS-25	Mary Ann Sifter	—	10/20	6/13	10/20	6/13	Rotary/Tapping														
SS-23	Wet/Dry Sieve Vibrator	—	2	—	—	—	Vibratory														
SS-28	Vibra-Pad	3	—	—	—	—	Vibratory														

SIEVE SHAKER SELECTION

Matching a sieve shaker to material characteristics saves time and money and ensures superior accuracy and repeatability.

ROTARY **Rotary Sifters** hold a sieve stack in an enclosed cabinet tilted at an angle while rollers rotate the sieves to continuously reorient particles. Individual hammers tap sieves to enhance passage of near-size particles. Rotary sifters do not have exposed moving parts and are relatively quiet and dust-free. Clamping systems are not required. Rotary Sifters work well for mineral aggregates and other materials from No.4 to No. 635 (4.75mm to 20 μ m).

CIRCULAR **Circular Sieve Shakers** move the sieve stack on a flat, circular plane. Particles are evenly distributed around most of the sieve surfaces and randomly fall through openings. Units with circular action alone are adequate for coarser free-flowing materials between No.4 (4.75mm) and No.100 (150 μ m). Addition of a tapping mechanism enhances performance and allows efficient separation over a wider range of materials from 1 or 2in (25 or 50mm) to No.635 (20 μ m).

ORBITAL **Orbital Sieve Shakers** mimic the motion of hand sieving and are an economical choice for free-flowing materials. The particles are essentially rolled around on the mesh surface until they fall through an opening. The sieve stack is suspended from a single point at the top while the base is moved in an orbital motion. A bumping action is sometimes introduced as the sieve stack oscillates. Orbital shakers work well for most materials between No.4 (4.75mm) and No.200 (75 μ m).

VIBRATORY **Vibratory Sieve Shakers** use electromagnetic energy to agitate particles. An ideal setting creates a fluid bed of material moving across the mesh. This optimizes the number of openings tried by the sample material. Adjustments for vibration amplitude and frequency on some shakers allow optimization for a wider range of materials. Vibratory Shakers perform well on most materials between No.10 (2mm) and No.635 (20 μ m).

SONIC **Sonic Sieve Shakers** use up to 3,600 sonic energy pulses per minute to oscillate an air column enclosed within the sieve stack. This continuous agitation excites the particles and continuously reorients particles to the mesh surface. Programmable horizontal and vertical tapping clears the sieves and allows accurate separations down to 5 μ m.

TAPPING **Tapping** is a performance-enhancing feature included on many premium sieve shakers with vibratory, circular, orbital, or other primary actions. Repetitive mechanical tapping of the sieve stack reorients particles, aids passage, and prevents blinding. Tapping sieve shakers improve the passage of fines for nearly any material.

PAUSE **Pause** is a function on higher quality Vibratory Shakers with an effect similar to tapping. Programming a pause into the test cycle causes particles to briefly stop and then reorient themselves when agitation resumes.



SS-8R
shown with Sieves



SS-15D shown with Sieves



SS-30 shown with Sieves

1 SIEVING / SIEVE SHAKERS



SS-15D shown with Sieves



SS-14D shown with Sieves

GILSON SIEVE SHAKERS

Gilson portable Sieve Shakers outperform comparably priced sieving equipment. These cost-effective 1/4hp units are widely accepted by state transportation departments for highway materials testing. Both units feature a back-and-forth lateral motion combined with up/down and tilting actions. The test specimen travels in an orbit on the sieve surfaces, assuring full use of sieve mesh area.


Both models feature Gilson's exclusive EZ-Clamp system to quickly and securely lock in sieves for testing. The easy to operate clamping system with integral sieve cover slides freely up and down the clamp rods with the push of a button. Once in position, a quick twist secures the stack. When the test is complete, raise just enough to remove the stack and the clamps stay in place, ready for the next test without readjustment. The "D" digital models control test times with Gilson's exclusive digital countdown timer. The large LED display shows precisely timed operation up to 99 minutes at ± 1 second. A pause function and user-selectable modes offer greater versatility. Settings are saved between cycles for precise repeatability and easy, one-button operation. Standard models use a classic 15-minute spring wound mechanical-electrical timer with manually

adjustable knob stop for improved repeatability and a "Hold" feature for continuous running.

All mechanical and electrical parts are enclosed in a rugged painted steel case with rubber feet. Freestanding operation is normal, but they may be securely mounted via holes provided in bottom end flanges. Standard models operate on 115V, 60Hz power. Units ordered with "F" model number suffix operate on 230V, 50Hz and are shipped without an electrical plug.

SS-14 Gilson 8in/12in Sieve Shakers accept sieves in 8in, 12in, 200mm, or 300mm diameters for maximum versatility. Extended stack height allows more sieves in a single stack for efficient processing. Sieve capacity ranges from six 12in full-height to twenty-one 8in half-height sieves plus pan. Recommended for 1/2in–No.200 (12.7mm–75 μ m) size range. **Product Dimensions:** 26x20x40in (660x508x1,016mm), WxDxH.

SS-15 Gilson 8in Sieve Shakers have a stack capacity of six full-height sieves with pan or twelve half-height sieves with pan and also accept 200mm sieves.

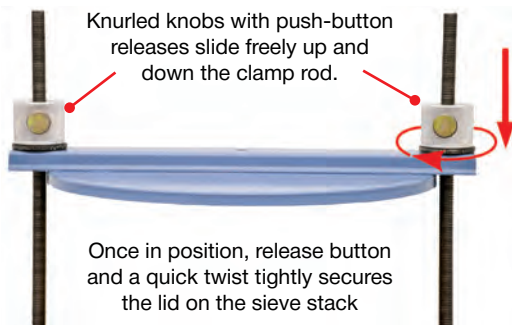

EZ-Clamp System



EZ-Clamp close-up



SSA-802 shown with TSA-150 and Sieve



Close-up of Digital Timer



SSA-806



OBA-15R shown with TSA-150 and Sieve

The SSA-806 EZ Clamp Upgrade kit is available to update older SS-15 shakers for more efficient performance and easier operation. Recommended for No.4–No.200 (4.75mm to 75µm) size range. **Product Dimensions:** 17x11x30in (432x279x762mm), WxDxH.

SSA-802 and OBA-15R Clean-N-Stor units are fast and efficient for collection, cleaning, and weighing operations when sieving. Includes metal stand, collection scoop, and soft bristle brush.

Gilson Sieve Shakers

Gilson 8in Sieve Shaker, 115V,60Hz	SS-15
230V,50Hz	SS-15F
Gilson 8in Sieve Shaker, Digital Timer, 115V,60Hz	SS-15D
230V,50Hz	SS-15DF
Gilson 8in/12in Sieve Shaker, 115V,60Hz	SS-14
230V,50Hz	SS-14F
Gilson 8in/12in Sieve Shaker, Digital Timer, 115V,60Hz	SS-14D
230V,50Hz	SS-14DF

Accessories

EZ-Clamp Upgrade Kit for SS-15	SSA-806
Stand Alone Clean-N-Stor	SSA-802
Adjustable Height Clean-N-Stor	OBA-15R

technote

Test Sieve Capacity of Gilson Portable Shakers

Sieve Diameters and Designations	SS-14	SS-15
8in and 200mm, Full-Height	10	6
8in and 200mm, Half-Height	21	12
12in and 300mm, Full-Height	6	—
12in and 300mm, Intermediate-Height	10	—
12in and 300mm, Half-Height	14	—



VIDEO TUTORIALS

Visit globalgilson.com to watch DIY videos for maintenance, repair, and calibration.



1 SIEVING / SIEVE SHAKERS



SS-20



DIY VIDEO



VIDEO ONLINE



TAPPING



ROTARY



SS-21



DIY VIDEO



VIDEO ONLINE



TAPPING



ROTARY



SILENT SIFTER



SS-20 inside view shown with 8in Sieves

GILSON ROTARY SIFTERS

- Built by Gilson, backed by Gilson
- Accurate results
- Simple and efficient
- Silent Sifter® and Silent Sifter® II: “The quietest in the industry”

Rotary Sifters by Gilson bring innovative performance updates and Gilson-guaranteed quality and reliability to a long-proven design favored by many state DOTs. Our newest Silent Sifter® models reflect today's emphasis on noise reduction and worker protection in the laboratory environment.

The totally enclosed cabinet is high quality CNC machined MDF board, precisely fitted to confine and control airborne respirable quartz, silica, crystalline particles, and other nuisance dusts. An ergonomically positioned side knob allows for easy tilting of the cabinet between loading and testing positions. No clamping is required, simply place the sieve stack in the cabinet, close the door, tilt the cabinet to test position, and press start. A safety interlock switch disables the sifter and resets the timer if the door is opened during the test. The full width door swings open fully on heavy-duty commercial grade hinges to permit easy loading and unloading of sieves. Bearing and rod safety covers eliminate exposed moving parts below the cabinet for greater compliance with OSHA regulations.

Adjustment between 8 to 12in or 200 to 300mm diameter sieves is a simple turn of a spring-loaded knob and repositioning of the turntable. Sieve stack capacity ranges from six 12in/300mm diameter full-height sieves with pan, to twenty 8in/200mm diameter half-height sieves with pan. Rubber-covered drive rollers continuously rotate the sieve stack and particle separation is aided by individual tapping hammers. The digital countdown timer with large LED display precisely times operation up to 99 minutes, 59 seconds at ±1 second for precise repeatability. The timer features easy, one-button operation and settings are saved between cycles.

The cabinet is mounted on a sturdy, powder-coated ASTM A513 heavy steel tubing stand. Hammer assemblies are 6061 aluminum alloy with Ultra High Molecular Weight (UHMW) Polyethylene heads. The system is driven by a dependable 1/4hp continuous-duty motor. Users of other Rotary Sifters can still take advantage of Gilson's advances in design, along with better pricing and availability by upgrading commonly replaced parts with Gilson components. Gilson Hammer Assemblies, Hammer Heads, and Timers fit all current rotary sifter brands and are designed for efficient operation and long service life. Inquire for other quality replacement components. **Product Dimensions:** 19x24x58in (483x610x1,473mm), WxDxH.

NEW



SS-22 shown with 12in Sieves





Close-Up of SS-22 Tapping Hammers



Close-Up of Ergonomic Test Positioning Knob

GILSON ROTARY SIFTERS

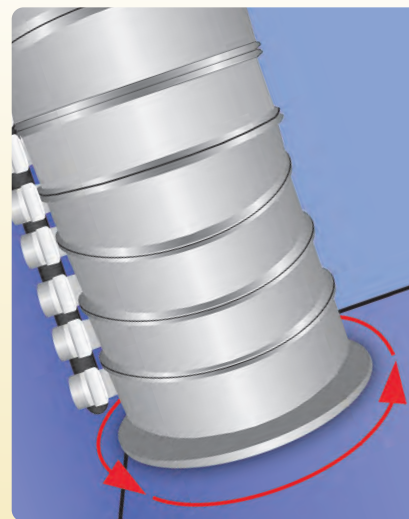

As the sieve stack rotates, hammers tap the sieves to reorient and redistribute particles across the sieve surface.

SS-21 Silent Sifter® significantly reduces operational noise levels with no loss of performance. Design modifications made using Gilson’s proprietary silencing technology have resulted in a unit with noise levels 7–10dB lower than other rotary sifters. The floor stand of the SS-21 is equipped with 4in diameter hard rubber locking swivel casters for easy mobility in the lab. The Silent Sifter makes a significant contribution to the reduction of noise levels in your lab.

SS-22 Silent Sifter® II offers the highest level of noise reduction and much lower dust levels. Specially engineered with advanced soundproofing materials and techniques, this sifter is 16–18dB quieter than standard rotary sifters and 8–10dB quieter than even our SS-21 Silent Sifter. A heavy-duty, over-center lever latch pulls the door tightly against the case gasket, ensuring a tight, dust-proof seal that enhances noise control. This is your first choice for enhanced worker protection and reduction of nuisance noise levels while maintaining a high level of accuracy and repeatability. The Silent Sifter® II includes durable 4in hard rubber locking casters on the frame.

SS-20 Rotary Sifter offers classic design and efficient operation in an economic package. Advanced design, upgraded materials, and efficient operation put the SS-20 a step above ordinary rotary sifters, while maintaining compliance with specification requirements. For ease of mobility, SSA-77 4in Hard Rubber Locking Swivel Casters may be purchased separately for the SS-20.

Gilson Rotary Sifters

Gilson Rotary Sifter, 115V, 60Hz	SS-20
230V, 50Hz	SS-20F
Gilson Silent Sifter®, 115V, 60Hz	SS-21
230V, 50Hz	SS-21F
Gilson Silent Sifter® II, 115V, 60Hz	SS-22
230V, 50Hz	SS-22F

Accessories

Rotary Sifter Hammer Assembly	SSA-72
Rotary Sifter Hammer Head	SSA-74
Rotary Sifter Timer/Controller	SSA-76
Rotary Sifter 4in Locking Swivel Casters	SSA-77
Bearing Covers	SSA-16
Replacement Tapper Caps	SSA-12



Ship Weight Index. Find estimated ship weight for every product in the Ship Weight Index.

1 SIEVING / SIEVE SHAKERS

DESIGNED FOR THESE
8in
200mm
SIEVE DIAMETERS




SS-8R shown with Sieves

DESIGNED FOR THESE
8 in 200 mm
12 in 300 mm
SIEVE DIAMETERS



SS-12R shown with Sieves



Once in position, release button and a quick twist tightly secures the lid on the sieve stack

EZ-Clamp System



DIY VIDEO



VIDEO ONLINE



TAPPING



CIRCULAR



DIY VIDEO



VIDEO ONLINE



TAPPING



ROTARY



SILENT SIFTER

GILSON TAPPING SIEVE SHAKERS


- Two-way tapping
- Gilson exclusive EZ-Clamp System
- No permanent mounting required
- Precision digital controller
- Capacities of up to twenty sieves

Research-based sieving action of Gilson SS-8R and SS-12R Tapping Sieve Shakers produces sharp, repeatable separations quickly over a broad range of particle sizes and material types. The Gilson-engineered sieving action results from perfect circular rotation of the sieve stack plus vertical two-way tapping at 48 taps per minute. Superior circular rotation prevents “dead spots” on the sieve surfaces that prevent complete separation. Particles roll in all directions relative to the pattern of woven sieve mesh. “Up” taps mix, reorient, and redistribute particles to present new orientations to sieve surfaces. “Down” taps assist in passing near-size particles to clear the mesh. These high-capacity shakers can hold as many as twenty sieves, depending on model and sieve frame dimensions.

Gilson’s exclusive digital controller provides precise test times for exact repeatability up to 99 minutes, at ± 1 second. Settings are saved between cycles for easy, one-button operation. A pause function allows the cycle to be suspended and resumed with no loss of test time and a five-second audible alarm sounds at completion of the interval. The controller is simple to program and the large, bright 0.5in (12.7mm) LED display is easy to read.

Easy to operate new EZ-Clamp system with integral sieve cover slides freely up and down the clamp rods with the push of a button. Once in position, simply release, then a quick twist secures the cover on the sieve stack. Once the test is complete, raise just enough to remove the stack. The clamps stay in place, ready for the next test without readjustment. The EZ-Clamp system is also available as an accessory to retrofit older SS-8R and SS-12R shakers.

Gilson’s internal counterbalance system promotes stability during operation without the need for permanent mounting. The unit can easily be relocated, using the adjustable footpads for leveling. Gilson Sieve Shakers are housed in sturdy painted steel cases and powered by 1/3hp electric motors. Standard models operate on 115V, 60Hz power. Units ordered with “F” model number suffix operate on 230V, 50Hz and are shipped without an electrical plug. Sieves and accessories are ordered separately. **Product Dimensions:** 22.5x13x41in (572x330x1,041mm), WxDxH.

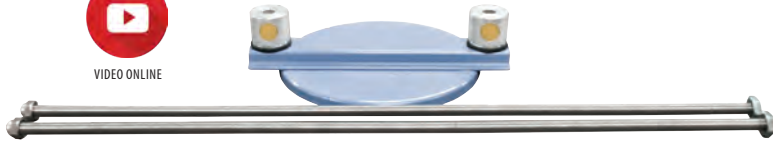

SSA-807



SSA-801 shown with Sieve on SS-8R



SSA-802 shown with TSA-150 and Sieve



SSA-805R shown with SS-8R and Sieves

technote

Test Sieve Capacity of Gilson Tapping Shakers

Sieve Diameters and Designations	SS-8R	SS-12R
8in and 200mm, Full-Height	10	10
8in and 200mm, Half-Height	20	20
12in and 300mm, Full-Height	—	6
12in and 300mm, Intermediate-Height	—	10
12in and 300mm, Half-Height	—	13

Gilson SSA-805R Sound Enclosure accessory controls noise and dust associated with Sieve Shakers and other lab equipment. Sturdy painted steel case with full-width hinged doors is lined with 1in (25.4mm) of sound-attenuating foam. **Product Dimensions:** 31x19x46in (787x483x1,168mm), WxDxH.

Clean-N-Stor accessories streamline collection, cleaning, and weighing functions for sieving operations. Inverting an 8in or 200mm sieve on the stainless steel funnel empties contents into a receiving scoop or pan. A scoop and soft-bristle brush are included with all models. SSA-801 attaches to the top of the SS-8R case. SSA-802 is a stand-alone model that can be positioned directly over an electronic balance. OBA-15R features adjustable height to fit over taller balances. **Product Dimensions:** OBA-15R 8.4x11x6.8in (213x279x173mm), SSA-801 8.5x11.6x5.5in (216x295x140mm), SSA-802 8.5x11.6x5.5in (216x295x140mm), WxDxH.

Gilson Tapping Sieve Shakers

Gilson Tapping Sieve Shaker 8in, 115V, 60Hz	SS-8R
230V, 50Hz	SS-8RF
Gilson Tapping Sieve Shaker 12in, 115V, 60Hz	SS-12R
230V, 50Hz	SS-12RF

Accessories

EZ-Clamp Upgrade Kit for SS-8R	SSA-807
EZ-Clamp Upgrade Kit for SS-12R	SSA-809
Sound Enclosure	SSA-805R
Clean-N-Stor Attachment for SS-8R	SSA-801
Stand Alone Clean-N-Stor	SSA-802
Adjustable Height Clean-N-Stor	OBA-15R

1 SIEVING / SIEVE SHAKERS



SS-30 shown with Sieves



SS-33 shown with Sieves



SS-31 shown with Sieves



W.S. TYLER® RO-TAP® SIEVE SHAKERS

W.S. Tyler® Ro-Tap® Sieve Shakers are widely accepted in standardized test methods. They complete 278 oscillations and 150 taps per minute, as specified in some ASTM and other sieving applications. The horizontal, circular action applied to the sieves, combined with the vertical tapping of the hammer, allows materials to separate and “seek” critical openings in the sieves. This two-dimensional operation assures accurate and consistent results. This sieve shaker eliminates the need for hand sieving, saving the operator valuable time that can be spent elsewhere in the lab. Using this shaker decreases the amount of time spent on each analysis, allowing the operator to perform more tests and analyze more results in less time. Many sieving operations can be completed in less than fifteen minutes.

These shakers are designed for heavy-duty use, and maintenance is typically simple and easy to complete. The shakers bolt easily to a solid table or sturdy bench top to ensure testing is run safely and the machine doesn’t move during testing. All models feature an adjustable-plate sieve support and built-in 99-minute digital timer that is accurate to 0.1 second. Powerful 1/4hp motors provide plenty of action for efficient separations. Sieves are ordered separately, and a sieve cover is required. Accessories are available both individually and in kits with a sieve shaker and can be found listed on the opposite page.

SS-30 W.S. Tyler® Ro-Tap® 8in Sieve Shaker holds up to six full-height 8in (203mm) sieves with a full-height pan, or thirteen half-height sieves with a half-height pan. Recommended particle size range is No.4–635 (4.75mm–20µm). Add “S” suffix to model number for 230V, 60Hz power supply, and “F” suffix for 110–220V, 50Hz power supply. **Product Dimensions:** 28x21x25in (711x533x635mm), WxDxH.

SS-31 W.S. Tyler® Ro-Tap® 12in Sieve Shaker holds up to four 12in (305mm) full-height sieves and pan, six intermediate-height sieves and pan, or eight half-height sieves and pan. Recommended particle size range is 1/2in–No.500 (12.5mm–25µm). Add “S” suffix to model number for 230V, 60Hz power supply, and “F” suffix for 230V, 50Hz power supply. **Product Dimensions:** 28x21x25in (711x533x635mm), WxDxH.

SS-33 W.S. Tyler® Ro-Tap® II 8in Sieve Shaker performs two 8in (203mm) sieve tests simultaneously with exactly the same action as the single-stack models. Recommended particle size range is No.4–635 (4.75mm–20µm). Add “S” suffix to model number for 230V, 60Hz power supply, and “F” suffix for 230V, 50Hz power supply. **Product Dimensions:** 30x27x26in (762x686x660mm), WxDxH.

SS-30K W.S. Tyler® Ro-Tap® 8in Sieve Shaker Lab Kit includes the SS-30 8in Sieve Shaker, SSA-320A Sound Enclosure, and SSA-325 Test Stand.



SS-30K shown with Sieves



SS-31 shown with Sieves and SSA-320A

SS-31K W.S. Tyler® Ro-Tap® 12in Sieve Shaker Lab Kit includes the SS-31 12in Sieve Shaker, SSA-320A Sound Enclosure, and SSA-325 Test Stand.

SSA-320A Sound Enclosure for SS-30 or SS-31 W.S. Tyler Ro-Tap Sieve Shakers has a steel cabinet lined with 1in (25.4mm) thick acoustic foam. Two front doors and a top-opening panel allow easy access. A small access port is built into the rear of each unit. **Product Dimensions:** 35x24x29in (889x610x737mm), WxDxH.

SSA-321 Sound Enclosure has all of the same features as the SSA-320A, but it is dimensioned to fit the larger SS-33 W.S. Tyler Ro-Tap II 8in Sieve Shaker. **Product Dimensions:** 34x33x31in (864x838x787mm), WxDxH.

SSA-325 Test Stand for SS-30 and SS-31 can be used with or without the SSA-320A. The sturdy aluminum frame includes hardware for assembly and floor anchoring. **Product Dimensions:** 20x32x28in (508x813x711mm), WxDxH.

SSA-321 Sound Enclosure has all of the same features as the SSA-320A, but it is dimensioned to fit the larger SS-33 W.S. Tyler® Ro-Tap® II 8in Sieve Shaker. **Product Dimensions:** 34x33x31in (864x838x787mm), WxDxH.

SSA-325 Test Stand for SS-30 and SS-31 can be used with or without the SSA-320A. The sturdy aluminum frame includes hardware for assembly and floor anchoring. **Product Dimensions:** 20x32x28in (508x813x711mm), WxDxH.

W.S. Tyler® Ro-Tap® Sieve Shakers

W.S. Tyler® Ro-Tap® 8in Sieve Shaker, 115V, 60Hz	SS-30
110–220V, 50Hz	SS-30F
230V, 60Hz	SS-30S
W.S. Tyler® Ro-Tap® 12in Sieve Shaker, 115V, 60Hz	SS-31
230V, 50Hz	SS-31F
W.S. Tyler® Ro-Tap® II 8in Sieve Shaker, 115V, 60Hz	SS-33
230V, 50Hz	SS-33F
230V, 60Hz	SS-33S
W.S. Tyler® Ro-Tap® 8in Sieve Shaker Lab Kit	SS-30K
W.S. Tyler® Ro-Tap® 12in Sieve Shaker Lab Kit	SS-31K

Accessories

Sound Enclosure for SS-30 and SS-31	SSA-320A
Test Stand for SS-30 and SS-31	SSA-325
Sound Enclosure for SS-33	SSA-321

W.S. Tyler® and Ro-Tap® are registered trademarks of Haver Tyler, Inc.

1 SIEVING / SIEVE SHAKERS



SS-82 shown with Sieves



SS-34 shown with Sieves

W.S. TYLER® COARSE SIEVE SHAKER

Designed for materials in the No.4 (4.75mm) to No.100 (150µm) size range, this rugged W.S. Tyler® sieve shaker is portable enough for field applications. An effective circular sifting motion is imparted to sieves via the 1/4hp motor. Built-in digital timer with 99 minute range is accurate to 0.1 second.

SS-82 accommodates both 8in (203mm) and 12in (305mm) sieves with included adapter. Shaker will accept six to thirteen 8in (203mm) sieves and four to eight 12in (305mm) sieves, dependent upon use of full-, intermediate-, or half-height sieve frames. Mounting holes are provided in the frame for securing the unit to a table or benchtop. **Product Dimensions:** 28x22x34in (711x559x864mm), WxDxH.

W.S. Tyler® Coarse Sieve Shaker

W.S. Tyler® Coarse Sieve Shaker, 115V, 60Hz	SS-82
220V, 50Hz	SS-82F

W.S. Tyler® is a trademark of Haver Tyler, Inc.



CONNECT WITH US!

Follow us on Facebook, Twitter, YouTube, Instagram, and LinkedIn.

W.S. TYLER® RO-TAP® E SIEVE SHAKERS

W.S. Tyler® Ro-Tap® E Sieve Shakers designed for 8in (203 mm) or 12in (305mm) test sieves are intended for light to medium duty applications in the size range of No.10 (2mm) to No.635 (20µm). Electromagnetic vibration produces constant amplitude and three-dimensional sieving action to ensure complete separations. Controls allow customized settings for analyses of fine or coarse materials. Digital controls, quick-release clamping, quiet operation, and a see-through cover are featured on both models. Heavy construction and cast iron parts assure a long service life.

SS-34 W.S. Tyler® Ro-Tap® E 8in Sieve Shaker is compact and requires minimal counter space. The shaker will accept eight full-height or sixteen half-height sieves, plus pan. Units automatically adjust to 110V, 60Hz or 220V, 50Hz power supplies. **Product Dimensions:** 18x18x30in (457x457x762mm), WxDxH.

SS-36 W.S. Tyler® Ro-Tap® E 12in Sieve Shaker is a larger floor unit. The digital control panel can be remotely mounted. Sieve capacity is seven full-height or ten half-height sieves with pan. Units operate on 110V, 60Hz or 220V, 50Hz power supplies. **Product Dimensions:** 15x17x38in (380x430x960mm), WxDxH.

W.S. Tyler® Ro-Tap® E Sieve Shakers

W.S. Tyler® Ro-Tap® E 8in Sieve Shaker, 110V, 60Hz or 220V, 50Hz	SS-34
W.S. Tyler® Ro-Tap® E 12in Sieve Shaker, 110V, 60Hz or 220V, 50Hz	SS-36


W.S. Tyler® and Ro-Tap® are registered trademarks of Haver Tyler, Inc.



SS-10 shown with Sieves




SS-10 CLAMPING SYSTEM



Apply light upward pressure on both bottom levers to move sieve cover up or down.



Press downward on both top levers several times to securely hold the sieves.

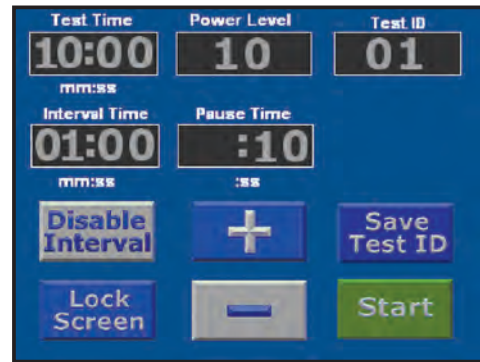SS-10
Touchscreen

GILSON VIBRATORY SIEVE SHAKER

- ▶ Quiet, efficient operation with a compact benchtop footprint
- ▶ Three-dimensional agitation for maximum efficiency
- ▶ Menu-guided touchscreen controls for easy set up
- ▶ Wide range of control settings for performance customized to materials
- ▶ Fast, accurate separations for materials No.10–635 (2.00mm–20µm)

Gilson's Vibratory Sieve Shaker for 8in and 200mm sieves combines the latest in electronic control with proven separation technology for fast, accurate separations of materials 2mm and finer. The touchscreen programmable controller allows selection of vibration level, time and pauses. Once operating parameters are set, just tap "Start" on the display screen to begin each new test. Up to 99 testing profiles can be stored in nonvolatile memory to ensure exact repeatability. Quiet, compact benchtop unit offers complete control of multidirectional agitation for optimum performance based on material type.

The wide range of user-controlled performance options means the SS-10 is suitable for a variety of materials. Pharmaceuticals, powders, and many other granular materials are efficiently sized on this programmable sieving system. The three-dimensional sieving action evenly distributes the specimen across sieve surfaces and continuously reorients particles to ensure the maximum number of passing opportunities. Optimal size range is dependant on material

type, but typically, particles between No.10 and No.635 sieve sizes are easily processed. GAA-19 Clear Acrylic Spacer for 8in sieves can be used in place of one sieve to visually observe specimen action when optimizing vibration settings. The 5.6in (142.2mm) touchscreen offers a bright, clear view of controls and operating information. Fast acting stack clamps adjust quickly, hold their position, and tighten with little effort. Sieves are securely locked down, assuring efficient transfer of vibration energy during operation.

The shaker accepts eight full-height, or sixteen half-height 8in (203mm) diameter sieves plus pan. 200mm sieves can also be used. Times can be set up to 99 minutes, 59 seconds. Ten levels of vibration power are selectable for optimum separation efficiency with different materials.

The sturdy housing is powder-coated steel and has adjustable leveling feet with nonskid rubber pads. Electrical requirements are 115V, 60Hz. **Product Dimensions:** 12x16.5x28in (305x419x711mm), WxDxH,

Gilson Vibratory Sieve Shaker

Gilson Vibratory Sieve Shaker, 115V, 60Hz

SS-10

Accessories

Clear Acrylic Spacer for 8in Test Sieves

GAA-19

1 SIEVING / SIEVE SHAKERS



SS-3 shown with Acrylic Sieves



EZ-Clamp Knob



SSA-15



SS-3 shown with Stainless Steel Sieves



VIDEO ONLINE



GILSON 3IN VIBRATORY SIEVE SHAKER

- Efficient electromagnetic vibratory action
- 0–100% amplitude control
- Accepts metal or acrylic frame sieves
- Switchable tapping action
- Exclusive Gilson EZ-Clamp System quickly secures sieves

The Gilson 3in Vibratory Sieve Shaker compact size and efficient operation make it ideal for dry powder separations of small samples. The 3in (76mm) Sieve Shaker is designed for chemicals, minerals, pharmaceuticals, powdered metals, cosmetics, abrasives, ores, foods, and other fine powders. Effective size range is No.4–635 (4.75mm–20µm) with woven-wire sieves. Extended sizes are possible with some materials.

High frequency 3,600vpm electromagnetic vibratory action with 0–100% amplitude control allows optimal settings for fine particle separations. In-line solenoid actuated tapping action (60 taps/min) redistributes the sample on the sieves and breaks static blinding, helping to rapidly clear undersize particles.

The SS-3 accepts 3in (76mm) test sieves or Gilson clear acrylic frame sieves. Sieve capacity is seven full-height or fourteen half-height metal sieves, or fourteen acrylic sieves, plus pans. The unique Gilson EZ-Clamp sieve clamping mechanism makes insertion and removal of the sieve stack simple and convenient. The knobs on the clamping mechanism allow the stack to be released with a quick twist. The mechanism remains at this height until the knobs are tightened to secure the sieves in place.



VIDEO TUTORIALS

Visit globalgilson.com to watch DIY videos for maintenance, repair, and calibration.

SS-3 features include a rugged powder-coated steel case, variable control for vibration intensity and a manual/timed mode switch. A sieve cover is included. The digital countdown timer controls operation to 99 min., 59 sec. and has a pause feature. SSA-15, 3in (76mm) Acrylic Spacer is helpful for observing sample action while leveling platform or for setting vibration. SSA-17 Clear Acrylic Adapter allows 3in acrylic sieves to be used with 3in stainless steel pan. Power requirements are 115V, 50/60Hz. For 230V operation, order TR-502 Transformer. **Product Dimensions:** 8x11x22in (203x279x559mm), WxDxH.

Gilson 3in Sieve Shaker	
Gilson 3in Vibratory Sieve Shaker, 115V, 50/60Hz	SS-3
Accessories	
Adapter for Acrylic Sieves to Stainless Steel Pan	SSA-17
Acrylic Spacer for Metal Sieves	SSA-15
Clear Acrylic Spacer for Acrylic Sieves	GAA-88
500 Watt, Step-Up/Step-Down Transformer	TR-502



DESIGNED FOR THESE
3in
Acrylic
ONLY
SIEVE DIAMETERS



GA-6 shown with Sieves



DIY
VIDEO



VIDEO ONLINE



TAPPING



SONIC

GILSONIC AUTOSIEVER SONIC SIFTER


- Fast, efficient, and proven dry separations of fine powders
- Size range from 850µm (No.20) to 5µm
- Programmable vertical and horizontal tapping clears sieve openings and reduces clumping
- 3in (76mm) acrylic frame sieves are available in standard woven wire cloth or precision electroformed mesh

The GilSonic AutoSiever uses sonic sieving action with two-way (horizontal/vertical) tapping to achieve the most accurate and reliable particle separation of fine dry powders and granular materials. Testing profiles are fully customizable, assuring consistent, repeatable values for even the most difficult materials. Only minimal training is required for proper operation.

3,600 sonic energy pulses per minute oscillate the air column enclosed within the sieve stack. This agitation continuously excites and reorients the particles to the mesh surface. Programmable tapping clears the sieves and prevents clumping of materials. Controls for intensity, ramp and dwell, and total test time assure fully customizable profiles for many different material types. Up to ten profiles can be saved to memory, assuring repeatability for similar materials. The AutoSiever is designed and manufactured in the USA to meet CE requirements.

Test times vary depending on material type and particle size. Five minutes is typical, but some samples may be complete in as little as thirty seconds. Operating time can be set for up to 99.9 minutes. Sieving intensity (amplitude) is selected with a proportional power controller. Ramping function automatically increases power at a programmed rate for optimum separation of difficult materials. Programmable tapping is built into each unit and can be programmed for horizontal and vertical, vertical only, or turned off completely.

GA-6 SONIC SIEVING ACTION

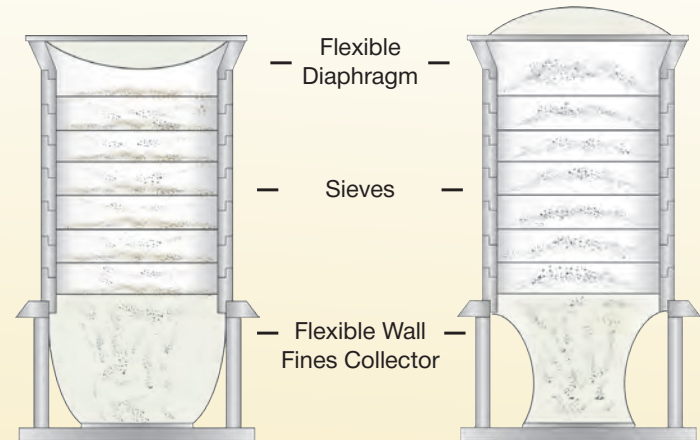

The diagram represents one pulse. The GA-6 generates 3,600 sonic pulses per minute.

Tapping is controlled by the user and can be set for horizontal and vertical, vertical only, or turned off completely.

Sample capacity is a function of particle size and material type. Larger particle samples may range up to 20g (about 7cc). Samples with maximum particle sizes of 38µm (No.400) should be about 10g (4cc). For precision sieving with electroformed sieves down to 5µm, some samples may be as small as 1g. The 3in (76mm) diameter clear acrylic frame sieves are available with ASTM E11 woven-wire cloth or ASTM E161 precision electroformed mesh. The AutoSiever holds seven woven-wire cloth or three precision electroformed sieves in the fixed-height stack assembly. Clear acrylic spacers are available if fewer sieves are desired.

Fines are retained in a flexible-walled latex fines collector. A latex diaphragm on top of the stack seals the air column and confines the sample during testing. The complete stack assembly is held together with a column lock, inserted into the backlit testing chamber and quickly secured in place for testing.

The cabinet is powder-coated steel with a sliding acrylic door. The AutoSiever is supplied with one GAA-2 Stack Assembly, consisting of seven clear acrylic spacers, a fines collector with collector holder, top cone, diaphragm, and column lock. Sieves are purchased separately. Operates on 115/230V, 50/60Hz (selectable) power supplies, 40 Watts maximum. **Product Dimensions:** 10x10x20in (254x254x508mm), WxDxH.

GilSonic AutoSiever Sonic Sifter

GilSonic AutoSiever Sonic Sifter, 115/230V, 50/60Hz, selectable	GA-6
Accessories	
Stack Assembly	GAA-2
Replacement Diaphragm	GAA-3
Replacement Fines Collector	GAA-4
Clear Acrylic Spacer for Acrylic Sieves	GAA-88



Video Tutorials. Visit globalgilson.com to see DIY videos for maintenance, repair, & calibration.

1 SIEVING / SIEVE SHAKERS


DESIGNED FOR THESE
8in ONLY
SIEVE DIAMETERS



GA-8 shown with Sieves



GA-8 SONIC SIEVING ACTION

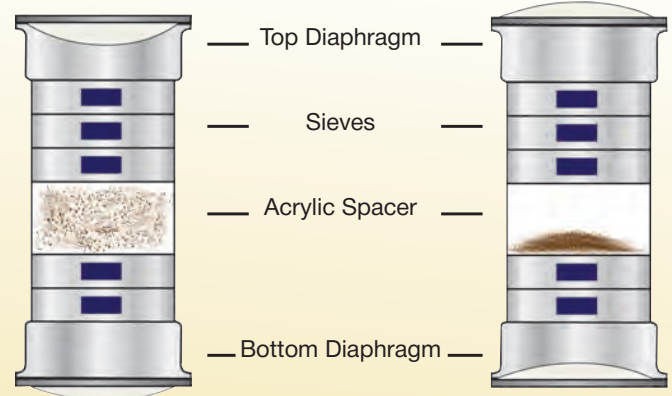

The diagram represents one pulse. The GA-8 generates 3,600 sonic pulses per minute.



GAA-5 shown with Sieves



GAA-19



GAA-10

GILSONIC ULTRASIEVER® SONIC SIFTER

- Sonic sieving for samples up to 100g
- Accepts up to seven full-height 8in or 200mm diameter sieves
- Fully programmable time, amplitude, and vertical or horizontal tapping sequences

The GilSonic UltraSiever® uses sonic sieving action with two-way (horizontal and vertical) tapping to achieve the most accurate and reliable particle separations of fine dry powders and granular materials. Its larger design allows for an increased sample capacity of more than seven times that of our GA-6 AutoSiever and it accepts up to seven 8in (203mm) diameter full-height test sieves. ASTM E11 woven-wire sieves from 1/4in to No.635 (6.3mm to 20µm) or ASTM E161 sieves with unsupported precision electroformed mesh from 150 to 5µm with tolerances of ±2µm can be used. ISO 565/3310 200mm sieves can also be used when paired with the GAA-10 Adapter Set. Sample size for materials up to 1/4in (6.3mm) may be 100g or more. 10g or less is typical when using precision electroformed sieves below 20µm.

Sieving action is created by 3,600 sonic pulses per minute oscillating inside the sieve stack. Sieving intensity (amplitude) is set through a proportional controller, based on observation of particles during agitation. A programmable ramping function incrementally increases amplitude to the maximum rate and holds it, then steps it back down for optimum separation. There are additional controls for selectable horizontal and vertical tappers. The horizontal tappers can be positioned to tap on selected sieves. Four vertical tappers can be operated as one pair for most materials or two pairs for difficult samples. Up to ten programs with specific amplitude, ramping, tapping, and test duration settings for specific materials can be stored in the memory. Test times vary depending on material type and particle size. Typical sieving time is 1–5 minutes, but operating time can be set for up to 99.9 minutes.

The powder-coated steel case has vertically-hinged Lexan™ doors enclosing the sieve chamber. Sample material is contained by flexible top and bottom diaphragms. The stack is sealed when the upper enclosure is lowered. Upon test completion, fines are recovered from the bottom diaphragm. Acrylic spacers are required when using less than seven sieves or for viewing sieving action.

The GA-8 UltraSiever® includes top and bottom sieve stack adapters, four diaphragms for top or bottom use, two acrylic spacers, one double-height acrylic sieve spacer, and twelve polyurethane Sieve Seal Gaskets. The GAA-5 Extra Sieve Stack Assembly includes top and bottom sieve adapters, handle plate, bottom diaphragm, and sieve seal gaskets to assemble a second sieve stack for faster processing. Sieves are ordered separately. Operates on 115/230V, 50/60Hz (selectable) power supplies, 100 Watts maximum. **Product Dimensions:** 19x23x45in (483x584x1,143mm), WxDxH.

GilSonic UltraSiever® Sonic Sifter

GilSonic UltraSiever® Sonic Sifter, 115–230V, 50/60Hz, selectable	GA-8
Accessories	
Replacement Top/Bottom Diaphragm	GAA-15
8in Sieve Seal Gasket	SSA-10
Diaphragm Seal Gasket	GAA-18
Clear Acrylic Spacer for 8in Test Sieves	GAA-19
Double-Height Spacer, 8in	GAA-16
Sieve Stack Assembly	GAA-5
Adapter Set for 200mm Sieves	GAA-10
Clear Acrylic Spacer for 200mm Test Sieves	GAA-19M
Double-Height Spacer, 200mm	GAA-16M

WET/DRY SIEVE VIBRATOR

The vibration energy of the SS-23 is transferred directly to the sieve frames, promoting passage of finer particles from wet or dry material. The powder-coated steel frame is designed for use with a notched plastic bucket to collect fines.



VIDEO ONLINE



SS-23 shown with SSA-20 & Sieves



SS-23 shown with Sieve



SS-25 shown with Sieves



VIDEO ONLINE



“MARY ANN” SIFTER

The original “Mary Ann” Sifter has been a tool for separation of particles ranging in size from No.4 to No.635 (4.75mm to 20µm) for many years. It accommodates either 8in (203mm) or 12in (305mm) diameter test sieves, with stack heights up to 26in (660mm). The sieve stack is set into place inside the cabinet. During the testing cycle, the sieve stack is positioned at a 45° angle, the sieves are rotated, and the wooden faced hammers tap the sieve frames to help assist passage of near size particles. The enclosed cabinet helps control and confine the airborne respirable quartz, silica, and crystalline particles. Testing duration is controlled to ±1 second with a 99-minute digital timer. Recent improvements to the “Mary Ann” sifter includes a modified cam and rubberized hammer covers, placed over the original hardwood tappers, to help reduce operational noise. Support stand includes a sieve storage rack and wheels for portability. **Product Dimensions:** 18x26x58in (457x660x1,473mm), WxDxH.

WET/DRY SIEVE VIBRATOR

Economical electric sieve vibrator is helpful for fast separations of wet or dry materials using one or two 8in diameter, full-height sieves.

For wet samples, WT-7 Spray Fitting, WT-5 Spray Bottle, or other wet sieving accessories can be used to assist processing. Use SSA-20 Notched Bucket or one sieve and an extended rim sieve pan to catch undersize material.

Vibrating unit is mounted on a durable, powder-coated steel frame. Includes 3-wire cord and plug for 115V,60Hz operation. For 230V operations order TR-502 Transformer. **Product Dimensions:** 13.5x12x10in (343x305x254mm), WxDxH.

Wet/Dry Sieve Vibrator

Wet/Dry Sieve Vibrator, 115V, 60Hz	SS-23
Accessories	
Notched Bucket	SSA-20
500 Watt Step-Up/Step-Down Transformer	TR-502

“Mary Ann” Sifter

“Mary Ann” Sifter, 115V, 60Hz	SS-25
230V, 50Hz	SS-25F

1 SIEVING / SIEVE SHAKERS

NEW



AJ-103 shown with AJA-4 and AJA-8



Screen for AJA-103



AJA-131



AJA-8

technote

New-style AJ-103 and AJ-105 Mikro Air Jets do not require special Micron Air Jet Sieves. They accept either 200mm or standard 8in sieves fitted with the SSA-10 Sieve Seal Gasket.

MIKRO AIR JET SIEVE™

The Mikro Air Jet Sieve™ is an accurate and reliable single-sieve system for 10–100g samples of dry powders from No. 4 to 635 (4.75mm to 20µm). Operation is clean and quiet. A rotating slotted nozzle supplies positive air pressure to gently fluidize the sample in a covered test sieve. Exiting air is drawn downward with an external vacuum system, creating a negative pressure to carry undersize particles to a collection canister. Air Jet sieving action is gentle, effective, and especially useful for fragile or low specific gravity materials. Vacuum pressure can be programmed in multiple units. Test times and vacuum/pressure settings are controlled through the integrated computer, with a capacitive touch screen controls and display. USB ports are provided for external keyboard and mouse use. The unit has 20GB of internal storage. Basic or Advanced versions are offered, each with separate models configured for use with ISO 200mm and older style Air Jet Test Sieves, or with ASTM 8in Test Sieves. Inquire for parts to adapt either model to use alternate sieve sizes. All models include a polycarbonate sieve cover, plastic tapping hammer, and nylon cleaning brush. The SSA-10 Sieve Seal Gasket is required for all sieves and replaces the original sealing gasket of original Air Jet Test Sieves. CE certified. Made in the USA. **Product Dimensions:** 16.5x10.5x7.5in (419x267x191mm), WxDxH.

Basic Mikro Air Jet Sieve™ is suitable for specific micron size evaluation. It consists of the base unit with a clear acrylic sieve cover, slotted brass air nozzle, electronic controls, and integrated computer with touchscreen display. The 15 Watt bevel gear motor has lifetime lubricated bearings. The cast aluminum instrument housing features a built-in pressure differential gauge and has a baked enamel finish. An integral electrical outlet provides a convenient connection for the vacuum system, which is purchased separately. Vacuum is monitored at the housing outlet and has a control valve for adjustment. AJ-103 accepts 200mm ISO Test Sieves or old-style Air Jet Test Sieves. AJ-103B model is configured for ASTM E11 8in (203mm) Test Sieves.

Advanced Mikro Air Jet Sieve™ consists of the Basic Air Jet model with advanced menu-driven software. The software collects and calculates particle

sizes from a number of test sieve screens then generates a distribution. The advanced model connects to compatible printers via USB, Wi-Fi, or CAT 5 cable and compatible balances via a RS-232 connection. Additional Advanced model functionality includes comparative overlay of analyses, USB data backup, speed boost feature for deagglomeration of difficult samples, and data transfer to CSV file formatting for LIMS software. This model can be ordered directly or by purchasing a simple AJ-111 upgrade to unlock these features on an existing Basic unit. AJ-105 accepts 200mm ISO Test Sieves or old-style Air Jet Test Sieves. AJ-105B model is configured for ASTM E11 8in (203mm) Test Sieves. AJ-105 models or upgrades require an AJA-135 A&D Apollo Precision Balance, purchased separately. The balance has a capacity of 1,220g with a readability of 0.01g, and is supplied with a USB cable.

Mikro Air Jet Sieve™

Mikro Air Jet Sieve™ Basic for 200mm Sieves, 100–230V, 50/60Hz	AJ-103
Mikro Air Jet Sieve™ Basic for 8in Sieves, 100–230V, 50/60Hz	AJ-103B
Mikro Air Jet Sieve™ Advanced for 200mm Sieves, 100–230V, 50/60Hz	AJ-105
Mikro Air Jet Sieve™ Advanced for 8in Sieves, 100–230V, 50/60Hz	AJ-105B

Accessories

Advanced Upgrade: AJ-103 to AJ-105	AJ-111
A&D Apollo Precision Balance, 1,220x0.01g, 115–230V, 50/60Hz	AJA-135
Sieve Seal Gasket	SSA-10
Universal Clear Acrylic Cover for 8in Test Sieves	AJA-8
Universal Clear Acrylic Cover for 200mm Test Sieves	AJA-8M
Vacuum System for Fines, 110V, 50/60Hz	AJA-131
Vacuum System for Fines, 220V, 50/60Hz	AJA-131F
High-Efficiency Cyclone Collector	AJA-4
Disposable Paper Bags for AJA-133 Vacuum, pkg. 10	AJA-139
HEPA Replacement Cartridge for AJA-133 Vacuum	AJA-140





TS-1 shown with Screen Trays and TSA-169R

TS-2 shown with Screen Trays

TS-3 shown with Screen Trays

GILSON TESTING SCREENS

Gilson Testing Screens are ideal for particle size determinations on large samples of aggregate, slag, ores, and many other coarse materials. Sample batch sizes up to 100lb (45kg) can be separated into size fractions in six to ten minutes, depending on material type and characteristics. Vibration and amplitude characteristics are fixed at optimum for mineral aggregates in the 4in (101mm) to No.4 (4.75mm) size range, but Testing Screens can process material down to No.200 (75µm) with some loss in separation efficiency. Several models are available with different features and Screen Tray capacities, but all have the same performance specifications.

Removable Screen Trays designed to fit both Testing Screen and Test-Master models are purchased separately in a wide range of opening sizes with ASTM E11, ISO 565 specification wire cloth or punched steel plate. Each tray features a generous 14.75x22.75in (375x578mm), 2.33ft² (0.22m²) clear screen area. Testing screen wire cloth is replaceable, ensuring long life and inexpensive maintenance of trays. Available Screen Trays, Dustpans, and Replacement Wire Cloth sizes are listed in the screen tray selection guide. Dustpans are available in configurations for increased capacity, reduced dust output, or dispensing of fines directly into outside bag or container.

Standard vibration characteristics are designed to separate coarse mineral aggregates. Separation of fine, sensitive, or low-density materials such as wood chips, coal, or coke can be improved by adding optional Vibration Speed Variation accessory or an optional factory-installed Low-Amplitude Drive Shaft. These options reduce degradation of material and allow the user to optimize screening profiles for specific materials. Accessories such as Clean-N-Weigh and Tray Racks enhance overall efficiency and other accessories facilitate sample handling, dust and noise control, and separation performance.

Gilson Testing Screens are proven economical performers, designed for mounting to a solid, rigid floor system. Securing with anchor bolts to a concrete floor is recommended. Models are available with clamping activated by a manual

hydraulic pump or by threaded cranks. Top-mounted drive mechanisms are enclosed for safety and operated by powerful 1/2hp capacitor-type motors with built in overload protection. TS-1, TS-2, and TS-3 offer simple On/Off switching controls operation. Accuracy, repeatability, and convenience can be improved by connecting the optional TSA-169R Digital Lab Timer. TS-4 includes an integrated digital controller. Dustpans are normally placed in the bottom tray slot of the Testing Screens, but can be placed on the bottom shelf, freeing up a slot for an additional screen tray. Standard models operate on 115V,60Hz power. Units ordered with "F" model number suffix operate on 230V,50Hz and are shipped without an electrical plug.

TS-1 Gilson Testing Screen has a quick-acting hydraulic pump system to clamp the screen trays in place. Trays are quickly released using the same handle. This more efficient model is recommended for labs with a steady workload of particle size testing. A total of six tray slots hold five Screen Trays plus a Dustpan. **Product Dimensions:** 23x31x43in (584x787x 1,092mm, WxDxH).

TS-2 Gilson Testing Screen the "Original Testing Screen" uses manually operated threaded clamping handles to secure the screen trays. This model is more economical, but also more labor-intensive during use. A total of six tray slots hold five Screen Trays plus a Dustpan. TSA-155 or TSA-159 Hydraulic Clamping Conversion Kits are available to convert existing TS-2 models to hydraulic clamping TS-1 units. **Product Dimensions:** 23x31x43in (584x787x1,092mm), WxDxH.

TS-3 Gilson Testing Screen has a quick-acting hydraulic pump system to clamp the screen trays in place. Trays are quickly released using the same handle. A reinforced top frame allows for the increased sample load expected from the additional screen tray slot added to accommodate samples requiring another size fraction. Has a total of seven tray slots, holds six screen trays plus a dustpan. **Product Dimensions:** 23.4x31.4x47.4in (594x798x1,204mm), WxDxH.



TS-4

NEW



TS-4 shown with lid closed



TS-4 shown with lid open



TS-4 shown with Screen Trays and door open

productspotlight

GILSON TESTING SCREEN COMPARISON

	TS-1	TS-2	TS-3	TS-4	TM-5	TM-6
TRAY CAPACITY (+ PAN)	5	5	6	6	6	7
ACCURATE SEPARATION OF COARSE MATERIALS	✓	✓	✓	✓	✓	✓
LARGE SAMPLE CAPACITY	✓	✓	✓	✓	✓	✓
HYDRAULIC CLAMPING	✓	✗	✓	✓	✓	✓
COUNTERBALANCED MECHANISM	✗	✗	✗	✗	✓	✓
INTEGRATED TIMER	✗	✗	✗	✓	✓	✓
ENCLOSURE	OPTIONAL	OPTIONAL	OPTIONAL	✓	✓	✓
SAMPLE FEED HOPPER	✗	✗	✗	✗	✓	✓

Gilson Testing Screens

Gilson Testing Screen, 6-Tray Capacity, Hydraulic Clamping, 115V, 60Hz	TS-1
Gilson Testing Screen, 6-Tray Capacity, Manual Clamping, 115V, 60Hz	TS-2
Gilson Testing Screen, 7-Tray Capacity, Hydraulic Clamping, 115V, 60Hz	TS-3
Gilson Silent Testing Screen, 7-Tray Capacity, Hydraulic Clamping, 115V, 60Hz	TS-4
Accessories	
Sound Enclosure	TSA-180
Clean-N-Weigh	TSA-167
Screen Tray Storage Rack	TSA-156
Digital Lab Timer	TSA-169R
Door Enclosure for TS-1 and TS-2	TSA-157
Door Enclosure for TS-3	TSA-157R
Speed Variation Accessory for Testing Screens (Factory-Installed)	TSA-154R
Low-Amplitude Drive Shaft for Testing Screens (Factory-Installed)	TSA-200
Hydraulic Clamping Conversion for TS-2; S/N 13824 and Lower	TSA-155
Hydraulic Clamping Conversion for TS-2; S/N 13825 and Higher	TSA-159

helpfulhint

Standard Testing Screen models operate on 115V, 60Hz power, add "F" suffix for units designed to operate on 230V, 50Hz.

TS-4 Gilson Silent Testing Screen is our newest model, offering the original testing screen's proven reliability and introducing advanced safety and convenience features. The fully enclosed Silent Testing Screen is lined with sound-damping material to reduce operational noise by 8–10dB. A sealed door with a heavy-duty adjustable latch and wear-resistant gaskets confines and controls airborne nuisance dust. Strong ferrite magnets secure the top cover in the open position for easy loading or secure it in the closed position during testing, further reducing dust and noise.

The reinforced top frame allows a seventh tray slot, increasing the total screen tray capacity to six, plus a dustpan. The extra tray increases throughput efficiency when test methods require an additional size fraction. Gilson's proven and reliable quick-acting hydraulic pump securely clamps the screen trays for operation and quickly releases them for easy removal. A built-in electronic LED digital controller displays the time remaining and sounds an audible tone at the end of the test cycle. Test cycles can be programmed up to 99 minutes, 59 seconds, and cycles can be interrupted or paused and restarted without affecting the total testing time. **Product Dimensions:** 23.4x31.4x47.4in (594x798x1,204mm), WxDxH.



TM-5 shown with Screen Trays and Doors open



Foot-operated Tray Clamping



Feed Hopper elevated



TM-6 shown with Screen Trays and Doors open

GILSON TEST-MASTER® TESTING SCREENS

- Counterbalanced drive assembly
- Foot-operated hydraulic pump
- Integrated hopper for loading samples

Test-Master® Testing Screens feature a counterbalanced drive assembly with internal rotating counterweights to equalize the vertical screening action and assure smooth, quiet operation. The Test-Master® can be placed anywhere with no need for permanent bolting to the floor. Sample vibration characteristics are identical to our TS-1 and TS-2 models.

Test-Master models have a full enclosure covering all moving parts that lessens operational noise and confines and controls airborne respirable quartz, silica, and crystalline particles in the breathing zone of personnel.

The panel doors open flat across the front and feature a safety interlock to prevent operation when open. A 1.6ft³ (45.3L) integrated hopper allows in-

cremental introduction of sample material during operation. The hopper is hinged at the rear and has a panel to block dust when closed.

A built-in electronic LED digital controller displays time remaining and sounds an audible tone at the end of the test cycle. Test cycles lasting up to 99 minutes, 59 seconds may be programmed and cycles can be interrupted without loss of test time. An ergonomic foot pedal easily operates the hydraulic clamping and pressure release system for the screen trays. Both operate with powerful, capacitor start, 1/3hp motor. Standard models operate on 115V, 60Hz power. Units ordered with "F" model number suffix operate on 230V, 50Hz and are shipped without an electrical plug. **Product Dimensions:** 28x35x50in (711x889x1,270mm), WxDxH.

Gilson Test-Master® Testing Screens

Gilson Test-Master®, Six-Tray Capacity, 115V, 60Hz	TM-5
230V, 50Hz	TM-5F
Gilson Test-Master®, Seven-Tray Capacity, 115V, 60Hz	TM-6
220V, 50Hz	TM-6F

Accessories

Sound Enclosure	TSA-180
Clean-N-Weigh	TSA-167
Screen Tray Rack	TSA-156
Speed Variation Accessory for Test-Master (Factory-Installed)	TSA-153
Low-Amplitude Drive Shaft for Test-Master (Factory-Installed)	TSA-201

contactus

Contact a Gilson Technical Support Specialist to discuss optimizing Testing Screen Performance for special materials.



by email

techsupport@gilsonco.com



by phone

800.444.1508



by livechat

globalgilson.com



PS-4 shown with Screen Trays



PSA-367



PSA-312 on PS-3



PSA-356 shown with Screen Trays



Foot-Tab Leveling

GILSON PORTA-SCREEN®

- Counterbalanced mechanism for smooth operation
- Portable for mobile applications
- Smaller screens are easier to handle

The Gilson Porta-Screen® has long been accepted for quality control of construction aggregates. Porta-Screen® models are built for performance and durability, yet are light enough to be portable. Designed for best separation in the 2in (50.8mm) to No.16 (1.18mm) range, it is often used to sieve materials to No.200 (75µm). Porta-Screens are also useful for separations of many other materials. Capacity depends on material characteristics but may range up to 60lb (27.3kg) per test. PS-3 holds five screen trays plus a pan. PS-4 holds seven screen trays plus a pan to permit two added mesh sizes per test. Both the PS-3 and PS-4 fit inside the TSA-180 sound enclosure. Vibration of both models is mechanically counterbalanced for smooth, stable operation; no mounting is required. A built-in electronic digital timer has an LED display of remaining test time and issues a five second audible alarm at zero. Timer resets to repeat times which can be programmed up to 99 minutes, 59 seconds. Standard models operate on 115V,60Hz power. Units ordered with "F" model number suffix operate on 230V,50Hz and are shipped without an electrical plug. **PS-3 Product Dimensions:** 21x15x42in (533x381x1,067mm), WxDxH. **PS-4 Product Dimensions:** 21x15x48in (533x381x1,219mm), WxDxH.

Screen Trays and Dustpans for the Porta-Screen® units are ordered separately. Trays have 14x14in (356x356mm) screen area and are quickly secured for operation by dual hand clamp levers. When levers are released, trays are individually removable for convenient emptying, cleaning, and weighing operations. Wire cloth sizes No.4 and larger have metal shields around edges to cover partial openings for accuracy of separations. Porta-Screen® trays with wire cloth in the No.16–80 (1mm–180µm) range have three added support ribs. No.100 (150µm) and finer trays are supplied with backup cloth. Replaceable stainless steel wire cloth is available in all sizes. **Tray Dimensions:** 16x16.5x3in (406x419x76mm), WxDxH.

The vibrating assembly is mounted on hardened guide pins. The 1/2hp motor, drive shaft and connecting rod are synchronized with a rotating weight counterbalance system. All are enclosed by the enameled steel case. The machine is quickly leveled by foot tab adjustment of the three support legs while watching an indicator bubble on the top frame.

PSA-114 Porta-Wheels can be attached for added mobility. Ballbearing wheel assemblies with rubber tires quickly attach to the frame of the Porta-Screen®.

PSA-312 Porta Cover bolts to the top flange to enclose the sample chamber. It has a latch and hinged to open for introduction of samples.

PSA-367 Porta Sample Pan is helpful in emptying and cleaning trays and in weighing operations. This chute-end pan fits inverted trays and holds entire samples for cumulative weighing. Handling is easy with the top swing away handle and end handle grip. **Product Dimensions:** 17x30x4in (432x762x 102mm), WxDxH.

PSA-356 Porta-Screen® Tray Rack organizes up to eight Porta-Screen® trays for storage and to protect frames and wire cloth from possible damage. Sturdy painted steel sections can be bolted together for stacking. Assembly required. **Product Dimensions:** 18.9x17.4x30.2in (480x442x767mm), WxDxH.

Gilson Porta-Screen®

Gilson Porta-Screen®, Five Tray Capacity, 115V,60Hz	PS-3
230V,50Hz	PS-3F
Gilson Porta-Screen®, Seven Tray Capacity, 115V,60Hz	PS-4
230V,50Hz	PS-4F

Accessories	
Sound Enclosure	TSA-180
Porta-Wheels, set of 2	PSA-114
Porta Cover	PSA-312
Porta Sample Pan	PSA-367
Porta-Screen® Tray Rack	PSA-356



Testing Screen & Test-Master® Trays



Porta-Screen® Trays

ASTM SCREEN TRAYS

ASTM E11, E323

Gilson Screen Trays for Testing Screen, Test-Master®, and Porta-Screen® units have stainless steel cloth and meet ASTM E11 specifications. Non-ASTM sizes of 1/8in and 1/16in are available as TSA-101 and TSA-126A for Testing Screen and Test-Master or PSA-301 and PSA-326A for Porta-Screen®.

Testing Screen and Test-Master Trays with No.16 (1.18mm) and finer wire cloth include metal ribs installed to support mesh. No.4 stainless steel backing cloth reinforcement is included in Testing Screen Trays with No.230 and finer cloth and may be added to other trays with or without support ribs. Backing Cloth is intended for use as reinforcement and features flat-rolled surfaces to prevent abrasion of finer cloth. Porta-Screen trays with cloth from No.16 to No.100 use metal support ribs and No.4 stainless steel backing cloth is included on these trays with mesh from No.100 to No.400 opening sizes. Dustpans for Testing Screen and Test-Master models are 1.6in (40mm) deep and Porta-Screen Dustpans are 2.9in (74mm) deep. Both have a capacity of approximately 0.4ft³ (11L). Testing Screen and Test-Master® (cloth only) is 16x24in (406x610mm). Porta-Screen® (cloth only) is 15x15in (381x381mm).

Blank trays (with no wire cloth) for Testing Screen and Test-Master models are available as TSA-136 to accept No.4 and coarser mesh and TSA-137 for cloth No.5 and finer. For Porta-Screen models, order PSA-336 Blank Tray. Gilson also offers Round-Hole Perforated Plate Trays that can be used in Testing Screen and Test-Master units and meet ASTM D4749 and E323 test standards. Visit our website at globalgilson.com to see the available perforated plate options, ranging from 4in to 1/8in (102 to 3.18mm)

ASTM E11 Screen Trays					
Screen Designation		Testing Screen & Test-Master®		Porta-Screen®	
Alternate	Standard	Full Tray	Cloth Only	Full Tray	Cloth Only
-	125.0mm	TSA-99 5"	TSA-124 5"	n/a	n/a
-	106.0mm	TSA-110 4.24"	TSA-132 4.24"	n/a	n/a
-	100.0mm	TSA-100 4"	TSA-125 4"	n/a	n/a
3-1/2in	90.0mm	TSA-100 3-1/2"	TSA-125 3-1/2"	n/a	n/a
3in	75.0mm	TSA-100 3"	TSA-125 3"	Inquire	Inquire
2-1/2in	63.0mm	TSA-100 2-1/2"	TSA-125 2-1/2"	Inquire	Inquire
2.12in	53.0mm	TSA-110 2.12"	TSA-132 2.12"	Inquire	Inquire
2in	50.0mm	TSA-100 2"	TSA-125 2"	PSA-300 2"	PSA-325 2"
1-3/4in	45.0mm	TSA-100 1-3/4"	TSA-125 1-3/4"	PSA-300 1-3/4"	PSA-325 1-3/4"
1-1/2in	37.5mm	TSA-100 1-1/2"	TSA-125 1-1/2"	PSA-300 1-1/2"	PSA-325 1-1/2"
1-1/4in	31.5mm	TSA-100 1-1/4"	TSA-125 1-1/4"	PSA-300 1-1/4"	PSA-325 1-1/4"
1.06in	26.5mm	TSA-110 1.06"	TSA-132 1.06"	PSA-299 1.06"	PSA-324 1.06"
1in	25.0mm	TSA-100 1"	TSA-125 1"	PSA-300 1"	PSA-325 1"
7/8in	22.4mm	TSA-100 7/8"	TSA-125 7/8"	PSA-300 7/8"	PSA-325 7/8"
3/4in	19.0mm	TSA-100 3/4"	TSA-125 3/4"	PSA-300 3/4"	PSA-325 3/4"
5/8in	16.0mm	TSA-100 5/8"	TSA-125 5/8"	PSA-300 5/8"	PSA-325 5/8"
.530in	13.2mm	TSA-110 .530"	TSA-132 .530"	PSA-299 .530"	PSA-324 .530"
1/2in	12.5mm	TSA-100 1/2"	TSA-125 1/2"	PSA-300 1/2"	PSA-325 1/2"
7/16in	11.2mm	TSA-100 7/16"	TSA-125 7/16"	PSA-300 7/16"	PSA-325 7/16"
3/8in	9.5mm	TSA-100 3/8"	TSA-125 3/8"	PSA-300 3/8"	PSA-325 3/8"
5/16in	8.0mm	TSA-100 5/16"	TSA-125 5/16"	PSA-300 5/16"	PSA-325 5/16"
.265in	6.7mm	TSA-110 .265"	TSA-132 .265"	PSA-299 .265"	PSA-324 .265"
1/4in	6.3mm	TSA-100 1/4"	TSA-125 1/4"	PSA-300 1/4"	PSA-325 1/4"
No.3-1/2	5.6mm	TSA-110 #3-1/2	TSA-132 #3-1/2	PSA-299 #3-1/2	PSA-324 #3-1/2
No.4	4.75mm	TSA-100 #4	TSA-125 #4	PSA-300 #4	PSA-325 #4
No.5	4.00mm	TSA-101 #5	TSA-126A #5	PSA-301 #5	PSA-326A #5
No.6	3.35mm	TSA-101 #6	TSA-126A #6	PSA-301 #6	PSA-326A #6
No.7	2.80mm	TSA-101 #7	TSA-126A #7	PSA-301 #7	PSA-326A #7
No.8	2.36mm	TSA-101 #8	TSA-126A #8	PSA-301 #8	PSA-326A #8
No.10	2.00mm	TSA-101 #10	TSA-126A #10	PSA-301 #10	PSA-326A #10
No.12	1.70mm	TSA-101 #12	TSA-126A #12	PSA-301 #12	PSA-326A #12
No.14	1.40mm	TSA-101 #14	TSA-126A #14	PSA-301 #14	PSA-326A #14
No.16	1.18mm	TSA-102 #16	TSA-126B #16	PSA-302 #16	PSA-326B #16
No.18	1.00mm	TSA-102 #18	TSA-126B #18	PSA-302 #18	PSA-326B #18
No.20	850µm	TSA-102 #20	TSA-126B #20	PSA-302 #20	PSA-326B #20
No.25	710µm	TSA-102 #25	TSA-126B #25	PSA-302 #25	PSA-326B #25
No.30	600µm	TSA-102 #30	TSA-126B #30	PSA-302 #30	PSA-326B #30
No.35	500µm	TSA-102 #35	TSA-126B #35	PSA-302 #35	PSA-326B #35
No.40	425µm	TSA-102 #40	TSA-126B #40	PSA-302 #40	PSA-326B #40
No.45	355µm	TSA-102 #45	TSA-126B #45	PSA-302 #45	PSA-326B #45
No.50	300µm	TSA-102 #50	TSA-126B #50	PSA-302 #50	PSA-326B #50
No.60	250µm	TSA-102 #60	TSA-126B #60	PSA-302 #60	PSA-326B #60
No.70	212µm	TSA-102 #70	TSA-126B #70	PSA-302 #70	PSA-326B #70
No.80	180µm	TSA-102 #80	TSA-126B #80	PSA-302 #80	PSA-326B #80
No.100	150µm	TSA-102 #100	TSA-126B #100	PSA-302 #100	PSA-326B #100
No.120	125µm	TSA-103 #120	TSA-140 #120	PSA-303 #120	PSA-328 #120
No.140	106µm	TSA-103 #140	TSA-140 #140	PSA-303 #140	PSA-328 #140
No.170	90µm	TSA-103 #170	TSA-140 #170	PSA-303 #170	PSA-328 #170
No.200	75µm	TSA-103 #200	TSA-140 #200	PSA-303 #200	PSA-328 #200
No.230	63µm	TSA-103 #230	TSA-140 #230	PSA-303 #230	PSA-328 #230
No.270	53µm	TSA-103 #270	TSA-140 #270	PSA-303 #270	PSA-328 #270
No.325	45µm	TSA-103 #325	TSA-140 #325	PSA-303 #325	PSA-328 #325
No.400	38µm	TSA-103 #400	TSA-140 #400	PSA-303 #400	PSA-328 #400
No.4 Backing Cloth		-	TSA-135	-	PSA-335
Blank Tray, No.4 and Coarser		TSA-136	-	PSA-336	-
Blank Tray, No.5 and Finer		TSA-137	-	PSA-336	-
Dustpan		TSA-112	-	PSA-310	-

helpfulhint

Gilson Screen Trays can be verified to ASTM E11 or ISO 565 and 3310-1 Inspection or Calibration grades.

Screen Tray Verification

ASTM E11	Inspection	GV-61	ISO 565/3310-1	Inspection	GV-64
ASTM E11	Calibration	GV-66	ISO-565/3310-1	Calibration	GV-67

See separate listing for Gilson Test Sieve and Screen Tray Verification Services.





ISO Porta-Screen Trays

ISO SCREEN TRAYS

ISO 565, 3310-1

ISO Screen Trays for Gilson Testing Screen, Test-Master,® and Porta-Screen® units are fitted with ISO series stainless steel wire cloth.

Testing Screen and Test-Master Trays with wire cloth 1.18mm and finer have metal support ribs under the mesh. No.4 (4.75mm) stainless steel backing cloth reinforces Testing Screen Trays with cloth openings of 63µm and finer and can be added to other trays with or without support ribs. Screen Tray Backing Cloth features flat-rolled surfaces to prevent abrasion of the primary mesh. Porta-Screen trays with 1.18mm to 150µm openings use metal support ribs. No.4 (4.75mm) stainless steel backing cloth is included on trays with mesh from 150µm to 38µm opening sizes.

Blank trays (with no wire cloth) for Testing Screen and Test-Master models are available as TSA-136 for 4.75mm and coarser mesh and TSA-137 for 4.00mm and finer. For Porta-Screen models, order PSA-336 Blank Tray.

technote

Gilson also offers Round-Hole Perforated Plate Trays that can be used in Testing Screen and Test-Master units and meet ASTM D4749 and E323 test standards. Visit our website at globalgilson.com to see the available perforated plate options, ranging from 1/8 to 4in (3.18 to 100mm).

technote

Wire cloth in sizes 4.25in and larger or 112mm and larger are welded rather than woven, so they do not strictly meet ASTM E11 or ISO 565, 3310-1 specifications.

ISO Screen Trays				
Screen Designation	Testing Screen & Test-Master®		Porta-Screen®	
	Full Tray	Cloth Only	Full Tray	Cloth Only
125mm	TSA-103 125M	TSA-140 125M	—	—
106mm	TSA-100 106M	TSA-125 106M	—	—
100mm	TSA-100 100M	TSA-125 100M	—	—
90.0mm	TSA-100 90M	TSA-125 90M	—	—
75.0mm	TSA-100 75M	TSA-125 75M	—	—
63.0mm	TSA-100 63M	TSA-125 63M	—	—
56.0mm	TSA-100 56M	TSA-125 56M	—	—
53.0mm	TSA-100 53M	TSA-125 53M	—	—
50.0mm	TSA-100 50M	TSA-125 50M	PSA-300 50M	PSA-325 50M
45.0mm	TSA-100 45M	TSA-125 45M	PSA-300 45M	PSA-325 45M
40.0mm	TSA-100 40M	TSA-125 40M	PSA-300 40M	PSA-325 40M
37.5mm	TSA-100 37.5M	TSA-125 37.5M	PSA-300 37.5M	PSA-325 37.5M
35.5mm	TSA-100 35.5M	TSA-125 35.5M	PSA-300 35.5M	PSA-325 35.5M
31.5mm	TSA-100 31.5M	TSA-125 31.5M	PSA-300 31.5M	PSA-325 31.5M
28.0mm	TSA-100 28M	TSA-125 28M	PSA-300 28M	PSA-325 28M
26.5mm	TSA-100 26.5M	TSA-125 26.5M	PSA-300 26.5M	PSA-325 26.5M
25.0mm	TSA-100 25M	TSA-125 25M	PSA-300 25M	PSA-325 25M
22.4mm	TSA-100 22.4M	TSA-125 22.4M	PSA-300 22.4M	PSA-325 22.4M
20.0mm	TSA-100 20M	TSA-125 20M	PSA-300 20M	PSA-325 20M
19.0mm	TSA-100 19M	TSA-125 19M	PSA-300 19M	PSA-325 19M
18.0mm	TSA-100 18M	TSA-125 18M	PSA-300 18M	PSA-325 18M
16.0mm	TSA-100 16M	TSA-125 16M	PSA-300 16M	PSA-325 16M
14.0mm	TSA-100 14M	TSA-125 14M	PSA-300 14M	PSA-325 14M
13.2mm	TSA-100 13.2M	TSA-125 13.2M	PSA-300 13.2M	PSA-325 13.2M
12.5mm	TSA-100 12.5M	TSA-125 12.5M	PSA-300 12.5M	PSA-325 12.5M
11.2mm	TSA-100 11.2M	TSA-125 11.2M	PSA-300 11.2M	PSA-325 11.2M
10.0mm	TSA-100 10M	TSA-125 10M	PSA-300 10M	PSA-325 10M
9.5mm	TSA-100 9.5M	TSA-125 9.5M	PSA-300 9.5M	PSA-325 9.5M
9.0mm	TSA-100 9M	TSA-125 9M	PSA-300 9M	PSA-325 9M
8.0mm	TSA-100 8M	TSA-125 8M	PSA-300 8M	PSA-325 8M
7.1mm	TSA-100 7.1M	TSA-125 7.1M	PSA-300 7.1M	PSA-325 7.1M
6.7mm	TSA-100 6.7M	TSA-125 6.7M	PSA-300 6.7M	PSA-325 6.7M
6.3mm	TSA-100 6.3M	TSA-125 6.3M	PSA-300 6.3M	PSA-325 6.3M
5.6mm	TSA-100 5.6M	TSA-125 5.6M	PSA-300 5.6M	PSA-325 5.6M
5.0mm	TSA-100 5M	TSA-125 5M	PSA-300 5M	PSA-325 5M
4.75mm	TSA-100 4.75M	TSA-125 4.75M	PSA-300 4.75M	PSA-325 4.75M
4.50mm	TSA-100 4.5M	TSA-125 4.5M	PSA-300 4.5M	PSA-325 4.5M
4.00mm	TSA-101 4M	TSA-126A 4M	PSA-301 4M	PSA-326A 4M
3.55mm	TSA-101 3.55M	TSA-126A 3.55M	PSA-301 3.55M	PSA-326A 3.55M
3.35mm	TSA-101 3.35M	TSA-126A 3.35M	PSA-301 3.35M	PSA-326A 3.35M
3.15mm	TSA-101 3.15M	TSA-126A 3.15M	PSA-301 3.15M	PSA-326A 3.15M
2.80mm	TSA-101 2.8M	TSA-126A 2.8M	PSA-301 2.8M	PSA-326A 2.8M
2.50mm	TSA-101 2.5M	TSA-126A 2.5M	PSA-301 2.5M	PSA-326A 2.5M
2.36mm	TSA-101 2.36M	TSA-126A 2.36M	PSA-301 2.36M	PSA-326A 2.36M
2.00mm	TSA-101 2M	TSA-126A 2M	PSA-301 2M	PSA-326A 2M
1.80mm	TSA-101 1.8M	TSA-126A 1.8M	PSA-301 1.8M	PSA-326A 1.8M
1.70mm	TSA-101 1.7M	TSA-126A 1.7M	PSA-301 1.7M	PSA-326A 1.7M
1.60mm	TSA-101 1.6M	TSA-126A 1.6M	PSA-301 1.6M	PSA-326A 1.6M
1.40mm	TSA-101 1.4M	TSA-126A 1.4M	PSA-301 1.4M	PSA-326A 1.4M
1.25mm	TSA-101 1.25M	TSA-126A 1.25M	PSA-301 1.25M	PSA-326A 1.25M
1.18mm	TSA-102 1.18M	TSA-126B 1.18M	PSA-302 1.18M	PSA-326B 1.18M
1.12mm	TSA-102 1.12M	TSA-126B 1.12M	PSA-302 1.12M	PSA-326B 1.12M
1.00mm	TSA-102 1M	TSA-126B 1M	PSA-302 1M	PSA-326B 1M
900µm	TSA-102 900U	TSA-126B 900U	PSA-302 900U	PSA-326B 900U
850µm	TSA-102 850U	TSA-126B 850U	PSA-302 850U	PSA-326B 850U
800µm	TSA-102 800U	TSA-126B 800U	PSA-302 800U	PSA-326B 800U
710µm	TSA-102 710U	TSA-126B 710U	PSA-302 710U	PSA-326B 710U
630µm	TSA-102 630U	TSA-126B 630U	PSA-302 630U	PSA-326B 630U
600µm	TSA-102 600U	TSA-126B 600U	PSA-302 600U	PSA-326B 600U
560µm	TSA-102 560U	TSA-126B 560U	PSA-302 560U	PSA-326B 560U
500µm	TSA-102 500U	TSA-126B 500U	PSA-302 500U	PSA-326B 500U
450µm	TSA-102 450U	TSA-126B 450U	PSA-302 450U	PSA-326B 450U
425µm	TSA-102 425U	TSA-126B 425U	PSA-302 425U	PSA-326B 425U
400µm	TSA-102 400U	TSA-126B 400U	PSA-302 400U	PSA-326B 400U
355µm	TSA-102 355U	TSA-126B 355U	PSA-302 355U	PSA-326B 355U
315µm	TSA-102 315U	TSA-126B 315U	PSA-302 315U	PSA-326B 315U
300µm	TSA-102 300U	TSA-126B 300U	PSA-302 300U	PSA-326B 300U
280µm	TSA-102 280U	TSA-126B 280U	PSA-302 280U	PSA-326B 280U
250µm	TSA-102 250U	TSA-126B 250U	PSA-302 250U	PSA-326B 250U
224µm	TSA-102 224U	TSA-126B 224U	PSA-302 224U	PSA-326B 224U
212µm	TSA-102 212U	TSA-126B 212U	PSA-302 212U	PSA-326B 212U
200µm	TSA-102 200U	TSA-126B 200U	PSA-302 200U	PSA-326B 200U
180µm	TSA-102 180U	TSA-126B 180U	PSA-302 180U	PSA-326B 180U
160µm	TSA-102 160U	TSA-126B 160U	PSA-302 160U	PSA-326B 160U
150µm	TSA-102 150U	TSA-126B 150U	PSA-302 150U	PSA-326B 150U
140µm	TSA-102 140U	TSA-126B 140U	PSA-302 140U	PSA-326B 140U
125µm	TSA-103 125U	TSA-140 125U	PSA-303 125U	PSA-328 125U
112µm	TSA-103 112U	TSA-140 112U	PSA-303 112U	PSA-328 112U
106µm	TSA-103 106U	TSA-140 106U	PSA-303 106U	PSA-328 106U
100µm	TSA-103 100U	TSA-140 100U	PSA-303 100U	PSA-328 100U
90µm	TSA-103 90U	TSA-140 90U	PSA-303 90U	PSA-328 90U
80µm	TSA-103 80U	TSA-140 80U	PSA-303 80U	PSA-328 80U
75µm	TSA-103 75U	TSA-140 75U	PSA-303 75U	PSA-328 75U
71µm	TSA-103 71U	TSA-140 71U	PSA-303 71U	PSA-328 71U
63µm	TSA-103 63U	TSA-140 63U	PSA-303 63U	PSA-328 63U
56µm	TSA-103 56U	TSA-140 56U	PSA-303 56U	PSA-328 56U
53µm	TSA-103 53U	TSA-140 53U	PSA-303 53U	PSA-328 53U
50µm	TSA-103 50U	TSA-140 50U	PSA-303 50U	PSA-328 50U
45µm	TSA-103 45U	TSA-140 45U	PSA-303 45U	PSA-328 45U
40µm	TSA-103 40U	TSA-140 40U	PSA-303 40U	PSA-328 40U
38µm	TSA-103 38U	TSA-140 38U	PSA-303 38U	PSA-328 38U



TSA-157



Testing Screen and Test-Master® Accessories	
Description	Model
<p>Low-Amplitude Drive Shaft is a factory-installed option often used in conjunction with the Speed Variation Accessory for gentle separations of fragile, sensitive, or lightweight materials. The special drive shaft has a shorter stroke than the original design. For Testing Screen or Continuous-Flow Screen models order TSA-200 and for Test-Master® order TSA-201.</p>	<p>Low-Amplitude Drive Shaft for TS + CF Low-Amplitude Drive Shaft for TM</p> <p>TSA-200 TSA-201</p>
<p>Door Enclosure is a lightweight, easily removable door panel for TS-1 and TS-2 Testing Screens, designed to minimize dust and noise. Sturdy fiberboard door has a full-width hinge and sound-deadening liner to cover the top and front openings. It is held in place with permanent magnets. Specify Testing Screen model and serial number when ordering to ensure proper fit.</p>	<p>Door Enclosure for TS-1 and TS-2 Door Enclosure for TS-3</p> <p>TSA-157 TSA-157R</p>
<p>Sound Enclosure is a sturdy, painted steel cabinet lined with 1in (25.4mm) thick sound-attenuating foam reduces noise by 8–10dB. The enclosure is designed for use with Testing Screen and Test-Master® units, but can also be used with Porta-Screen® and other laboratory equipment. Full-width doors and top are hinged for easy access to equipment. When used with TS-1 or TS-2 Testing Screens, use of the TSA-157 Door Enclosure is recommended. Product Dimensions: 36.5x38.5x57in (927x978x1,448mm), WxDxH.</p>	<p>TSA-180</p>
<p>Clean-N-Weigh Accessory provides a fast, convenient method of cleaning and collecting contents of Testing Screen, Test-Master®, or Porta-Screen® screen trays for weighing of separated fractions. Loaded screen trays are inverted and cleaned on top of the unit and specimen is collected in the included TSA-162 Chute-End Handling Pan below. The pan can also be positioned on an electronic balance for instant display or data collection of cumulative weights. Sturdy, painted steel construction with adjustable shelf and leveling feet. TSA-171 Coarse Screen Tray Brush is included. Product Dimensions: 30.5x19.5x30.5in (775x495x775mm), WxDxH.</p>	<p>TSA-167</p>



TSA-180 shown with TS-1 and Screen Trays



TSA-167 shown with Screen Tray



CLEAN-N-WEIGH ACCESSORY

- Step 1:** Place the Chute-End Handling Pan under the hopper of the Clean-N-Weigh, then invert a Screen Tray on the hopper support bars.
- Step 2:** Brush all particles from the Screen Tray through the hopper.
- Step 3:** Weigh the sample fraction in either the Chute-End Handling Pan or separate container.

Note: A high-capacity electronic balance can be positioned under the Handling Pan for immediate display of accumulated fraction weights or to transfer data to user's PC.





TSA-154R



TSA-169R



TSA-155



VIDEO ONLINE



TSA-156 shown with Screen Trays




TSA-112S



TSA-114



VIDEO ONLINE



TSA-116



TSA-117

Testing Screen and Test-Master® Accessories

Description	Model
<p>Speed Variation Accessory is factory-installed to allow precise control of vibration speed on Testing Screen and Test-Master® machines. Control of vibration speed assures reliable separations of materials with specific gravities different from common mineral aggregates or for materials finer than No.4 (4.75mm). The TSA-154R for Testing Screens and TSA-153 for Test-Master® both feature a remotely-mounted digital controller that displays stroke values between 240 and 635 strokes per minute. Please inquire for retrofitting existing units. Product Dimensions: 6.1x4.3x7.5in (155x109x191mm), WxDxH.</p> <p>Speed Variation Accessory for Testing Screen Speed Variation Accessory for Test-Master</p>	TSA-154R TSA-153
<p>Digital Lab Timer controls up to 1hp single-phase motors or 20 amp loads. Bright 1/2in (12.7mm) LED display shows remaining time, stops machine at zero, then resets to programmed time for next use. Test times are set with tactile panel buttons. When stopped and restarted, countdown resumes from time remaining when paused. Timer operates in four modes with capacities of: 9,999 sec, 9,999 min, 99:59 min:sec or 99:59 hr:min. Electronics are mounted in a stainless steel case. The timer has a three-wire receptacle for timed devices operating on 115V,60Hz power. TSA-169RF has two 6ft (3m) three-wire cords without plugs for hardwiring to mains and machine. Overall Product Dimensions: 4.5x5x5.5in (114x127x140mm), WxDxH.</p> <p>Digital Lab Timer 115V,60Hz Digital Lab Timer 230V,50Hz</p>	TSA-169R TSA-169RF
<p>Hydraulic Clamping Conversion Kit converts the threaded manual clamping of the TS-2 to the fast-acting hydraulic system of the TS-1. Time and effort for each test cycle are reduced and clamping pressure is automatically equalized between the two sides. For serial numbers lower than 13825 order TSA-155 and higher than 13825 order TSA-159. Kit includes pump, cylinders, rods, bearings, and other necessary parts, along with a drilling template and instructions.</p> <p>Hydraulic Clamping Conversion Kit, S/N 13825 and Lower Hydraulic Clamping Conversion Kit, S/N 13826 and Higher</p>	TSA-155 TSA-159
<p>Screen Tray Storage Rack provides organized storage for up to seven screen trays while protecting tray flanges and wire cloth from possible damage. Enameled steel sections fit on top of or below most lab bench tops and can be bolted together for stacking. Assembly required. Product Dimensions: 20.3x27.7x23.1in (516x704x587mm), WxDxH.</p>	TSA-156

Dustpans are used with Gilson Testing Screen and Gilson Test-Master® models to collect fines during the separation of construction aggregates and other materials. The pans are manufactured from rugged steel and are available in multiple depths. See chart below for dustpan compatibility based on Testing Screen or Test-Master unit. The TSA-112 Standard Dustpan is the most popular design and its 1.6in (41mm) depth is appropriate when percentage passing the smallest screen tray is 20% or less. The TSA-112S 4in (102mm) Extra Deep Dustpan is preferred when the expected percentage passing the finest screen tray exceeds 20%, however it's extra depth will result in the loss of one available screen tray slot. The TSA-114 3in (76mm) Intermediate Depth Dustpan is also designed for use when samples are expected to contain a higher percent passing the finest screen tray. The TSA-114 is compatible with all models except the TM-6, however a screen tray slot will be lost when used in the TM-5. **Product Dimensions:** TSA-112: 17.5x26.25x2in (445x666.75x50.8mm), WxDxH; TSA-112S: 17.5x26.25x3in (445x666.75x76mm), WxDxH; TSA-114: 17.5x26.25x4in (445x666.75x101.6mm), WxDxH.

Gilson also offers two specialty dustpans, the TSA-116 Dustpan with Adapter and TSA-117 Inclined Chute Dustpan. The TSA-116 is a two-piece unit designed for use with Test-Master® Testing Screen models only. It has a flexible sleeve and adapter that provides a dust seal to reduce nuisance fines generated by the separation process. The use of the TSA-116 will result in the loss of one screen tray slot. The TSA-117 Inclined Chute Dustpan allows passing fines from Gilson Testing Screen models to be directed continuously into an external pan or bag. Useful for samples with higher percentage of particles finer than the smallest test screen tray cloth. The TSA-117 is only compatible with TS-1, TS-2, and TS-3, and its use will eliminate one screen tray slot from the Testing Screen. **Product Dimensions: TSA-116:** 19x27x2.5in (482.6x685.8x63.5mm), WxDxH; **TSA-117:** 31x20x3in (787.4x508x76.2mm), WxDxH.

Standard Dustpan	TSA-112
3in, Intermediate Depth Dustpan	TSA-112S
4in, Extra Deep Dustpan	TSA-114
3in Deep, Two-Piece Dustpan with Adapter	TSA-116
Inclined Chute Dustpan	TSA-117

productspotlight

TESTING SCREEN AND DUSTPAN COMPATIBILITY

	TS-1	TS-2	TS-3	TS-4	TM-5	TM-6
TSA-112	✓	✓	✓	✓	✓	✓
TSA-112A	✓	✓	✓	✓	✓	✓
TSA-114	✓	✓	✓	✓	✓	✗
TSA-116	✗	✗	✗	✗	✓	✓
TSA-117	✓	✓	✓	✗	✗	✗



CF-1



CFA-100

CONTINUOUS-FLOW SCREEN

Gilson's CF-1 Continuous-Flow Screen is extremely versatile and is ideal for laboratories where many different separation jobs are encountered. For small-scale scalping, mass separation, and continuous-feed production applications with coarse sized materials, CF-1 does the job practically and efficiently.

Continuous-Flow trays are vibrated in an inclined position, with incline angle adjustable in a range of 4°–10° and speed is digitally controlled up to 650 cycles per minute. The unit can be used with one or two trays with screening area approximately 16x24in (406x610mm) per tray. Inclined Screen Trays are available with stainless steel wire cloth in ASTM E11 sizes 4in to No.100, or may be specified with round openings, slotted openings, or other special wire cloth.

Discharge pans are provided in two styles, for either front or bottom discharge. The trays and pan are secured by clamp rods readily accessible on

top of the unit. The CF-1 is powered by a 1/2hp, fan cooled, completely enclosed motor. The vertical throw action of the CF-1 is designed primarily for coarse materials (2in–No.4), but adjustable incline and frequency allow use with a wide range of materials. A special low-amplitude drive shaft may also be specified to improve separations in sizes finer than No.4.


Continuous-flow screening is not recommended for testing applications. However, the versatile CF-1 may be adapted for testing routines by setting it at the lowest incline angle and replacing Inclined Screen Trays and pan with TSA-100 to TSA-112 trays and pans (described elsewhere for use with the TS-1 Testing Screen). Standard models operate on 115V,60Hz power. Units ordered with "F" model number suffix operate on 230V,50Hz and are shipped without an electrical plug. **Product Dimensions:** 26x34x31in (660x864x787mm), WxDxH. Tray length is 41in (1,041mm).

Continuous-Flow Screen

Continuous-Flow Screen, 110V,60Hz	CF-1
230V,50Hz	CF-1F

Accessories

Inclined Screen Tray, 4in–No.4	CFA-100
Inclined Screen Tray, No.5–14	CFA-101
Inclined Screen Tray, No.16–100	CFA-102
Inclined Front Discharge Pan	CFA-112
Bottom Chute Discharge Pan	CFA-113
Replacement Cloth only, 4in–No.4	TSA-125
Replacement Cloth only No.5–14	TSA-126A
Replacement Cloth only, No.16–100	TSA-126B
Low-Amplitude Drive Shaft (Factory-Installed)	TSA-200

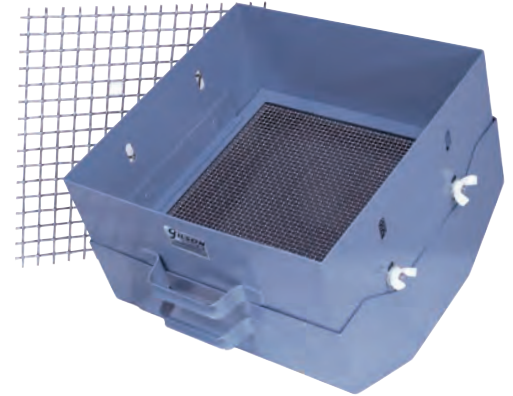

SS-35 shown with Wire Cloth Squares

ROCKER SCREEN SET

Set consists of a 12in (305mm) square steel frame designed for interchangeable wire cloth and bottom pan. Stainless Steel Wire Cloth squares are held in place by two bolted side clamps with wing nuts. Order required squares separately in mesh sizes desired. When not in use, all squares can be clamped into the frame for carrying or storing. Frame and rocker bottom have handles for rocking and carrying. Frame height above cloth is 5in (127mm). Not recommended for use with sizes below No.20. **Product Dimensions:** 12x15x10in (305x381x254mm), WxDxH.

Rocker Screen Set

Rocker Screen Set	SS-35
Accessories	
No.7 and Coarser Wire Cloth Squares	SSA-351
No.8–20 Wire Cloth Squares	SSA-355

contactus.....

SIGN UP TODAY

for your personal "MY GILSON" account at globalgilson.com.

Enjoy these features:

- ▶ Quick Order
- ▶ Order Status
- ▶ Order History
- ▶ Saved Carts
- ▶ Favorites List
- ▶ Online Account Management







SP-1



SP-0



SP-0 close-up of Universal Splitter Chutes

GILSON UNIVERSAL SPLITTERS

ASTM C702, C778; AASHTO R 76, T 27, T 248

- Adjustable width chutes
- Lever-release hoppers
- Four capacities for up to 4in topsize

Gilson's family of Universal Splitters features our exclusive adjustable chute system and lever-release hoppers, assuring top accuracy when reducing bulk materials. Each of these agile workhorses takes the place of two or more conventional splitters with just a few quick adjustments. Selecting the optimum chute width for each material yields accurate representative sample splits without bridging. The lever-release hoppers allow level placement of the bulk sample for even, consistent flow over the chutes as the gate is opened. The largest SP-0 and SP-1 models allow representative splitting of sample volumes and particle sizes not available anywhere else.

Universal Splitter chutes are formed by a series of aluminum bars pivoting on a rod through their lower ends. The operator arranges the precision-ground bars equally on alternate sides, creating V-shaped chutes of the desired width. Once set, the bars are drawn together by tightening wing nuts on threaded ends of the rod. Chutes for SP-1 and SP-2 are angled at 45°. Other models have standard 60° chute angles to improve material flow of lighter and finer materials and to meet certain coal or coke testing specifications. All splitters are supplied with two pans (four pans for SP-0). Additional pans are available for faster, more efficient processing.

Universal Splitter SP-0 has a 3.5ft³ (99L) hopper and is built for large volume bulk aggregate or raw coal samples. Use for materials with particle size up to 4in (102mm). Each split is evenly distributed into four pans, two on each side. The SPA-450 Lift Cart is recommended for handling fully loaded pans. **Product Dimensions:** 56x26x41in (1,422x660x1,041mm), WxDxH.

Universal Splitter SP-1 is a rugged, large capacity floor model for laboratory or field use for materials with particle sizes up to 2in (51mm). The convenient size and a wide range of available accessories make the SP-1 our most versatile splitter. The SPA-114 Fixed Chute Adapter converts the SP-1 into a SP-1C Fixed Chute Splitter with ten 2.25in wide chutes. SPA-7 Dust Enclosure converts the SP-1 into a totally enclosed sample splitter, reducing dust. The SPA-102 Chute Attachment replaces one pan to permit direct loading of material into a bag or container. PSA-114 Porta-Wheels easily bolt to splitter legs for added mobility. **Product Dimensions:** 29x19x39in (737x483x991mm), WxDxH.


Universal Splitter SP-2 is compact and more durable than conventional portable splitters. Lightweight with ample hopper capacity for materials up to 1.5in (38mm), the SP-2 is convenient for use from floor or benchtop positions. This splitter provides accurate and representative samples for a wide range of materials. **Product Dimensions:** 22x14.5x20.5in (559x368x521mm), WxDxH.

Universal Splitter SP-2.5 is widely used for fine aggregates below 1in (25mm) in size and is rugged enough for field or laboratory use. The frame is painted steel and most contact parts are stainless steel except for the anodized aluminum chute bars. The SPA-109 Dust Enclosure Kit installs easily and has hinged flaps that hold in the open position for easy pan access. **Product Dimensions:** 15.5x12.5x17.5in (394x318x445mm), WxDxH.

GILSON UNIVERSAL SPLITTERS

Gilson's adjustable chute bars make the Universal Splitter Series the most versatile available. All of these unique splitters have a row of precision-machined aluminum bars, easily positioned by the operator to direct material into one of two sample pans. Using the adjustable bars, chute size is quickly adjusted to the optimum width of 2 to 3 times the largest particle size. One splitter does the work of several.

Our proprietary gated hopper holds the entire sample in place, allowing proper sample leveling and distribution prior to splitting. One pull of the lever releases the material to flow freely across the entire width of the chutes, not just a portion. This method results in the most accurate and precise sample reduction possible using traditional splitters or riffles.

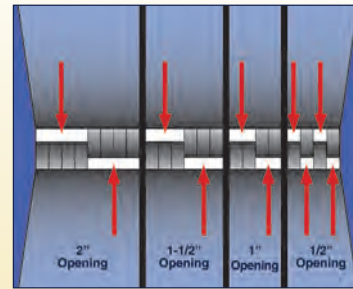

SP-1 Chute bars can be adjusted to create alternating chute openings between 0.5in and 4in wide.



Material released from the gated Universal Splitter Hopper flows evenly across the entire width of the chutes.

technote

ASTM C702 requires the chute widths of mechanical splitters to be at least 50% larger than the maximum nominal particle size of the aggregate sample. A minimum of eight chutes for coarse aggregate and twelve chutes for fine aggregate samples is also specified. To assure accurate splits with best performance and minimal opportunities for "bridging" or blockages, Gilson recommends chute widths 2 to 3 times larger than maximum particle size.



SP-2



SP-2.5



Gilson Universal Splitters				
Model	Recommended Maximum Particle Size, in (mm)	Hopper Capacity, ft ³ (L)	Chute Bar Width, in (mm)	Chute Angle
SP-0	4 (102)	3.5 (99.1)	1 (25)	60°
SP-1	2 (51)	1.0 (28.3)	0.5 (13)	45°
SP-2	1.5 (38)	0.55 (15.6)	0.5 (13)	45°
SP-2.5	1 (25)	0.28 (7.9)	0.25 (6)	60°

Accessories

Lift Cart for SP-0	SPA-450
Fixed Chute Adapter for SP-1	SPA-114
Chute Attachment for SP-1/SP-1C	SPA-102
Porta-Wheel, set of 2	PSA-114
Dust Enclosure Adapter Set for SP-1	SPA-7
Dust Enclosure Kit for SP-2.5	SPA-109
SP-0 Sample Pan, Painted Steel, 25x9x8in (635x229x203mm)	SPA-400
SP-1 Sample Pan, Painted Steel, 25x9x6in (635x229x152mm)	SPA-100
SP-2 Sample Pan, Painted Steel, 20x7x6in (508x178x152mm)	SPA-101
SP-2.5 Sample Pan, Stainless Steel, 12x6x4in (305x152x102mm)	SPA-108

Universal Splitter Chute Specifications				
	SP-0	SP-1	SP-2	SP-2.5
Hopper/Pans Capacity, ft ³	3.5	1.0	0.55	0.28
Capacity (L)	(99.1)	(28.3)	(15.6)	(7.9)
Chute Angle	60°	45°	45°	60°
Chute Bar Width, in	1	0.5	0.5	0.25
No. of Chute Bars	48	48	36	48
Chute Bar Width, in (mm)	Total Openings Based on Chute Bar Width			
1/4 (6.4)	—	—	—	48
1/2 (12.7)	—	48	36	24
3/4 (19.1)	—	—	—	16
1 (25.4)	48	24	18	12
1-1/2 (38.1)	—	16	12	8
2 (51)	24	12	—	6
3 (76)	16	8	6	4
4 (102)	12	6	—	—
6 (152)	8	4	—	—
8 (203)	6	—	—	—
12 (305)	4	—	—	—

didyouknow?

Gilson also manufactures adjustable chute SP-3 and SP-33 for particles smaller than 0.25in (6.35mm)

3 SAMPLE SPLITTING / FIXED CHUTE



SP-1C



SP-12CG



GILSON FIXED CHUTE SPLITTER

ASTM C702; AASHTO R 76, T 248; CTM 201

The Fixed Chute Splitter is based on our original SP-1 Universal Splitter design, and features ten 2.25in (57.2mm) fixed-width chutes, and a gated material hopper for equal sample distribution. The original Gilson designed lever-release hopper with 1ft³ (28.3L) capacity enables rapid and accurate splitting and mixing of granular materials up to 1.125in (28.6mm) topsize.

This steel frame, floor model splitter has a painted and baked finish. Two Collection Pans are included. Extra SPA-100 Sample Pans may be ordered for more efficient sample processing. The SP-1C uses the same accessories as the SP-1, including the SPA-102 Chute Attachment, which replaces one pan to direct loading of material into a bag or container. PSA-114 Porta-Wheels bolt to splitter legs for added mobility. SPA-7 Dust Enclosure converts the splitter into a totally enclosed sample splitter, reducing dust to help confine and control airborne respirable quartz, silica, or crystalline particles. An existing SP-1 Universal Splitter can be converted to a Fixed Chute Splitter with the SPA-114 Fixed Chute Adapter.

Product Dimensions: 29x19x39in (737x483x991mm), WxDxH.

Gilson Fixed Chute Splitter	
Gilson Fixed Chute Splitter	SP-1C
Accessories	
Sample Pan	SPA-100
Chute Attachment for SP-1/SP-1C	SPA-102
Porta-Wheels, Set of 2	PSA-114
Dust Enclosure Adapter Set	SPA-7
Fixed Chute Adapter for SP-1	SPA-114

GILSON CALIFORNIA FIXED CHUTE SPLITTER

ASTM C702; AASHTO R 76, T 248; CTM 201

Designed by and constructed for the California Department of Transportation, the SP-12CA Splitter meets CalTrans 201 Test Method for coarse aggregate splitters. Large capacity, 1.9ft³ (53.8L), gate-release hopper assures accuracy when mixing and dividing bulk aggregate into representative samples. Ten 2.25in (57.2mm) fixed chutes process particle sizes up to 1.125in (28.6mm). Sturdy, heavy-gauge steel frame with painted, baked finish is built for extended service life with heavy use. Swivel casters permit mobility and easy storage.

SP-12CA includes two 1.2ft³ (34L) capacity welded steel sample pans. SP-12CG includes same size sample pans, but fabricated of lightweight aluminum. These reinforced aluminum pans have sturdy handles for durable and easier to grasp handling of materials. Order extra Steel Sample Pans as SPA-120 or lightweight Aluminum Pans as SPA-122. **Product Dimensions:** 29x28x46in (737x711x1,169mm), WxDxH.

Gilson California Fixed Chute Splitter	
Gilson California Fixed Chute Splitter with Steel Pans	SP-12CA
Gilson California Fixed Chute Splitter with Aluminum Pans	SP-12CG
Accessories	
Steel Sample Pan	SPA-120
Aluminum Sample Pan	SPA-122





SP-10



SP-6 tilt-feeding mechanism at loading position



SP-6



GILSON ENCLOSED SPLITTER

ASTM C702, C778; AASHTO R 76, T 248, T 27

Gilson's Enclosed Splitter can be loaded and sample processed through a complete splitting cycle without releasing dust into the room or loss of material. Dust-tight hinged panels enclose the hopper and pans during operation and are easily opened at completion to retrieve divided sample material.

The SP-10 is an adaptation of the top-selling SP-1 Universal Splitter, but designed so that all in-lab sample splitting operations are done inside the splitter. This significantly reduces dust and helps confine and control the airborne respirable quartz, silica, or crystalline particles. Samples in an SPA-100 Pan are placed in a slot inside the top of the splitter through a hinged door. After closing the door, the pan is dumped into the hopper by external lever. When internal dust settles, the door may be opened momentarily to level the sample material in the hopper before using a second lever to release sample through the adjustable chutes and into two lower pans enclosed by spring-held covers. To continue splitting sample into smaller fractions, the bottom pan is switched with the feed pan, covers closed, and the process repeated until the desired sample fraction is obtained in the bottom pan. **Product Dimensions:** 33x21x51.3in (838x533x1,303mm), WxDxH.

Gilson Enclosed Splitter

Gilson Enclosed Splitter	SP-10
Accessories	
Sample Pan	SPA-100
Porta-Wheels, Set of 2	PSA-114
Fixed Chute Adapter	SPA-114

GILSON QUADRI-SPLITTER

ASTM C702, D346, D2013, E276, E389, E877

The Gilson Quadri-Splitter yields four equal representative samples of up to 0.4ft³ (11.3L) for total sample capacity of 1.6ft³ (45.3L). Unit is totally enclosed, including feed inlet and sample outlets. Fully enclosed construction reduces dust to confine and control airborne respirable quartz, silica, or crystalline particles. Gilson's unique tilt-feeding mechanism lifts and rotates the removable feed pan to the hopper opening using the feed lever. The pan seals to the hopper inlet as the material is dumped, preventing the release of dust into the room and avoiding sample loss. Sample pans seal to splitter body, yet easily slide out using pan handles. Body has hinge-mounted doors on both sides for inspection and cleaning of chute sections. The three chute decks each have fourteen chutes of 1in (25.4mm) width and 60° angle for smooth sample flow.

The Quadri-Splitter divides any free-flowing material and is ideally suited for coal and coke since dust and moisture loss are minimized by fewer passes and less handling. Two passes yields a 1/16 split and three passes yields a 1/64 split, each with a set of four representative samples.

The SP-6 Quadri-Splitter has stainless steel contact parts (chutes and pans); other parts are fabricated from galvanized steel, spot welded, riveted, and painted for long life and durability. Four Sample Pans of 0.4ft³ (11.3L) and one Feed Pan of 0.7ft³ (19.8L) are included. **Product Dimensions:** 24x34x55in (610x864x1,397mm), WxDxH.

Gilson Quadri-Splitter

Gilson Quadri-Splitter	SP-6
Accessories	
Sample Pan	SPA-110
Feed Pan	SPA-111





SP-55



GILSON QUARTERMASTER SAMPLE DIVIDER

The Quartermaster Sample Divider quickly reduces bulk samples up to 120lbs (55kg) of asphalt or aggregate into four representative samples. Place the bulk sample into the large hopper and level the material. Release the handle to allow the sample to free fall through the specially designed Quartermaster into the four galvanized buckets.

Quartering Process

Specially Designed Quartering Divider

GILSON QUARTERMASTER ASPHALT SAMPLE DIVIDER

ASTM D979; AASHTO R 47

- Quickly and safely divides bulk asphalt and aggregate samples
- Rugged construction; built for field use
- Proven history of accurate performance
- Bucket Liner Sample Bags streamline sample handling
- Two-part construction for easy cleanup and portability

Gilson's SP-55 Quartermaster quickly and accurately divides the large bulk samples required in Superpave specifications for quality control analysis. Asphalt and aggregate samples of 120lb (55kg) or more are easily quartered, ensuring representative samples for consistent laboratory results. The Quartermaster is versatile and has a proven history of significantly reducing bias in sample reduction.

The bulk asphalt or aggregate sample is loaded into the hopper, the handle is released, and the sample falls through the divider and is distributed into four included galvanized steel buckets. SPA-22 Bucket Liner Sample Bags may be used for collection and handling of divided specimens and reduce sample loss and cleaning of the sample buckets. The Sample Bags are made of durable cotton, with fabric and thread that are temperature-rated to 400°F (204°C). SPA-23 Double-Loop Wire Ties and SPA-24 Wire Tie Twister allow bag openings to be quickly and securely closed. Occasional cleanup to prevent buildup on the exposed splitting surfaces is recommended.

The Quartermaster's rugged two-part steel construction stands up to field conditions and allows portability between job sites. The SPA-21 Quick Funnel Insert drops into the top of the Quartermaster to reduce hopper volume and allow accurate reduction of smaller samples.



SPA-21



SPA-22 shown with SPA-23 and SPA-24

Four Galvanized Steel Sample Buckets and four Bucket Liner Sample Bags are included with Quartermaster. Additional buckets can be ordered to increase efficiency. Liner bags in quantities of 10, 100, or 1,000 are available. HMA-68 Material Handling Chute allows fast and easy loading of hopper. **Product Dimensions:** 17x14x48in (432x356x1,219mm), WxDxH.

Gilson Quartermaster Asphalt Sample Divider

Gilson Quartermaster Asphalt Sample Divider	SP-55
Accessories	
Quick Funnel Insert	SPA-21
Bucket Liner Sample Bags, qty. 10	SPA-22
Bucket Liner Sample Bags, qty. 100	SPA-22C
Bucket Liner Sample Bags, qty. 1,000	SPA-22K
8in Double-Loop Wire Ties, qty. 50	SPA-23
Wire Tie Twister with Plastic Grip	SPA-24
Galvanized Steel Sample Buckets	MA-950
Material Handling Chute	HMA-68

NEW



SP-52



VIDEO ONLINE



SP-50 shown with SPA-51

GILSON HEAVY-DUTY 1/16 SAMPLE REDUCER

ISO 13503-2-2006; API STD 19C

The Heavy-Duty 1/16 Sample Reducer by Gilson has four times more sample capacity than traditional models. Suitable for any free-flowing granular material with particle sizes up to 0.5in (12.7mm), the SP-52 is especially useful in sample preparation and dividing of frac sand proppant materials for hydraulic fracturing operations. Final yield is a 1/16 representative specimen of the bulk sample in a single pass.

The Reducer quickly adjusts to select 45° or 60° dividing positions using a spring-loaded positive-locking knob. The fully-adjustable sliding gate of the large 1.0ft³ (28L) capacity hopper allows precise control of flow rate, or can be locked fully open for continuous flow-through of large samples. The fixed-height integral frame/ floor stand is optimal for ergonomic loading and operation. A sturdy welded steel pan is included to collect the waste fraction and the divided specimen can be collected in the optional SC-20 12qt Polyethylene Sample Container with Lid, or in a container supplied by the user. An additional SPA-115 Steel Waste Pan can be ordered for greater efficiency in sample processing.

The Sample Reducer features sturdy painted steel welded construction and the flow table is designed to leave minimal sample residue behind after use. **Product Dimensions:** 22x28.5x41in (559x724x1,041mm), WxDxH.

Gilson Heavy-Duty 1/16 Sample Reducer

Gilson Heavy-Duty 1/16 Sample Reducer SP-52

Accessories

Steel Waste Pan SPA-115
Polyethylene Sample Container with Lid, 12qt SC-20

1/16 SAMPLE REDUCER

ISO 13503-2-2006; API STD 19C

The 1/16 Sample Reducer cuts a representative 1/16 fraction from feed material by systematically rejecting segments of material flowing down the adjustable 45° or 60° cast aluminum incline. Adjustable 0.25ft³ (7.1L) hopper can be used batchwise or locked in open position for pouring larger samples. Use for up to 0.5in (12.7mm) particle sizes.

Reducer adjusts 10in (254mm) vertically on removable legs. Main components are aluminum. **Product Dimensions:** 27x18x36in (686x457x914mm), WxDxH.

SP-50 is supplied without pans, but SPA-51 Pan Set can be ordered separately. The Pan Set includes heavy painted steel reject pan, 22x13x11in (559x330x279mm), WxDxH and lightweight 12qt (11L) polyethylene sample container, 10x11.5in (254x292), dia.xH with lid.

1/16 Sample Reducer

1/16 Sample Reducer	SP-50
Accessories	
Pan Set	SPA-51
Polyethylene Sample Container with Lid, 12qt	SC-20



3 SAMPLE SPLITTING / MICRO



SP-3



SP-33



SP-304



SP-306



GILSON UNIVERSAL MINI-SPLITTERS

ASTM B215, C702; AASHTO R 76, T 248

The Mini-Splitters are the smallest of Gilson's exclusive Universal Splitter design and are suited for powders and granular materials with top sizes less than 0.25in (6.4mm). The portable benchtop models are identical in size and design and can easily be positioned anywhere. Both feature 48 adjustable 0.125in (3.2mm) wide chute bars for maximum versatility and are built with stainless steel hoppers and frames. 60° chute angles ensure fast, accurate splitting of powders and lightweight materials. The spring-loaded gate release hoppers allow proper placement of bulk sample and controlled, even release of material over the chutes for accurate, repeatable splits. Hopper capacity is 103.7in³ (1.7L). Two sample pans are included for proper operation and additional pans are available for more efficient sample processing.

SP-3 Gilson Universal Mini-Splitter has a stainless steel hopper and frame, with adjustable chute bars and sample pans fabricated from economical anodized aluminum. **Product Dimensions:** 9.5x8.5x13.5in (241x216x343mm), WxDxH.

SP-33 Gilson Universal All Stainless Steel Mini-Splitter is constructed of quality stainless steel throughout, including chute bars and sample pans, enhancing durability and reducing the risk of sample contamination. This model is a good choice for sensitive materials, food-grade samples, or abrasives. **Product Dimensions:** 9.5x8.5x13.5in (241x216x343mm), WxDxH.

The optional SPA-302 Dust Enclosure Kit controls nuisance dust during operation and prevents the loss of fines. The kit consists of two stainless steel panels that secure via spring attachment to either Mini-Splitter model. The panels slide up for easy access to the pans and quickly detach when not in use.

Gilson Universal Mini-Splitters

Gilson Universal Mini-Splitter	SP-3
Gilson Universal All Stainless Steel Mini-Splitter	SP-33
Accessories	
Sample Pan for SP-3, Aluminum	SPA-301
Sample Pan for SP-33, Stainless Steel	SPA-303
Dust Enclosure Kit	SPA-302

GILSON PRECISION SPLITTERS

ASTM B215, C702; AASHTO R 76, T 248

Gilson Precision Splitters quickly divide granular materials and fine powders. These riffle-type splitters feature precision fixed-width chutes and a gate-controlled hopper to achieve greater accuracy. The Precision Splitters are constructed of heavy-gauge, type 304 stainless steel throughout to avoid potential sample contamination, resist corrosion, and stand up to rugged daily use. The easy-flip gate hopper control allows the sample to be loaded completely and distributed evenly before opening. Side panels control dust, reducing the loss of fines during processing. The unit quickly and easily disassembles for cleaning and all parts can be autoclaved. Two 304 stainless steel sample pans are included. Additional sample pans are ordered separately.

SP-300 Gilson Precision Splitter hopper capacity is 132in³ (2.2L) and the sixteen 0.5in (12.7mm) chutes have a discharge angle of 45°. Suitable top size is 4–5mm. **Product Dimensions:** 11.5x9x12in (292x229x305mm), WxDxH.

SP-302 Gilson Precision Splitter has a hopper capacity of 61in³ (1L) and the discharge angle from the sixteen 0.25in (6.3mm) fixed chutes is 45°. The SP-302 is suitable for materials finer than 2.2mm top size. **Product Dimensions:** 8.8x7.4x12in (224x188x305mm), WxDxH.

SP-304 Gilson Precision Splitter has a hopper capacity of 61in³ (1L) and the thirty 0.125in (3.2mm) fixed chutes have a discharge angle of 45°. Suitable for materials finer than 1mm top size. **Product Dimensions:** 8.8x7.4x12in (224x188x305mm), WxDxH.

SP-306 Gilson Precision Splitter is more compact for smaller samples of fine powders. Hopper capacity is 8.8in³ (0.14L). The thirty fixed chutes are 0.0625in (1.6mm) wide and have a 60° discharge angle. Suitable for materials up to 0.6mm top size. **Product Dimensions:** 5.3x5.3x7in (135x135x178mm), WxDxH.

Gilson Precision Splitters

Model	Recommended Maximum Particle Size, (mm)	Chute Width, in (mm)	Number of Chutes	Hopper, in ³ (L)	Extra Pan
SP-300	5	0.5 (12.7)	16	132 (2.2)	SPA-129
SP-302	2.2	0.25 (6.4)	16	61 (1)	SPA-130
SP-304	1.0	0.125 (3.2)	30	61 (1)	SPA-130
SP-306	0.6	0.0625 (1.6)	30	8.8 (0.14)	SPA-132



SP-171X



SP-177



SP-1015FX



SP-1070

JONES SPLITTERS

ASTM B215, C702; AASHTO R 76, T 248

Jones Splitters are ruggedly constructed for long service life. The stainless steel feeder guides material directly past fixed-width chutes and into two sample pans.

SP-171 has 0.125in (3.2mm) hardened aluminum chutes for materials with 1.0–1.5mm top size. Four standard SPA-241 Aluminum Pans are included and have an extended back to prevent spillage. SPA-242 0.5L High-Volume Pans have increased capacity for larger sample volumes.

SP-171X features all stainless steel contact parts to avoid sample contamination and includes three stainless steel pans

SP-173, SP-174, SP-175, and SP-177 have gated hoppers that hold material until released. The gated hopper enables easy mixing and distribution of samples prior to splitting and requires only the two included pans for processing. Frames and hoppers are stainless steel, while riffle plates and pans are hardened aluminum. Pans for SP-174 are stainless steel. Models with 0.25, 0.375, or 0.5in (6.4, 9.5, or 12.7mm) chute openings are offered.

Jones Splitters					
Model	Hopper Capacity, in ³ (L)	No. of Chutes	Chute Width, in (mm)	Dimensions, WxDxH, in (mm)	Extra Pan
SP-171	–	14	0.125 (3.2)	4.25x2.25x6.5 (108x57x165)	SPA-241 SPA-242
SP-171X	–	14	0.125 (3.2)	4.25x2.25x6.5 (108x57x165)	SPA-240X
SP-173	160 (2.6)	32	0.25 (6)	11.5x11x12.5 (292x279x318)	SPA-244
SP-174	325 (5.3)	64	0.25 (6)	20.5x11x12.75 (521x279x324)	SPA-245X
SP-175	100 (1.6)	22	0.375 (9.5)	12x11x12.5 (305x279x318)	SPA-244
SP-177	150 (2.5)	16	0.5 (13)	11.5x11x12.5 (292x279x318)	SPA-244

HOLMES ENCLOSED SPLITTERS

ASTM B215, C702, D346, D2013; AASHTO R 76, T 248

Enclosed splitters are suggested for samples of fine, dusty powders, or where moisture retention is important. Holmes splitters have 60° chute angles, feed guide, and enclosure, as preferred for coal and coke applications to meet ASTM D2013 and D346.

Small Enclosed FX Series Splitters have twenty-four chutes, 0.375in (9.5mm), 0.5in (12mm), or 0.75in (19mm) wide, depending on model. SP-1017FX and SP-1018FX models have a built-in feed guide to introduce sample evenly across chutes through an open vertical slot. SP-1015FX has no feed guide and sample is poured directly into chutes. Riffle chutes, sample pans, and feed guide are stainless steel.

Large Enclosed SP-1050, SP-1060, and SP-1070 Splitters are manufactured with fixed chute widths of 0.5in (12mm), 0.75in (19mm), or 1in (25mm), all with a built-in feed guide. Lugs on pan top-ends fit slotted brackets on feed guides for pour feeding. Models with stainless steel contact surfaces are designated with an "X" suffix on the model number. Other models have galvanized surfaces. SPA-502 Dolly has four 2.25in (63mm) diameter casters on the mounting base for mobility in the lab.

Enameled steel enclosure reduces dust to help confine and control the airborne respirable quartz, silica, or crystalline particles. Two sample pans are included; extras are suggested for pouring to feed guide for repetitive splits.

Holmes Enclosed Splitters					
Model	Hopper Capacity, in ³ (L)	No. of Chutes	Chute Width, in (mm)	Dimensions, WxDxH, in	Extra Pan
SP-1015FX	0.24 (6.8)	24	0.375 (9.5)	11x15x22	SPA-151
SP-1017FX	0.36 (10.2)	24	0.5 (12.7)	15x15x22	SPA-171
SP-1018FX	0.48 (13.6)	24	0.75 (19.1)	21x15x22	SPA-181
SP-1060	1.40 (39.6)	28	0.5 (12.7)	17x31x34	SPA-501
SP-1070	1.40 (39.6)	18	0.75 (19.1)	17x31x34	SPA-501
SP-1050	1.40 (39.6)	14	1 (25.4)	17x31x34	SPA-501
SP-1060X	1.40 (39.6)	28	0.5 (12.7)	17x31x34	SPA-501X
SP-1070X	1.40 (39.6)	18	0.75 (19.1)	17x31x34	SPA-501X
SP-1050X	1.40 (39.6)	14	1 (25.4)	17x31x34	SPA-501X



SP-230



SPA-260



SPA-261



SPA-262



SPA-267



SPA-268



SPA-264

GILSON SPINNING RIFFLER

ASTM B215

Gilson Spinning Riffler is the most accurate and reliable means for representative sampling of dry materials. Gilson's expertise in sampling and analyses of powders and granular material is utilized to produce this next-generation Spinning Riffler. The SP-230 features a custom designed touchscreen controller/display, minimal moving parts, and an outer case designed for easy cleanup and maintenance. Operation is quieter and safer thanks to an isolated motor and vibrator, automatic belt-drive system, and sample vessel enclosure. Rotation speed and vibration level are displayed and precisely controlled on the touch screen.

A built-in vibratory feeder provides a constant flow of material from a stainless steel hopper with 61in³ (1L) capacity. A durable urethane-based resin dividing head sharply separates flowing material into as many as sixteen 60mL glass sample vessels. Standard Test Tube vessels may be used, or vials with screw-

top caps in different sizes of amber or clear glass are available. The vials enable freshly divided samples to be capped and stored immediately, with minimal handling and little chance for contamination. Either type of vessel is contained within the drum during operation to minimize exposure of moving parts and contain spillage. The number of final fractions can be controlled by simply leaving tubes or vials out of the drum. Excess material will then flow directly into the drum. Rotation speed is continuously variable between 0–20rpm and the vibration amplitude of the feeder is variable as well. All adjustments are controlled and displayed on the touchscreen. The unique, digitally controlled stepper motor turns a toothed belt and cogged drive wheel for accurate speed control with no slippage. A digitally controlled variable amplitude feeder ensures a constant and steady feed rate. A "sleep" mode conserves power when the unit is not operating. A power cord is supplied for use with standard North American outlet configurations. Power cords for other configurations are readily available locally.

The SP-230 includes a sixteen-port Dividing Head, a set of sixteen Standard Tube Sample Vessels, a Sample Drum to contain the vessels, and a Holder Plate for positioning the vessels in the drum. All are listed below as separate accessories for more efficient sample processing or as replacements. Threaded Glass Sample Vials with plastic cap are available by the dozen.

Product Dimensions: 13x20.5x23in (330x521x584mm), WxDxH.

Gilson Spinning Riffler

Gilson Spinning Riffler, 90–277V, 47–63Hz SP-230

Accessories

Standard Test Tube, qty. 12	SPA-260
60mL, Clear Sample Vials with Screw Caps, qty. 12	SPA-261
40mL, Clear Sample Vials with Screw Caps, qty. 12	SPA-267
40mL, Amber Sample Vials with Screw Caps, qty. 12	SPA-268
20mL, Clear Sample Vials with Screw Caps, qty. 12	SPA-265
20mL, Amber Sample Vials with Screw Caps, qty. 12	SPA-266
Sample Vessel Holder Plate	SPA-262
Sample Drum	SPA-263
Dividing Head	SPA-264

technote

The Gilson Spinning Riffler virtually eliminates operator error and bias associated with other types of sample dividing. The accuracy of spin riffling has been demonstrated in the 1968 MSc thesis of A. A. Khan, Bradford University. Sampling tests based on a 60/40% mixture of coarse and fine sands produced the following comparisons:

Method	Std. Dev. of Samples (%) σ	Var. (P_n)	Est. Max. Sample Error (%) E
Cone and Quartering	6.81	46.4	22.7
Scoop Sampling	5.14	26.4	17.1
Table Sampling	2.09	4.37	7.0
Chute Riffling	1.01	1.02	3.4
Spinning Riffling	0.125	0.016	0.42
Random Variation	0.076	0.0058	0.25



SP-245



SP-48R shown with SC-108

GILSON MIXING WHEEL

ASTM D2013

Proper sample preparation for materials such as coal or ores requires careful and thorough mixing to assure consistent and accurate results. Gilson offers floor-mounted Mixing Wheels for a wide range of sample quantities.

SP-48R Mixing Wheel is floor mounted and has ten large 0.5gal (2L) sample containers which rotate at a 45° angle from 0 to 25rpm. Numbered sample stations secure sample jars with spring-loaded clamping. SC-108 wide-mouth polyethylene sample jars with screw-top lids are 4.7x9.4in (119x239mm), dia.xH and ordered separately in cases of 12. The wheel is mounted on a rugged, welded steel heavy-duty painted floor stand. When permissible, SPA-64 Jack Rocks may be added to speed the mixing process. Standard models operate on 115V, 60Hz power. Units ordered with “F” model number suffix operate on 230V, 50Hz and are shipped without an electrical plug. **Product Dimensions:** 48x40x50in (1,219x1,016x1,270mm), WxDxH.

Gilson Mixing Wheel

Mixing Wheel, 115V, 60Hz	SP-48R
230V, 50Hz	SP-48RF

Accessories

Sample Jar for SP-48R, 0.5gal (2L), case/12	SC-108
Jack Rocks, case/500	SPA-64

GILSON ACCU-MAX SPINNING RIFFLER

ASTM D2013

Gilson's Accu-Max Spinning Riffler scales up precision dividing and sample preparation for large bulk samples. Aggregates, coal, or ores with particle topsize to 2in (50.8mm) are quickly and accurately split to 1/8 or 1/4 fractions with less handling and risk of sample loss. The unit works equally well for finer granular materials or powders with large volumes. Samples that do not flow well through fixed chute type gravity splitters process more effectively with the Accu-Max vibratory feeder. The high power vibratory feeder enhances accuracy, efficiency, and improves sample flow. All contact parts are stainless steel for long service life and low contamination.

Total capacity of the hopper is 1.8ft³ (51L). Feed rate through the 6.5in (165mm) wide hopper discharge is controlled by a sliding gate that adjusts for openings from 0 to 4in (0 to 102mm) and by power settings of the variable-amplitude vibratory feeder. Adjustable

angle of the vibratory feeder and feed trough assembly assures a constant, controlled flow of material. Eight precise sample fractions are divided into special stainless steel collection pans rotating at a constant 14rpm (12rpm at 50Hz) on the turntable. A precision 1/3hp gear motor assembly drives the turntable and the 0.32ft³ (9L) collection pans lock together with unique overlapping cutting edges to prevent loss of fines. Lifting bars in the pans are positioned for easy and convenient handling.

Working components are mounted in a durable, painted steel frame. Eight Collection Pans for 1/8 fractions are included. Additional pans are available: SPA-30 for 1/8 fractions or SPA-31 double-sized pans for 1/4 fractions. Units ordered with “F” model number suffix operate on 230V, 50Hz and are shipped without an electrical plug. **Product Dimensions:** 50x35x58in (1,270x889x1,473mm), WxDxH.

Gilson Accu-Max Spinning Riffler

Accu-Max Spinning Riffler, 115V, 60Hz	SP-245
230V, 50Hz	SP-245F

Accessories

Collection Pan, 1/8 Fraction	SPA-30
Collection Pan, 1/4 Fraction	SPA-31



3 SAMPLE SPLITTING / BULK SPLITTERS

LABORATORY SPLIT-O-MATIC SPLITTERS

ASTM C702, C778; AASHTO R 76, T 248

- 1/2, 1/4, or 1/8 fractions in a single pass
- High-capacity hoppers with gate release
- Fixed-width chutes
- Particle topsiize up to 2in

Laboratory Split-O-Matic Splitters are the best choice for large samples that must be quickly and accurately reduced. With a single pass, these higher-capacity units process bulk samples of granular materials into small fractions for efficient preparation of test specimens. Exclusive Gilson three-stage design allows the user to select sample fractions of 1/2, 1/4, or 1/8 of bulk sample. A selection lever sets internal sample fraction positions, directing selected fraction to the sample pan and the balance to the reject pan. V-bottom chutes precisely align material flow for more accurate divisions. Laboratory Splitters are well-suited for aggregates, sand, gravel, ores, coal and coke, or other free-flowing granular materials up to 2in (51mm) topsiize.

Laboratory Splitters have heavy, welded-steel construction with painted and baked finish. Sample hoppers have a gate-release mechanism for greater control of sample dividing. Front panel doors latch shut for superior dust control and open wide for easy cleaning. Sample pans are included and are size-matched to hopper capacity. Bottom flange is suitable for anchored or freestanding lab use. Standard models feature three stages of 45° chute angles, suitable for most materials. Steeper 60° chute angle models are recommended for low specific gravity materials such as coal or coke, or materials with a large fraction of fines. The 60° Laboratory Splitters are approximately 20% taller, slightly heavier, and are ordered by adding a “C” suffix to model numbers.

For best results, choose a splitter with chute width at least twice that of the material’s topsiize to avoid bridging over chute openings. For coal or coke, or for materials with oblong pieces, 3 to 4 times topsiize is recommended. Any Laboratory Splitter can be custom-ordered with special larger hopper and sample pans if needed. Custom models may also be ordered with four or more chute stages for sample fractions smaller than 1/8.



SM-3L shown without pans



SM-3L

technote

ASTM C702 requires chute widths of mechanical splitters to be at least 50% larger than the maximum nominal particle size of the aggregate sample being divided. A minimum of eight chutes for coarse aggregate and twelve chutes for fine aggregate samples is also specified. To assure accurate splits with best performance and minimal opportunities for “bridging” or blockages, Gilson recommends chute widths 2 to 3 times larger than maximum particle size.

Laboratory Split-O-Matic Splitters

Model	Chutes per Stage	Sample Fractions	Chute Width, in (mm)	Chute Angle	Maximum Particle Size, in (mm)	Dimensions without Hopper, WxDxH, in (mm)	Hopper Capacity, ft³ (L)
SM-3L	8	1/2, 1/4, 1/8	4 (102)	45°	2 (51)	42x25x79 (1,067x635x2,007)	3.0 (85)
SM-4L	8	1/2, 1/4, 1/8	2 (51)	45°	1 (25)	25x16x53 (635x406x1,346)	1.6 (45)
SM-4XL	12	1/2, 1/4, 1/8	2 (51)	45°	1 (25)	34x16x53 (864x406x1,346)	2.4 (68)
SM-5L	24	1/2, 1/4, 1/8	1 (25)	45°	0.5 (13)	32x17x47 (813x432x1,194)	1.8 (51)
SM-6L	36	1/2, 1/4, 1/8	0.5 (13)	45°	0.25 (6)	33x13x40 (838x330x1,016)	1.6 (45)
SM-6SL	18	1/2, 1/4, 1/8	0.5 (13)	45°	0.25 (6)	22x13x40 (559x330x1,016)	0.8 (23)
SM-3LC	8	1/2, 1/4, 1/8	4 (102)	60°	2 (51)	42x25x99 (1,067x635x2,515)	3.0 (85)
SM-4LC	8	1/2, 1/4, 1/8	2 (51)	60°	1 (25)	25x16x67 (635x406x1,702)	1.6 (45)
SM-4XLC	12	1/2, 1/4, 1/8	2 (51)	60°	1 (25)	34x16x67 (864x406x1,702)	2.4 (68)
SM-5LC	24	1/2, 1/4, 1/8	1 (25)	60°	0.5 (13)	32x17x60 (813x432x1,524)	1.8 (51)
SM-6LC	36	1/2, 1/4, 1/8	0.5 (13)	60°	0.25 (6)	33x13x49 (838x330x1,245)	1.6 (45)
SM-6SLC	18	1/2, 1/4, 1/8	0.5 (13)	60°	0.25 (6)	22x13x49 (559x330x1,245)	0.8 (23)





SM-5 and MH-5 shown with Pneumatic Release Option

helpfulhint

Gilson designs and manufactures complete automated sample splitting and screening solutions for quality control, or can integrate Gilson components into your existing system. Contact us to discuss how Gilson can increase your QC efficiency.

PRODUCTION SPLIT-O-MATIC SPLITTERS

Production Split-O-Matic Splitters accurately divide large amounts of material through multiple stages in a single pass. The Production series allows this unique Gilson design to be adapted to different applications and sampling environments. These units frequently feature custom design or special fabrication for installation in production or pilot-plant facilities. Our most popular Production Split-O-Matic configurations are listed in the accompanying chart.

Production Split-O-Matics have three to six stages of riffles and chute widths from 0.5 to 12in (13 to 305mm). Standard chutes are angled at 45°. Three-position fraction control gates allow a choice of three final sample fractions, ranging from 1/2 to 1/32. Nonadjustable, single-fraction models are also available. V-bottom chutes precisely align material flow for more accurate divisions. Rugged, heavy steel construction throughout assures long service life.

Custom options include chutes with 60° angles for low-density materials, fabrication with all stainless steel contact parts, specially-sized material hoppers,

pneumatic operation for hopper gates and/or fraction gates, fixed-fraction models, mounting or positioning fixtures, and special collection pans.

Material Hoppers and sample pans are sold separately for design flexibility. Bulk material is accumulated in hoppers before the chutes, assuring even divisions. Capacities from 1.6 to 12ft³ (45 to 340L) are available. Recommended standard hopper sizes for the Split-O-Matic assemblies are indicated in the chart.

Production Split-O-Matics have a useful range for material particle sizes from 5in (127mm) to fine sand. Chute widths should be specified at more than twice as wide as the largest particle to avoid bridging. For oblong shapes, or low density materials such as coal or coke, three to four times topsize is recommended.

Contact Gilson to discuss custom design requirements best suited for your application.

Production Split-O-Matic Splitters¹

Model	Chutes per Stage	Number of Stages	Sample Fractions	Chute Width, in (mm)	Dimensions without Hopper, WxDxH, in (mm)	Recommended Material Hopper Model	Hopper Capacity, ft ³ (L)
SM-1	4	3	1/2, 1/4, 1/8	12 (305)	68x60x112 (1,727x1,524x2,845)	MH-1	12.0 (340)
SM-2	6		1/2, 1/4, 1/8	8 (203)	64x49x82 (1,626x1,245x2,083)	MH-2	8.0 (227)
SM-3	8		1/2, 1/4, 1/8	4 (102)	42x25x47 (1,067x635x1,194)	MH-3	3.0 (85)
SM-4	8		1/2, 1/4, 1/8	2 (51)	25x16x26 (635x406x660)	MH-4	1.6 (45)
SM-4X	12		1/2, 1/4, 1/8	2 (51)	34x16x26 (864x406x660)	MH-4X	2.4 (68)
SM-5	24		1/2, 1/4, 1/8	1 (25)	32x17x24 (813x432x610)	MH-5	1.8 (51)
SM-6	36	1/2, 1/4, 1/8	0.5 (13)	33x10x18 (838x254x457)	MH-6	1.6 (45)	
SM-31	8	5	1/32	4 (102)	45x22x63 (1,143x559x1,600)	MH-3	3.0 (85)
SM-41	12		1/32	2 (51)	31x15x38 (787x381x965)	MH-4	2.4 (68)
SM-51	24		1/32	1 (25)	32x16x35 (813x406x889)	MH-5	1.8 (51)
SM-61	36		1/32	0.5 (13)	27x9x21 (686x229x533)	MH-6	1.6 (45)

¹Most popular basic models shown. Contact Gilson to discuss specific requirements.



3 SAMPLE SPLITTING / ACCESSORIES



HM-275



TSA-162



SPA-400



HMA-68

Sampling Accessories

Description	Model	Size, WxDxH, in (mm)	Capacity, qt (L)
<p>Quartering Cloth Kit includes a heavy canvas cloth, broom, and shovel specified in the standard procedures for sampling and splitting aggregates and asphalt mixes.</p> <p>HMA-591 Quartering Cloth is a 6x8ft, heavy-duty finished canvas. The HMA-592 Square-Point Shovel has a 9.75x12in (248x305mm) blade and a 30in (762mm) D-handle. The HMA-593 Broom has a 16in (406mm) wide Prolene plastic brush head and a 4ft (1.2m) long wooden handle.</p> <p>Quartering Cloth Kit Quartering Cloth, 6x8ft Square-Point Shovel Prolene Broom</p>	HM-275 HMA-591 HMA-592 HMA-593	-	-
<p>Multi-Purpose Sample Pans handle heavy loads in lab and field conditions and are suitable for use in drying ovens. They are durable heavy-gauge steel, welded and painted for long service life.</p> <p>Material Handling Pans have a swinging handle mounted at the balance point and a flanged end for safe, easy lifting. The chute end allows efficient emptying and distribution. Handling Pans can be cross-stacked for storage.</p> <p>Sample Pans have lifting flanges at both ends and will nest together for storage.</p>	Material Handling Pans TSA-162 TSA-163 Sample Pans SPA-105 SPA-104 SPA-400 SPA-100 SPA-101	30x15x4 (762x381x102) 12x20.5x4 (305x521x102) 29x12x9 (737x305x229) 22x13x11 (559x330x279) 25x9x8 (635x229x203) 29x9x6 (737x229x152) 20x7x6 (508x178x152)	39 (37) 17 (16) 48 (45) 49 (46) 31 (29) 24 (23) 14 (13)
<p>Material Handling Chute is an all-purpose chute for loading, filling, and handling of any bulk material, including asphalt, aggregates, and soils. It quickly and uniformly fills Gyrotory, Marshall, Proctor, CBR, and Relative Density molds, as well as Quartermaster™ or Universal Splitters. The Handling Chute conforms to mold loading procedures in ASTM D4013 and AASHTO T 312.</p> <p>The flat bottom and integral feet make weighing convenient. The two sturdy aluminum bar handles reinforce the unit and enable balanced handling for easy and accurate placement of sample materials. Material Handling Chute is constructed of 24-gauge stainless steel with rolled edges. The open end is formed with a 2in (51mm) radius to fit most mold openings. The unit stands horizontally or vertically. Product Dimensions: 22x11.5x10.5in (559x292x267mm), WxDxH.</p>	HMA-68	22x11.5x10.5 (559x292x267)	48 (45)

also available

See our General Lab section for a complete selection of Material Pans.



PRODUCT VIDEOS

Watch video demonstrations of many Gilson products online at globalgilson.com!





GP-12



GP-6S



GPA-11



GP-82



GP-8



GP-118



GP-112

Sampling Probes

Description	Model	Length, in (mm)	OD, in	Material	Openings/Partitions
Double-Tube Probes feature seamless construction with durable points. Inner tube is rotated to open/close sampling holes. Probes with partitions between holes have a closed-end handle and pockets are emptied individually. Those without partitions have an open-ended handle for convenience of emptying total sample. Partition type is USDA approved for grain sampling. GP-16 meets ASTM C183 and AASHTO T 127 for bulk sampling of hydraulic cement. GP-25 Spiral Probe has offset inner tube openings that open in sequence from bottom to top as the probe is rotated. Smaller diameters may be used for in-bag sampling. The stainless steel probe is suitable for foods, pharmaceuticals, and fertilizers.	GP-12	40 (1,016)	1.375	Brass with Cast Bronze Point	6/No
	GP-14	51 (1,295)	1.375		8/No
	GP-16	63 (1,600)	1.375		10/No
	GP-22	63 (1,600)	1.375		10/Yes
	GP-24	63 (1,600)	1.375		11/Yes
	GP-25	62 (1,575)	1.375		10/No
	GP-29	72 (1,829)	1.375		12/Yes
	GP-29A	72 (1,829)	1.375		12/No
	GP-68A	96 (2,438)	1.375		16/No
	GP-70A	120 (3,048)	1.375		20/No
T-Handle accessory grips the outside of 1.375in (35mm) diameter Double-Tube Sample Probes for better leverage and control during sampling operations. Handle is detachable. Each end has a handle grip for comfortable use. Product Dimensions: 21x15x11in (533x381x279mm), WxDxH.	GP-4	18 (457)	0.5	Nickel/Brass	5/No
	GP-5	30 (762)	0.5	Nickel/Brass	9/No
	GP-6	39 (991)	0.875	Nickel/Brass	6/No
	GP-6S	39 (991)	0.875	Stainless	6/No
Single-Tube, Single-Slot Probes are useful for fertilizers, foods, pharmaceuticals, etc. GP-80 for flour and similar materials has solid wooden handle and the outside diameter tapers from 1.0 to 0.7in (25.4 to 17.8mm) at the end. Slot width is 0.5in (12.7mm). GP-82 fertilizer tube has an open-end handle with score marks at 28 and 31in (711 and 787mm) from the tip.	GP-80	34 (864)	0.7	Stainless	1/No
	GP-82	36.5 (927)	0.875	Stainless	1/No
Triple-Zone Sampler has three partitioned cells to collect 9cc samples of powders, pellets, and other bulk granular materials from drums, bags, bins, or stockpiles. The sampler is inserted and the "T" handle is rotated one-half turn to collect samples through the 3x0.4in (76x10mm) openings. After closing the ports, samples representing three separate zones are easily recovered for inspection. Made of anodized aluminum with sharp stainless steel point.	GP-8	22 (559)	0.75	Aluminum Stainless	3/Yes
Keystone Carbon Sampling Probe is designed especially to sample fine powders that tend to compact. Ideal for powdered metals and chemicals. Double-tube construction, 1x40.5in (25.4x1,029mm). Thirteen openings with partitions; inner tube rotates to close openings for removal. A 2.675in auger vane on bottom 13in (330mm) of outer tube and a "T" handle on top aids augering.	GP-118	40.5 (1,029)	1	Chrome-Plated Steel	13/Yes
Bag Triers are tapered to a point with a single large opening for sampling granular material through bags. Sample can be poured through hollow handle. GP-106 has nickel-plated steel construction. GP-112 is made from black anodized aluminum.	GP-106	6 (152)	0.5	Nickel-Plated Steel	1/No
	GP-112	12 (305)	1		1/No



VIDEO TUTORIALS

Visit globalgilson.com to watch DIY videos for maintenance, repair, and calibration.



Read Our Monthly Blog

Each month, Gilson shares a blog post focusing on an important and relevant construction materials testing topic. Our industry leaders offer detailed explanations of test methods, new technologies, selection of test equipment to use, and the results to expect. Stay informed with selection guides, infographics, and step-by-step analyses on a variety of operational and maintenance topics.



Never miss a post!

Add the Gilson Blog to your RSS feed or subscribe to our newsletter.

➤ GO TO GLOBALGILSON.COM/BLOG TO READ AND SUBSCRIBE





HM-70A

LOS ANGELES (L.A.) ABRASION MACHINE

ASTM C131, C535; AASHTO T 96, TP 108


- Enclosure is lined with sound-attenuating foam
- Electronic safety interlocks allow operation only with doors secured
- Powerful 1hp motor rotates drum through slip clutch protected chain drive

The Los Angeles Abrasion test is widely used as an indicator of the relative quality of aggregates and is done by measuring the degradation of aggregates when subjected to abrasion and impact in a rotating steel drum. The drum contains an abrasive charge of up to twelve steel balls, depending on the gradation of the test sample, as well as an ASTM approved wide steel shelf to catch and drop the sample.

Gilson's design has built-in safety features with user controls on the outside of the integral sound enclosure. Safety interlocks allow the machine to operate only when the double lid and doors are closed. Drum is positioned for loading and unloading using a jog button while watching through a viewing window in the enclosure. Noise is reduced by the heavy, painted steel enclosure lined with sound-attenuating foam.

The 0.5in (12.7mm) thick welded steel drum has inside dimensions of 28x20in (711x508mm), IDxW and is mounted on a rigid, welded steel support frame. The bolted cover with dust-tight gasket for the 6x20in (152x508mm) opening fits flush with the inside contour of the drum. The 20x3.5x1in (508x89x25mm), WxDxH steel shelf is securely fastened with five 3/4in bolts, allow-

LOS ANGELES ABRASION MACHINE

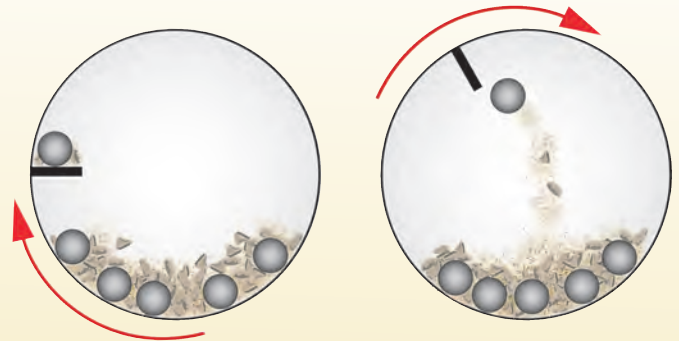

The Los Angeles Abrasion machine rotates at 30–33rpm. The shelf plate catches and drops the aggregate sample and abrasive charge to the other side of the drum, creating an impact-crushing effect. Aggregate sample and abrasive charge then roll within the drum creating additional abrasion and grinding actions. Degradation is determined as a percent loss of mass after 500 revolutions.

helpful hint

The Los Angeles Abrasion machine is also used to perform the Cantabro test—an asphalt mix performance indicator. Place an individual compacted asphalt specimen inside the drum, without the abrasive charge, then rotate the drum 300 revolutions to determine stone loss.

ing easy replacement when worn. The opening cover and shelf are fabricated and positioned following the “preferred design” noted in ASTM C131. Optional HMA-132WR Wear-Resistant steel shelf features extended service life.

A 1hp electronically controlled gear motor rotates the drum at 30–33rpm via enclosed chain drive. Drum assembly rotates in flanged ball bearings with dust seals and grease fittings. Controller console with overload protection has large JOG and On/Off push button controls and automatic counter stops rotation after a preset number of revolutions. Abrasive charge of twelve hardened steel balls are included. Heavy-duty catch pan measures 24x26x2.5in (610x660x64mm), WxDxH. Units ordered with “F” model number suffix operate on 230V, 50Hz and are shipped without an electrical plug. **Product Dimensions:** 38x40x46.5in (965x1,016x1,181mm), WxDxH.

Los Angeles Abrasion Machine

Los Angeles Abrasion Machine, 220V, 60Hz, 1 phase	HM-70A
230V, 50Hz, 1 phase	HM-70AF

Accessories


Los Angeles Abrasive Charge, set of 12 Balls	HMA-130
Catch Pan	HMA-131
Replacement Steel Shelf	HMA-132
Replacement Wear-Resistant Steel Shelf	HMA-132WR





MD-2000

MICRO-DEVAL APPARATUS

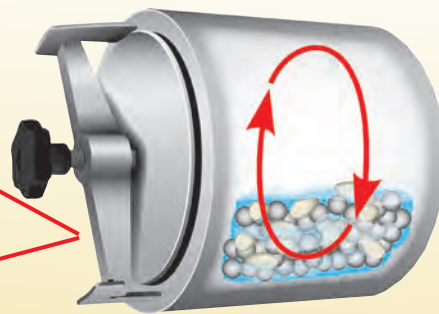

HMA-920 shown with HMA-922

MICRO-DEVAL

ASTM D6928, D7428; AASHTO T 327; TxDOT: 845-49-40; Ontario LS-618

- Multi-function electronic controller tracks time, speed, and total revolutions
- Safe, efficient, and easy operation
- Lexan doors with safety interlocks enclose all moving parts

The increasingly popular Micro-Deval test measures abrasion resistance and durability of fine and coarse mineral aggregates. An aggregate sample with an abrasive charge of up to 5,000g of 9.5mm diameter stainless steel balls and water is placed in a sealed stainless steel jar then rotated at 100rpm for two hours. Aggregate quality is determined by percentage loss in gradation results at completion. Smaller equipment size, lower sample quantities, and a simpler procedure make the Micro-Deval method easier and less costly to perform than other test methods.

The MD-2000 meets current ASTM, AASHTO, and Canadian test methods, as well as more stringent Texas DOT requirements. This contemporary version of the Micro-Deval test should not be confused with older versions originating in Europe which use different equipment and test protocol. A sophisticated electronic controller with optical sensing system accurately tracks test time, total revolutions, and rpm of jars. Test duration is controlled by either elapsed time or total revolutions. Jars stop within a fraction of one revolution at test termination. Jar revolution and speed data may also be used as a verification of machine performance.

The jars revolve behind Lexan™ doors with safety interlocks. No moving parts are exposed during operation. Other manufacturers use separate timers to control test duration, which does not permit tracking of jar revolutions or speed and allows variations up to ±6% of the optimum number of revolutions. In addition, other machines rotate the jars on unguarded open rollers, creating a potential safety haz-

helpfulhint

SIEVES TO MEET ASTM AND AASHTO SPECIFICATIONS

Coarse Aggregate		Fine Aggregate	
3/4in	19.0mm	No.4	4.75mm
5/8in	16.0mm	No.8	2.36mm
1/2in	12.5mm	No.16	1.18mm
3/8in	9.5mm	No.30	600mm
1/4in	6.3mm	No.50	300mm
No.4	4.75mm	No.100	155mm
No.16	1.18mm	No.200	75mm

ard. The Micro-Deval is a two-tier unit with sturdy steel frame. Each tier rotates one stainless steel 5L jar (194mm IDx170mm internal height) with locking cover. Power to the rubber-covered rollers is supplied by a thermally protected 3/4hp electric motor through a gear transmission and chain drive. The unit is supplied with two jars and two sets of 5,500g abrasive charges. A magnet is included to assist in removing the abrasive charge after test completion. For additional sample preparation and increased sample testing capacities, order additional Jars HMA-920 and Abrasive Charge HMA-922. Add "F" to model number for operation on 230V, 50Hz or "V" for 230V, 60Hz power supply. **Product Dimensions:** 20.5x13.5x38in (521x343x965mm), WxDxH.

Micro-Deval	
Micro-Deval, 115V, 60Hz	MD-2000
230V, 50Hz	MD-2000F
230V, 60Hz	MD-2000V
Accessories	
Stainless Steel Micro-Deval Jar with Locking Cover	HMA-920
Abrasive Charge	HMA-922
Magnet	HMA-924



SULFATE SOUNDNESS TEST

ASTM C88; AASHTO T 104; CTM 214; PTM 510

The Sulfate Soundness test subjects aggregate samples to alternate cycles of immersion in sodium or magnesium sulfate solution and oven drying. Aggregates are placed into sample sieves, stacked into the sieve holder, then lowered into the sulfate solution buckets. The solution buckets can be placed inside the water bath tank to regulate temperature.



HM-447 shown with Sieves



HM-452



HM-444



MA-168 W MA-169



HM-442



MA-246



MA-531F

Sulfate Soundness Test

Description	Model
<p>Aggregate Sample Sieves hold sample materials for immersion in sulfate solution. Sieves for coarse aggregate are 8in (203mm) diameter, full-height stainless steel No.5 or No.10. Blank frame sieves are full-height, 8in (203mm) diameter sieve frames with no mesh and extend the overall height for coarse aggregate samples when stacked. Fine Aggregate Sieves are Full- or Half-Height, 8in stainless steel No. 70 sieves.</p> <p>8in Full-Height, No.5 8in Full-Height, No.10 8in Full-Height, No.70 8in Half-Height, No.70 8in Full-Height Blank Frame</p>	<p>V8SF #5 V8SF #10 V8SF #70 V8SH #70 SV-800</p>
<p>8in Sample Sieve Holder holds up to seven stacked sample sieves, depending on sieve heights utilized. Stainless steel holders are designed to allow optimum fluid circulation. Handles lock upright, but fold for easy loading into drying ovens. Product Dimensions: 8x9x11in (203x229x279mm), WxDxH.</p>	HM-447
<p>Solution Buckets hold sulfate solution for immersion of samples. One bucket is required for each Sieve Holder. 6gal (22L) buckets are thick wall, high-density polyethylene with bail handles. Product Dimensions: 11.5x16.5in (292x419mm), dia.xH.</p>	HM-452
<p>Washing Buckets are used to rinse sulfates out of specimens after immersion cycles. Water flows in through the bottom and out through top overflow. 0.25in (6.4mm) thick white polyethylene. Each Washing Bucket holds one Sample Sieve Holder. Supplied with 12ft (366cm) of 1/2in (12.7mm) ID flex tubing. Interior Product Dimensions: 12x12x18in (305x305x457mm), WxDxH.</p>	HM-444
<p>Solution Hydrometers measure specific gravity of sulfate solutions to ± 0.001 SG. Choose hydrometer for use in sodium sulfate or magnesium sulfate solutions. Product Dimensions: MA-168: 1x14x1in (25x356 25mm), WxDxH. MA-169: 1x13.5x1in (25x343x25mm), WxDxH.</p> <p>Sodium Sulfate Hydrometer, 1.120–1.190 Magnesium Sulfate Hydrometer, 1.240–1.310</p>	MA-168 MA-169
<p>Water Bath Tank allows circulation of warmer or cooler tap water around the outside of the solution buckets when additional temperature regulation is required. The tank accepts up to four HM-452 Solution Buckets. The included fitted cover reduces temperature fluctuations and prevents evaporative loss. A thermometer to monitor water bath temperature is purchased separately. The tank is 0.188in (4.76mm) thick white polyethylene and includes circulation and drain fittings. Interior Product Dimensions: 36x24x18in (914x610 457mm), WxDxH.</p>	HM-442
<p>Platinum RTD Data Logging Thermometer is highly accurate and allows transfer of recorded data (CSV files) to PC or Mac using a USB flash drive (not included) — no need for additional software. Temperature range is -130°–221°F (-90°–105°C) with 0.01° resolution and accuracy of $\pm 0.2^{\circ}$C across the entire range. Rolling data logging memory captures temperatures at user-defined intervals from one minute to 24 hours with capacity for a year of recorded data using one minute intervals. Smart-Alarm™ visual and audible indicators signal continuously until acknowledged. Up to ten alarm events are stored and time-stamped in memory. Also features max/min, difference, and average functions. This two-channel unit is available supplied with one or two 316 stainless steel factory-calibrated probes for connection to high-impact, chemical-resistant ABS plastic case with 10ft (3m) leads. Replacement probes must be factory-installed and calibrated. Each CE marked thermometer features NIST traceable calibration from an A2LA lab and has a unique identification number. Includes two AAA batteries, AC adaptor, built-in stand, and wall-mount accessories. Product Dimensions: 2.75x0.75x4.25in (70x19x108mm), WxDxH.</p> <p>Platinum RTD Data Logging Thermometer, with one Probe Platinum RTD Data Logging Thermometer, with two Probes</p>	MA-246 MA-247
<p>ASTM S63F Thermometer is used to check temperatures while mixing solution and for periodic checks of water bath temperatures. Total immersion, 18°–89°F range, 0.2°F readability. Blue spirit filled, white-backed glass with permanent graduations.</p>	MA-531F



SS-18 shown with SSA-22

DURABILITY INDEX AGITATOR

ASTM D3744; AASHTO T 210; CTM 227, 229

Durability Index measures the relative resistance of aggregates to producing clay-like fines when mechanically agitated in a special washing vessel. Resulting fines material is evaluated using sand equivalent apparatus, listed separately. The versatile Gilson SS-18 Agitator runs at 285 cycles per minute and may also be used as a sieve shaker for up to six full-height 8in or 200mm diameter sieves and pan.

SSA-22 Stainless Steel Washing Vessel measures 8x9.5in (203x241mm), dia.xH and is supplied with lid, gasket, and clamps. Standard models operate on 115V,60Hz power. Units ordered with “F” model number suffix operate on 230V,50Hz and are shipped without an electrical plug. Gilson TSA-169R Digital LabTimer can be purchased separately to precisely control test times. SSA-22 Stainless Steel Washing Vessel is ordered separately.

Holes are provided in case flanges for securing to floor or bench. **Product Dimensions:** 16x14x30in (406x356x762mm), WxDxH.


Durability Index Agitator

Durability Index Agitator, 115V, 60Hz	SS-18
230V, 50Hz	SS-18F

Accessories

Stainless Steel Washing Vessel	SSA-22
Digital Lab Timer	TSA-169R
Sand Equivalent Test Set	SEA-100

SLAKE DURABILITY INDEX

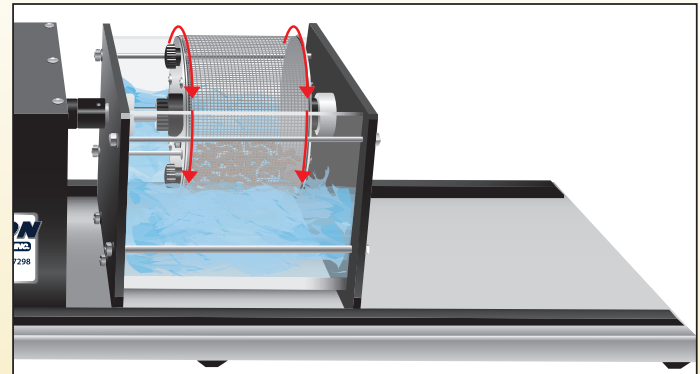

A pre-weighed sample is placed in a partially submerged wire mesh drum, tumbled for ten minutes, then oven-dried and weighed. Retained mass is calculated and recorded for each of two cycles.



SA-80

SLAKE DURABILITY DEVICE

ASTM D4644

Slake durability is a simulated weathering test to determine abrasion resistance during wetting and drying cycles of shale and similar soft rocks. Samples in mesh drums are alternately tumbled through a water medium and oven-dried for two cycles. The percent loss of mass is referred to as the Slake Durability Index.

The SA-80 Slake Durability Device consists of a base-mounted drive unit, two mesh drums, and two water tank assemblies with quick-release drive couplers. The 5.5x3.9in (140x100mm) drums rotate at a speed of 20 revolutions per minute and are constructed of corrosion-resistant stainless steel mesh with 2mm openings and solid end plates. The 4ft (1.219m) base of the unit can accommodate up to four tank/drum assemblies to allow additional samples to be tested simultaneously. For increased sample testing add two water tank assemblies (SAA-30) and two wire mesh drums (SAA-31). **Product Dimensions:** 48x14x9.25in (1,219x356x235mm), WxDxH.

Slake Durability Device

Slake Durability Device, 115V, 60Hz	SA-80
230V, 50Hz	SA-80F

Accessories

Water Tank Assembly, qty. 2	SAA-30
Wire Mesh Drums, qty. 2	SAA-31



VIDEO ONLINE



SEA-100



SEA-101



SEA-102



SEA-100A



SEA-100B



SEA-100C



SEA-100E



SEA-100F

SAND EQUIVALENT TESTING

ASTM D2419, D3744; AASHTO T 176, T 210; CTM 217, 229

The Sand Equivalent Test indicates the portion of undesirable clay-like fines in granular soils and fine aggregates. It is used in conjunction with the Aggregate Durability Index Test, measuring the resistance of aggregates to producing clay-like fines when subjected to degradation. The sample is placed in a clear plastic cylinder with sand equivalent solution, consisting of calcium chloride, formaldehyde, and glycerin. After agitating the cylinder, it is allowed to stand for a sedimentation period. Readings are taken for the clay suspension and sand level. "Sand Equivalent" is the sand reading divided by the clay reading x 100.

Sand Equivalent Testing

Description	Model
Sand Equivalent Test Set includes four Clear Plastic Graduated Cylinders, Siphon Assembly, Irrigator Tube, Weighted Foot, Funnel, Measuring Tin, Solid Stopper, and 8oz of Stock Solution. All items are packed in a convenient, foam-lined plastic case with carrying handle and latch. Product Dimensions: 26x8x16in (660x203x406mm), WxDxH.	SEA-100
Basic Sand Equivalent Test Set includes all components of the SEA-100 Set, without carrying case.	SEA-99
Clear Plastic Graduated Cylinder is transparent acrylic with 0.1in graduations from bottom of cylinder to 15in height. Product Dimensions: 17x1.25in (432x31.8mm), HxD.	SEA-101
Stock Solution is a calcium chloride solution available in 8oz (237mL) or 1gal (3.8L) containers. Stock solution is diluted to prepare working solution for testing and has a limited shelf life of three months after opened.	SEA-102 SEA-103
Weighted Foot Assembly consists of a steel weight, brass foot, and sand reading indicator mounted on a brass rod. The assembly weighs 1,000g.	SEA-100A
Siphon Assembly includes a siphon tube, blow tube, and stopper used to transfer the working calcium chloride solution into the graduated cylinder. The Irrigation Tube is purchased separately.	SEA-100B SEA-100G
Sand Equivalent Funnel has a wide mouth and is used to transfer test specimens into the Graduated Cylinder. Product Dimensions: 3.44x0.38x3.94in (87.4x9.7x100.1mm), Top dia.xBottom dia.xH.	SEA-100C
Sand Equivalent Carrying Case is a foam-lined plastic case with handle and latch and holds all required accessories. Product Dimensions: 26x8x16in (660x203x406mm), WxDxH.	SEA-100E
Solid Stopper is a No.7 rubber stopper that seals the SEA-101 Graduated Cylinder during agitation.	SEA-100F
Measuring Tin is used to measure Stock Solution when preparing working solution, as well as for sampling and measuring specimen material. Round metal, approximately 2.25in (57mm) diameter with 88mL (3oz) capacity.	SC-500-1





SE-6 shown with SEA-101



SE-2B shown with SEA-101



SE-5 shown with SEA-101

SAND EQUIVALENT SHAKERS

ASTM D2419; AASHTO T 176, T 210; CTM 217, 229

Sand Equivalent Shakers are proven to increase accuracy and repeatability while reducing operator variability when compared to hand agitation. Both motorized and manually operated mechanisms ensure proper regulation of speed and stroke for more consistent results. Motorized models free technicians to perform other tasks.

SE-2B Motorized Sand Equivalent Shaker is recommended for labs performing sand equivalent tests on a regular basis. This motorized shaker assures precise speed and stroke and eliminates operator error. A selection switch gives options of precise fixed times of 45 seconds or ten minutes. The 8in (203mm) throw at 175cpm is smooth, quiet, and efficient. The 1/8hp DC sealed gear motor is housed in a sturdy metal case. The hinged safety cover with top viewing windows must be closed to operate the shaker. Test cylinder is held secure by base pin and spring-loaded holder on stoppered end. Standard models operate on 115V,60Hz power. Units ordered with “F” model number suffix operate on 230V,50Hz and are shipped without an electrical plug. **Product Dimensions:** 35x14x20in (889x356x508mm), WxDxH; allow 10in (254mm) additional height for opening of safety cover.

SE-6 Manual Sand Equivalent Shaker has three cycles per revolution of crank. Operator cranks at one turn per second until the digital counter reaches 131 cycles. Cylinder mounts to fixed-travel guide rod by base pin and threaded clamp holder on stoppered end. Base has holes for mounting. **Product Dimensions:** 30x14x10in (762x356x254mm), WxDxH.

SE-5 Economy Sand Equivalent Shaker has a cylinder mounting bracket suspended by two steel straps. Operator manually oscillates cylinder to a preset mark on the case at proper rate. A mechanical counter records stroke counts. Components are mounted in a clear-coated plywood case with removable front and a top handle. **Product Dimensions:** 24x6x25in (610x152x635mm), WxDxH.

Sand Equivalent Shakers		
Motorized Sand Equivalent Shaker, 115V,60Hz		SE-2B
	230V,50Hz	SE-2BF
Manual Sand Equivalent Shaker		SE-6
Economy Sand Equivalent Shaker		SE-5

AUTOMATIC AGGREGATE WASHERS

Gilson Aggregate Washers efficiently wash away fines from aggregate or soil materials. Both Aggregate Washers connect to a standard water line or faucet with user supplied adapter. Water continuously flows into the revolving drum and washes the aggregate sample. The fines and water mixture overflows from the wash drum over a sieve with desired mesh size.



HM-57R



HM-52



HMA-262

AUTOMATIC AGGREGATE WASHERS

ASTM C117, D1140; AASHTO T 11

Gilson's Automatic Aggregate Washers remove minus No. 200 (75µm) fines from soil and aggregate samples, eliminating inconsistencies and the high cost of manual washing methods.

Water is continuously fed into the revolving, inclined stainless steel drum via a permanent regulated connection. The sample is gently agitated and overflow water is directed onto sieves to prevent loss of oversize material.

Models are equipped with completely enclosed gear motors for drum rotation and 6ft (1.8m) power cords with GFCI plugs. The fixed-angle removable drum can be used as a weighing container. Gooseneck water tube swivels aside to allow drum removal. Both models are portable and convenient for placement on a counter top adjacent to a sink.

HM-57R Large Aggregate Washer allows processing of large aggregate samples up to 15lb (7kg). Stainless steel drum measures 11x13in (279x330mm), dia.xH. Extra drums can be ordered as HMA-261 to improve sample processing efficiency. **Product Dimensions:** 24x20x27in (610x508x686mm), WxDxH.

HM-52 Small Aggregate Washer is useful for washing geotechnical or small aggregate samples of up to 8lb (3.6kg). Order extra drums as HMA-260 to improve sample processing efficiency. Stainless steel drum measures 9x10.75in (229x273mm), dia.xH. **Product Dimensions:** 19x16x22in (483x406x559mm), WxDxH.

When determining an amount of material finer than a No.200 (75µm) sieve by washing, the following Automatic Aggregate Washer accessories are recommended: 8in (203mm) and 12in (305mm) stainless steel wet-wash sieves (select from table), 8in (203mm) and 12in (305mm) brass or stainless steel sieve pans with drains. 3/8in Clear Vinyl Tubing and Hose Clamps can be used to connect pan to drain, if desired.

Other recommended accessories include: HMA-262 Vacuum Lid, purchased separately, fits 1/4in Clear Vinyl Tubing and allows the wash drum to function both as a deairing device and vacuum pycnometer for asphalt rice test or other

specific gravity specimens. The unique action of the rotating drum allows the sample to tumble under water during the removal of entrapped air. The lid is made from clear acrylic and fitted with a rotating vacuum seal, a port for connection to a vacuum source, and locking tabs. **Product Dimensions:** 13x3in (330x76mm), dia.xH.

Automatic Aggregate Washers

Large Automatic Aggregate Washer, 115V, 60Hz	HM-57R
230V, 50Hz	HM-57RF
Small Automatic Aggregate Washer, 115V, 60Hz	HM-52
230V, 50Hz	HM-52F


Accessories

Wash Drum for HM-52	HMA-260
Wash Drum for HM-57R	HMA-261
Vacuum Lid for HM-52	HMA-262
8in Stainless Steel Sieve Pan with Drain	WT-3S
8in Brass Sieve Pan with Drain	WT-3
12in Stainless Steel Sieve Pan with Drain	WT-10S
12in Brass Sieve Pan with Drain	WT-10
Clear Vinyl Tubing, 1/4in ID, per foot	WT-8
Clear Vinyl Tubing, 3/8in ID, per foot	WT-4
Adjustable Hose Clamp	MA-198

Deep Frame Wet-Wash Sieves No. 200 (75µm)

Frame Diameter x Depth, in (mm)	Stainless Steel Cloth Stainless Steel Frame	Stainless Steel Cloth Brass Frame
12x8 (305x203)	WT-128S #200	WT-128C #200
8x8 (203x203)	WT-88S #200	WT-88C #200
8x6 (203x152)	WT-86S #200	—
8x4 (203x102)	WT-84S #200	WT-84C #200
3x4 (76x102)	WT-34S #200	WT-34C #200

Add "BU" suffix to Wet-Wash Sieve model number to include backing cloth.

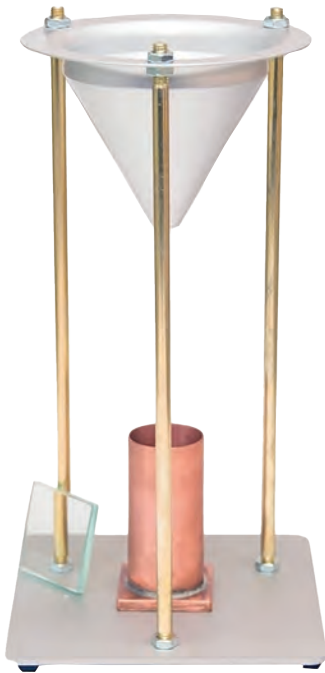

SG-40



SG-40A



SG-42

FINE AGGREGATE ANGULARITY APPARATUS

ASTM C1252; AASHTO T 304

The Fine Aggregate Angularity Apparatus measures the uncompacted void content of fine aggregates and determines angularity and sphericity properties that affect workability of mix designs. Each sample is mixed with a spatula until homogeneous and transferred to the hopper while the discharge opening is blocked with a finger. After mixing and leveling, the sample is allowed to flow into the 100mL copper cylindrical measure. The bottom of the measure has a recess to fit a locating pin on the funnel stand to ensure precision and repeatability. The HMA-11A Spatula is purchased separately and meets specification requirements to strike off excess material. The specimen mass is determined, then void content is computed. Gilson recommends SGA-93 Stainless Steel Pan to retain sample material.

SG-40 Fine Aggregate Angularity Apparatus includes a 100mL Copper Cylindrical Measure, funnel with specified hopper, funnel stand, and a glass plate for calibration. **Product Dimensions:** 8x8x14.5in (203x203x368mm), WxDxH.

SG-40A Fine Aggregate Angularity Apparatus features a strike-off guide for exact alignment of the spatula blade to the top of the cylindrical measure. The strike-off guide improves repeatability of test results between operators. A 100mL Copper Cylindrical Measure, Funnel, Funnel Stand, and a Glass Plate for calibration are included. **Product Dimensions:** 6.5x6.5x13in (165x165x330mm), WxDxH.

Fine Aggregate Angularity Apparatus

Fine Aggregate Angularity Apparatus	SG-40
Fine Aggregate Angularity Apparatus with Strike-Off Guide	SG-40A

Accessories

Glass Plate	SGA-91
100mL Copper Cylindrical Measure	SGA-92
Stainless Steel Pan, 12x2in, dia.xH	SGA-93
Spatula	HMA-11A

COARSE AGGREGATE ANGULARITY APPARATUS

AASHTO T 326

The Coarse Aggregate Angularity Apparatus determines uncompacted void content of coarse aggregate. Gradation and void content data provide an indication of angularity, sphericity, and surface texture. NCAT research correlates test results to permanent deformation and fatigue cracking of asphalt and the test is recommended for evaluation of aggregates for asphalt pavement.

Coarse aggregate is placed and distributed evenly in the hopper. The cylindrical measure is centered below the hopper using the inscribed circle and locating pin on the base. The aggregate is released from the hopper using a spring loaded gate release that allows the aggregate to free fall without interference. The excess aggregate is leveled off with the top of the measure, the weight recorded, and coarse aggregate void content calculated.

SC-4 Galvanized Iron Pan measures 24x24x3in (610x610x76mm), WxDxH and is recommended for collecting overflow particles during testing. The TSA-163 Chute-End Aggregate Handling Pan is useful for weighing and loading of aggregate test material. **Product Dimensions:** 10x10x27in (254x254x686mm), WxDxH.


Coarse Aggregate Angularity Apparatus

Coarse Aggregate Angularity Apparatus	SG-42
Accessories	
Galvanized Iron Pan	SC-4
Chute-End Aggregate Handling Pan	TSA-163
Glass Plate	SGA-94
Stainless Steel Measure for Coarse Aggregate Void Content	SGA-95






HM-38R

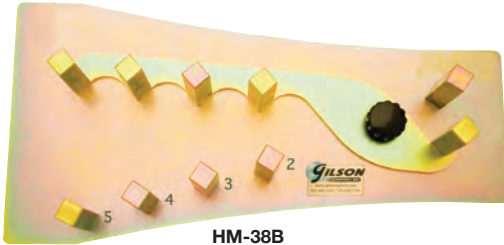

HM-38B



HM-925

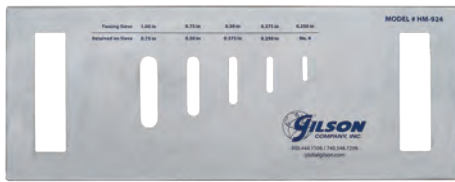

HM-924




HM-926

NEW



HM-725

NEW



HM-726

AGGREGATE SHAPE

ASTM D4791; BS 812-105

Aggregate Shape		
Description	Model	Test Method
<p>Proportional Calipers are used for rapid determination of percentages of flat and elongated particles in coarse aggregate fractions of 0.375in (9.5mm) or larger. Both units are constructed of durable plated steel, precision tooled for accuracy. Flat particles are identified by setting the width at the large end of the caliper, then checking thickness of the same aggregate at the smaller end. The aggregate is considered flat if it fits within the smaller gap. Tests for elongated aggregates are performed in a similar manner, comparing length. Consists of a base plate with fixed posts and a 13in (330mm) pivoting arm with posts at each end to measure opening ratios of 1:2, 1:3, 1:4, and 1:5. Posts are easily removed and replaced as necessary.</p> <p>Budget Caliper adjusts by securing a pivot arm screw at one of four threaded positions to provide end opening ratios one at a time. Product Dimensions: 16x6x3in (406x152x76mm), WxDxH.</p> <p>Four-Station Caliper is similar, but provides openings for all four ratios simultaneously, without the need to reposition the pivot screw. Product Dimensions: 16x8x3in (406x203x76mm), WxDxH.</p>	<p>Budget Proportional Caliper Four-Station Proportional Caliper</p>	<p>ASTM D4791</p>
<p>Flakiness Index Gauges characterize particle shape of aggregates used in asphalt and concrete paving mixes and for pavement base courses. Aggregate particles are manually tried against labeled slots. Aggerate particles not passing are identified as flaky and their percent of the total sample by weight is the flakiness index. Gauges are rugged laser-cut stainless steel with clearly labeled fraction ranges for each slot. Product Dimensions: 15x6x0.5in (381x152x13mm), WxDxH.</p> <p>Standard Flakiness Index Gauge meets BS 812-105 and has seven labeled slots for each of the seven sieve cuts from 2.5 to 0.25in (64 to 6.4mm).</p> <p>Indiana Flakiness Index Gauge meets Indiana Department of Transportation standard ITM No. 224-18 and requirements for several other state agencies for flakiness index testing. This gauge has five slots ranging from 0.25 to 1in (6.35 to 25.4mm) for manual checking of particles.</p>	<p>Standard Flakiness Index Gauge Indiana Flakiness Index Gauge</p>	<p>BS EN 933-3 ITM-224-18</p>
<p>Length Gauge has six labeled openings between pairs of metal pins for measuring length of aggregate from each of the six sieve cuts from 2 to 0.25in (51 to 6.4mm). The aggregate is elongated when its longest dimension is more than 1.8 times the midsize of the sieve fraction. The mass of all elongated aggregates as percent of the total sample is the elongation index. The Length Gauge has stainless pins set in an anodized brushed aluminum base, stamped with sieve fraction ranges between pins. Product Dimensions: 12.75x2x2.5in (324x51x64mm), WxDxH.</p>		<p>BS EN 933-3</p>
<p>Ballast Flatness and Elongation Ratio Gauges provide fast and dependable determinations of the Flatness and Elongation Ratio of ballast used in construction of high speed railway systems. Both gauges are easy to use and feature durable steel construction. Each gauge has four openings of different sizes to determine flatness/elongation of ballast retained on one of four corresponding sieve sizes. These four sieve sizes are 2.12in, 1-1/2in, 1-1/4in, and 3/4in. Opening sizes match those described in the ballast test methods of Tokaido Shinkansen.</p> <p>Flatness Ratio Gauge allows for ballast specimens to be tested against the opening in the gauge that corresponds to the sieve that the specimen was retained. The shortest side length of the specimen is examined to identify that it passes the gauge's openings. The Flatness ratio of the ballast is determined by taking the weight of ballast that passes the proper gauge openings and dividing by the original ballast weight.</p> <p>Elongation Ratio Gauge similarly helps examine samples of ballast against the gauge opening that matches with the sieve where the sample was retained. The longest side length of the ballast sample is tested to determine if it does not pass the opening of the gauge. The total weight of ballast sample that does not pass the openings of the gauge is then divided by the total original weight of the sample to determine the Elongation ratio.</p>	<p>Flatness Ratio Gauge Elongation Ratio Gauge</p>	<p>— —</p>



HM-137

ORGANIC IMPURITIES TEST SET

ASTM C40; AASHTO T 21

Deleterious organic materials in fine aggregates are easily detected with this simple, widely used test. Samples are mixed in a special graduated colorless glass bottle with a 3% sodium hydroxide solution, then allowed to stand for 24 hours. If the color of the supernatant liquid above the test sample is darker than a standard reference color, organic compounds may be present and further testing should be done before approval.

The complete HM-137 Gilson Organic Impurities Test Set includes six 8oz (240mL) graduated Impurities Test Bottles, 1lb (454g) of Sodium Hydroxide (NaOH) Pellets and a circular Color Reference Disk with five standard reference colors. The sodium hydroxide pellets make enough 3% solution to perform over 150 tests. For areas with shipping restrictions, this set is available without sodium hydroxide as HM-137F. For strict compliance to ASTM and AASHTO Standards, Reagent Grade Sodium Hydroxide Pellets (HM-818) can be ordered separately. Impurities Test Bottles are graduated to 8oz and 240mL and have watertight screw-on caps. All individual set components can be purchased separately.

The Color Reference Disk has five permanent, fade-free, solid-glass reference colors of 5, 8, 11, 14, and 16 on the Gardner color scale mounted in a protective plastic frame. Individual Gardner Liquid Color Standards are also available for the same reference colors and meet ASTM/AASHTO requirements. The liquid is securely sealed in glass tubes marked with the Gardner number and packaged in a protective case. Shelf life of each liquid standard color is five years.



HM-58R

METHYLENE BLUE VALUE SET

ASTM C837; AASHTO T 330

The Methylene Blue Value (MBV) estimates of the amount of potentially harmful fine material such as clay and organic material present in fine aggregate. Material passing the No.200 (75µm) sieve is maintained in dispersion with distilled water by mixing with a magnetic stirrer. Methylene Blue solution is titrated into the stirred dispersion in increments until a drop of the mixture on filter paper shows a blue ring, indicating that the sample can absorb no more reagent. The MBV is a measure of the amount of reagent absorbed and is proportional to the amount of clay or organic material present.


Methylene Blue Reagent solution is light sensitive. The solution shelf life is 4-6 months maximum, when stored in a dark cabinet in foil-wrapped amber bottles. The HM-58R Set includes 25g of Methylene Blue Reagent in stable powder form, a 50x0.1mL special amber glass burette, a burette clamp and stand, two amber 500mL solution storage bottles, three glass 600mL beakers, two glass dropping rods, a 1L volumetric flask, and a 100 sheet pack of 24cm diameter filter paper. Instructions for preparation and storage of solution are provided along with details of the test procedure. The 25g of powder reagent provided in the set is sufficient to prepare solution for over 500 tests.

Organic Impurities Test Set	
Organic Impurities Test Set	HM-137
Organic Impurities Test Set without Sodium Hydroxide	HM-137F
Accessories	
Color Reference Chart	HM-815
Sodium Hydroxide (NaOH) Pellets, 1lb	HM-816
Sodium Hydroxide (NaOH) Pellets, Reagent Grade, 1lb	HM-818
Impurities Test Bottle	HM-817
Gardner No. 5 Liquid Color Standard	HM-810
Gardner No. 8 Liquid Color Standard	HM-811
Gardner No. 11 Liquid Color Standard	HM-812
Gardner No. 14 Liquid Color Standard	HM-813
Gardner No. 16 Liquid Color Standard	HM-814
Gardner No. 18 Liquid Color Standard	HM-819


Methylene Blue Value Set	
Methylene Blue Value Set	HM-58R
Accessories	
Powder Reagent, 25g	HMA-78
Filter Paper, pkg. 100	HMA-79

AQUA-CHECK MOISTURE TESTER

The gas-pressure method for moisture determination has long been in use and is widely accepted for accurate field testing of soils, aggregates, coal, abrasives, and other materials. These devices are essentially pressure vessels and depend on the formation of gas when calcium carbide reacts with moisture in the sample. A precision gauge in the sealed chamber measures pressure for relative readings and results are easily correlated to laboratory results for enhanced accuracy.

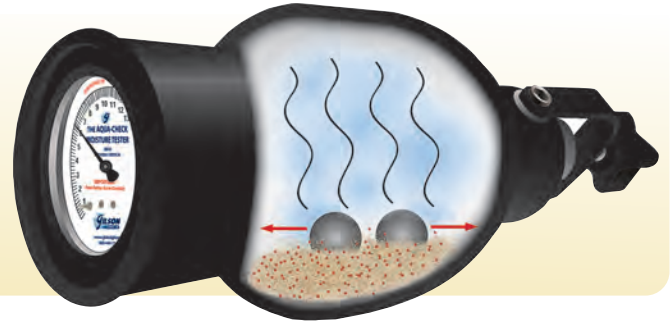

MA-26X



MAA-45



MA-26X additional views

GILSON AQUA-CHECK MOISTURE TESTER

ASTM D4944; AASHTO T 217; Florida FM 5-507

Gilson Aqua-Check is made in the USA and an affordable choice for rapid, accurate, and reliable moisture tests on soils, sand, aggregates, ores, coal, and other materials with particle size up to 20mm (0.8in). Samples are quickly tested on-site, eliminating risk of moisture loss during transport. Portable units are easy to use and meet ASTM, AASHTO, and Florida DOT requirements. The Gilson Aqua-Check was evaluated by the Florida DOT and verified to meet FM 5-507 DOT requirements.

A pre-weighed 20g sample is placed in the test chamber, along with a measured quantity of Calcium Carbide Reagent. When the chamber is sealed and agitated for one to three minutes, free moisture in the test sample reacts with the reagent to produce acetylene gas. The integral pressure gauge registers 0–20% moisture by weight in 0.2% graduations. Moisture range can be doubled by halving the pre-weighed sample weight.

MA-26X Aqua-Check has a rugged, cast aluminum body with a tough, wear-resistant coating and includes a 0–20x0.2% pressure gauge with certificate of calibration. Also included are an electronic digital balance, two 1.25in (32mm) dia. steel pulverizing balls, reagent measuring scoop, brush, and instructions in a heavy-duty, waterproof plastic case. **Approximate Pressure Chamber Dimensions:** 14x5.5in (356x140mm), Lxdia. Recalibration of existing Aqua-Check gauges is available as MAA-53. Calcium Carbide Reagent is available separately in 10lb (4.5kg) cans as MAA-44. The pressure gauge and all accessories are compatible with both Aqua-Check and Speedy-brand Moisture Testers.

MAA-45 Aqua-Check 0–20% Replacement Pressure Gauge includes a certificate of calibration. Due to shipping restrictions, reagent is sold in 10lb (4.5kg) cans only. Reagent from these larger cans can be used to replenish smaller containers, MAA-43 or SC-116, for field use. **Product Dimensions:** 20x17x9in (508x432x229mm), WxDxH.

Gilson Aqua-Check Moisture Tester

Gilson Aqua-Check Moisture Tester	MA-26X
Accessories	
Calcium Carbide Reagent, 10lb Can	MAA-44
Empty 1lb Metal Can for Reagen	MAA-43
Aqua-Check 0–20% Pressure Gauge	MAA-45
Recalibration of MAA-45 Pressure Gauge	MAA-53
Electronic Balance, 220x0.1g	OB-205
1.25in (32mm) Steel Balls, pkg. 2	MAA-47
Sample Cup	MAA-52
Long-Handle Reagent Scoop	MAA-48
Large, Coarse Clean Out Brush	MAA-51
Small, Fine-Bristle Brush	MAA-50
Heavy-Duty Waterproof Plastic Case	MAA-46
Round Plastic Sample Jars, pkg. 12	SC-116

technote

Gilson Company, Inc. offers repair and pressure gauge calibration services for the MA-26X Aqua-Check and Speedy Moisture Testers. Please call 800.444.1508 for pricing.



HM-602W



VIDEO ONLINE



DIY VIDEO

PENDULUM SKID TESTER


ASTM D3319, E303; AASHTO T 278, T 279; BS 812-114; BS EN 1097-8, 13036

The Pendulum Skid Tester measures skid resistance when a rubber slider on a 20in (508mm) pendulum arm contacts a test surface. A drag pointer on a 0–150 scale measures friction. The unit quantifies the potential of automotive tire skidding and also evaluates skid resistance of surfaces and polishing tendencies of aggregates. A supplementary 0–10 scale is provided for work using smaller sliders. Adjustments to the arm position and base maintain a true circular path when operated on sloping road surfaces. Sliders are made with a graded rubber strip bonded to an aluminum backing plate.

Gilson supplies large or small rubber sliders either mounted to aluminum plates or as unmounted replacement pads. Order 3in (76mm) wide Large Sliders for testing road surfaces or 1.25in (32mm) wide Small Sliders for testing polishing wheel specimens.

The Tester includes a setting gauge, three wrenches, water bottle, instrument case, traceable calibration certificate, and instructions. Large or Small Sliders are ordered separately. When evaluating specimens from Accelerated Polishing Machines, order HMA-204W Laboratory Base Plate and HMA-207 Small Sliders separately. Base Plate is 25x19x2in (635x483x51mm), WxDxH, including a specimen mounting block. Order HMA-208P 6x24in (152x610mm) No.60 grade silicon carbide Slider Conditioning Cloth in packs of ten to condition sliders per ASTM E303. Molds to form Accelerated Polishing Machine specimens are also available. **Product Dimensions:** 28.3x28.7x8.7in (719x729x221mm), WxDxH.

Pendulum Skid Tester	
Pendulum Skid Tester	HM-602W
Accessories	
Slider Conditioning Cloth, pkg. 10	HMA-208P
Laboratory Base Plate	HMA-204W
Large Slider, Mounted	HMA-203
Large Pad, Unmounted	HMA-228
Small Slider, Mounted	HMA-207
Small Pad, Unmounted	HMA-229
Accelerated Polishing Specimen Mold	HMA-258
Mold Plate	HMA-259

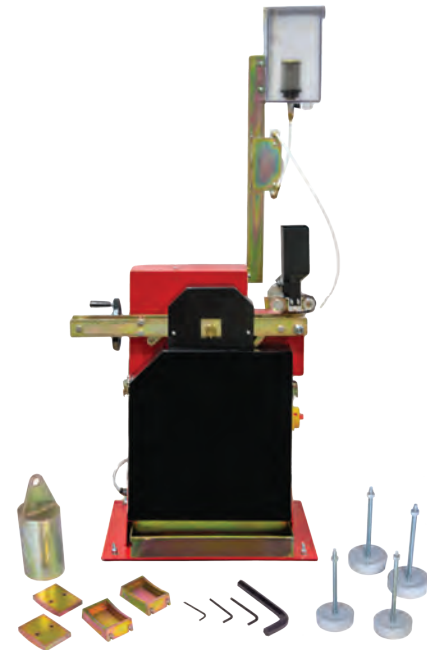

HM-614

ACCELERATED POLISHING MACHINE

ASTM D3319, AASHTO T 279, BS 812/EN 1097-8

The Accelerated Polishing Machine simulates aggregate wear on asphalt pavements caused by action of vehicle tires. Specimens are prepared by securing aggregate pieces into special curved molds with bonding agent. Fourteen curved segments of specimens are clamped around a "road wheel" to form a continuous aggregate surface 1.75in (44.5mm) wide and 16in (406mm) in diameter. The road wheel is driven in loaded contact with a rubber-tired wheel while an abrasive and water are fed to the contact area. After polishing, friction values are determined using a Pendulum Skid Tester.

The road wheel is driven by an electric motor at 320 ±5rpm through an abrasive adjustable timing belt. The Goodyear 8in (203mm) diameter pneumatic-tire assembly maintains an 88lbf (391N) load on the road wheel while HMA-240 Abrasive Silicon Carbide Grit and water are distributed onto the test surface at a prescribed rate. Water is gravity fed from a tank through a calibrated flow meter and is collected with used abrasive in a removable tray. Pneumatic tire assembly loads are controlled by a mechanical lifting device. Tests are automatically terminated by a preset revolution counter. Each unit consist of a welded steel frame on adjustable leveling feet and are supplied with two specimen molds, two mold plates, required feeders, wheel assemblies, wrenches, mounting pads, and operating instructions. Order abrasives separately. Each ASTM/AASHTO test requires about 10lb (4.5kg) of silicon carbide grit. Standard models operate on 115V, 60Hz. To order a model that operates on 230V, 50Hz, add "F" suffix to model number. **Product Dimensions:** 32x31x48in (813x787x1,219mm), WxDxH.

HM-614 Accelerated Polishing Machine is designed to meet ASTM D3319, AASHTO T 279.

HM-615 Accelerated Polishing Machine is configured for BS 812/EN 1097-8.

Accelerated Polishing Machine		
Accelerated Polishing Machine (ASTM/AASHTO),	115V, 60Hz 230V, 50Hz	HM-614 HM-614F
Accelerated Polishing Machine (BS 812/EN 1097-8),	115V, 60Hz 230V, 50Hz	HM-615 HM-615F
Accessories		
Abrasive Silicon Carbide Grit, 50lb (23kg) box		HMA-240
Tired Wheel Assembly ASTM (for Silicon Carbide)		HMA-250
Replacement Tire (Pneumatic) with Tube		HMA-251
Accelerated Polishing Specimen Mold		HMA-258
Mold Plate		HMA-259






SG-20 shown with SGA-120, OBX-512, and SG-7A



HM-649

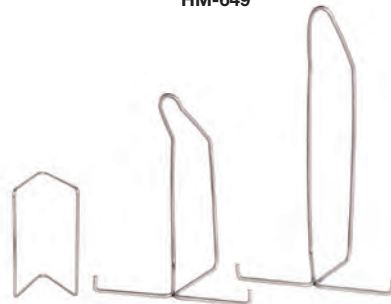

SGA-119, SGA-125, SGA-135



MA-170

SPECIFIC GRAVITY BENCH

ASTM C20, C127, C642, C830, D1188, D2041, D2726; AASHTO T 85, T 166, T 209, T 275

The Specific Gravity Bench allows easy suspended weighing of samples in water for relative density determinations of aggregates, hardened concrete, bituminous mixtures, refractory brick, and similar materials. Bench is sturdy painted steel and features three 2in (51mm) diameter holes in the top for suspension of samples and thermometer. The lower support doubles as a shelf that adjusts to fit Gilson 30gal (114L) or 44gal (170L) Plastic Water Tanks. **Product Dimensions:** 31x25x46in (787x635x1,168mm), WxDxH.

Heavy-duty polyethylene water tanks are ordered separately. The 0.25in (6.4mm) thick molded tanks are seamless and translucent for water level visibility and equipped with drain and overflow outlets. Maximum operating temperature is 140°F (60°C). SGA-120 has 30gal (114L) capacity with dimensions of 24x18x18in (610x457x457mm), LxWxD. SGA-122 has 44gal (170L) capacity with dimensions of 24x18x24in (610x457x610mm), LxWxD and is preferred for ASTM D2041, AASHTO T 209, and similar tests.

HM-651 Heater and HM-655 Circulator or alternate HM-649 Portable Heater/Circulator accessories for temperature control are ordered separately. Use SGA-130 Locking Caster Set for portability of the bench. SGA-135 Mega Density Weighing Cradle holds large pycnometers and solid specimens for weighing. Stainless steel SGA-125 Large Density Weighing Cradle allows for samples to tilt backward to prevent specimen loss. SGA-119 Small Density Weighing Cradle, shaped from heavy stainless steel wire, is useful for weighing odd-shaped specimens. Additional accessories and scales are described below. SGA-135, SGA-125, and SGA-119 dimensions are: 10x6x17in (254x152x432mm), 10x6x12in (254x152x305mm), and 4x4x6.5in (102x102x165mm), respectively.

Specific Gravity Bench

Specific Gravity Bench	SG-20
Accessories	
Water Tank 30gal, 18in deep	SGA-120
Water Tank 44gal, 24in deep	SGA-122
Small Density Weighing Cradle	SGA-119
Large Density Weighing Cradle	SGA-125
Mega Density Weighing Cradle	SGA-135
Tank Heater, 120V, 60Hz	HM-651
Tank Circulator, 115V, 60Hz	HM-655
EZ-Mount Heater/Circulator, 120V, 60Hz	HM-649
Locking Caster Set	SGA-130
No.8 Wire Mesh Basket	SG-7A

DIGITAL RESIDUAL PRESSURE MANOMETERS

ASTM D2041; AASHTO T 209

Digital Residual Pressure Manometers are safe, accurate, and environmentally friendly alternatives for precise measurement of vacuum levels. These models meet the requirements of ASTM D2041 and AASHTO T 209 to measure specific gravity and density of asphalt mixtures, often called the Rice Test. The mercury-free gauges use absolute pressure transducers for instant digital display of applied vacuum from 0 to 1,000mm Hg. Accuracy is $\pm 0.5\%$ of full scale. Resolution is 0.1mm. A 0.25in hose barb connection with a needle valve is supplied for vacuum tubing.

The MA-170C version is supplied with a certificate of NIST calibration to meet requirements of AASHTO T 209. This model undergoes multi-point calibration at 25, 30, and 35mm Hg on NIST traceable equipment. The same NIST calibration or recalibration is available for existing MA-170 Digital Manometers by ordering MAA-25 and sending the units in. Contact Gilson customer service for shipping instructions.

Both models are powered by a 9V battery or AC adapter, both included. Automatic shutoff saves power in battery mode. Adapter included with MA-170F and MA-170FC operates on 230V, 50Hz. **Product Dimensions:** 3.1x6.5x1.18in (78.7x165.1x30mm), WxDxH.

Digital Residual Pressure Manometers

Digital Manometer, 115V, 60Hz	MA-170
230V, 50Hz	MA-170F
Digital Manometer, NIST Calibration, 115V, 60Hz	MA-170C
230V, 50Hz	MA-170FC
Digital Manometer Recalibration	MAA-25

Specific Gravity Accessories

Description	Model	Test Method
<p>Vibra-Pad assists with agitation of specific gravity specimens during deairing operations and is specified by the Kentucky Transportation Cabinet for fine aggregate specific gravity testing. The plastic coated 5.25in (133mm) square platform has two wing nut fasteners and corner pillars with springs for holding flasks and pycnometers up to 6in (152mm) diameter in place. Product Dimensions: 6x7x6.5in (152x178x165mm), WxDxH.</p> <p>Vibra-Pad, 115V, 50/60Hz Vibra-Pad, 230V, 50/60Hz</p>	SS-28 SS-28F	KM 64-605
<p>The Aggregates Handbook is a compilation of articles and a comprehensive reference for anyone dealing with aggregates. Discusses basic properties, aggregate as a component of Portland cement and asphalt concrete, sampling and testing principles, and more. New second edition features expanded coverage of many industry topics. Product Dimensions: 8.5x11in (216x279mm), WxH.</p>	BK-36	—
<p>Specific Gravity & Absorption of Fine Aggregate Set includes a pycnometer, conical mold, and tamper. Pycnometer is 1qt (0.95L) threaded glass jar with a rubber gasketed brass top tapered to 0.125in (3.18mm) hole at top. Mold is 40mm ID at top, 90mm at bottom, 75mm H. The 340g tamper has a 25mm diameter face.</p> <p>Complete Set Jar and Top Mold and Tamper Mold Only Tamper Only</p>	SG-1 SG-2 SG-3 SGA-15 SGA-16	ASTM C128 AASHTO T 84
<p>Specific Gravity & Absorption of Coarse Aggregate Set includes a stainless steel Wire Mesh Basket with handle and a polyethylene 24qt Water Container for weighing coarse aggregate samples while suspended in water. Wire Basket is No.8 stainless steel mesh, 8x8in (203x203mm), dia.xH. Inquire for baskets with No.4, No.6, No.12, or No.16 mesh sizes. 14qt Galvanized Steel Sample Bucket is available as a container.</p> <p>No. 8 Wire Mesh Basket and Polyethylene Container Set No. 8 Wire Mesh Basket Polyethylene Container Galvanized Steel Sample Bucket</p>	SG-6 SG-7A SG-8 MA-950	ASTM C127 AASHTO T 85
<p>Chapman Specific Gravity Flask is used to determine approximate percentage of surface moisture and voids in fine aggregates. Upper and lower bulbs contain 175mL and 200mL, respectively. Stem is graduated above the bulbs from 375 to 450mL.</p>	SG-450	ASTM C70
<p>LeChatelier Specific Gravity Flask is used to obtain specific gravity of hydraulic cement, dust, sand, and other fine materials. Body holds about 250mL, bulb in neck holds 17mL. Below the bulb are graduations from 0 to 1mL. Above the bulb, the neck is graduated from 18 to 24mL. Complete with stopper. Inquire for Gay-Lussac type SG bottles.</p>	SG-24	ASTM C188 AASHTO T 133
<p>Volumetric Flasks are borosilicate glass and calibrated to contain indicated quantity at 20°C. Supplied with plastic snap cap. Meets ASTM E288, E694; useful for specific gravity tests such as ASTM D854.</p> <p>Volumetric Flask, 100mL Volumetric Flask, 250mL Volumetric Flask, 500mL Volumetric Flask, 1,000mL</p>	SG-100 SG-250 SG-500 SG-1000	ASTM D854 AASHTO T 100
<p>Hubbard & Hubbard-Carmick Specific Gravity Bottles determine specific gravity of semi-solid bituminous materials, asphalt cements, and soft tar pitches. Included stopper is concave on lower surface and has 1.6mm center hole for air evacuation. The Hubbard Bottle has a 24mL capacity and the Conical Hubbard-Carmick bottle has a 25mL capacity. SG-62 Product Dimensions: 1.06x2.75in (27x70mm), dia.xH. SG-63 Product Dimensions: 1.54x1.7in (39x43mm), dia. (at bottom) x H (without stopper).</p> <p>Hubbard Specific Gravity Bottle Hubbard-Carmick Specific Gravity Bottle</p>	SG-62 SG-63	ASTM D70 AASHTO T 43
<p>Phunque Flasks are a fast and reliable method to determine specific gravity/absorption of fine, coarse, or blended fine and coarse aggregate. Simple procedures are ideal for tracking values without the complexity and delay of traditional lab tests. SG-26 for fine aggregate has 2,500mL capacity and 1in (25mm) diameter neck. Product Dimensions: 7x39in (178x991mm), dia.xH. SG-27 for coarse and blended fine and coarse aggregate has 5,000mL overall capacity and a 2in (51mm) diameter neck. Product Dimensions: 8.5x48in (216x1,219mm), dia.xH Scale on both are readable to 0.1 grams. Both Flasks can be purchased together as SG-28 Set. Quality laboratory-grade glassware includes Excel calculation sheet and a swabbing utensil.</p> <p>Phunque Flask for Fine Aggregate Phunque Flask for Coarse or Blended Aggregate Phunque Flask Set, for Fine and Coarse Aggregate</p>	SG-26 SG-27 SG-28	ASTM Pending; AASHTO T 354



SS-28 shown with SG-2



BK-36



SG-1



SG-6



SG-450

SG-24

SG-250



SG-62



SG-63



SG-28

RICE TEST SET-UP

The SGA-5R Rice Shaker agitates the pycnometer containing an asphalt sample under vacuum. Vibratory action dislodges entrapped air, which is evacuated by the vacuum pump. The MA-170 Digital Absolute Pressure Manometer measures vacuum applied to the sample and the SG-70 Air/Gas Dryer Tube with indicating Drierite prevents water from entering the vacuum pump.



Close up of EZ-Clamp



MA-170



SGA-5R shown with GW-76 & SGA-8



VIDEO ONLINE

SGA-5R shown with SG-16A

RICE SHAKER

ASTM C128, D854, D204, D4867; AASHTO T 84, T 100, T 209; Tex-227-F

- **Consistent, repeatable agitation for Asphalt Rice Test and other specific gravity determinations**
- **Variable vibration control allows for setting optimum agitation**
- **Automatic operation minimizes operator error**

The Gilson Rice Shaker performs consistent, automatic agitation of Asphalt Rice Test vacuum pycnometers, freeing lab technicians for other duties. It is also a useful deairing device for specific gravity tests of fine aggregates (ASTM C128) and soils (ASTM D854), as well as sample preconditioning per ASTM D4867 and AASHTO T 209.

The Rice Shaker features built-in 0–99 min. digital timer with one second accuracy, a vibration speed controller, and a three position switch for manual or timed operation. Variable speed settings closely control agitation to avoid stripping of asphalt. Gilson's exclusive EZ-Clamp system quickly secures the pycnometers. Push the buttons, slide into place, and a quick twist secures the container. The powder coated steel case has nonslip rubber feet so no mounting is required.

The SGA-5R includes fitted top and bottom plates for exact fit with SG-16A or SG-18A Aluminum Pycnometers. Order SGA-7 Adapter Set for use with high-capacity plastic SG-15 Pycnometer. SGA-8 Adapter Set is required for use

with GW-75 or GW-76 Filter Flasks, SG-500 Volumetric Flasks, SG-24 LeChatelier Flask, or SG-2 Mason Jar Pycnometer. MA-170 Digital Residual Pressure Manometer precisely measures applied vacuum during testing. NIST certified model is available as MA-170C. SGA-5RT has modified vibration characteristics to meet Texas DOT requirements. To upgrade Rice Shaker from old style knobs to new EZ-Clamp system, order SGA-12. **Product Dimensions:** 13x14x19in (330x356x483mm), WxDxH.

Rice Shaker	
Rice Shaker, 115V, 50/60Hz	SGA-5R
Rice Shaker, Texas, 115V, 50/60Hz	SGA-5RT
Accessories	
Adapter Set for SG-15	SGA-7
Adapter Set for GW-75 or GW-76	SGA-8
Digital Residual Pressure Manometer, 115V, 60Hz	MA-170
230V, 50Hz	MA-170F
Digital Residual Pressure Manometer, NIST Calibrated, 115V, 60Hz	MA-170C
Digital Residual Pressure Manometer, NIST Calibrated, 230V, 50Hz	MA-170FC
EZ-Clamp Upgrade	SGA-12

Specific Gravity Pycnometers and Accessories

Description	Model	Test Method
<p>2,000g Aluminum Pycnometer is 7.5x6in (191x152mm), IDxDi and tests a maximum 2,000g sample with aggregates up to 0.75in (19.1mm). A transparent vacuum lid and a second tapered aluminum lid with capillary bore are included to allow use as a volumeter for specific gravity of compacted mixes. Vacuum hose, quick-disconnect, and a 3/8in (9.5mm) threaded aspirator vacuum source are included. Product Dimensions: 8.125x6.375in (206x162mm), dia.xH.</p>	SG-16A	ASTM D2041 AASHTO T 209
<p>4,000g Aluminum Pycnometer has a higher capacity, measuring 7.5x9in (191x229mm), IDxDi with enough volume for specimens up to 4,000g. Included transparent acrylic vacuum lid and aluminum lid with capillary bore are identical to SG-16A lids for use in specific gravity of compacted mixtures. Vacuum hose, quick-disconnect, and a 3/8in (9.5mm) threaded aspirator vacuum source are also included. Product Dimensions: 8.125x9.375in (206x238mm), dia.xH.</p>	SG-18A	ASTM D2041 AASHTO T 209
<p>6,000g Pycnometer has large, 10L capacity for mixes with aggregates up to 2in (51mm). High strength plastic vessel with 9.38in (238mm) ID and O-Ring seal to prevent leakage. An adjustable valve controls water level and a perforated plastic shelf is included. The shelf supports three 4in (102mm) dia. specimens. Vacuum hose, quick-disconnect, and a 3/8in (9.5mm) threaded aspirator vacuum source are included. Order SGA-7 Adapter Set for use with SGA-5R Rice Shaker. Product Dimensions: 10.75x13.3in (273x338mm), dia.xH.</p>	SG-15	ASTM D2041 AASHTO T 209
<p>Filter Flasks have side tubulation for 0.375in ID tubing. Heavy-duty 2,000/4,000mL sizes are thick walled for maximum strength. Order SGA-8 Adapter Set for use with SGA-5R Rice Shaker.</p>	1,000mL 2,000mL 4,000mL	GW-74 GW-75 GW-76
<p>Laboratory Air/Gas Dryer works in vacuum or pressure applications and protects vacuum pumps from harmful moisture during operations. Water capacity is 50 grams. Molded polycarbonate column has a threaded cap and stainless steel springs hold the included Indicating Drierite Granules between two felt filters. Hose barbs accept 1/4in (6.4mm) or 3/8in (9.5mm) ID tubing. Recommended Flow Rate: 0.1scfm (200lph) at 90psi (6.2bar). Product Dimensions: 2.6x11.4in (66x290mm), dia.xH</p>	SG-70	—
<p>Indicating Drierite Granules rapidly absorb water vapor from air and gases. Blue desiccant crystals turn pink when exhausted and can be regenerated in an oven for longer life, or replaced as needed. Use No.8 size for SG-70 Laboratory Air/Gas Dryer and No.4 size for GW-74 Filter Flasks.</p>	No.4 Indicating Drierite Granules, 5lb (2.3kg) Jar No.8 Indicating Drierite Granules, 5lb (2.3kg) Jar	SGA-105 SGA-106
<p>Accessories for specific gravity determinations includes 3/8in Reinforced Vinyl Tubing priced per foot, Tubing Clamp, and No.12 Rubber Stopper with 0.375in (9.5mm) hole for GW-76 Flask.</p>	3/8in ID Reinforced Vinyl Tubing, per foot Adjustable Hose Clamp No.12 Rubber Stopper	WT-4B MA-198 GWA-3



SG-16A



SG-18A



SG-15



GW-76



SG-70



SGA-105



WT-4B



MA-198



GILSON NEWSLETTER

Sign up for the Gilson newsletter at globalgilson.com and never miss a thing!



SHIP WEIGHT INDEX

The estimated ship weight for every product is easy to find in the Ship Weight Index!



MA-23



MA-24



MA-27A

VACUUM PUMPS

ASTM C128, C830, D2041, D2172, D4867; AASHTO T 100, T 164, T 209; OTHERS

MA-23 Oilless Vacuum Pump, Heavy-Duty is a large oilless pump that allows multiple specific gravity tests to be performed simultaneously. This heavy-duty unit combines large capacity with maintenance free operation. The 1/3hp motor pulls 29.6in Hg (759.46mm), with free air displacement up to 99L/min (3.5cfm). Includes a NEMA guarded switch and grounded electric cord. **Product Dimensions:** 11.1x9.2x11.0in (282x234x279mm), WxDxH.

MA-24 Oilless Vacuum Pump, Economy offers the same vacuum capacity as some oil systems in an economical oil-less pump package. The 1/3hp motor pulls a vacuum to 29.6in Hg (759.46mm), with free-air displacement up to 45L/min (1.6cfm). Includes a NEMA guarded switch and grounded electric cord. **Product Dimensions:** 11.7x7.2x9.5in (297x183x241mm), WxDxH.

MA-27A Two-Stage High Vacuum Pump is a two-stage, direct drive, rotary vane pump that provides good performance to cost ratio. This lightweight 1/2hp pump features 3.0cfm free air capacity. The compact design reduces space requirements and a 2.5in (64mm) diameter Bourdon-style 0–30in (0–762mm) vacuum gauge is mounted on the intake side. A gas ballast valve permits purging of water vapor. The handy plastic grip handle allows easy portability. **Product Dimensions:** 14x5.25x11in (356x133x279mm), WxDxH

MA-31 Economy Chemical Resistant Vacuum Pump is a smaller, affordable oilless pump optimized for ultimate protection against corrosive solvents. This quiet model exhibits noise levels as low as 54dB and is optimized for vacuum filtration and degassing applications. The low-maintenance MA-31 is equipped with a 1/7hp motor that pulls a vacuum to 22in Hg (559mm), with free air displacement up to 20L/min (0.7cfm). The pump includes a regulator gauge to adjust and monitor vacuum levels and the inlet catch-pot protects from accidental intake of fluids and particulates. **Product Dimensions:** 6.8x7.3x8.3in (173x185x211mm), WxDxH.

MA-33 Chemical Resistant Vacuum Pump is a durable, corrosion, and bleach-resistant pump ideal for mid-range vacuum applications and safe for use with cell culture contamination protocols. The included liquid inlet trap and vacuum regulator are suitable for organic aqueous solvents and light acid/base solutions. The 1/5hp motor pulls a 24in Hg (607mm) vacuum, with free air displacement up to 37L/min (1.3cfm). The unit is supplied with a power cord, plug, and power switch. **Product Dimensions:** 8.75x5x8.75in (222x127x222mm), WxDxH.




MA-31



MA-33

Vacuum Pumps

Model	Electrical	hp (kW)	Ultimate Vacuum, in (mm) Hg	Free Air Capacity, cfm (L/min)	Intake Nipple OD, in (mm)
MA-23 MA-23F	115V, 60Hz 230V, 50Hz	1/3 (0.25) 1/3 (0.25)	29.6 (759)	3.5 (99) 3.5 (99)	0.375 (9.5) 0.375 (9.5)
MA-24 MA-24F	115V, 60Hz 230V, 50Hz	1/3 (0.25) 1/3 (0.25)	29.6 (759)	1.6 (45) 1.6 (45)	0.375 (9.5) 0.375 (9.5)
MA-27A MA-27AF	110V, 60Hz 220V, 50Hz	1/2 (0.37) 1/2 (0.37)	29.8 (765)	3.0 (85) 3.0 (85)	0.375 (9.5) 0.375 (9.5)
MA-31	115V, 60Hz	1/7 (0.14)	22 (559)	0.7 (20)	0.25 (6.3)
MA-33 MA-33F	115V, 60Hz 230V, 50Hz	1/5 (0.20) 1/5 (0.20)	24 (607)	1.3 (37) 1.3 (37)	0.25 (6.3) 0.25 (6.3)

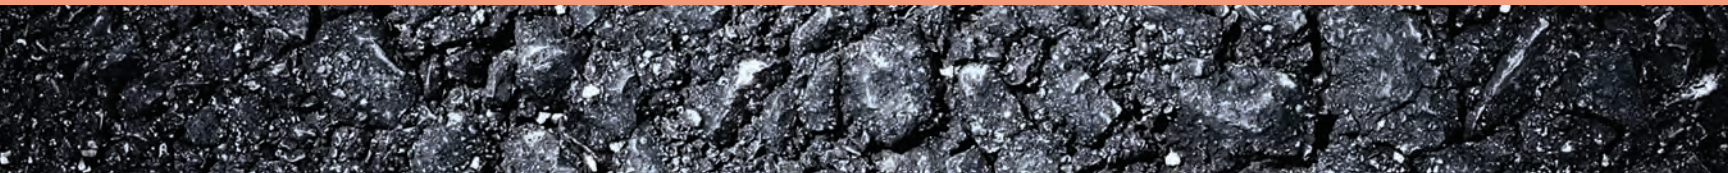

MARSHALL STABILITY AND ASPHALT LOAD FRAMES

ASTM D4867, D5581, D6927, D6931, D8044;
AASHTO T 245, T 283, TP 114, TP 124

Karol-Warner Asphalt Load Frames from Gilson perform more than just Marshall stability and flow tests for asphalt mix designs. Many other asphalt test methods take advantage of the specific strain rate and load capacity of these load frames to perform other important strength tests. These tests are typically performed at a strain rate of 2in (50.8mm) per minute, although some Semi-Circular Bend (SCB) and Interlayer Shear Strength (ISS) tests are performed at a slower rate of loading.

- **Marshall stability and flow is a popular and established test to measure plastic flow of asphalt paving mixtures**
- **The Indirect Tensile Strength (IDT) or Lottman Test evaluates moisture susceptibility and allows calculation of tensile strength ratios (TSR)**
- **Interlayer Shear Strength (ISS) test, measures the shear strength of tack coats between asphalt layers**
- **Semi Circular Bend (SCB) test determines resistance to cracking and fracture energy of asphalt mixtures**

All Asphalt Load Frames are powered by heavy-duty direct drive motors with over-limit switches to prevent movement beyond the 3in (76mm) range. Large 8in (203mm) diameter test platens and threaded adjustable cross heads easily accommodate a variety of test fixtures. Sturdy 14-gauge powder-coated steel cabinets stand up to rugged use in lab environments. An optional sturdy steel rolling cart allows easy positioning of the load frames.

MS-398 Load Frame operates at a variable strain rate from 0.02 to 2.0in/min (0.508 to 50.8mm/min), precisely regulated to ±1% of set point by a 3/4hp DC motor and controller. The variable rate of strain allows a wide range of asphalt test variations as well as geotechnical/soil mechanics applications like CBR, Unconfined Compression, Triaxial, and Soil-Cement tests. The frame has a 10,000lbf (44.5kN) capacity, and a daylight opening of 11.9x37.3in (302x947mm). **Product Dimensions:** 18x29x54.5in (457x737x1,384mm), WxDxH.

MS-86 Load Frame has a fixed strain rate of 2.0in/min (50.8mm/min) and 10,000lbf (44.5kN) capacity. This model is powered by a 1hp DC motor and controller to precisely control strain rates and has a daylight opening of 11.9x19.5in (302x495mm) to accommodate a wide range of asphalt test fixtures. **Product Dimensions:** 18x29x54.5in (457x737x1,384mm), WxDxH.

MS-87 Load Frame has a capacity of 20,000lbf (89kN), but is otherwise identical to MS-86.


Analog or Digital Marshall Stability Component Test Sets feature high-quality instrumentation to measure load and deformation. MSA-860 Marshall Stability Analog Component Test Set includes a 10,000lbf capacity high-strength aluminum alloy load ring supplied with a factory calibration chart. A 1x0.001in Mechanical Dial Indicator with low friction mechanism and steel indicator bracket are also included.



Manufactured in cooperation with
Karol-Warner



MS-398 shown with MSA-860, MS-26, and MS-25

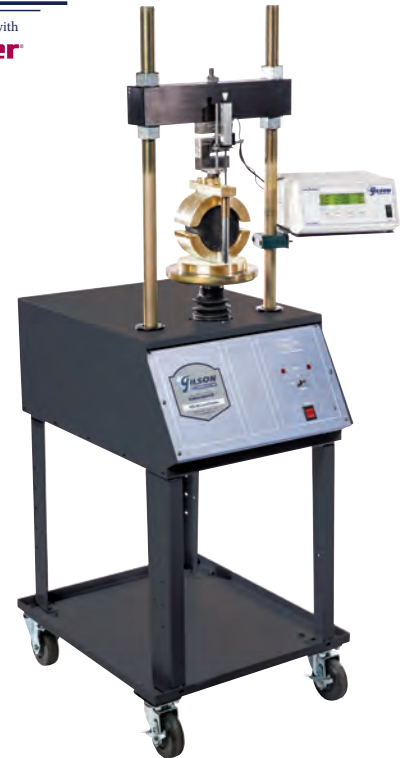

MS-86 shown with MSA-860D, MS-26, and HMA-94

MSA-860D and MSA-860DF Marshall Stability Digital Component Test Set includes a HM-418 Two-Channel Data Readout, HM-430D 10,000lbf Load Cell, and HM-740 2in Linear Variable Displacement Transducer (LVDT) with mounting bracket. The readout features a large, bright display, and three panel keys that allow instant taring and data entry. A mini USB connection provides data communication for includ-


ed GetData 5 software to download data to common spreadsheets for development of graphs and reports. MSA-134 Marshall Data Acquisition Software, listed separately, works with MSA-860D to record specimen and real-time test data, calculate results, and prepare reports meeting ASTM and AASHTO requirements.

Marshall Stability and Asphalt Load Frames

Model	Capacity	Strain Rate	Electrical
MS-398	10,000lbf (44.5kN)	0.02–2.0in/min	120V, 50/60Hz
MS-398F	10,000lbf (44.5kN)	0.02–2.0in/min	230V, 50/60Hz
MS-86	10,000lbf (44.5kN)	2.0in/min	120V, 60Hz
MS-86F	10,000lbf (44.5kN)	2.0in/min	230V, 50Hz
MS-86S	10,000lbf (44.5kN)	2.0in/min	220V, 60Hz
MS-87	20,000lbf (89kN)	2.0in/min	200–240V, 50/60Hz

Accessories


Marshall Stability Analog Component Test Set	MSA-860
Marshall Stability Digital Component Test Set, 110V, 50/60Hz	MSA-860D
Marshall Stability Digital Component Test Set, 230V, 50/60Hz	MSA-860DF
4in Marshall Breaking Head, Base Diameter: 6in, Height: 7.5in	MS-26
6in Marshall Breaking Head, Base Diameter: 8in, Height: 9.5in	MS-29
4in Lottman Breaking Head, Base Diameter: 6in, Height: 8.2in	MS-35
6in Lottman Breaking Head, Base Diameter: 8in, Height: 10.2in	MS-36
Semi-Circular Bend (SCB) Test Fixture	MS-45
4in/6in Asphalt Tack Coat/Interlayer Shear Strength	MS-43
100mm/150mm Asphalt Tack Coat/Interlayer Shear Strength	MS-43F
Rolling Load Frame Cart	HMA-94
Marshall Data Acquisition Software	MSA-134

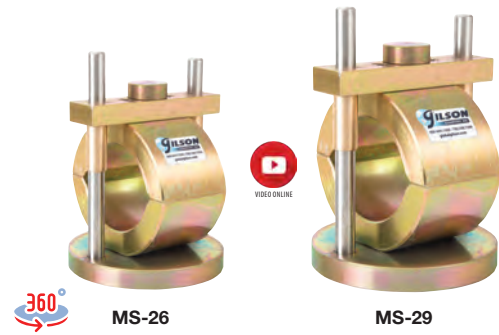

Asphalt Load Frame Accessories

Description	Model	Sample Size, in (mm)	ASTM/AASHTO
<p>Marshall Breaking Heads have machined upper/lower segments to accommodate 4in (102mm) or 6in (152mm) asphalt specimens. Segments are connected by two vertical guide rods with precisely machined sleeves to reduce friction and assure nonbinding movement.</p> <p>Base Diameter: 6in, Height: 7.5in Base Diameter: 8in, Height: 9.5in</p>	MS-26 MS-29	4 (102) 6 (152)	D5581 D6927/ T 245
<p>Lottman Breaking Heads (Indirect Tensile) are used with conventional Marshall Load Frames to determine Lottman values, also know as Indirect Tensile Strength (IDT), of asphalt mixes. Tensile strength ratio (TSR), can also be determined by calculating stress levels between conditioned and unconditioned specimens. Each fixture consists of a base with upright guide rods and top with mating guide sleeves. The upper and lower stainless steel loading strips have concave contact surfaces. Available for 4in (102mm) or 6in (152mm) specimens.</p> <p>Base Diameter: 6in, Height: 8.2in Base Diameter: 8in, Height: 10.2in</p>	MS-35 MS-36	4 (102) 6 (152)	D4867 D6931/ T 283
<p>Asphalt Tack Coat/Interlayer Shear Strength determines the Interlayer Shear Strength (ISS) of tack coat material between two asphalt layers and is used in a Marshall Load Frame. The heavy steel frame holds a fixed and a moveable shear plate. The moveable plate is centered over the shear plane and features roller bearings to minimize drag. Lateral load on the specimen is controlled by a calibrated spring and a dial indicator displays force. The shear plane gap and maximum shear travel are 0.5in (12.7mm). Adapters are included for testing 4in (102mm) and 6in (152mm) diameter cores. A version for 100mm and 150mm specimens is available as MS-43F. The Asphalt Tack Coat/Interlayer Shear Strength is compatible with Gilson Asphalt Load Frames and most Marshall Load Frames with daylight openings of at least 10in (254mm). Product Dimensions: 9x22x9.5in (229x559x241mm), WxDxH.</p> <p>Asphalt Tack Coat/Interlayer Shear Strength, 4in and 6in Asphalt Tack Coat/Interlayer Shear Strength, 100mm and 150mm</p>	MS-43 MS-43F	4/6 (102/152) (100/150)	TP 114
<p>Semi-Circular Bend (SCB) Test Fixture determines the fracture energy of asphalt mixtures from a load-displacement curve. Semicircular samples are cut from Superpave Gyrotory compacted cylinders or 150mm field cores. The fixture consists of a 0.5in (12.7mm) thick steel base plate, two L-shaped roller support steel blocks, two steel rollers, and a U-shaped frame. The test fixture is mounted in a Marshall Stability Load Frame for loading. A specimen is positioned with the flat side on two rollers and a load is applied along the vertical diameter of the specimen. Load and displacement are measured to calculate test results. Initial roller position is maintained by springs and backstops that establish the test span dimension. Product Dimensions: 6.25x5x8.4in (159x127x213mm), WxDxH.</p>	MS-45	6 (150)	D8044/ TP 124
<p>Dial Flow Meters are used for manual measurement of flow in Marshall Load Frames. Dial indicator with maximum position brake is attached to a sleeve over guide rod of the Breaking Head during testing.</p> <p>Graduated 1x0.001in Graduated 25x0.01mm Digital 1x0.0001in</p>	MS-25 MS-25F MS-25D	— — —	D5581 D6927/ T 245
<p>Asphalt Sample Preparation Saw prepares asphalt samples for Semi-Circular Bend (SCB) Testing and cuts samples for Disk-Shaped Compact Tension (DCT) Tests in accordance with ASTM D7313. A spring-clamp fixture quickly secures the specimen for required notch cuts with no need to adjust the saw blade. Just change out the spacer blocks to switch between specimen types and notch depths. The saw also makes the required half-cuts and flat-cuts for these samples. The included 10in (254mm) diameter blade is 0.050in (1.27mm) thick and meets specified cut-width requirements. Each saw includes an alignment block to verify proper blade alignment. MSA-220 Spacer Block Set for ASTM D8044 (Louisiana) SCB specimens is purchased separately. The MS-48 features a fully-enclosed, high-torque, fan-cooled motor, and permanently lubricated heavy-duty shaft bearings. The aluminum table has a nonslip molded neoprene surface. Sturdy steel folding stand is included. Product Dimensions: 48x21.5x35in (1,219x546x889mm), WxDxH.</p> <p>Asphalt Sample Preparation Saw, 115V,60Hz Replacement Blade, 10in diameter x 0.05in thick</p>	MS-48 MSA-222	— —	D8044 D7313/ TP 124


NEW

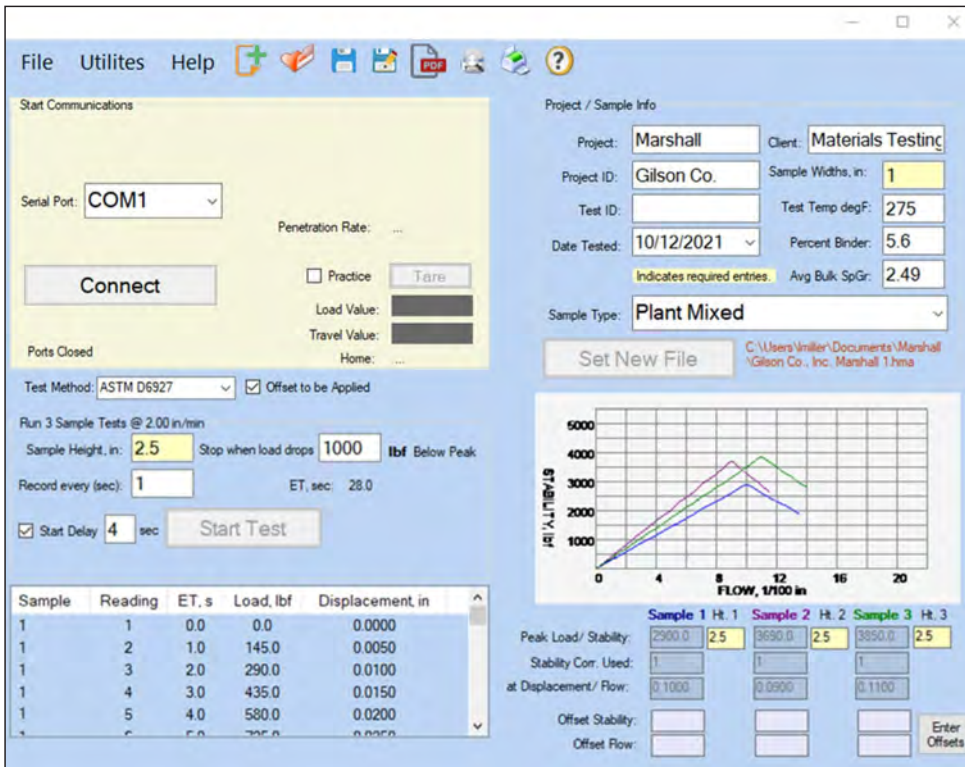

MSA-134 Screen Shot



MSA-860D

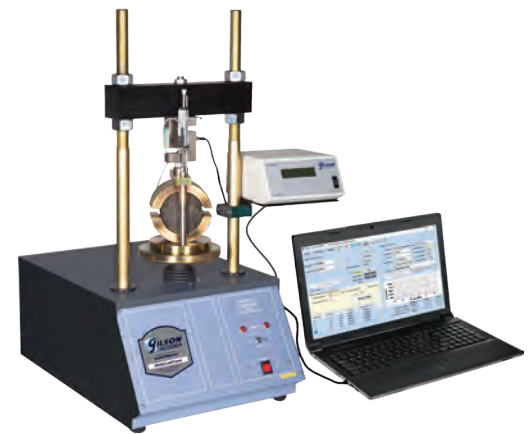

MSA-860D Shown with MS-86, MS-26, and MSA-134

MARSHALL DATA ACQUISITION SOFTWARE

ASTM D6927, D5581; AASHTO T 245

Gilson's Marshall Data Acquisition Software automatically records and graphs load and displacement data to determine peak stability and flow of asphalt pavement mixtures. This intuitive software utilizes clear data entry fields and testing prompts to reduce user error and increase repeatability.

Marshall Software runs on computers with Windows XP or newer operating systems and is designed for convenient use on tablets and laptops. Large popup keyboards can be enabled for touchscreen computers or disabled when a desktop PC with a mouse and keyboard are used. Testing agency information, company logo, and equipment information can also be entered into the program settings to be included on final testing reports.

Real-time graphing and calculations are shown throughout the test procedure and saved automatically at test completion in accordance with ASTM and AASHTO specifications. Test report data and information can be exported to a spreadsheet application or converted into a PDF document.

Marshall Data Acquisition Software requires a HM-418 Two-Channel or HM-419 Four-Channel Data Readout for operation. The MSA-860D Marshall Stability Digital Component Set is optimized for use with the software and includes the HM-418 Two-Channel Data Readout, along with a HM-430D 10,000lbf Load Cell, HMA-401 Mounting Bracket with 3/4in Hole, and HM-740 2in Linear Variable Displacement Transducer. All digital components and sets are purchased separately.

technote

Free, fully functional 30-day trial version available for download from globalgilson.com

Marshall Stability and Flow Software is available as a fully operational free download from our website for a 30-day trial. A security key and licensing information to unlock the software for permanent operation will be sent upon purchase. Visit globalgilson.com to view our video with complete details on ease of use, intuitive operation, and features of the software.

Marshall Data Acquisition Software	
Marshall Data Acquisition Software	MSA-134
Accessories	
Marshall Stability Digital Component Test Set, 110V, 50/60Hz	MSA-860D
Marshall Stability Digital Component Test Set, 230V, 50/60Hz	MSA-860DF



MSA-130



MSA-131



VIDEO ONLINE



MSA-125

ASPHALT WATER BATHS

ASTM D5581, D6927, D8044; AASHTO T 245, T 283, TP 124

Asphalt Water Baths			
Description	Model	Capacity, gal (L)	Tank Dimensions, in (mm), LxWxD
<p>Asphalt Water Baths accept five 6in (152mm) or twelve 4in (102mm) diameter specimens. Accurate electronic temperature controls regulate fluid temperatures from ambient to 212°F (100°C) to within ±1% of set point using Type K thermocouples. Digital display shows temperatures in °F or °C. Built-in variable speed magnetic stirrer assures even heat distribution and uniformity. The fully insulated baths include a perforated 14-gauge bottom support shelf to maintain 2in (51mm) of water below specimens. Sturdy, all stainless steel construction with 14-gauge tank and cover and a 20-gauge case with external drain valve. MSA-130S version is fitted with a gas-assist strut cover and drip shield. Product Dimensions: 24.5x16.5x15in (622x419x381mm), WxDxH.</p>	<p>Asphalt Water Bath, 120V, 60Hz Asphalt Water Bath, 220V, 50/60Hz Asphalt Water Bath with Gas Assist Strut, 120V, 60Hz Asphalt Water Bath with Gas Assist Strut, 220V, 50/60Hz</p>	<p>8.3 (31.4)</p>	<p>20x12x8 (508x305x203)</p>
<p>Large Asphalt Water Bath holds nine 6in (152mm) or sixteen 4in (102mm) diameter specimens. Accurate electronic controls regulate water bath temperature to 140°F (60°C) to within ±1% of set-point, well within specified Marshall water bath tolerances. Higher water temperatures can be achieved up to 212°F (100°C). A built-in variable speed magnetic stirrer assures even heat distribution and uniformity. Long-lasting all stainless steel construction features 14-gauge tank and cover and fully insulated 20-gauge case with external drain valve. The perforated 14-gauge bottom support shelf assures 2in (51mm) of water below specimens. The cover has a built-in drip shield and operates on gas-assist strut for easy lifting. Product Dimensions: 24.5x24.5x17in (622x622x 432mm), WxDxH.</p>	<p>Large Asphalt Water Bath, 120V, 60Hz Large Asphalt Water Bath, 220V, 50/60Hz</p>	<p>17.3 (65.5)</p>	<p>20x20x10 (508x508x254)</p>
<p>Budget Water Bath is an efficient, economical 1,440 Watt unit with 5.5gal (20.8L) capacity. An automatic thermostat controls temperature from 200° to 500°F (93° to 260°C). Specimens are supported above the bottom on a perforated stainless steel bottom shelf to permit circulation. This model does not strictly meet ASTM/AASHTO guidelines, but is often used in this application for non-specification testing. Product Dimensions: 23.4x16x12.5in (594x406x317.5mm), WxDxH.</p>	<p>Budget Water Bath, 115V, 60Hz Budget Water Bath, 230V, 50Hz</p>	<p>5.5 (20.8)</p>	<p>23.4x16x12.5 (594x406x317.5)</p>



MOBILE FRIENDLY

globalgilson.com is mobile friendly so you can view on any device.



PRODUCT VIDEOS

Watch videos about many Gilson products online at globalgilson.com

MARSHALL COMPACTORS

ASTM D5581, D6926; AASHTO R 68, T 245; PTM 705

Marshall Compactors are used to prepare molded test specimens for Marshall stability load testing. 4in (102mm) diameter specimens are suitable for mixes containing aggregates up to 1in (25.4mm), and 6in (152mm) diameter specimens are preferred for maximum aggregate sizes up to 1.5in (38.1mm). All automatic Marshall Compactor models operate on 115V, 60Hz power supplies. Add "F" suffix to specify models for 230V, 50Hz operation.




MS-10



MS-1



MS-2

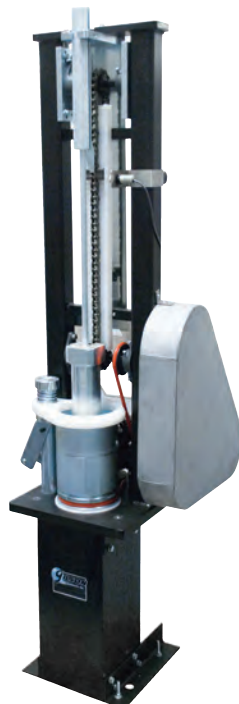

MS-6

Marshall Compactors

Description	Model
<p>Manual Marshall Compactor allows manual compaction of a single 4in (102mm) Marshall asphalt specimen in a stationary mold. Included is an oak pedestal, hammer support and guide rod, 10lb (4.5kg) flat-face hammer, a MSA-100 4in (102mm) Mold, Base, and Collar Assembly, and a mold holder. Product Dimensions: 12x12x64in (305x305x1,626mm), WxDxH.</p>	<p>Manual Marshall Compactor 4in Mold, Base, and Collar Assembly</p> <p>MS-10 MSA-100</p>
<p>Automatic Standard-Duty Compactor 4in (102mm) compacts Marshall specimens in a stationary 4in (102mm) mold. Automatic counter is set to the specified number of blows and stops at completion. MS-1 meets ASTM D6926 and provides 64 blows per minute. MS-1B operates at 55 blows per minute. The unit includes a painted oak pedestal with steel plate, a 10lb (4.5kg) flat-face hammer, and a MSA-100 4in (102mm) Mold, Base, and Collar Assembly. Product Dimensions: 20x12x66in (508x305x1,676mm), WxDxH.</p>	<p>Automatic Standard Duty 4in Compactor, 64 blows per minute Automatic Standard Duty 4in Compactor, 55 blows per minute Additional Hammer Assembly 4in Mold, Base, and Collar Assembly</p> <p>MS-1 MS-1B MSA-111 MSA-100</p>
<p>Double or Triple Automatic Standard-Duty Rotating Compactors 4in (102mm) compact two or three Marshall asphalt specimens simultaneously in rotating molds. The bevel-face hammers and rotating base plates produce a consistent kneading action during compaction. Large painted oak pedestals with steel plates accommodate multiple specimens. A single motor and counter controls the number of blows on multiple specimens and shuts off at completion. 10lb (4.54kg) bevel-face hammer and MSA-101 4in (102mm) Mold, Base, and Collar Assembly are included. MS-2 Product Dimensions: 25x20x64in (635x508x1,626mm), WxDxH. MS-3 Product Dimensions: 33x17x49in (838x432x1,245mm), WxDxH.</p>	<p>Double Automatic Standard-Duty 4in Rotating Compactor Triple Automatic Standard-Duty 4in Rotating Compactor Additional Hammer Assembly 4in Mold, Base, and Collar Assembly</p> <p>MS-2 MS-3 MSA-112 MSA-101</p>
<p>Automatic Heavy-Duty Rotating Compactor 4in (102mm) compacts one 4in (102mm) diameter Marshall specimen in a rotating mold. Heavy-duty frames reduce structural and mechanical wear and tear during operation. The bevel-face hammer and rotating base plate produce a consistent kneading action during compaction. Molds are secured with a cam-action lever assembly. An automatic counter shuts off the unit at completion of the compaction process. Painted oak pedestal with steel plate, 10lb (4.5kg) bevel-face hammer, and MSA-101 4in (102mm) Mold, Base, and Collar Assembly are included. The MS-5 Automatic Compactor converts to compact 6in (152mm) Marshall specimens by adding the MSA-113 22.5lb (10.2kg) Bevel-Face Hammer and MSA-106 6in (152mm) Mold. Product Dimensions: 20x12x66in (508x350x1,676mm), WxDxH.</p>	<p>Automatic Heavy-Duty Rotating 4in Compactor Additional 4in Hammer Assembly 4in Mold, Base, and Collar Assembly Hammer Assembly for 6in Conversion 6in Mold, Base, and Collar Assembly</p> <p>MS-5 MSA-114 MSA-101 MSA-113 MSA-106</p>
<p>Automatic Heavy-Duty Rotating Compactor 6in (152mm) compacts one 6in (152mm) diameter Marshall specimen in a rotating mold. Heavy-duty frame reduces structural and mechanical wear and tear during operation. The bevel-face hammer and rotating base plate produce a consistent kneading action during compaction. Molds are secured with a cam-action lever assembly. An automatic counter shuts off the unit at completion of the compaction process. Painted oak pedestal with steel plate, 22.5lb (10.2kg) bevel-face hammer, and MSA-106 6in (152mm) Mold, Base, and Collar Assembly are included. The MS-6 Automatic Compactor converts to compact 4in (102mm) specimens by adding the MSA-114 10lb (4.54 kg) Bevel-Face Hammer and MSA-101 4in (102mm) Mold. Product Dimensions: 24x21x65in (610x533x 1,651mm), WxDxH.</p>	<p>Automatic Heavy-Duty Rotating 6in Compactor Additional 6in Hammer Assembly 6in Mold, Base, and Collar Assembly Hammer Assembly for 4in Conversion 4in Mold, Base, and Collar Assembly</p> <p>MS-6 MSA-113 MSA-106 MSA-114 MSA-101</p>



MSA-100



MSA-106



MSA-100M



MSA-106M



MSA-101B



MSA-120



HM-516



MS-27

Marshall Compaction Accessories

Description	Model	Size, dia. in (mm)	ASTM/AASHTO
<p>Marshall Mold Assemblies are three-part assemblies consisting of mold, base plate, and collar constructed of sturdy, rust-resistant plated steel. 4in (102mm) or 6in (152mm) ID molds are available for stationary or rotating Marshall Compactors as noted. Stationary molds are used with the MS-1 and MS-10 Marshall Compactors. Rotating molds are used with the MS-2, MS-3, MS-5, and MS-6 Marshall Compactors.</p>			D5581 D6926/ R 68
<p>4in Stationary Mold Assembly, Complete 4in Rotating Mold Assembly, Complete 6in Rotating Mold Assembly, Complete</p>	MSA-100 MSA-101 MSA-106	4 (102) 4 (102) 6 (152)	
<p>Marshall Mold Components are available as individual components for 4in (102mm) or 6in (152mm) Marshall Stability Molds for more efficient sample processing or as economical replacements. Sturdy, rust-resistant plated steel. Mold, collar, and base components of 4in (102mm) diameter molds fit stationary or rotating Marshall Compactors as noted.</p>			D5581 D6926/ R 68
<p>4in Stationary Mold Only 4in Stationary Base Only 4in Rotating Mold Only 4in Rotating Base Only 4in Collar Only, fits Stationary or Rotating Molds 6in Rotating Mold Only 6in Rotating Base Only 6in Collar Only</p>	MSA-100M MSA-100B MSA-101M MSA-101B MSA-100C MSA-106M MSA-106B MSA-106C	4 (102) 4 (102) 4 (102) 4 (102) 4 (102) 6 (152) 6 (152) 6 (152)	
<p>Circular Paper Discs by Gilson are strong and tear-resistant with smooth edges. Choose between the MSA-120, designed for both 4in and 100mm, or the MSA-121 for 6in and 150mm Marshall and Gyrotory Molds. The discs are 0.007–0.008in thick and made of 100lb paper stock.</p>			D5581 D6925 D6926/ T 312
<p>4in Paper Discs, pkg. 1,000 6in Paper Discs, pkg. 500</p>	MSA-120 MSA-121	3.875 (98.4) 5.875 (149.2)	
<p>Sample Ejectors extract specimens from molds. HM-514 Ejector extracts specimens from 4in (102mm) asphalt or soil molds. HM-516 Combination Ejector extrudes either 4 or 6in (102 or 152mm) asphalt or soil samples. Adapter sets are purchased separately for 2, 2.5, or 3in (51, 64, or 76mm) diameter molds. These ejectors are 12,000lbf (53.4kN) manually-operated hydraulic jack frames. Product Dimensions: 9.5x10x24in (241x254x610mm).</p>			D5581 D6926/ R 68
<p>Sample Ejector, 4in Sample Ejector, Combination 4in and 6in Adapter Ring and Extruder Disc, 2in (51mm) dia. Adapter Ring and Extruder Disc, 2.5in (64mm) dia. Adapter Ring and Extruder Disc, 3in (76mm) dia.</p>	HM-514 HM-516 HMA-219 HMA-220 HMA-221	- - - -	
<p>Budget Sample Ejector MS-27 is a 3.95in (100mm) dia. x 0.5in (12.7mm) thick disc with a pedestal for 4in (102mm) specimen removal using a separate laboratory load frame.</p>	MS-27	3.95 (100)	D5581 D6926/ R 68

ORDER ONLINE



Conveniently shop and place orders at globalgilson.com using your phone, tablet, or computer.

ONE STOP



globalgilson.com is your one stop resource for materials testing equipment and expert knowledge.



HM-687



HMA-696



HMA-694



HMA-697

BROVOLD SUPERPAVE GYRATORY COMPACTOR

ASTM D6925, D7229; AASHTO T 312

The rugged and proven Brovold Gyrotory Compactor is unmatched for portability and ease of use when compacting hot-mix asphalt specimens. This reliable self-contained model is built by Pine Instruments and is ideal for both mix design and QC/QA applications. The self-contained unit weighs only 304lb (138kg) and is easily transported to remote sites or mobile labs. An integrated industrial computer controls the entire specimen compaction cycle. After compaction parameters are entered through the simple, menu-driven controller and the prepared mold is set in place, just secure the gyrotory head and press start. The system automatically applies consolidation pressure, induces the angle, and gyrates the mold to the specified settings. At completion, the specimen is extruded with the same hydraulic ram used for compaction, eliminating handling of hot, heavy molds. Rigid tubular frame design and patented gyrotory mechanism assure accurate, repeatable results.

The HM-687 Brovold Gyrotory includes integrated data logging functionality designed by Pine to save or export data to a portable USB flash drive, or output directly to optional HMA-626 PCL Laser Printer. Up to ten completed tests are stored in the compactor's internal memory, and data is also output to the two USB ports and a RS232 serial port. Test data can also be viewed in real time on the four-line digital display. Default settings control compaction of specimens to the height, number of gyrations, compaction force, and speed required by the standard test method. All of these parameters can be reset by the user for special applications and different materials. Default internal angle of gyration is 1.16° and 1.25° external. The angle can also be factory set to 0.82° internal if specified when ordering.

Compaction forces are supplied through a hydraulic/electro-mechanical system. Precision machined steel 150mm Mold Assemblies are ordered separately. Each mold is 280mm overall height for maximum specimen heights of 200mm and includes both top and bottom platens. Preparation, processing, and handling efficiencies are improved by having extra molds on hand. A Mold Funnel Cap is included for proper placement of sample material in the mold. The user can select a specimen squaring function to specify the amount of time pressure is applied to a specimen after squaring, from 0 to 16 seconds in two-second intervals. A magnet for lifting mold plates, Specimen Lifting Handle for 150mm specimens, and Mold Tongs for handling 150mm molds are all included. The HMA-696 Com-

plete Calibration Kit is available to verify height, force, and external angle measurements (see complete description in gyrotory compactor accessories chart). Electrical requirements are 115V, 60Hz for the HM-687 and 230V, 50/60Hz for the HM-687F. **Product Dimensions:** 30x21.3x55.4in (762x541x1,407mm), WxDxH.

Brovold Superpave Gyrotory Compactor		
Brovold Superpave Gyrotory Compactor, 115V, 60Hz		HM-687
	230V, 50/60Hz	HM-687F
Accessories		
150mm Gyrotory Compactor Mold Assembly		HMA-694
Specimen Lift Handles, 150mm		HMA-697
Complete Calibration Kit		HMA-696
Rapid Angle Measurement (RAM) Device		HMA-621
Laser Printer		HMA-626

technote

Brovold Superpave Gyrotory Compactor Specifications

Number of Gyrations	0–299
Speed of Gyrations	20–40 gpm (Default is 30±0.5)
Compaction Force	300–600kPa (Default is 600±18.0kPa)
Angle of Gyration ¹	1.16° Internal, 1.25° External
Specimen Squaring	0–16 seconds, two-second intervals
Mold Dimensions	150x280mm, IDxH
Specimen Ht.	10–200mm
Dimensions	30x21.3x55.4in (762x541x1,407mm), WxDxH
Power Requirements	
HM-687	115V, 60Hz, 15 amp, 1ph
HM-687F	230V, 50/60Hz, 10 amp, 1ph

¹ Can be factory set to 0.82° if specified at time of order.



HM-685

SUPERPAVE GYRATORY COMPACTOR

ASTM D6925, D7229; AASHTO T 312

The Superpave Gyrotory Compactor is made in the USA by Pine Instruments and meets all Superpave requirements for preparation of hot-mix asphalt specimens. User-controlled settings for compaction pressure, angle adjustment, gyrations, and adaptability for different size molds make this a versatile and reliable unit. An integrated computer with two USB ports and an Ethernet port controls settings through a simple menu interface. A four-button control panel simplifies machine operation. The computer also controls the angle of gyration and allows the user to switch between internal and external angle settings with little effort. The control system is network compatible for complete data management. Number and angle of gyrations, specimen height, and consolidation pressure can be sent to a network or stand-alone PC, stored on a flash drive, or printed directly with the optional HMA-626 PCL Laser Printer.

Operation modes can be set to a specified number of gyrations, specified sample height, or a locking point, all at a selected internal or external angle. Total gyrations can be selected from 0 to 999 at 30 ±0.5 gyrations per minute and 0° to 1.50° internal or external angle, with compaction pressure selectable from 200 to 999kPa. Final specimen height is user-controlled up to 200mm. A built-in specimen extruder and a completely enclosed compacting chamber are convenience and safety features, minimizing lifting of hot, heavy molds and shielding moving parts.

The HM-685 is equipped for 150mm diameter specimen sizes, but can be configured to use 100mm or 4.0in molds with the optional Conversion Kit. Precision machined steel Mold Assemblies are ordered separately in 150mm, 100mm, and 4.0in (101.6mm) inside diameters. Order extra molds for more efficient sample preparation and processing. Overall mold height is 250mm for all diameters and compacted specimen height is 200mm. A bottom platen is supplied with each mold. A Mold Funnel and Specimen Lift handle are optional accessories for each machine. Internal angle of gyration and gyrotory shear force measurement are confirmed using the HMA-621 Rapid Angle Measurement Device, purchased separately. A 5,000lbf (22.2kN) Load Ring and Gauge Blocks are available to verify force and spacing requirements. Both are certified and NIST traceable.



HMA-616



HMA-624

technote

Superpave Gyrotory Compactor Specifications

Number of Gyrations	0-999
Speed of Gyrations	30 gpm
Compaction Force	200-999kPa
Angle of Gyration	0.00-1.50° (Selectable internal or external)
Mold Dimensions	150x250mm, dia.xH 100x250mm, dia.xH
Specimen Ht.	0-200mm
Dimensions	34.5x35.5x54in (876x902x1,372mm), WxDxH
Power Requirements	
HM-685	115V, 50/60Hz, 12 amp, 1ph
HM-685F	230V, 50/60Hz, 6 amp, 1ph
HM-685S	115V, 50/60Hz, 12 amp, 1ph
HM-685SF	230V, 50/60Hz, 6 amp, 1ph

Optional HMA-629 Cooling Door for the compaction chamber reduces waiting times for specimen cooling and extrusion for asphalt mixtures containing rubber. A specimen squaring function resists specimen expansion issues when testing hot mix asphalt with ground tire rubber content. Power requirements are 115V, 50/60Hz, or 230V, 50/60Hz for the HM-685F. Inquire for other electrical configurations. Machine weight is approximately 850lb (396kg). **Product Dimensions:** 34.5x35.5x54in (876x902x1,372mm), WxDxH.

The HM-685S is an advanced Superpave Gyrotory Compactor, which has been factory-equipped to measure and graph gyrotory shear, the force required to gyrate the specimen. The data can be depicted as gyrotory shear force vs. gyrations, or as shear force vs. percent air voids. This information provides insight into the workability and compactability of a mix.

Superpave Gyrotory Compactor

Superpave Gyrotory Compactor, 115V, 50/60Hz	HM-685
230V, 50/60Hz	HM-685F
Superpave Gyrotory Compactor with Shear Measurement, 115V, 50/60Hz	HM-685S
230V, 50/60Hz	HM-685SF

Accessories

150mm Gyrotory Compactor Mold Assembly	HMA-615
100mm Gyrotory Compactor Mold Assembly	HMA-616
4.0in Gyrotory Compactor Mold Assembly	HMA-617
Gyrotory Compaction Mold Funnel, 150mm	HMA-618
Conversion Kit for 100mm and 4.0in Molds	HMA-619
Specimen Cooling Door	HMA-629
Specimen Lift Handles, 150mm	HMA-624
Specimen Lift Handles, 100mm and 4.0in	HMA-630
External Angle Measurement Jig	HMA-628
Laser Printer	HMA-626
Rapid Angle Measurement Device	HMA-621



HMA-621



HMA-696



HMA-694



HMA-622



HMA-628



MSA-120



MSA-121



HMA-615

SUPERPAVE GYRATORY COMPACTOR ACCESSORIES


ASTM D6925, D7229; AASHTO T 312, T 344

Superpave Gyrotory Compactor Accessories

Description	Model
Rapid Angle Measurement (RAM) Device verifies internal angle of gyration for any Superpave Gyrotory Compactor. It takes only a few minutes to safely and efficiently complete the angle measurements in 150mm diameter gyrotory molds as required by AASHTO T 344. Measurements are taken at room temperature, avoiding the handling of hot molds. The self-contained instrument is simply placed inside the mold after set-up with the push-button controls. The compactor is briefly operated, then the RAM is removed and the result is read on the LED display. No computer interface is required, no asphalt mix is needed, and no test data is stored. A NIST traceable certified calibration tube is included to verify operation of the RAM device. Certification is valid for one year. Contact Gilson for recertification. Product Dimensions: 0.875X6in (22x152mm), WxH.	HMA-621
Complete Calibration Kit For HM-687 has everything required to calibrate the height, force, and gyrotory angle of the Brovold Gyrotory Compactor. A load cell with digital display, a height tube, and an external angle calibration device are all NIST traceable and packed in the included plastic carrying case. Inquire for the same kit with ISO 17025 certification.	HMA-696
Superpave Gyrotory Mold Assemblies for HM-687 have 150mm inside diameter, 280mm overall height, and produce specimens up to 200mm in height. The machined stainless steel molds fit Brovold Gyrotory Compactors only and include top and bottom platens.	HMA-694
Calibration Accessories for HM-685 are certified and NIST traceable. Models are purchased separately to verify applied loads and height measurements for the Superpave Gyrotory Compactor. The Load Ring has 5,000lbf (22.2kN) capacity and is supplied with a dial gauge. Gauge Blocks are supplied individually, and a total of four are required for verification. The Gyrotory should be verified semi-annually. External Angle Measurement Jig includes a sturdy frame with two digital dial indicators so that the external angle can be verified. HMA-622 Product Dimensions: 10.25x7.25in (260x184mm), WxH. HMA-623 Product Dimensions: 3x1in (76x25mm), WxH. HMA-628 Product Dimensions: 10.75x9.75x4.5in (273x248x114mm), WxHxD.	
Load Ring, 5,000lbf, Certified	HMA-622
Gauge Block, Certified	HMA-623
External Angle Measurement Jig	HMA-628
Superpave Gyrotory Mold Assemblies for HM-685 Gyrotory Compactor are available with 150mm, 100mm, and 4.0in inside diameters. A Conversion Kit is required to use 100mm or 4.0in molds. All molds are machined stainless steel, have 250mm overall height, and produce maximum 200mm height specimens. A bottom platen is included with each mold.	
150mm Gyrotory Compactor Mold	HMA-615
100mm Gyrotory Compactor Mold	HMA-616
4.0in Gyrotory Compactor Mold	HMA-617
Large Display Digital Stopwatch is convenient for measuring gyration speed of gyrotory compactors during verification. Click-stop controls with positive tactile feedback and large LCD display with split interval, clock, and calendar functions. Timer measures to 30min x 0.1sec, or 24hr x 1sec. Housed in a rugged ABS plastic case. A vinyl case is included. Product Dimensions: 3x2.5x0.75in (76x64x19mm), WxDxH.	MA-30
Circular Paper Discs are strong and tear-resistant with smooth edges. Choose between the MSA-120 designed for both 4in and 100mm or the MSA-121 for all 6in and 150mm Marshall and Gyrotory Molds. The discs are 0.007–0.008in thick and made of 100lb paper stock.	
4in Paper Discs, pkg. 1,000	MSA-120
6in Paper Discs, pkg. 500	MSA-121
Laser Printer with USB port is a wide format using Printer Command Language (PCL). Data will automatically be printed during a test if a printer is connected and turned on. Data can also be printed from saved test data files. Type A-B USB cable in 10ft (3m) length is included. Product Dimensions: 14.25x7in (362x178mm), WxH.	HMA-626




SP-55

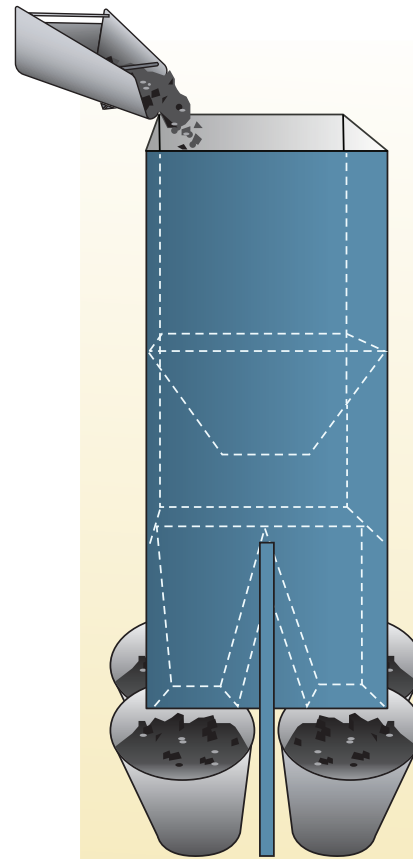

Quartering Process

GILSON QUARTERMASTER SAMPLE DIVIDER

The Quartermaster Sample Divider can quickly reduce bulk samples up to 120lbs (55kg) of asphalt or aggregate into four representative samples. Place a bulk sample into the large hopper, level the material, and slide the lever release, allowing the sample to free fall through the specially designed quartering divider and into the four galvanized buckets.

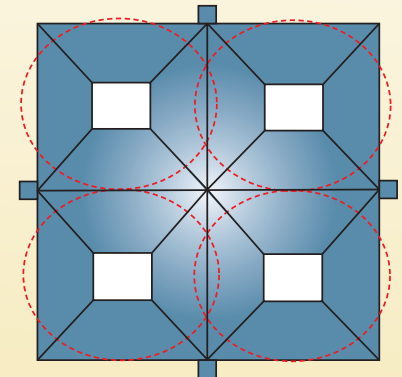

Specially Designed Quartering Divider

GILSON QUARTERMASTER ASPHALT SAMPLE DIVIDER

ASTM D979; AASHTO R 47

- Quickly and safely divides bulk asphalt and aggregate samples
- Rugged construction built for field use
- Proven history of accurate performance
- Bucket Liner Sample Bags streamline sample handling
- Two-part construction for easy cleanup and portability

Gilson's SP-55 Quartermaster quickly and accurately divides the large bulk samples required in Superpave specifications for quality control analysis. Asphalt and aggregate samples of 120lb (55kg) or more are easily quartered, ensuring representative samples for consistent laboratory results. The Quartermaster is versatile and has a proven history of significantly reducing bias in sample reduction.

The bulk asphalt or aggregate sample is loaded into the hopper, the handle is released, and the sample falls through the divider and is distributed into four included galvanized steel buckets. SPA-22 Bucket Liner Sample Bags may be used for collection and handling of divided specimens and reduce sample loss and cleaning of the sample buckets. The Sample Bags are made of durable cotton, with fabric and thread that are temperature-rated to 400°F (204°C). SPA-23 Double-Loop Wire Ties and SPA-24 Wire Tie Twister allow bag openings to be quickly and securely closed. Occasional cleanup to prevent buildup on the exposed splitting surfaces is recommended.

The Quartermaster's rugged two-part steel construction stands up to field conditions and allows portability between job sites. The SPA-21 Quick Funnel Insert drops into the top of the Quartermaster to reduce hopper volume and allow accurate reduction of smaller samples.



SPA-21



SPA-22 shown with SPA-23 and SPA-24

Four Galvanized Steel Sample Buckets and four Bucket Liner Sample Bags are included with Quartermaster. Additional buckets can be ordered to increase efficiency. Liner bags in quantities of 10, 100, or 1,000 are available. HMA-68 Material Handling Chute allows fast and easy loading of hopper. **Product Dimensions:** 17x14x48in (432x356x1,219mm), WxDxH.

Gilson Quartermaster Asphalt Sample Divider

Gilson Quartermaster Asphalt Sample Divider	SP-55
Accessories	
Quick Funnel Insert	SPA-21
Bucket Liner Sample Bags, qty. of 10	SPA-22
Bucket Liner Sample Bags, qty. of 100	SPA-22C
Bucket Liner Sample Bags, qty. of 1,000	SPA-22K
8in Double-Loop Wire Ties, qty. of 50	SPA-23
Wire Tie Twister with Plastic Grip	SPA-24
Galvanized Steel Sample Bucket	MA-950
Material Handling Chute	HMA-68






HM-457



Inside view of HM-457

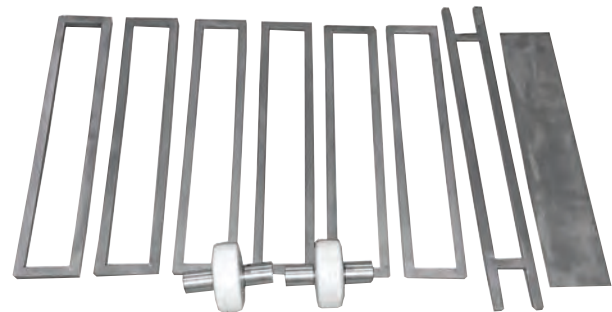

HMA-821

ASPHALT PAVEMENT ANALYZER JUNIOR (APA JR.)

AASHTO T 324, T 340; Tex-242-F; FAA/P401

The APA Jr. is a multi-functional, two-wheel Loaded Wheel Tester (LWT) to determine rutting, fatigue cracking, and moisture susceptibility of hot, warm, or cold asphalt paving mixes in dry or submerged conditions. This versatile CE Approved model from Pavement Technology has a small footprint and meets all requirements for the AASHTO T 324 Hamburg wheel tracking test and AASHTO T 340 rut test. The HM-457 can also be equipped to perform a variety of other tests including high contact pressure (250psi) testing for airport runways and taxiways, in accordance with FAA/P401 test method, microsurfacing/slurry seal testing, and low-temperature fatigue and studded wheel tests with the optional chiller. The unique frequency drive of the APA Jr. allows mixes to be tested at multiple speeds and multiple rates of loading.

A sample holding assembly positions the specimens in molds under the wheels for testing. Heating and cooling of the main chamber is accomplished by a series of heating elements and the optional HMA-820 Chiller. With the chiller, temperature can be controlled from -9° to 80°C (-15° to 176°F). A 15gal (57L) stainless steel water tank circulates temperature controlled water to the reservoir, which maintains water levels about 0.5in over specimens during the test. Temperature can be maintained up to 80°C (176°F). Vertical measurements are determined using linear position transducers and rut depth is monitored with transducers mounted inside the pneumatic cylinders.

The APA Jr. is equipped with a PLC based control system, operated through the included laptop computer, pre-loaded with Gen 5 software. All calibration and operation is performed through the laptop computer. Data is plotted and displayed in numeric and graphical format. Five or more measurements on a beam and three or more on a cylindrical specimen are collected in each pass and the data is calculated to 0.00001mm. The wheel tracking assembly operates from 0 to 60 cycles (120 passes) per minute, with stroke and speed adjustable for Hamburg Testing. Wheel loading is applied through independent pneumatic cylinders and can be changed during a test cycle.

Four cylindrical molds of ultra-high molecular weight (UHMW) plastic are provided with the APA Jr., two 150x62mm, dia.xH, for Hamburg tests and two 150x75mm, dia.xH, for rut and moisture damage tests. The molds can accommodate gyratory, Marshall, Hveem, or core specimens. Two Hamburg-type solid wheels and two APA concave wheels with high-pressure hoses are also included. Both are solid stainless steel construction. Additional beam-type molds and wheels for studded wheel, slurry seal, and fatigue tests are also available. Equipment for microsurfacing/slurry seal testing is an optional set that includes molds, rubber wheels, and software and is available as HMA-821. An optional equipment set for studded wheel and fatigue testing at temperatures to -5°C includes cold plate, molds, studded wheels, and software and is available as HMA-822. A source of clean, dry compressed air at 120psi (8.3bar) and 8CFM (226LPM) is required. Electrical requirements are 208 or 230V, 50/60Hz, 40A single phase. Unit weight is approximately 1,300lb (590kg). **Product Dimensions:** 27x45x61in (685.8x1,143x1,549.4mm), WxDxH.

Asphalt Pavement Analyzer Junior (APA Jr.)

APA Jr., 208 or 230V, 50/60Hz, 1ph	HM-457
Accessories	
Low-Temperature Studded Wheel Testing Kit	HMA-822
Microsurfacing/Slurry Seal Testing Kit	HMA-821
Chiller for APA Jr., 208V, 50/60Hz	HMA-820
Wheel Tracker Sample Trimming Jig	HMA-815

ASPHALT PAVEMENT ANALYZER (APA)

AASHTO T 324, T 340; Tex-242-F; FAA/P401

The Asphalt Pavement Analyzer (APA) by Pavement Technology is a three-wheel, multi-function Loaded Wheel Tester (LWT) for evaluating rutting, fatigue cracking, and moisture susceptibility of both hot and cold asphalt mixes. Samples can be tested in dry or submerged conditions in the environmentally controlled chamber. An exclusive high-pressure feature can perform rut testing at contact pressures of 250psi or more on mix designs for airport runways and taxiways in accordance with FAA/P401 test methods. The APA also conforms to AASHTO methods T 324 Hamburg test with solid steel wheels and T 340 APA rut test with concave wheels loading high-pressure rubber hoses.

This versatile model has a unique drive system allowing multiple speeds and load rates to be applied simultaneously to separate samples. Samples can be tested from gyratory, Marshall, or vibratory compacted beam specimens molded in the laboratory, or from field cores cut from existing pavement. Three rectangular slab or beam specimens or six cylindrical specimens can be tested at the same time. A built-in chiller for low temperature fatigue testing on beam specimens is included. Optional accessories for additional testing are available. HMA-826, meant for studded wheel and fatigue testing at temperatures to -5°C, includes a cold plate, molds, studded wheels, and software. HMA-828, meant for microsurfacing and slurry seal testing, includes molds, rubber wheels, and software.

Operation is controlled through a PLC-based system with new Gen 5 Software and data is collected on a PC. Measurements are plotted and data is displayed in numeric and graphical format. In a single pass, five or more measurements can be collected on a beam specimen and three or more on a cylindrical specimen. This extremely accurate system calculates the data to 0.00001mm. The drive system operates the wheel tracking assembly from 0 to 60 cycles (120 passes) per minute. Both speed and stroke are adjustable for Hamburg testing. Wheel loading is applied with controlled contact pressure on beam or cylindrical samples for rutting, fatigue, and moisture damage testing. Independent pneumatic cylinders generate adjustable loads to each of the three wheels applying contact pressure on the specimens.

The Sample Holding Assembly locates the sample molds properly under the loading wheels for testing. A sliding tray makes it easy to load and position the samples and is locked against the frame by two toggle clamps. Temperature control of the main chamber from 5° to 80°C ±1.5°C (41° to 176°F) is accomplished by a series of heating strips and a cooling unit, regulated by a microprocessor-based controller. The 30gal reservoir can be raised with a pneumatic cylinder and flooded to a constant water level over the top of the test specimen for submerged testing. A weir valve allows water to drain back to the 35gal stainless steel storage tank where water temperature is maintained from ambient to 80°C (176°F). Sample



HM-459

pre-conditioning shelves are located in the base of the APA to bring three beam or six cylindrical specimens up to desired test temperature.

The Asphalt Pavement Analyzer is supplied fully equipped to run a variety of loaded wheel tests. Concave wheels to perform rut and moisture testing, and solid wheels for fatigue and Hamburg testing are included in sets of three each. Wheels are stainless steel and comply with requirements for each test. Four sets of High Density Polyethylene Molds, 300x125x75mm, LxWxH, for rut testing, 150x75mm, dia.xH, for rut and moisture testing, 300x125x75mm, LxWxH, for fatigue testing and 300x150x62mm, LxWxH, for Hamburg tests are also included, each as a set of three. The HMA-815 Wheel Tracker Sample Trimming Jig prepares asphalt specimens or cores in a sample saw with a single straight cut. The cut ends of two specimens fit together in the sample fixture for rut and moisture testing. This Jig fits most popular sample saws and mounts quickly with slotted holes, bolts, and nuts. Sturdy aluminum construction.



HMA-815

Three 3/4in (19mm) high-pressure rubber hoses are used in conjunction with concave wheels for the AASHTO T 340 Rut Test and with the high pressure loading feature for airport runway and taxiway design. A source of clean, dry compressed air at 120psi (8.3bar) and 8CFM (226LPM) is required. Electrical Requirements are 208V, 60Hz, 40amp Single Phase. Unit weight is approximately 3,000lb (1357kg). **Product Dimensions:** 35x70x80in (889x1778x2,032mm), WxDxH.

Asphalt Pavement Analyzer (APA)

Asphalt Pavement Analyzer, 208V, 60Hz, 1ph	HM-459
Accessories	
Low-Temp Studded Wheel Testing Kit	HMA-826
Microsurfacing/Slurry Seal Testing Kit	HMA-828
Wheel Tracker Sample Trimming Jig	HMA-815



RICE TEST SET-UP

The SGA-5R Rice Shaker agitates the pycnometer containing an asphalt sample under vacuum. Vibratory action dislodges entrapped air, which is evacuated by the vacuum pump. The MA-170 Digital Absolute Pressure Manometer measures vacuum applied to the sample and the SG-70 Air/Gas Dryer Tube with indicating Drierite prevents water from entering the vacuum pump.



SGA-5R shown with SG-16A



Close up of EZ-Clamp



MA-170



SGA-5R shown with GW-76 & SGA-8

RICE SHAKER

ASTM C128, D854, D204, D4867; AASHTO T 84, T 100, T 209; Tex-227-F

- **Consistent, repeatable agitation for Asphalt Rice Test and other specific gravity determinations**
- **Variable vibration control allows for setting optimum agitation**
- **Automatic operation minimizes operator error**

The Gilson Rice Shaker performs consistent, automatic agitation of Asphalt Rice Test vacuum pycnometers, freeing lab technicians for other duties. It is also a useful deairing device for specific gravity tests of fine aggregates (ASTM C128) and soils (ASTM D854), as well as sample preconditioning per ASTM D4867 and AASHTO T 209.

The Rice Shaker features built-in 0–99 min. digital timer with one second accuracy, a vibration speed controller, and a three position switch for manual or timed operation. Variable speed settings closely control agitation to avoid stripping of asphalt. Gilson's exclusive EZ-Clamp system quickly secures the pycnometers. Push the buttons, slide into place, and a quick twist secures the container. The powder coated steel case has nonslip rubber feet so no mounting is required.

The SGA-5R includes fitted top and bottom plates for exact fit with SG-16A or SG-18A Aluminum Pycnometers. Order SGA-7 Adapter Set for use with

high-capacity plastic SG-15 Pycnometer. SGA-8 Adapter Set is required for use with GW-75 or GW-76 Filter Flasks, SG-500 Volumetric Flasks, SG-24 LeChatelier Flask, or SG-2 Mason Jar Pycnometer. MA-170 Digital Residual Pressure Manometer precisely measures applied vacuum during testing. NIST certified model is available as MA-170C. SGA-5RT has modified vibration characteristics to meet Texas DOT requirements. To upgrade Rice Shaker from old style knobs to new EZ-Clamp system order SGA-12. **Product Dimensions:** 13x14x19in (330x356x483mm), WxDxH.

Rice Shaker	
Rice Shaker, 115V, 50/60Hz	SGA-5R
Rice Shaker, Texas, 115V, 50/60Hz	SGA-5RT
Accessories	
Adapter Set for SG-15	SGA-7
Adapter Set for GW-75 or GW-76	SGA-8
Digital Residual Pressure Manometer, 115V, 60Hz	MA-170
230V, 50Hz	MA-170F
Digital Residual Pressure Manometer, NIST Calibrated, 115V, 60Hz	MA-170C
Digital Residual Pressure Manometer, NIST Calibrated, 230V, 50Hz	MA-170FC
EZ-Clamp Upgrade	SGA-12

RICE TEST WITH AUTORICE™ CONTROLLER SYSTEM SETUP

The new AutoRice™ Controller System allows precise control of vacuum pressure and time while monitoring SGA-5R Rice Shaker vibration energy for deairing of samples. Accuracy and repeatability is increased, while decreasing the need for constant attention to the procedure.



NEW



SG-35



SG-36

AUTORICE™ DIGITAL MANOMETER AND CONTROLLER

ASTM D2041; AASHTO T 209, T 283

The AutoRice™ Digital Manometer and Controller precisely measures vacuum and regulates the vacuum pressure setting and time. The device can also be equipped to monitor shaker vibration energy during theoretical maximum specific gravity testing (Rice Test) of hot-mix asphalt samples. Control of these three factors can mean dramatic improvements in inter-laboratory repeatability and accuracy. Variations in acceleration and frequency energy produced by rice shakers can create repeatability issues and may cause stripping of the sample. Actual shaker energy profiles help establish parameters for adjustment of settings between different shakers.

With the push of a button, the AutoRice™ Controller starts the vacuum pump, regulates and displays vacuum pressure, and controls vacuum time. The optional SGA-126 Shaker Sensor attaches to the pycnometer and is connected to the controller's USB port to measure vibration acceleration and frequency. Data from the sensor can be used to calculate a "shaker factor" to establish proper vibration levels. The Controller is easy to setup with menu-driven software and replaces traditional analog or digital manometers. Sample weights can be entered and the system calculates maximum specific gravity results. Data from each test cycle can be downloaded to a PC via the USB port for review to assure adherence to test specifications. Documented test data can be stored and shared. The Controller and Shaker Sensor work well with Gilson's SGA-5R Rice Shaker and are compatible with glass, metal, or plastic pycnometers. Compact design allows benchtop placement or easy wall mounting of the controller. The

SG-35 also automates the saturation process for AASHTO T 283 Moisture-Induced Damage specimens. The Controller is equipped with a 3/8in (10mm) hose barb connection and controls vacuum pumps up to 3/4hp to ±0.4mm at 27.5mm Hg. **Product Dimensions:** 12x4x9in (305x102x229mm), WxDxH.

Gilson recommends use of the SGA-128 PumpSaver™ with the SG-35 AutoRice™ or with any laboratory vacuum pump. PumpSaver™ is an air drier to protect vacuum pumps and optimize efficiency. The high-performance thermoelectric (Peltier) chamber chills incoming air, condensing moisture and removing it before it reaches the vacuum pump, eliminating the need for elaborate moisture traps and desiccant cartridges. It also reduces resistance to air flow, maximizing pump efficiency and increasing service life. The pump reaches the desired vacuum immediately, enhancing accuracy and repeatability. The unit has one inlet and one outlet port for connection between the vacuum pump and pycnometer, using 3/8, 7/16, or 1/2in (10, 11, or 12.7mm) ID tubing, purchased separately. The AutoRice™ and PumpSaver™ devices can be purchased together as model SG-36. Both models operate on nominal 120 to 240V, 50 or 60Hz electrical supplies. **Product Dimensions:** 11x8x8in (280x203x203mm), WxDxH.

AutoRice™ Digital Manometer and Controller


AutoRice™, 120–240V, 50/60Hz	SG-35
AutoRice™ with PumpSaver™, 120–240V, 50/60Hz	SG-36

Accessories

Shaker Sensor	SGA-126
PumpSaver™ Air Drier, 120–240V, 50/60Hz	SGA-128
3/8in ID Reinforced Vinyl Tubing, per foot	WT-4B



HM-649



SGA-119, SGA-125, & SGA-135



MA-170



SG-20 shown with SGA-120, OBX-512, & SG-7A

SPECIFIC GRAVITY BENCH

ASTM C20, C127, C642, C830, D1188, D2041, D2726; AASHTO T 85, T 166, T 209, T 275

The SG-20 Specific Gravity Bench allows easy weighing of suspended samples in water for relative density determinations of aggregates, hardened concrete, bituminous mixtures, refractory brick, and similar materials. Bench is sturdy painted steel and features three 2in (51mm) diameter holes in the top for suspension of samples. The lower support doubles as a shelf that can be adjusted to fit Gilson 30gal (114L) or 44gal (170L) Plastic Water Tanks. Requires assembly. **Product Dimensions:** 31x25x46in (787x635x1,168mm), WxDxH.

Heavy-duty polyethylene water tanks are ordered separately. Both 0.25in (6.4mm) thick molded tanks are seamless and translucent for water level visibility and equipped with drain and overflow outlets. Maximum operating temperature is 140°F (60°C). SGA-120 has 30gal (114L) capacity with dimensions of 24x18x18in (610x457x457mm), LxWxD. SGA-122 has 44gal (170L) capacity and dimensions of 24x18x24in (610x457x 610mm), WxDxH and is preferred for ASTM D2041, AASHTO T 209, and similar tests.

HM-651 Heater and HM-655 Circulator or alternate HM-649 Portable Heater/Circulator are accessories for temperature control. Use SGA-130 Locking Caster Set for portability of the bench. SGA-135 Mega Density Weighing Cradle holds 4,000g pycnometers and solid specimens for weighing. Stainless steel SGA-125 Large Density Weighing Cradle holds 2,000g, SG-16A pycnometers. SGA-119 Small Density Weighing Cradle is useful for weighing Marshall and field core specimens. SGA-135, SGA-125, and SGA-119 dimensions are: 10x6x17in (254x152x432mm), 10x6x12in (254x152x305mm), and 4x4x6.5in (102x102x165mm), WxDxH, respectively.

Specific Gravity Bench

Specific Gravity Bench	SG-20
Accessories	
Water Tank 30 gallon, 18in deep	SGA-120
Water Tank 44 gallon, 24in deep	SGA-122
Small Density Weighing Cradle	SGA-119
Large Density Weighing Cradle	SGA-125
Mega Density Weighing Cradle	SGA-135
Tank Heater, 120V, 60Hz	HM-651
Tank Circulator, 115V, 60Hz	HM-655
EZ-Mount Heater/Circulator, 120V, 60Hz	HM-649
Locking Caster Set	SGA-130
No.8 Wire Mesh Basket	SG-7A

DIGITAL RESIDUAL PRESSURE MANOMETERS

ASTM D2041; AASHTO T 209

MA-170 Digital Residual Pressure Manometer is a safe, accurate, and environmentally friendly alternative for precise measurement of vacuum levels. These models meet the requirements of ASTM D2041 and AASHTO T 209 to measure specific gravity and density of asphalt mixtures, often called the Rice Test. The mercury-free manometer uses an absolute pressure transducer for instant digital display of applied vacuum from 0 to 1,000mm Hg. Resolution is 0.1mm. Accuracy is ±0.5% of full scale. A 0.25in hose barb connection with a needle valve is supplied for vacuum tubing.

The MA-170C version is supplied with a certificate of NIST calibration to meet requirements of AASHTO T 209. This model undergoes multi-point calibration at 25, 30, and 35mm Hg on NIST traceable equipment. The same NIST calibration or recalibration is available for existing MA-170 Digital Manometers by ordering MAA-25 and sending the units in. Contact Gilson customer service for shipping instructions.

Digital manometers are powered by a 9V battery or AC adapter, both included. Automatic shutoff saves power in battery mode. Adapter included with MA-170F and MA-170FC operates on 230V, 50Hz. **Product Dimensions:** 3.1x6.5x1.18in (78.7x165.1x30mm), WxDxH.

Digital Residual Pressure Manometers

Digital Manometer, 115V, 60Hz	MA-170
230V, 50Hz	MA-170F
Digital Manometer, NIST Certified, 115V, 60Hz	MA-170C
230V, 50Hz	MA-170FC
Digital Manometer Recalibration	MAA-25



SG-16A



SG-18A



SG-15



SG-62



SG-63



GW-76, GW-75, & GW-74 shown with Stopper Fittings

Specific Gravity Pycnometers

Description	Model	Test Method
2,000g Aluminum Pycnometer is 7.5x6in (191x152mm), IDxDi and tests a maximum 2,000g sample with aggregates up to 0.75in (19.1mm). A transparent vacuum lid and a second tapered aluminum lid with capillary bore are included to allow use as a volumeter for specific gravity of compacted mixes. Vacuum hose, quick-disconnect, and a 3/8in (9.5mm) threaded aspirator vacuum source are included. Product Dimensions: 8.125x6.375in (206x162mm), dia.xH.	SG-16A	ASTM D2041 AASHTO T 209
4,000g Aluminum Pycnometer with higher capacity is 7.5x9in (191x229mm), IDxDi with enough volume for specimens up to 4,000g. Included transparent acrylic vacuum lid and aluminum lid with capillary bore are identical to SG-16A lids for use in specific gravity of compacted mixtures. Vacuum hose, quick-disconnect, and a 3/8in (9.5mm) threaded aspirator vacuum source are also included. Product Dimensions: 8.125x9.375in (206x238mm), dia.xH.	SG-18A	ASTM D2041 AASHTO T 209
6,000g Pycnometer has large, 10L capacity for mixes with aggregates up to 2in (51mm). High strength plastic vessel with 9.38in (238mm), ID and O-Ring Seal to prevent leaking. An adjustable valve controls water level and a perforated plastic shelf is included. The shelf supports three 4in (102mm) dia. specimens. Vacuum hose, quick-disconnect, and a 3/8in (9.5mm) threaded aspirator vacuum source are included. Order SGA-7 Adapter Set for use with SGA-5R Rice Shaker. Product Dimensions: 10.75x13.3in (273x338mm), dia.xH.	SG-15	ASTM D2041 AASHTO T 209
Hubbard & Hubbard-Carmick Specific Gravity Bottles determine specific gravity of semi-solid bituminous materials, asphalt cements, and soft tar pitches. Included stopper is concave on lower surface and has 1.6mm center hole for air evacuation. The Hubbard bottle has a 24mL capacity and the Conical Hubbard-Carmick bottle has a 25mL capacity. SG-62 Product Dimensions: 1.06x2.75in (27x70mm), dia.xH. SG-66 Product Dimensions: 1.54x1.7in (39x43mm), dia. (at bottom) xH (without stopper).	Hubbard Specific Gravity Bottle SG-62 Hubbard-Carmick Specific Gravity Bottle SG-63	ASTM D70 AASHTO T 43
Filter Flasks are thick-walled glass with side tubulations for 3/8in (9.5mm) ID vacuum tubing. 2L and 4L sizes are often used as pycnometers and GW-76 4L Flask meets ASTM and AASHTO specifications for use as a vacuum container for weighing in air only. 1L flasks can be used in line with SGA-105 No. 4 Drierite Granules as a moisture trap for vacuum pump protection. Neoprene stoppers have 3/8in (9.5mm) hole.	1L Filter Flask GW-74 2L Filter Flask GW-75 4L Filter Flask GW-76 No. 8 Stopper for GW-74 Flask GWA-1 No. 9 Stopper for GW-75 Flask GWA-2 No. 12 Stopper for GW-76 Flask GWA-3	ASTM D2041 AASHTO T 209, T 283

PRODUCT VIDEOS


Watch videos about many Gilson products online at globalgilson.com!

VIDEO TUTORIALS

Visit globalgilson.com to watch DIY videos for maintenance, repair, and calibration.



HM-649



SGA-135



SGA-125



SGA-119



SG-70



SGA-105



WT-4B



MA-198



SGA-128

Specific Gravity Accessories

Description	Model	Test Method
<p>EZ-Mount Heater/Circulator for laboratory water bath tanks combines circulation and temperature functionality into a compact and portable unit. Mounts securely to straight or curved tank walls with an adjustable clamp and dismounts quickly for use on other tanks. Compact Design features convenient sliding control to adjust flow rate and easy to read 3.25in LCD backlit display with onscreen prompts. Tough plastic protective housing is easy to keep clean. Over temperature and low-liquid level shutoffs are set manually to assure safe operation. HM-649 has 1,100 Watt heat output and adjustable pump flow up to 3.4gpm (12.8Lpm) to heat and maintain water in SGA-120 and SGA-122 tanks to the required temperature ranges. Smaller tanks up to 7.4gal (28L), temperatures are controlled to $\pm 0.13^\circ$ from ambient + 20° to 275°F ($\pm 0.07^\circ$ from ambient + 10° to 135°C). Maximum flow rate for model HM-649F is 2.8gpm (10.6Lpm). Suitable for tanks with a working depth of 7.25in (184mm) or more using tap or distilled water only. Two-year manufacturer's warranty. Supplied with a 5ft power cord with grounded plug. Product Dimensions: 4.3x3.8x14.1in (109x97x358mm), WxDxH.</p> <p style="text-align: right;">EZ-Mount Heater/Circulator, 115V, 60Hz EZ-Mount Heater/Circulator, 230V, 50Hz</p>	<p>HM-649 HM-649F</p>	<p>ASTM C20, C127, D1188, D2041 AASHTO T 85, T 166, T 209, T 275</p>
<p>Density Weighing Cradles are fabricated of heavy stainless steel rod to hold various size samples and containers for suspension weighing. SGA-135 Mega Density Weighing Cradle for large specimens and pycnometers accepts the HMA-260 Small Aggra-Washer Drum when used with the HMA-262 Vacuum Lid for Rice tests, the SG-18A Vacuum Pycnometer and other large samples. Vertical clearance is 12.5in (318mm). SGA-135 Product Dimensions: 10x6x17in (254x152x432mm), WxDxH. SGA-125 Large Density Weighing Cradle accepts SG-16A Vacuum Pycnometer Canisters, Aggregate Density Baskets, Marshall or Gyratory Compaction Specimens, cores up to 6in (152mm), and other large samples. The Cradle tilts back when loaded to prevent specimen loss. SGA-125 Product Dimensions: 10x6x12.5in (254x152x318mm), WxDxH. SGA-119 Small Density Weighing Cradle holds various Marshall, Gyratory, or other material specimens for suspension weighing. SGA-119 Product Dimensions: 4x4x6.5in (102x102x165mm), WxDxH.</p> <p style="text-align: right;">Mega Density Weighing Cradle Large Density Weighing Cradle Small Density Weighing Cradle</p>	<p>SGA-135 SGA-125 SGA-119</p>	<p>ASTM C20, C127, D1188, D2041 AASHTO T 85, T 166, T 209, T 275</p>
<p>Laboratory Air/Gas Dryer protects vacuum pumps from harmful moisture while deairing specific gravity specimens and works in vacuum or pressure applications. Water capacity is up to 50g. Molded polycarbonate column has a threaded cap and stainless steel springs to hold the included Indicating Drierite Granules between two felt filters. Hose barbs accept 1/4in (6.4mm) or 3/8in (9.5mm) ID tubing. Recommended Flow Rate: 0.1scfm (200lph) at 90psi (6.2bar). Product Dimensions: 2.6x11.4in (66x290mm), dia.xL.</p>	<p>SG-70</p>	<p>—</p>
<p>Indicating Drierite Granules rapidly absorb water vapor from air and gases. Blue desiccant crystals turn pink when exhausted and can be regenerated in an oven for longer life, or replaced as needed. Use No. 8 size for SG-70 Laboratory Air/Gas Dryer and No. 4 size in GW-74 Filter Flasks.</p> <p style="text-align: right;">No. 4 Indicating Drierite Granules, 5lb (2.3kg) Jar No. 8 Indicating Drierite Granules, 5lb (2.3kg) Jar</p>	<p>SGA-105 SGA-106</p>	<p>— —</p>
<p>Reinforced Vinyl Tubing has 3/8in (9.5mm) ID and will not collapse under vacuum. Priced per foot.</p>	<p>WT-4B</p>	<p>—</p>
<p>Adjustable Hose Clamp has adjustment screw for vacuum regulation in vinyl tubing. Nickel-plated brass with pivoting lower jaw.</p>	<p>MA-198</p>	<p>—</p>
<p>PumpSaver™ Air Drier is an air drier to protect vacuum pumps and optimize efficiency. Designed for use with the SG-35 AutoRice™, the high-performance thermoelectric (Peltier) chamber chills incoming air, condensing and removing moisture before it reaches the vacuum pump. This eliminates the need for elaborate moisture traps and desiccant cartridges. It also reduces resistance to air flow while maximizing pump efficiency and increasing service life. The vacuum pump can reach the desired vacuum immediately, increasing accuracy and repeatability. The unit has one inlet and one outlet port for connection between the vacuum pump and pycnometer, using 3/8, 7/16, or 1/2in (10, 11, or 12.7mm) ID tubing, purchased separately. The drier unit operates at 120–240V, 50/60Hz. The SGA-128 PumpSaver™ is sold as a single unit and is also available together in a set with the AutoRice™ Controller as SG-36.</p>	<p>SGA-128</p>	<p>—</p>



MA-23



MA-24



MA-27A

VACUUM PUMPS

ASTM C128, C830, D2041, D2172, D4867; AASHTO T 100, T 164, T 209; OTHERS

MA-23 Oilless Vacuum Pump, Heavy-Duty is a large oilless pump that allows multiple specific gravity tests to be performed simultaneously. This heavy-duty unit combines large capacity with maintenance free operation. The 1/3hp motor pulls 29.6in Hg (759.46mm), with free air displacement up to 99L/min (3.5cfm). Includes a NEMA guarded switch and grounded electric cord. **Product Dimensions:** 11.1x9.2x11.0in (282x234x279mm), WxDxH.

MA-24 Oilless Vacuum Pump, Economy offers the same vacuum capacity as some oil systems in an economical oil-less pump package. The 1/3hp motor pulls a vacuum to 29.6in Hg (759.46mm), with free-air displacement up to 45L/min (1.6cfm). Includes a NEMA guarded switch and grounded electric cord. **Product Dimensions:** 11.7x7.2x9.5in (297x183x241mm), WxDxH.

MA-27A Two-Stage High Vacuum Pump is a two-stage, direct drive, rotary vane pump that provides good performance to cost ratio. This lightweight 1/2hp pump features 3.0cfm free air capacity. The compact design reduces space requirements and a 2.5in (64mm) diameter Bourdon-style 0–30in (0–762mm) vacuum gauge is mounted on the intake side. A gas ballast valve permits purging of water vapor. The handy plastic grip handle allows easy portability. **Product Dimensions:** 14x5.25x11in (356x133x279mm), WxDxH

MA-31 Economy Chemical Resistant Vacuum Pump is a smaller, affordable oilless pump optimized for ultimate protection against corrosive solvents. This quiet model exhibits noise levels as low as 54dB and is optimized for vacuum filtration and degassing applications. The low-maintenance MA-31 is equipped with a 1/7hp motor that pulls a vacuum to 22in Hg (559mm), with free air displacement up to 20L/min (0.7cfm). The pump includes a regulator gauge to adjust and monitor vacuum levels and the inlet catch-pot protects from accidental intake of fluids and particulates. **Product Dimensions:** 6.8x7.3x8.3in (172x185x211mm), WxDxH.

MA-33 Chemical Resistant Vacuum Pump is a durable, corrosion, and bleach-resistant pump ideal for mid-range vacuum applications and safe for use with cell culture contamination protocols. The included liquid inlet trap and vacuum regulator are suitable for organic aqueous solvents and light acid/base solutions. The 1/5hp motor pulls a 24in Hg (607mm) vacuum, with free air displacement up to 37L/min (1.3cfm). The unit is supplied with a power cord, plug, and power switch. **Product Dimensions:** 8.75x5x8.75in (222x127x222mm), WxDxH.



MA-31



MA-33

Vacuum Pumps					
Model	Electrical	hp (kW)	Ultimate Vacuum, in (mm) Hg	Free Air Capacity, cfm (L/min)	Intake Nipple OD, in (mm)
MA-23	115V, 60Hz	1/3 (0.25)	29.6 (759)	3.5 (99)	0.375 (9.5)
MA-23F	230V, 50Hz	1/3 (0.25)		3.5 (99)	0.375 (9.5)
MA-24	115V, 60Hz	1/3 (0.25)	29.6 (759)	1.6 (45)	0.375 (9.5)
MA-24F	230V, 50Hz	1/3 (0.25)		1.6 (45)	0.375 (9.5)
MA-27A	110V, 60Hz	1/2 (0.37)	29.8 (765)	3.0 (85)	0.375 (9.5)
MA-27AF	220V, 50Hz	1/2 (0.37)		3.0 (85)	0.375 (9.5)
MA-31	115V, 60Hz	1/7 (0.14)	22 (559)	0.7 (20)	0.25 (6.3)
MA-33	115V, 60Hz	1/5 (0.20)	24 (607)	1.3 (37)	0.25 (6.3)
MA-33F	230V, 50Hz	1/5 (0.20)		1.3 (37)	0.25 (6.3)



AP-20 shown with APA-31

```

-----
Elapsed Time: 39:00
Sample Weight: 1270g
Weight Loss: 79.8g
Percent Loss: 6.28%
Temp Comp: 0.17%
Calib. Factor: 0.26%
Bitumen Ratio: 6.27%
=====
Calibrated Asphalt Cnt
5.85%
=====
10 640 34.1 2.68
9 536 22.1 1.74
8 459 11.7 0.92
7 439 5.3 0.41
6 433 4.0 0.31
5 427 2.8 0.22
4 420 2.0 0.15
3 414 1.4 0.11
2 409 0.9 0.07
1 411 0.5 0.03
-----
T|TEMP|WT.LOSS|%LOSS
-----
Filter Set Pt: 750°C
Chamber Set Pt: 500°C

Tested By:-----
Mix Type:-----

Sample ID:-----
Time: 15:41:31
Date: 3-11-15
    
```

AP-20 Print-Out of Test Completion

THERMOLYNE® NCAT ASPHALT CONTENT FURNACE

ASTM D6307; AASHTO T 308

Asphalt binder ignition testing is an environmentally friendly and cost-effective test to determine asphalt content of paving mixtures. Testing time is reduced compared to solvent extraction. A 1,200–1,800g sample of asphalt can be tested in 30–45 minutes with the NCAT Furnace. The unit accommodates samples up to 5,000g at extended testing times. The method also eliminates the cost of solvent, solvent disposal, and safety concerns when handling solvent in the lab.

The NCAT Asphalt Furnace automatically monitors sample weight throughout the ignition process, saving valuable technician time and increasing productivity in the lab. Simply enter the sample weight and calibration factor, place the sample in the furnace chamber and press “start.” The system automatically ends the test and prints the results with an audible tone. Pressing “stop” unlocks the chamber door and the sample can be removed and allowed to cool for gradation analysis.

The NCAT Furnace features automatic or manual test modes. In the automatic mode, the software ends the test when the endpoint is detected and prints out the results. In the manual mode, an audible tone signals when the endpoint is detected, but continues to test until “stop” is pressed, unlocking the door and printing the results. Positive or negative correction factors can be entered and weight change due to sample and basket assembly temperature change is automatically compensated. The automatically detected endpoint of the test cycle is reached when weight loss from the sample is less than a user-established setpoint between 0.01% and 0.5% for three consecutive readings. Test results are computed as asphalt content per total weight of HMA sample or bitumen ratio per weight of dry aggregate to an accuracy of ±0.11%.

The furnace is pre-heated to a setpoint temperature within the range of 450°–650°C (842°–1,202°F). The default setting is 538°C (1,000°F). The hot-mix

asphalt sample is weighed and divided into two screened baskets on a tray assembly and placed in the furnace chamber. Once the door is closed and the test initiated, the door remains locked until completion. During the test, volatiles are oxidized in a high-temperature afterburner. This system has been shown to reduce process emissions by up to 95%.

The 24hr/7 day timing function can be programmed to preheat the furnace to any time set by the operator. The modular, refractory embedded heating elements provide extended service life and easy, inexpensive replacement. An RS-232 port provides data interface with a personal computer for graphical data analysis.

Included with the NCAT furnace are the Electronic Balance, Hearth Tray, six replacement Fuses, and an operation manual. Purchased separately, the APA-25 Starter Kit is required and includes four Sample Baskets, two Trays, two Tray Covers, Transport Handle, Cool Down Safety Cage, Insulated Plate, four rolls of Printer Paper, and Motor Lubricant. For increased safety, the kit includes a Face Shield and Heat Resistant Gloves. Order additional APA-31 Sample Basket Assemblies for quicker and more efficient sample preparation and more sample throughput.

Test Chamber Dimensions are 14x14x14in (356x356x356mm), WxDxH. NCAT Furnaces are not supplied with power cords and must be hard-wired directly to a suitable electrical supply or supplied with a cord and plug by the user. **Product Dimensions:** 25.75x21.75x36.75in (654x553x933mm), WxDxH.

Thermolyne® NCAT Asphalt Content Furnace

NCAT Asphalt Content Furnace, 220–240V, 60Hz, 1 phase, 23 amp

AP-20

NCAT Asphalt Content Furnace, 208V, 60Hz, 1 phase, 23 amp


AP-20L

Thermolyne® NCAT Asphalt Content Furnace Accessories

Description	Model
Starter Kit for NCAT Asphalt Content Furnace is required for initial start-up and operation of the AP-20 NCAT Asphalt Content Furnace. Kit includes four sample baskets, two basket covers, two trays, two basket retainer brackets, transport handle, aluminum cooldown plate, cooldown safety cage, fan motor lubricant, stainless steel basket brush, and four rolls of printer paper. For increased safety, the kit includes a face shield and heat resistant gloves.	APA-25
Sample Basket Assembly for AP-20 series NCAT Asphalt Content Furnace holds two screened baskets for hot-mix asphalt specimens in the furnace chamber during ignition testing. Additional Sample Basket Assemblies allow efficient sample preparation and higher productivity. Product Dimensions: 10.5x10.5x10in (267x267x254mm).	APA-31
Sample Basket Transport Handle for NCAT Asphalt Content Furnace enhances safe operation in temperatures up to 650°C (1,202°F). Extended handles allows for easy and safer positioning of sample baskets going in and out of NCAT Asphalt Content Furnace chambers. Product Dimensions: 11.4x36in (290x914mm).	APA-32
Cool-Down Plate provides an added measure of protection from extreme heat after testing in the NCAT Asphalt Content Furnace. The sturdy aluminum construction provides a secure base for cooling sample baskets. Product Dimensions: 11.2x12.9x1.5in (285x328x38mm)	APA-33
Cool-Down Safety Cage is designed to protect users from the extreme heat of sample baskets removed from the NCAT Asphalt Content Furnace. The slotted steel Cool-Down Safety Cage is placed over sample baskets during the cool-down process. Product Dimensions: 16x16x12.5in (406x406x318mm)	APA-34
Thermal Printer Paper for AP-20 NCAT Asphalt Content Furnace comes in rolls and is used by the internal printer of the furnace. The paper's thermal design withstands high heat. Test results are printed when the furnace is set to automatic mode for testing hot-mix asphalt samples. Thermal Printer Paper for NCAT Asphalt Content Furnace, 5 rolls/pkg. Thermal Printer Paper for NCAT Asphalt Content Furnace, case of 25 rolls	APA-35 APA-37
Exhaust Tubing for NCAT Asphalt Content Furnace has durable stainless steel construction and is designed to reduce and redirect fumes and gases from the furnace during operations. Product Dimensions: 3inx10ft (76mmx3m), 1DxL.	APA-36
Heat Resistant Gloves are made from long-lasting, genuine suede leather and protect hands from thermal heat up to 200°C (392°F). A cut and puncture-resistant layer provides protection from sharp edges and abrasions. The palm areas are reinforced with an extra layer of leather for additional durability. Soft, 100% cotton fleece lining adds extra insulation and comfort. 100% Kevlar® stitching provides improved flexibility, longevity, and is flame resistant. Ideal for asphalt hot-mix testing. One size fits all.	SE-33



APA-25

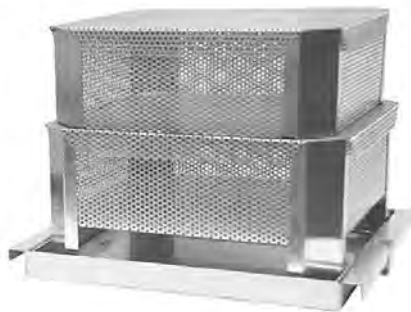

APA-31



APA-33



APA-34




SE-33



HM-378



HMA-69

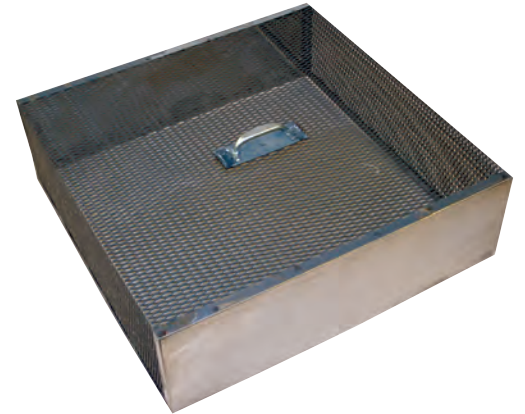

HMA-813

GILSON ASPHALT CONTENT FURNACE

ASTM D6307; AASHTO T 308

Gilson's Asphalt Content Furnace meets ASTM and AASHTO standards and features accurate, simple operation. Extensive testing has shown that process times and accuracy are comparable to automatic-weighing units. Standard 1,200–1,800g samples are processed in as little as 30–45 minutes. Larger samples over 3,000g require longer test times.

During a test, an asphalt sample is heated until the binder ignites. Temperature in the main chamber rises above setpoint, peaks, then returns to setpoint as coke-type products are burned off. This decoking period is based on user experience with similar mixes or specification requirements. When determining the decoking period to program for a new mix, the sample is simply returned to the furnace for additional 5–10 minute periods until completion is confirmed by stable total weight.

As the asphalt burns, volatile components are carried into the high-temperature afterburner chamber, where they are completely oxidized. Room temperature air is drawn in to quickly cool the exhaust for safe discharge to the outside. Any remaining particulate matter is captured in the disposable in-line filter. The furnace remains locked during operation until a safe temperature is reached during the cool-down period.

The easy to operate controller features a large, bright display showing operating temperatures, times, setpoints, and menu functions. Up to ten timed programs with chamber and afterburner time and tem-

perature setpoints can be stored. A pre-set function allows starting of the furnace at a specific time of day, to eliminate warm-up wait time. The controller can also be used for custom programs with multiple ramps and dwells for glassware cleaning or other applications. The stainless steel case has a drop door to serve as a shelf for ease of sample tray handling. Heating elements are quality Kanthal A-1 and easily accessible for inexpensive replacement as necessary.

The Asphalt Content Furnace includes two Sample Baskets, a Basket Cover, Sample Tray and Tray-Handling fork, two-piece ceramic Hearth Plate, Exhaust Filter, and Filter Holder for more efficient sample processing. Extra Sample Tray Assemblies, including a sample tray, basket, and cover, may be ordered as HMA-69. SE-33 Heat Resistant Gloves are purchased separately. HMA-810 all-steel Furnace Support Stand with locking casters and two shelves allows safe positioning of the furnace in the lab. Available HMA-813 Sample Cooling Cage protects personnel from hot surfaces as sample is cooling. HMA-814 Exhaust Vent Kit is easy to install for routing warm exhaust gases to the outside. A reliable bench scale of 12kg capacity or more, readable to 0.1g, is required; Gilson recommends our AD-12KA, listed separately.

The furnace ships configured to operate on 240V, 50/60Hz, single phase power supplies and a NEMA 6-50 Cord Set is supplied. It is easily converted

during installation to operate on a number of different single or three phase electrical supplies, from 208 to 380V at 50 or 60Hz, with current draw ranging from 16 to 45 amps. Chamber dimensions are 21x21x9in (533x533x229mm). **Product Dimensions:** 43x30x43in (1,092x762x1,092mm), WxDxH.

Gilson Asphalt Content Furnace

Gilson Asphalt Content Furnace	HM-378
Accessories	
Replacement Filters, box of 12	HMA-812
Sample Tray, Screen and Lid Set	HMA-69
Furnace Support Stand	HMA-810
Sample Cooling Cage	HMA-813
Exhaust Vent Kit	HMA-814
Heat Resistant Gloves	SE-33
A&D GP Industrial High-Capacity Balance	AD-12KA

productspotlight

GILSON ASPHALT CONTENT FURNACE

Electrical Wiring Configurations	kW	amps
240V, 1 phase, 50/60Hz	10	6
208V, 1 phase, 50/60Hz	21	12
240V, 3 phase, 50/60Hz	6	–
208V, 3 phase, 50/60Hz	10	–
380V, 3 phase, 50/60Hz	14	–



HM-807

GILSON CENTRIFUGE EXTRACTORS

ASTM D2172; AASHTO T 164

- Electrical braking system
- 1,500 or 3,000g sample capacities
- Explosion-proof motors available

Gilson's popular Centrifuge Extractors provide efficient and reliable quantitative determinations of bitumen content in hot-mix asphalt specimens. Models with explosion-proof rated motors and safe transformers are available with 1,500 or 3,000g capacities. A standard version with 1,500g capacity is also offered. All models feature a rugged, welded tubular steel frame, safe, simple operation, and long service life.

For each model, the precision machined and balanced inner aluminum bowl assembly quickly lifts out of the sealed housing for efficient specimen handling. Rotation speeds up to 3,600rpm are easily set using the speed control knob. The built-in electric brake stops the centrifuge in seconds when extraction is complete. The heavy cast aluminum outer cover latches securely in place and features an integral solvent dispensing cup. Paper filter rings prevent loss of fines during processing.

All models are powered by a reliable 1/8hp DC motor equipped with an electrical braking system. Additional centrifuge bowl assemblies may be ordered for faster sample processing. HMA-263 1,500g capacity Bowls may also be used on HM-807 3,000g Extractors. Twenty-five paper Filter Rings are included. 1,500g models use 9.75in diameter rings with 2.5in center holes. 3,000g model rings are 11.63in diameter with 2.5in diameter holes. **Product Dimensions for 1,500g:** 12x20x22in (305x508x559mm), WxDxH. **Product Dimensions for 3,000g:** 14x20x22in (356x508x559mm), WxDxH.

Gilson Centrifuge Extractors	
1,500g Standard Extractor, 115V,60Hz	HM-808
230V,50Hz	HM-808F
1,500g Explosion-Proof Extractor, 115V,60Hz	HM-806
230V,50Hz	HM-806F
3,000g Explosion-Proof Extractor, 115V,60Hz	HM-807
230V,50Hz	HM-807F
Accessories	
Centrifuge Bowl Assembly 1,500g	HMA-263
Centrifuge Bowl Assembly 3,000g	HMA-264
Filter Rings for 1,500g Models, pkg. 100	HMA-265
Filter Rings for 3,000g Models, pkg. 100	HMA-266



HM-750R

FILTERLESS CENTRIFUGE

ASTM D1856, D2172; AASHTO R 59, T 164

The American-made Continuous-Flow Filterless Centrifuge is effective for recovery of mineral filler fines from bitumen-laden nonflammable solvents from asphalt mix extraction tests. Analysis is simplified and accuracy is improved by eliminating the filter. Solvent suspension is fed through a top funnel into a special 526mL, 7x2.5in (178x64mm), HxID aluminum beaker (included) rotating at 11,000rpm. Under high centrifugal force, the liquid moves up the beaker wall and out through the overflow tubing while solids remain for easy removal. Continuous feeding is possible until the solids-retaining capacity of the beaker is reached.

No.18 (1mm) and No.200 (75µm) stainless steel full-height sieves are included for fitting to the top of the inlet funnel. A No.230 (63µm) sieve may be substituted for the No.200; please specify. When using the sieves, the extraction process can be run by pre-dissolving the mix sample with solvent, then pouring into the sieves.

The electric motor and rotating spindle of the centrifuge are enclosed in a sturdy cast aluminum case. Two aluminum beakers are included with each unit. **Product Dimensions:** 20x15x33in (508x381x838mm), WxDxH.

Filterless Centrifuge	
Filterless Centrifuge, 115V,60Hz	HM-750R
230V,50Hz	HM-750RF
Accessories	
Aluminum Beaker	HMA-308R

contactus

SIGN UP TODAY for your personal "MY GILSON" account at globalgilson.com and enjoy these features and more:

- Easy Reorder
- Quick Order
- Order Status
- Order History
- Saved Carts
- Favorites List



HM-8



HMA-54



HMA-56



HM-15

VACUUM EXTRACTOR

ASTM D2172; AASHTO T 164

Gilson HM-8 Vacuum Extractor with 3,000g capacity has superior design features for quantitative determination of bitumen in hot-mixed paving mixtures using the vacuum method. Extractor base is a 16x8in (407x203mm), dia.xH painted aluminum extract collection tank with carrying handles, a gauge-fitted vacuum source connection and an extract drain valve. Two sight-glass gauges are provided to monitor solvent level and color of extract during operation. A 12.25x4.5in (311x114mm), IDxH removable funnel ring clamps filter paper and the perforated aluminum support plate designed to prevent filter paper from collapsing under vacuum to the base with a Viton O-Ring seal. Sample and solvent are placed on paper inside the ring.

HM-8 Vacuum Extractor includes Vacuum Gauge, 25 Filter Papers, Filter Support, O-Ring Seal, 4ft (1.2m) Vacuum Hose Connection, and instructions. For best

results Gilson recommends using biodegradable terpene-based solvents and HMA-54-2 Filter Papers. Both the HMA-54 and HMA-54-2 are sold in packages of 100. Vacuum source is required; order vacuum pumps separately. The HMA-56, 2lb jar (package of 2) of Diatomaceous Silica Filtering Aid for slow filtering samples is sufficient for 36 tests. **Product Dimensions:** 16x12.5in (406x318mm) dia.xH.

Vacuum Extractor

Vacuum Extractor	HM-8
Accessories	
Filter Paper, Grade 613	HMA-54
Filter Paper Terpene Solvents, Grade 627	HMA-54-2
Viton O-Ring Seal	HMA-55V
Diatomaceous Silica Filter, 2lb jar (pkg. 2)	HMA-56
Diatomaceous Silica Filter, 50lb bag	HMA-56B

Filter Paper Selection Guide

Model	Outside dia. in (mm)	Hole dia. in (mm)	Grade	Flow Rate, mL/min	Filter Speed	Micron Retention
HMA-265	9.75 (248)	2.5 (64)	923	200	Fast	20
HMA-266	11.75 (298)	2.5 (64)	923	200	Fast	20
HMA-34	10 (254)	5 (127)	627	85	Medium	4
HMA-44	12.25 (311)	5 (127)	627	85	Medium	4
HMA-44B	12.25 (311)	5 (127)	904	70	Medium	2
HMA-54-2	13 (330)	-	627	85	Medium	4
HMA-54-5	13 (330)	-	633	435	Fast	31
HMA-64-1	15.7 (398.8)	-	617	360	Fast	6
HMA-54	13 (330)	-	613	60	Medium	6

BASIC VACUUM EXTRACTOR

ASTM D2172; AASHTO T 164

Basic Vacuum Extractor has a 12.25x4.5in (311x114mm), IDxH aluminum funnel ring, perforated stainless steel filter support, and an O-Ring seal, supported by three legs. Instead of a solvent collection tank, the assembly uses a vacuum filter flask such as GW-76. The Hose and Stopper Assembly has a 6ft (1.8m) rubber vacuum hose to fit to the 3/8in (9.5mm) OD drain connection and a No.12 neoprene stopper with glass tubing to fit GW-76. Order filter flask, hose and stopper assembly, diatomaceous silica filter aid, filter paper, and vacuum pump separately. Side tubulation on GW-76 flask is 3/8in (10mm), OD. **Product Dimensions:** 16.0x12.5in (406x318mm), dia.xH.

Basic Vacuum Extractor

Basic Vacuum Extractor	HM-15
Accessories	
4L Filter Flask	GW-76
Hose and Stopper Assembly	HMA-58
Filter Paper, Grade 613	HMA-54
Filter Paper Terpene Solvents, Grade 627	HMA-54-2
Viton O-Ring Seal	HMA-55V
Diatomaceous Silica Filter, 4lb carton	HMA-56
Diatomaceous Silica Filter, 50lb bag	HMA-56B



ONE STOP

globalgilson.com is your one stop resource for materials testing equipment and expert knowledge.



HM-6



HM-124H



HM-56

REFLUX EXTRACTORS

ASTM D2172; AASHTO T 164

Reflux extraction is the least expensive method for determining asphalt content in bituminous paving mixtures. Solvent vapor generated by hot plate passes around and through sample contained in two wire mesh cones lined with filter paper. Reflux solvent from the water-cooled condenser percolates through the sample repeatedly until the bitumen is extracted.

Extractors are offered in nominal capacities of 1,000g and 2,000g. Models HM-5 and HM-6 include Hot Plate, Extraction Jar, two interlocking wire mesh Cones with bail handles, copper Condenser with water inlet/outlet tubes, Filter Paper, and instructions. Model HM-5 has 6in (152mm) diameter jar and 6in (152mm) hot plate; Model HM-6 has 8.75in (222mm) diameter jar and 9in (228mm) hot plate. Both jars are 18in (457mm) high with ground tops for tight condenser fit. Included insulating pad is used for protection next to hot plate surface. HMA-54 and HMA-64 Grade 613 Filter Papers are supplied in packages of 100.

Reflux Extractors

1,000g Reflux Extractor, 115V, 50/60Hz	HM-5
230V, 50/60Hz	HM-5F
2,000g Reflux Extractor, 115V, 50/60Hz	HM-6
230V, 50/60Hz	HM-6F

Accessories

Extraction Jar for HM-5	HMA-51
Extraction Jar for HM-6	HMA-61
Wire Mesh Cone Set for HM-5	HMA-52
Wire Mesh Cone Set for HM-6	HMA-62
Condenser for HM-5	HMA-53
Condenser for HM-6	HMA-63
1,000g Filter Paper for HM-5, pkg. 100	HMA-54
2,000g Filter Paper for HM-6, pkg. 50	HMA-64-1
Insulating Pad	HM-5-1

ASPHALT EXTRACTION SOLVENTS

Gilson asphalt extraction solvents are available in 5gal (18.9L) Pails with Est. Ship Wt. of 40lb (18kg), or 55gal (208L) Drums with Est. Ship Wt. of 440lb (200kg).

Excel Clean HD and Hisol Plus both contain 100% natural orange and citrus terpenes. They are non-toxic, biodegradable, ozone-friendly, and rinse freely with no clumping. Not for use with reflux or other heated methods, but ideal for use in vacuum extractors or centrifuges for gradations. Flash point is 125°F for Excel Clean HD and 145°F for Hisol Plus.

Power-Solv contains citrus terpenes and petroleum solvent, is non-rinsable and can be used in vacuum extractors or centrifuges for gradations only. Flash point is 115°F.

Asphalt Extraction Solvents

Description	Flash Point	Model
Excel Clean HD, 5gal Pail	125°F	HM-124E
Excel Clean HD, 55gal Drum	125°F	HM-125E
Hisol Plus, 5gal Pail	145°F	HM-124H
Hisol Plus, 55gal Drum	145°F	HM-125H
Power-Solv, 5gal Pail	115°F	HM-124P
Power-Solv, 55gal Drum	115°F	HM-125P

DRAINDOWN BASKETS

ASTM D6390; AASHTO T 305

The draindown test for uncompacted bituminous mixes measures the amount of asphalt binder that separates from a sample held at the elevated temperatures encountered in production, transport, and placement. The test is particularly applicable to stone matrix asphalt (SMA) or open-graded porous asphalt mixtures. The sample is placed in the special Draindown Basket in a forced-air oven on a pre-weighed paper plate for one hour. The amount of draindown is measured as that portion that separates itself from the sample and is deposited onto the plate outside the basket. Paper plates are obtained locally.

ASTM E11 quality stainless steel mesh is used for HM-56 1/4in (6.3mm), HM-56A No.8 (2.36mm) and No.16 (1.18mm) Baskets. Each measure 4.25x5.5in (108x140mm), dia.xH and have a 1in (25mm) bottom skirt. A convenient bail-type handle is provided.

Draindown Baskets

Draindown Basket, 1/4in Mesh	HM-56
Draindown Basket, No.8 Mesh	HM-56A
Draindown Basket, No.16 Mesh	HM-56B

contactus

Gilson Technical Support Specialists are available to discuss your materials equipment needs, solutions, and questions. Contact our customer service specialists for more info.



by email

techsupport@gilsonco.com



by phone

800.444.1508



by livechat

globalgilson.com





MA-777 & MA-779



MA-777 shown with smartphone



MA-772



MA-769

FLIR® INFRARED THERMAL IMAGING CAMERAS

FLIR® Thermal Cameras instantly detect and display temperature gradients with visible details on color LCD displays. In paving operations, the cameras measure temperatures and highlight thermal gradients. Structural applications include locating and documenting voids, delaminations, and moisture in concrete or masonry walls, bridge decks, and floor slabs. FLIR® Cameras are light and compact, with focus-free lenses and simple operation. Models are built tough for rugged jobsite conditions and rated to withstand shock values to 25g.

FLIR® Infrared Thermal Imaging Cameras						
Description	Model	Temperature Range, F° (C°)	Accuracy	Thermal Sensitivity, C°	IR Sensor Resolution, (Pixels)	Field of View
<p>FLIR® ONE Pro Thermal Camera combines the power and performance of a FLIR thermal camera with the convenience of your smartphone. Separate versions of the ONE Pro attach to iPhones with Lightning connections or to Android models with USB-C ports. Performance features rival other FLIR models with extensive temperature range, infrared, visual, and MSX images, a full range of color palettes, and video, photo, or time-lapse capture modes. Sharp image clarity is augmented by VividIR™ for enhanced rendering of details. JPEG images and MPEG-4 video are stored in the memory of the phone. There are six temperature regions and three temperature spot meters on the display. A separate rechargeable Li-ion battery powers the unit for about one hour of operation. Product Dimensions: 2.7x0.6x1.3in (69x15x33mm), WxDxH.</p> <p>FLIR® ONE Pro Thermal Camera for iOS Smartphone FLIR® ONE Pro Thermal Camera for Android Smartphone</p>	MA-777 MA-779	-4°–752°F (-20°–400°C)	±3°C or ±5% of Reading	<0.07°	160x120 (19,200)	55°x43°
<p>FLIR® Compact Thermal Camera</p> <p>These pocket-sized devices combine a full-featured thermal camera, 5-megapixel visual inspection camera, and LED flashlight. FLIR C5 and entry-level C3-X models are affordable inspection tools for construction and maintenance applications. Wi-Fi and Bluetooth connectivity allows direct data transfer, storage, and backup to the cloud using the built-in FLIR Ignite™ application, or upload to a PC via the USB-C connector. Thermal, MSX®, and visual images are available on all your devices for instant email transfer or professional report generation. The new C5 features enhanced image resolution, video streaming, zoom functions, one-touch level/span adjustment, and a higher temperature range. The large, 3.5in (89mm) LCD touch screen displays feature auto-orientation and wide field of view. Internal memory stores 5,000 JPEG images. A lanyard and USB-C cable for charging and data transfer between PC, iOS, and Android devices, and a lanyard are included. Product Dimensions: 3.3x1x5.4in (84x25x137mm), WxDxH.</p> <p>FLIR® C5 Compact Thermal Camera FLIR® C3-X Compact Thermal Camera</p>	MA-773 MA-772	MA-773 -4°–752°F (-20°–400°C)	MA-773 0°–100°C: ±3°C, 100°–300°C: ±3%	MA-773 <0.07°	MA-773 160x120 (19,200)	MA-773 54°x42°
		MA-772 -4°–572° (-20°–300°)	MA-772 0°–100°C: ±3°C, 100°–300°C: ±3%	MA-772 <0.07°	MA-772 128x96 (12,288)	MA-772 54°x42°
<p>FLIR® Spot Thermal Camera</p> <p>This affordable imaging IR thermometer bridges the gap between ordinary infrared thermometers and FLIR® Infrared Thermal Cameras. The MA-769 lets you visualize heat patterns instead of relying on spot temperatures. Up to 50,000 images are saved to an included 4GB Micro SD card or to a PC over a USB connection. Memory can be expanded up to 32GB with user-supplied micro-SD card. The measurement field is framed by dual-laser pointers and has a 24:1 spot ratio for accurate measurements at a safe distance. The 2.4in (61mm) display has selectable color palettes, MSX® imaging, and adjustable auto power-off. A lanyard, USB cable, and international AC charger are included. Analysis Software is not included. MAA-14 Protective Vinyl Case and a convenient Belt Holster are available as options. Product Dimensions: 2.5x3.2x8.3in (64x81x211mm), WxDxH.</p>	MA-769	-13°–572° (-25°–300°)	varies ±1.5°–3°C	<0.10°	80x60 (4,800)	51°x66°



MA-774



MA-775



MA-776



MA-778

FLIR® Infrared Thermal Imaging Cameras

Description	Model	Temperature Range, F° (C°)	Accuracy	Thermal Sensitivity, C°	IR Sensor Resolution, (Pixels)	Field of View
E4 Thermal Imaging Camera is economical and features infrared, visual, and MSX image modes on 3in (76mm) color display. Sensor operates only in center-spot measurement mode. Comes with FLIR® Tools software and a sturdy plastic case. Product Dimensions: 3.1x1x4.9in (79x25x125mm), WxDxH.	MA-774	-4°-482° (-20°-250°)	±2°C OR 2%	<0.15°	80x60 (4,800)	45°x34°
E5-XT Thermal Imaging Camera measurement modes include center-spot or area box. Automatic hot/cold detection marks maximum and minimum temperatures within the 3in (76mm) color display. Image modes are infrared, visual, and MSX. A plastic carrying case and FLIR® Tools software with Wi-Fi connectivity are included. Product Dimensions: 3.7x5.5x9.6in (94x140x244mm), WxDxH.	MA-775	-4°-752° (-20°-400°)	±2°C or 2%	<0.10°	160x120 (19,200)	45°x34°
E6-XT Thermal Imaging Camera with higher infrared resolution and thermal sensitivity rating of less than 0.06°C. Measurement modes include center-spot or area box. Automatic hot/cold detection marks maximum and minimum temperatures within the display area. Image modes are infrared, visual, MSX, and picture-in-picture on the 3in (76mm) color display. FLIR® Tools analytical software with Wi-Fi connectivity and a plastic case are included. Product Dimensions: 3.7x5.5x9.6in (94x140x244mm), WxDxH.	MA-776	-4°-1022° (-20°-550°)	±2°C or 2%	<0.06°	240x180 (43,200)	45°x34°
E8-XT Thermal Imaging Camera features full, sharp 76,800 infrared pixel resolution with thermal sensitivity rating of less than 0.05°C. Measurement modes include center-spot or area box. Automatic hot/cold detection marks maximum and minimum temperatures within the display area. Image modes are infrared, visual, MSX, and picture-in-picture on the 3in (76mm) color display. A plastic case and FLIR® Tools software with Wi-Fi connectivity are included. Product Dimensions: 3.7x5.5x9.6in (94x140x244mm), WxDxH.	MA-778	-4°-1022° (-20°-550°)	±2°C or 2%	<0.05°	320x240 (76,800)	45°x34°

MOBILE FRIENDLY
 globalgilson.com is mobile friendly for any device.

GLOBALGILSON.COM
 SALES • SERVICE • SUPPORT



AP-1B



VIDEO ONLINE

NCAT ASPHALT FIELD PERMEAMETER

The NCAT Field Permeameter is a falling-head permeameter using Darcy's Law to determine rate of water flow through asphalt pavement. This design was selected by the National Center for Asphalt Technology (NCAT) for its close correlation with laboratory test results. Studies show that some asphalt mixes can be permeable to water even when compacted to an acceptable air void ratio. Field testing permits accurate estimation of permeability, eliminating the need for coring, patching, and laboratory testing. Corrections to mix and placement procedures can be implemented right away. Testing and subsequent calculations can usually be completed in 10–15 minutes by one technician.

APA-11B Permeameter is a four-tiered, graduated standpipe supplied in two sections and constructed of rugged plastic. A sealing material is placed on the base plate. The unit is then positioned on the test site and seated against the pavement using gentle foot pressure and included base weights. After filling with water, outflow is observed against the clearly marked graduations and timed. The smallest, uppermost tier allows rapid determinations in low-porosity pavements. The larger diameter tiers permit enough time to accurately read flow on more porous pavements. An alternate top section is included to replace the two top tiers with one larger diameter tier. This allows for extended test times on moderately permeable mats or for rapid filling when testing highly permeable mixes.

AP-1B NCAT Asphalt Field Permeameter Kit includes the four-tiered graduated Permeameter, Alternate Top Tier, Filling Tube, 5lb (2.3kg) tub of Moldable Sealant material, Whisk Broom for test site preparation, and four 5lb (2.3kg) Base Weights. Kit is packaged in a durable carrying case with wheels for easy transporting. **Product Dimensions:** 3x3x12.5in (76x76x318mm), WxDxH.

NCAT Asphalt Field Permeameter	
NCAT Asphalt Field Permeameter	AP-1B
Accessories	
Permeameter	APA-11B
Standard Top Tier, Replacement	APA-17
Alternate Top Tier, Replacement	APA-18
Moldable Sealant, 5lb (2.3kg)	APA-22



AP-14

AP-16



LABORATORY ASPHALT PERMEAMETERS

Florida FM 5-565

Laboratory Asphalt Permeameters utilize the falling head method to determine hydraulic conductivity of saturated 4in (102mm) and 6in (152mm) diameter asphalt cores or laboratory compacted specimens.

This simple, easy-to-use Permeameter design is based on test procedures developed at Florida DOT. The asphalt sample is placed inside a cylinder and held in place by expanding discs. A replaceable latex membrane allows the cylinder to be pressurized to fill voids and eliminate flow down the outside of the core. Permeability of the prepared specimen is determined by timing flow from the included 500cc Manometer through the sample. Both models include a self-contained hand pump which provides vacuum to hold the membrane out against the metal cylinder during assembly as well as confining pressure to push the membrane against the core during testing. A dial gauge displays pressure applied by the hand pump. The AP-14 model has a metal cylinder and the AP-16 model has an acrylic cylinder. Included with each Permeameter are two 4in (102mm) or two 6in (152mm) Latex Membranes. Replacement 500cc Manometers are available as APA-105. 2,000cc capacity Manometers are available as APA-120 for more permeable samples. **Product Dimensions:** 8x13x45in (203x330x1,143mm), WxDxH.

Laboratory Asphalt Permeameters	
Permeameter for 4in (102mm) dia.	AP-14
Permeameter for 6in (152mm) dia.	AP-16
Accessories	
Replacement 500cc Manometer	APA-105
Large Capacity 2,000cc Manometer	APA-120
4in (102mm) Latex Membranes, pkg. 12	APA-144
6in (152mm) Latex Membranes, pkg. 12	APA-166





HM-574



MA-366



MA-334



HM-591

BENKELMAN BEAM

ASTM D4695; AASHTO T 256

The Benkelman Beam is a simple lever-arm device to measure surface deflection of flexible pavements or base surfaces under the action of moving wheel loads. The rigid reference beam at one end supports a probe beam, where movement is measured by a dial indicator.

The probe beam is placed between the tires of a test vehicle and deflection is measured as the vehicle passes over the test area. The reference beam has a leveling adjustment to zero the dial indicator. A switchable battery-operated vibrator serves as a personnel alert and assures free movement of beam parts during measurements.

The three-piece, anodized, lightweight aluminum assembly is 33lb (15kg) net weight for easy portability and the longest piece is 6.5ft (1.99m). MA-334 Mechanical Dial Indicator or MA-366 Digital Dial Indicator must be ordered separately. **Product Dimensions:** Body: 55in (1,397mm) Long; Overall Length with probe: 144in (3,657mm).

Benkelman Beam

Benkelman Beam	HM-574
----------------	--------

Accessories

Mechanical Dial Indicator, 1x0.001in	MA-334
Mechanical Dial Indicator with Certificate of Calibration	MA-334C
Digital Dial Indicator, 1x0.0001in	MA-366

ASPHALT DEPTH GAUGE


The Asphalt Depth Gauge makes accurate pavement thickness determinations quickly and easily. Depth measurements up to 11.75in (298mm) in 0.25in (6.35mm) increments may be made from back of paver or from curbside with no need to step directly on hot asphalt. Depth rod will not pull on asphalt when retracted and leaves a small hole easily closed by roller. Storage bracket may be mounted directly to paver or pickup truck bed and holds the gauge securely in place with a spring clamp and PVC cup.

Gauge body is all-aluminum construction with 38in (965mm) total length, 1.25in (32mm) dia. anodized barrel is 25in (635mm) long. 3in (76mm) diameter foot ensures steady, accurate measurements. Depth probe is 0.25in (6.3mm) steel. Hole for lubricating oil is in barrel. Gauge weight is 2lb (1kg). **Product Dimensions:** 4x5x39in (102x127x991mm), LxWxH.

Asphalt Depth Gauge

Asphalt Depth Gauge	HM-591
---------------------	--------



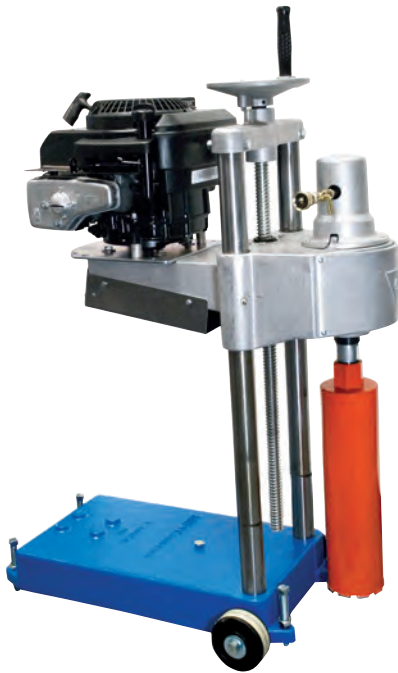

CD-1 shown with CDA-141



CD-6 shown with CDA-141



CDA-140



CDA-243



CDA-45

CORE DRILLING MACHINES

ASTM C42; AASHTO T 24, T 24M, R 67

Gasoline or electric-powered core drilling machines offer easy set up, fast drilling, and low bit wear to give low cost per core. The gasoline-powered unit has a 6in (152mm) diameter bit capacity, while the electric models have a bit capacity of up to 12in (305mm). Inquire for larger, trailer-mounted rigs for bits up to 16in (406mm). Quick-disconnect fittings for water supply are provided. Diamond coring bits are ordered separately.

CD-1 Gasoline-Powered Core Drill is designed for vertical coring of pavements and slabs. Stable platform base with leveling screws, a heavy-duty column and smooth, precision-feed system combine to make this model the ideal choice for large projects. Gasoline-powered drill allows operation independent of power supplies for minimal set up time and faster drilling. The unit easily adapts to mount to a pickup truck bed and has a 8.75hp four-cycle manual start engine. Carriage travel is 24in (610mm). **CD-1 Product Dimensions:** 14x32x46in (356x813x 1,168mm), WxDxH.

CD-6 Electric Core Drill adapts to a wide range of drilling jobs in addition to vertical pavement and slab coring. The column rotates 180° horizontally, allowing precise placement of drill bit. The super-duty two-speed (450/900rpm) 3.5hp motor and carriage can be removed or reattached without changing location for ease in swapping cores and adding extension rods. The 10in (254mm) wide wheeled base has a vacuum anchor to solidly grip smooth pavement or floors. Unit includes oilless vacuum pump, filter, hose, and quick connections. **CD-6 Product Dimensions:** 12x34x36in (305x864x 914mm), WxDxH.

Accessories for the Core Drilling Machines are purchased separately. CDA-20 is a 4gal (15L) manually-

pressurized portable water tank and CDA-22 is a trap-ring and electric pump to recirculate drilling water. CDA-24 9in (229mm) Extension Rod allows drilling to extended depth and CDA-26 18in (457mm) Strap Wrench is for attaching and removing coring bits without damage. CDA-32 is a replacement gasket with mastic for the CD-6 vacuum base.

Core Drilling Machines

Gasoline-Powered Core Drill	CD-1
Electric Core Drill, 115V, 60Hz	CD-6
220V, 50/60Hz	CD-6F

Accessories

Pressurized Water Tank, 4gal (15L)	CDA-20
Water Recirculator	CDA-22
Extension Rod, 9in (229mm)	CDA-24
Strap Wrench, 18in (457mm)	CDA-26
Replacement Vacuum Gasket	CDA-32
Long-Handle Core Retrieval Tongs, 4in Cores	CDA-15
Long-Handle Core Retrieval Tongs, 6in Cores	CDA-16
Core Extractors, 4in Cores	CDA-18
Core Extractors, 6in Cores	CDA-19

DIAMOND CORING BITS

ASTM C42; AASHTO T 24, T 24M, R 67

Open-Head Coring Bits require Expander Sets listed for attachment to drills. These bits are slightly less expensive and the expander sets can be reused many times as the core barrels wear out and are replaced. They are an economical choice for high-output and heavy-use applications.

Closed-Head Coring Bits are one piece construction for convenience and easy, direct attachment to drills. There are no extra parts to buy or lose. These are best suited for light to medium duty, or for occasional use.

Both bit styles are available in designs optimized for asphalt pavements, or for reinforced concrete and other hard materials. All bits are constructed for wet use and are fast-cutting when used according to design applications. Standard length is 14in (356mm) for cutting cores up to 12in long. Our most popular bit sizes are listed here. Please inquire for sizes not shown. All bits may be refurbished when worn.

Diamond Coring Bits

Nominal Bit Size OD, in (mm)	Open-Head Bits			Closed-Head Bits	
	Concrete	Asphalt	Expander Sets	Concrete	Asphalt
2 (50.8)	CDA-120	CDA-220	CDA-40	CDA-121	CDA-221
2-1/4 (57.2)	CDA-122	CDA-222	CDA-41	CDA-123	CDA-223
3 (76.2)	CDA-130	CDA-230	CDA-43	CDA-131	CDA-231
3-1/4 (82.6)	CDA-132	CDA-232	CDA-55	CDA-133	CDA-233
4 (101.6)	CDA-140	CDA-240	CDA-45	CDA-141	CDA-241
4-1/4 (108)	CDA-142	CDA-242	CDA-46	CDA-143	CDA-243
6 (152.4)	CDA-160	CDA-260	CDA-50	CDA-161	CDA-261
6-1/4 (158.8)	CDA-162	CDA-262	CDA-51	CDA-163	CDA-263

NEW



VIDEO ONLINE

CDA-18 and CDA-19



HM-60 shown with HMA-226



VIDEO ONLINE



HM-62 shown with HMA-234

CORE EXTRACTORS

Gilson Core Extractors are efficient and easy to use for the removal of drilled cores from asphalt or concrete pavements. To operate, simply insert the curved blades into the cut area around the core. Adjust the top screw, enabling the blades to grasp the core and lock the device into place by squeezing the handles. Push sharply to break off the core bottom and lift the specimen out. Release lever to free the core.

The lock feature protects cores from damage during extraction and assures laboratory acceptance for testing without repeat drilling. Models for 4in (102mm) or 6in (152mm) core sizes have identical features and operation. Extractors are welded, painted steel with sturdy handle grips. **Product Dimensions:** 12x10x10in (305x254x254mm), WxDxH.

Core Extractors	
Core Extractors, 4in Cores	CDA-18
Core Extractors, 6in Cores	CDA-19



CDA-15

LONG-HANDLE CORE RETRIEVAL TONGS

Fast, easy-to-use, patented Long-Handle Core Retrieval Tongs remove cores from asphalt or concrete surfaces. Simply insert blades into space from core drill bit, grasp the core with the tongs, and lift. Recovered cores are free of damage that may occur from use of improper tools. Laboratory acceptance for testing is assured without repeat drilling. Models are available for 4in (102mm) or 6in (152mm) core sizes. Tongs are welded, painted steel with plastic handle grips. **Product Dimensions:** 3x4.5x35in (76x114x889mm), WxDxH.

Long-Handle Core Retrieval Tongs	
Core Retrieval Tongs, 4in Cores	CDA-15
Core Retrieval Tongs, 6in Cores	CDA-16

HUSQVARNA® MASONRY SAWS

Masonry Saws from Husqvarna® are ideal for trimming concrete, asphalt, and masonry specimens to size for testing. Models include lightweight HM-60 1.5hp Portable unit and the larger HM-62 5hp Heavy-Duty version for high-production applications. Both include reliable high-torque motors and heavy-duty shafts mounted on quality ball bearings. Water distribution by submersible pumps permits wet cutting.

HM-60 Portable Masonry Saw has 2,330 blade rpm from the 1.5hp electric motor. The HM-60 uses 14in (356mm) diameter blades for up to 5in (127mm) cut depth. This saw features a unique, patented water distribution system designed to keep both the work piece and the work area cleaner and drier. The optional HMA-226 Portable Rolling Stand is quickly set up, easily relocated by one person, and has fast adjustment for proper height. The stand folds flat for easy portability. Lightweight, economical HMA-224 Fixed-Leg Stand is also available. A 14in (356mm) Vari-Cut™ blade is included with the saw. **Product Dimensions:** 27.5x39.8x27.5in (699x1,011x699mm), WxDxH. Height with Fixed-Leg Stand is approximately 54in (1,372mm).

HM-62 Heavy-Duty Masonry Saw is equipped with a powerful 5hp high-torque motor with 2,317 blade rpm to assure high-production performance. A convenient crank on the foot pedal sets table height and the patented Sta-level® blade guard controls blade orientation to assure the most accurate cuts possible. The painted integral rigid steel support stand resists flexing. The 20in (508mm) blade capacity permits cutting of 6in (152mm) cylinders or 8in (203mm) blocks in a single pass. Blades are purchased separately. **Product Dimensions:** 22x47.8x57.5in (559x1,214x1,461mm), WxDxH.

High-quality Diamond Blades are ordered separately. Premium grade blades for medium-sized jobs feature fast cutting and long life. Super Premium Blades allow maximum production for the largest jobs and have the lowest cost per cut. All blades listed below can be used wet or dry and cost less in quantities of five or more.

Husqvarna® Masonry Saws	
Portable Masonry Saw, including blade, 1.5hp, 115V, 60Hz	HM-60
Heavy-Duty Masonry Saw, without blade, 5hp, 230V, 60Hz	HM-62
Accessories	
Portable Rolling Stand for HM-60	HMA-226
Fixed-Leg Stand for HM-60	HMA-224
14in Super Premium Blade, qty. 1-4	HMA-234
14in Super Premium Blade, qty. 5+	HMA-234D
20in Premium Blade, qty. 1-4	HMA-232
20in Premium Blade, qty. 5+	HMA-232D
20in Super Premium Blade, qty. 1-4	HMA-236
20in Super Premium Blade, qty. 5+	HMA-236D

NEW



MO-39

PYROLYTIC OVEN

These second-generation high-temperature Pyrolytic Ovens replace the obsolete Pyro-Clean™ models and perform safe, solvent-free cleaning of asphalt and other organic residues from laboratory equipment and glassware. The cost-effective, fully automatic method saves time and creates a safer, more efficient lab environment. Costs and risks of hazardous waste handling and disposal, glass breakage and labor are reduced or eliminated. Even trace residues of organic contaminants from asphalt, injection molding, and organic chemistry applications are removed, leaving lab equipment ultra clean for critical testing.

Chamber temperatures up to 900°F (482°C) burn off organic contaminants, leaving behind only carbonized residues. Catalyst-filled shelves reduce oxygen in the chamber to the level needed to support combustion. Surfaces are then cleaned safely by the pyrolysis reaction. After a programmed soak period, air is introduced into the chamber to quickly oxidize residue. Exhaust smoke and gases are consumed in the downstream oxidizer at 1,300°–1,500°F (704°–816°C), assuring odorless, smoke-free emissions.

Both Pyrolytic ovens incorporate a state of the art touchscreen controller. User friendly, menu-driven programming allows completely automatic operation and system monitoring diagnostics alert operators when maintenance is required. Pre-programmed language options include English, German, French, Italian,

Chinese, Spanish, and Arabic. The clean, matte-black design fits the physical footprint and exhaust connection point of older Pyro-Clean models.

Chamber construction is welded stainless steel and features a pressure-release door with dual gasket system. Fully insulated chambers mean exterior walls remain cool during operation, and the automatic door lock and over-temperature switch combine to insure safe operation. The Pyrolytic ovens are shipped fully assembled and must be vented during installation with user-supplied 6 in (152mm) diameter double-walled vent pipe. Electrical: 240V, 50/60Hz, single phase.

MO-39 Product Dimensions: 37.9x32.8x59.3in (963x833x1,506mm), WxDxH.

MO-40 Product Dimensions: 45.375x32.8x62.125in (1,152.5x833x1,578mm), WxDxH.

Pyrolytic Oven					
Model	Maximum Temperature, F°(C°)	Chamber Dimensions, WxDxH, in (mm)	Chamber Capacity, ft³ (L)	RTFO Bottle Capacity	Weight, lb (kg)
MO-39	900° (482°)	14.9x18.5x16 (378x470x406)	2.5 (71)	70	380 (172)
MO-40	900° (482°)	23x19.4x19 (584x492x482)	4.9 (139)	100	480 (218)



Inside of MO-36

MO-36



GILSON ROLLING THIN FILM OVEN (RTFO)

ASTM D2872; AASHTO T 240; CTM 346

- Quick 5–8 minute temperature recovery time after loading samples, exceeds ASTM and AASHTO requirements
- Easy to remove bottom tray allows for quick change of elements or spill cleanup
- High-temperature silicone compression-fit gaskets securely grip RTFO Bottles
- Double-walled stainless steel oven maintains temperature to 200°C±1°C (392°F±1.8°F)
- Platinum Resistance Temperature Detector (RTD) ±0.1°C from 0° to 215°C (±0.18°F from 0° to 419°F)

The Gilson Rolling Thin Film Oven (RTFO) by ATS features advanced design, solid construction, and reliable accuracy. Precision components are paired with basic controls to ensure accurate, repeatable results and straightforward operation. Set-up and operational procedures are fast and easy with minimal training required. A built-in timer controls test times. Precision temperature control is easily programmed for test temperature of 163°C (325°F), with maximum temperature rated up to 200°C (392°F). The exclusive Gilson MO-36 is made in the USA and is CE marked. Meets all test method specifications and exceeding requirements for recovery time, a requirement other manufacturers have been unable to meet.

Temperature is precisely controlled to ±0.1°C with a built-in NIST Traceable Platinum RTD temperature sensor, assuring an overall temperature uniformity of ±1°C and safe, mercury-free operation. Time from ambient to 163°C (325°F) set point is 20 minutes and full heat recovery is 5–8 minutes after loading of specimens. A thermal shutdown switch provides over-temperature protection at 215°C (419°F). Operating air flow of 0–5,000mL/m is indicated on the included flow meter with a range of 200–14,000mL per minute. A source of clean, dry compressed air at 100psi (6.9bar) is required for operation. Soft, high-temperature silicone compression gaskets in the rotating carousel grip RTFO Bottles securely, yet allow quick and easy insertion and removal with no scratching. Cleaning and access for maintenance of the elements is easy with the removable tray at the bottom of the case.



MOA-6



MOA-10

also available

MO-38 Touchscreen RTFO by ATS is also available. See the complete listing at globalgilson.com.

The double-wall stainless steel case has a durable black powder-coated finish and is designed with leveling legs for convenient benchtop operation. A set of eight serial-numbered RTFO Sample Bottles is included. Additional Gilson serial-numbered bottles are ordered as MOA-6. The MOA-5 Bottle Scraper is optional and is shaped to fit RTFO bottles for quickly removing testing residue. Other optional accessories include special stainless steel MOA-3 Bottle Tongs with synthetic gripper pads for handling of hot bottles and the stainless steel MOA-10 Cooling Rack, constructed to meet ASTM requirements holds nine specimen bottles. Electrical requirements: 208–240V, 50/60Hz, single phase, 10 amps, 3,500 Watts. **Product Dimensions:** 37.25x28.75x36in (946x730x914mm), WxDxH.

Gilson Rolling Thin Film Oven (RTFO)	
Gilson Rolling Thin Film Oven, 208–240V, 50/60Hz	MO-36
Accessories	
RTFO Sample Bottle, Serial-Numbered	MOA-6
RTFO Bottle Cooling Rack	MOA-10
RTFO Bottle Scraper	MOA-5
RTFO Bottle Tongs	MOA-3



HM-923

ATS VACUUM DEGASSING OVEN (VDO)

ASTM D6521; AASHTO R 28; BS EN 14769

Vacuum Degassing Ovens (VDO) remove entrapped air bubbles from asphalt specimens after aging in a Pressure Aging Vessel. The VDO Touch by ATS is a completely automated tabletop degassing oven with a self-contained vacuum system to rapidly evacuate the chamber to the required 15 ± 1.0 kPa (25.5Hg). The network-ready 7in (178mm) industrial grade touchscreen controller features easy menu-driven operation in multiple language options for fast programming of vacuum, temperature values, and soak times. When connected to a network via the Ethernet connection, the VDO Touch can be operated remotely using widely available remote access applications on smart phones, tablets, or PCs. USB ports allow easy software upgrades. The controller display indicates time, temperature, and current process stage. Audible and visual alarms alert the user at end of each process.

Temperatures in the VDO Touch vacuum chamber are measured by a platinum RTD probe from ambient to 200°C with accuracy to $\pm 5^\circ\text{C}$. Soak time and degass times are both programmable up to 4,320 minutes. The rugged stainless steel cabinet, chamber, and cover are easy to maintain and the removable cover features a heat-resistant glass viewing window for observation during the vacuum degassing process. The chamber accommodates eight 4oz (118mL) or four 8oz (236mL) sample containers. The HM-923 includes four 8oz (236mL) sample tins and a specimen removal tool for easy loading and unloading of samples. Additional sample tins are available. The VDO Verification Kit is purchased separately and used periodically to confirm that the oven is producing specified temperature and vacuum values. The kit includes a 201°–1,210°C digital thermometer with accuracy of $\pm 0.03^\circ\text{C}$, an insulated vessel cap and temperature calibration block for temperature verification, and a 0–30in Hg digital vacuum gauge with 0.01 resolution. The kit is also available with NIST Certification. Electrical Requirements: HM-923 is 115V, 50/60Hz, 10 amps. HM-923F is 230V, 50/60Hz, 10 amps.

Product Dimensions: 24x16x12in (610x406x305mm), WxDxH.

ATS Vacuum Degassing Oven (VDO)

ATS Vacuum Degassing Oven, 115V, 50/60Hz	HM-923
230V, 50/60Hz	HM-923F

Accessories

VDO Verification Kit	HMA-674
VDO Verification Kit with NIST Certification	HMA-674C
Sample Tins, 4oz, pkg. 12	SC-502
Sample Tins, 8oz, pkg. 12	SC-506



HM-74

ATS PRESSURE AGING VESSEL (PAV4)

ASTM D6521; AASHTO R 28; BS EN 14769

Pressure Aging Vessels (PAVs) use heated, pressurized air to simulate long-term oxidative aging of asphalt binders. PAVs consist of an ASME-code and CE certified stainless steel pressure vessel, powder coated, stainless steel cabinet with encased band heaters, and integral pressure measurement control.

The new PAV4 features a recovery time of less than 20 minutes, meets ASTM, AASHTO, and EN 14769 requirements, and includes a platinum RTD device to ensure accurate temperature resolution and uniformity. Safety features include a pressure relief valve and high-temperature thermal shutdown. A USB port allows the user to easily store test data and upgrade software if necessary.

The HM-74 ATS Pressure Aging Vessel (PAV4) uses an industrial grade touchscreen controller for complete control and monitoring of all test processes. The system has an operating pressure of 2.1mPa (304psi) and temperature range programmable from 50° to 150°C, with resolution of 0.1°C. This easy-to-use system completes a test in three easy steps: press the heat button, insert specimens when prompted, and press the age button. The ATS PAV includes a set of ten (10) MOA-2 Stainless Steel Specimen Pans (pans formally used in the Thin Film Oven Test procedure), an anodized aluminum sample holder with lifting handle, specimen handling tool, regulator, and NIST Traceable Certificate. Additional pans can be ordered as single units or complete sets of ten. Bottled compressed air with a pressure of at least 340psi (2.34mPa) is required and user-supplied. **Product Dimensions:** 25x18x30in (635x458x762mm), WxDxH.

PAV4 Verification Kits are available as accessories and include a thermometer, RTD probe, thermocouple verification block and digital pressure gauge with a range of 0–500psi, accurate to $\pm 0.25\%$ full scale. HMA-714 Standard Kit includes a thermometer and RTD probe with a range of -201°–1210°C, accurate to $\pm 0.03^\circ\text{C}$ under 100°C and $\pm 0.1^\circ\text{C}$ over 100°C, with a resolution of 0.1°C. HMA-716 NIST Certified Kit has a thermometer and RTD probe have a range of -100°–400°C, accurate to $\pm (0.05\% \text{ reading} + 0.1^\circ\text{C})$, with a resolution of 0.01°C.

ATS Pressure Aging Vessel (PAV4)

ATS Pressure Aging Vessel, 208–240V, 50/60Hz	HM-74
--	-------

Accessories

Stainless Steel Specimen TFOT Pan	MOA-2
Stainless Steel Specimen TFOT Pans, pkg. 10	MOA-2C
PAV Standard Verification Kit	HMA-714
PAV NIST Certified Verification Kit	HMA-716



HM-59



HM-73



ATS BENDING BEAM RHEOMETERS (BBR)

ASTM D6648; AASHTO T 313

Bending Beam Rheometers (BBR) measure the flexural creep stiffness of asphalt binder at cold temperatures (ambient to -40°C) to predict low-temperature thermal cracking of asphalt pavements. Special molds are used to form small asphalt beam samples for testing. The three point bend apparatus is easily removed and reinstalled in the base unit for convenient sample preparation and loading. Deflection of the beam specimen is measured and recorded as a constant load is applied. Load, displacement, and bath temperature are displayed in tabular and graphic form in real time. The stiffness value is calculated at the lowest temperature anticipated for the region. A fluid bath controls the temperature of the Ethylene Glycol/Water/Methanol mixture down to -40°C (-40°F). Process temperature is controlled and monitored by two independent platinum RTD temperature transducers to maintain temperature stability. Both BBR models fully comply with ASTM/AASHTO requirements. A source of clean, dry, compressed air at 50 PSIG minimum must be provided by the user.

HM-59 ATS Bending Beam Rheometer is a proven and reliable model constructed of stainless steel and durable, high-strength polymer components. The unit uses an air bearing system to assure reliable loading with accurate and repeatable results. A linear variable displacement transducer (LVDT) with a range of 6.35mm and accuracy to ±2µm measures deflection. The temperature-compensating 500g load cell with mechanical overload protection ensures accurate load results. Safe, rapid cooling of the test fluid is provided by the mechanical refrigeration system.

The HM-59 includes a desktop computer with monitor, keyboard and mouse, pre-loaded control, acquisition and analysis software, five aluminum Specimen Molds with mylar strips, a Calibration Kit with required weights, and Confidence Beam. Calibrated test weights and a certified LVDT NIST-traceable standard are provided with each system. The easy-to-use software allows daily verification and periodic calibration of load cell, LVDT, and RTD transducers.

Product Dimensions: 49x49x41in (1,245x1,245x1,041mm), WxDxH.

HM-73 ATS BBR3 Bending Beam Rheometer Touchscreen incorporates state of the art design features but retains all of the accuracy, quality, and performance characteristics of the HM-59. Its built-in computer makes test set up and operation easier than ever. The industrial grade touchscreen controller also has intuitive step through menus for guidance. This model can also be started, stopped, and monitored remotely using an app installed on a smartphone, iPad, or tablet.

The HM-73 is ruggedly built with integral stainless steel construction. The

unit uses an air bearing system to assure reliable loading with accurate and repeatable results. A linear variable displacement transducer (LVDT) with a range of 6.35mm and accuracy to ±2µm measures deflection. The temperature-compensating 500g load cell with mechanical overload protection ensures accurate load results. The complete system consists of a fluid bath base unit with removable three-point bend test apparatus, a cooling unit with temperature controller, five aluminum Specimen Molds with mylar strips, a Calibration Kit with required weights, Confidence Beam, calibrated test weights, and a certified LVDT NIST-traceable standard. The easy-to-use control, acquisition, and analysis software is preloaded on the internal computer and allows daily verification and periodic calibration of load cell, LVDT, and RTD transducers. A USB port is located on the front of the unit for software upgrades and data storage.

Product Dimensions: 49x49x41in (1,245x1,245x1,041mm), WxDxH.

ATS Bending Beam Rheometers (BBR)		
ATS Bending Beam Rheometer, 115V, 50/60Hz		HM-59
230V, 50/60Hz		HM-59F
ATS Bending Beam Rheometer BBR3 Touchscreen, 115V, 50/60Hz		HM-73
230V, 50/60Hz		HM-73F

Accessories

Aluminum Beam Specimen Molds, set of 5	HMA-348R
Mylar Strips for BBR Molds	HMA-347

MONTHLY BLOG

Stay informed and learn from the experts. Subscribe to our monthly blog at globalgilson.com.

NEW



LP-72



LP-74

ROTATIONAL VISCOMETERS

ASTM D4402; AASHTO T 316; EN 13302

Rotational Viscometers determine fluid viscosities by measuring the torque required to rotate a spindle or other apparatus through a test specimen and converting it to a dynamic viscosity value. Testing asphalt binder viscosity at controlled, elevated temperatures allows accurate predictions of handling, pumping, and mixing properties of the binder fluid, and the compaction characteristics of paving mixtures. In the ASTM/AASHTO standard test method, liquefied binder is thermostatically heated in a sample chamber and rotational torque from a specified spindle is measured and expressed as Pascal seconds (Pa.s), millipascal seconds (mPa.s), or centipoise (cP).

Gilson offers two medium range rotational viscometers with $\pm 1\%$ accuracy and $\pm 0.2\%$ repeatability. Both accept a variety of test spindle and sample chamber combinations and feature a 7in touchscreen for control input and data display. Viscosity in Pa.s, mPa.s, or cP, speed in rpm, torque, shear stress, time, temperatures from a RTD sensor, and shear rate are all displayed in real time and in multiple supported languages. A selection of versatile accessories are purchased separately, allowing users to assemble a customized asphalt binder testing system to meet their specific needs. Both devices meet ASTM, AASHTO, and EN standards for asphalt viscosity determinations when fitted with proper accessories. Units operate on electrical supplies of 110–240V, 50/60Hz.

LP-72 Standard Rotational Viscometer measures viscosity from 15 to 60,000,000 mPa.s with a torque range of 0.05–13mNm. A USB port is provided for data recording and transfer, or PC and printer connection. Rotation speed is selectable from 0.3 to 250rpm. Basic data logging software is included, allowing data to be transferred in spreadsheet format to a PC or sent directly to a local printer via the USB drive. A viscosity stand, PT100 RTD temperature sensor, power cable, and connection cables are also included. **Product Dimensions:** 9.8x15.7x19.7in (249x399x500mm), WxDxH.

LP-74 High-Performance Rotational Viscometer features enhanced sensitivity to measure viscosity from 2 to 140,000,000 mPa.s with a torque range from 0.05 to 30mNm. Rotation speed is selectable from 0.3 to 1,500rpm. With optional LPA-713 Advanced Software installed, this unit has greater programming and recording functionality as well as direct control of the LPA-75 Temperature Control Device when used. Basic data logging software is included, allowing data to be transferred in spreadsheet format to a PC or sent directly to a local printer via the USB drive. A viscosity stand, PT100 RTD temperature sensor, power cable, and connection cables are also included. **Product Dimensions:** 9.8x15.7x19.7in (249x399x500mm), WxDxH.

Viscosity Spindles and Sample chambers are purchased separately. Spindles are designated from low viscosity TR8 to higher viscosity TR11 (see chart on opposite page). The LPA-708 (TR8) spindle is most often used for asphalt binder tests. Order extra spindles for wider viscosity range. Spindles can be purchased as individual units or as LPA-70 in a complete set of four spindles. Sample Chambers are purchased individually. LPA-77 Sample Chamber fits the TR8 Spindle, and all other spindles use the LPA-79 Sample Chamber. Additional stainless steel chambers and spindles are recommended for labs running multiple samples. Inquire for spindles for other viscosity applications.

LPA-73 Temperature Bath maintains sample temperature from 5° to 200°C (41° to 392°F) during testing to conform to test requirements. Order PTA-165 High-Temperature Silicone Bath Oil for operation above 100°C (212°F). Features a 12.7qt (12L) fluid tank with tank lid. Operates on 230V, 50Hz. **Product Dimensions:** 19.7x15.7x19.7in (500x399x500mm), WxDxH.

NEW



LPA-73



LPA-77 and LPA-79



LPA-75



LPA-708, LPA-709, LPA-710, and LPA-711

LPA-73

LPA-75 Temperature Control Device offers higher sample temperatures, greater control, and integrated operation when used with the LP-74 Viscometer and LPA-713 Advanced Software. Electrical heating with no liquid immersion maintains sample temperatures up to 300°C (572°F) with accuracy of ±0.2°C for consistent, high-temperature viscosity measurements. Regulated temperature set points and programmable operation make it easier to comply with ASTM/AASHTO standards when testing asphalt binder samples. Operates on 110–240V, 50/60Hz electrical supplies. **Product Dimensions:** 24x13.4x25.6in (610x340x650mm), WxDxH.

LPA-713 Advanced Software is purchased separately for enhanced computer control of the viscometer, and better processing, analysis, and reporting of data. User-defined steps for instrument control and temperature ramps can be saved for repeated use when used with the LP-74 Viscometer and LPA-75 Temperature Control Device. The software includes tools for mathematical modeling, management of data, and display of graphics for curves and tables.

Other accessories enhance convenience for sample preparation, setup, and handling. The LPA-715 Sample Chamber Rack holds four sample chambers vertically. MA-196 Crucible Tongs allow easy handling of hot sample chambers. LPA-717 Circular Bubble Level is an easy way to ensure the viscometer is level for each test.

Rotational Viscometers

Standard Rotational Viscometer, 110–240V, 50/60Hz	LP-72
High-Performance Rotational Viscometer, 110–240V, 50/60Hz	LP-74

Accessories

TR8 Viscosity Spindle	LPA-708
TR9 Viscosity Spindle	LPA-709
TR10 Viscosity Spindle	LPA-710
TR11 Viscosity Spindle	LPA-711
Complete Set of Four Spindles	LPA-70
Sample Chamber for TR8	LPA-77
Sample Chamber for TR9, TR10, TR11	LPA-79
200°C Temperature Bath, 230V, 50Hz	LPA-73
High-Temperature Silicone Bath Oil, 1gal	PTA-165
300°C Temperature Control Device, 110–240V, 50/60Hz	LPA-75
Advanced Software	LPA-713
Sample Chamber Rack	LPA-715
Crucible Tongs	MA-196
Circular Bubble Level	LPA-717

Spindle Viscosity Range, mPa.s

Spindle	Model	Shear Rate	LP-72	LP-74
TR8	LPA-708	0.92N	14–3,000,000	2–7,000,000
TR9	LPA-709	0.34N	75–16,000,000	12–37,000,000
TR10	LPA-710	0.28N	146–31,000,000	24–72,000,000
TR11	LPA-711	0.25N	300–64,000,000	50–149,000,000

technote

Gilson recommends these products for a complete system meeting ASTM D4402/AASHTO T 316 requirements:

LP-72 or LP-74	Rotational Viscometer
LPA-708	Viscosity Spindle
LPA-77	Sample Chamber
LPA-75	Temperature Control Device
LPA-713	Advanced Software

NEW



LP-84

NEW



LP-84 shown with LP-82

ANTON PAAR ROTATIONAL VISCOMETER

ASTM D4402; AASHTO T 316

The Anton Paar Rotational Viscometer provides rapid, reproducible, high-temperature viscosity measurements that correlate closely with the time-consuming AASHTO T 201 glass capillary method. Asphalt binder products are characterized, and temperature/viscosity relationships are developed to estimate optimum mixing and compaction temperatures for paving mixes.

For ASTM D4402 and AASHTO T 316 rotational viscosity tests of asphalt binders, the torque required to maintain a constant rotation speed of a specified spindle in the test specimen is measured. The chamber containing the specimen is temperature-controlled in a liquid or air bath and applied torque forces are converted to dynamic viscosity values.

LP-84 Anton Paar Rotational Viscometer performs multi-point viscosity measurements from 100 to 40 million cP or mPa.s with accuracy to $\pm 1\%$ and repeatability of $\pm 0.2\%$. Rotational speed range is fully selectable from 0.01 to 250rpm, with 18 standard speed presets. Selectable operating modes allow customization of test methods. The LP-84 can also perform speed or shear rate-controlled tests. The 7in full-color touchscreen displays all measurement data, as well as programming functions in an intuitive user interface. The system supports multiple languages on the display screen. As many as 999 tests with up to 10,000 sub-

measurements are stored in memory for printing or exporting to a computer. The instrument integrates into network Laboratory Information Management System (LIMS) or FTP Servers. The LP-84 comes pre-assembled, and setup takes just a few minutes. V-Collect software is a free download to print and export data as PDF or CSV files. **Product Dimensions:** 19x19.5x17in (483x495x432mm), WxDxH.

A selection of SC4 series spindle and sample chamber systems as well as spindles only are sold separately. Spindles easily snap into place magnetically and are automatically detected by the viscometer's Toolmaster™ system. The LPA-81, SC4-21 spindle and sample chamber system is the most common for asphalt binder testing specifications. Other SC4 Spindles and sample chamber systems for broader viscosity range are available and listed in the accessory chart. All Anton Paar spindles are AISI 316L chemically resistant stainless steel.

LP-82 Peltier Temperature Control Device is required and purchased separately for precise, wide range temperature control of viscosity samples. The device includes built-in sensors and controls to regulate sample temperatures from -45° to 175°C (-49° to 347°F) and integrates easily with the Rotational Viscometer. A separate PC is not required. LPA-82 meets the requirements for ASTM and AASHTO rotational



LP-88



LPA-816



LPA-83



LPA-87



LPA-821



LPA-827

technote

These products make up a complete system meeting ASTM D4402/AASHTO T 316 requirements for rotational viscosity testing of asphalt:

LP-84 Anton Paar Viscometer
 LP-82 Peltier Temperature Control Device

LP-88 V-Curve Software Module
 LPA-81 Spindle and Chamber, SC4-21

viscosity testing of asphalt binders and allows accurate testing of many different materials with no need for a liquid circulating bath. Order LPA-83 DIN Adapter if temperature control device is not required for other non-asphalt applications. **Product Dimensions:** 17x12.5x12in (432x318x305mm), WxDxH.

LP-88 V-Curve Software Module adds live real-time graphing, mathematical modeling for data analysis, and functionality with the LPA-82 Temperature Controller. Temperature ramps can be created and up to fifty measurement steps can be programmed for multi-point tests such as ASTM D4402/AASHTO T 316. V-Curve software can be purchased when the LP-84 Viscometer is ordered or activated later through purchase of a licensing code. A limited-use free trial for evaluation can be initiated with the viscometer at any time.

LPA-86 Holder for Disposable Chambers adapts convenient disposable chambers for conditioning in the LPA-82 Temperature Controller. Disposable Chambers cut cleaning time and improve testing turn around. One hundred aluminum Disposable Chambers are included. Replacement packs of 100 are ordered as LPA-816.

LPA-83 DIN Adapter must be ordered, along with the desired chamber and spindle combination if the LPA-82 Peltier Temperature Control Device is not used.

Anton Parr Rotational Viscometer¹

Anton Paar Rotational Viscometer, 115V, 60Hz	LP-84
Accessories	
Peltier Temperature Control Device, 115V, 60Hz	LP-82
V-Curve Software Module	LP-88
Holder for Disposable Chambers	LPA-86
Replacement Disposable Chambers, pkg.100	LPA-816
DIN Adapter, for Non-Heated Testing	LPA-83
Spindle with Sample Chamber system, SC4-21	LPA-81
Spindle with Sample Chamber, system SC4-27	LPA-87
Spindle with Sample Chamber, system SC4-28	LPA-88
Spindle with Sample Chamber, system SC4-29	LPA-89
Spindle Only, SC4-21	LPA-821
Spindle Only, SC4-27	LPA-827
Spindle Only, SC4-28	LPA-828
Spindle Only, SC4-29	LPA-829


¹Gilson distribution of the Anton Paar Rotational Viscometer system is limited outside of the United States. International customers may contact Gilson directly for quotations on these products.



NEW




HM-91

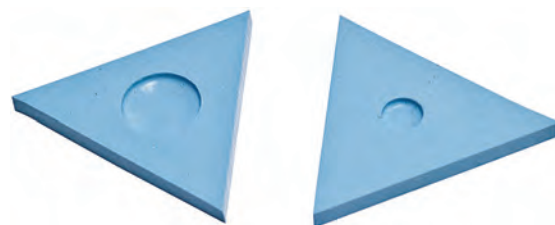

HMA-356



HMA-355



HMA-356C

ANTON PAAR DYNAMIC SHEAR RHEOMETERS

ASTM D7175, D7405; AASHTO T 315, T 350

Dynamic Shear Rheometers (DSRs) classify asphalt binders based on their resistance to damage from age, temperature, and mechanical forces over a wide temperature range. DSRs are particularly important in characterizations of polymer-modified, performance graded (PG) binders used in modern Superpave mix designs. A disc-shaped binder sample is confined between two parallel plates and subjected to horizontal oscillation to determine dynamic shear properties. Anton Paar SmartPave Dynamic Shear Rheometers are configured to meet the demands of everyday quality control testing of 4mm, 8mm, and 25mm samples in asphalt production facilities. These models are ideal for classification of SHRP/Superpave PG binders.

The synchronous, brushless DC motor drives a rotor mounted on a frictionless air bearing to allow the most precise movement and sensitive measurements. Maximum torque is 125mNm (milliNewtons-meter) and minimum oscillation torque is 1µNm. Speed range is from 10⁻³ to 1,500rpm. A clean, dry, and oil-free supply of compressed air is required for operation. Operating air pressures are from 58 to 101psi (4 to 7bar) with optimum pressure of 87psi (6bar). User-friendly RheoCompass™ software is included and designed specifically for the needs of the asphalt industry. Intuitive, step-by-step instructions guide user through predefined standard test procedures and temperature calibration and verification routines are fully automated. Simplified data retrieval and report generation make the software easy to use. Toolmaster™ automatic tool recognition and configuration instantly recognizes testing components and temperature control units, eliminating the need to enter data manually when changing components. Quick-Connect coupling allows one-handed connection of key components and ensures fast, convenient changes. TruRay LED lighting feature provides a clear view of the sample and measurement surface for easy set up and precise filling of the measuring gap. A sliding rail design allows easy access to the sample during trimming and set up operations. Upper and lower measuring plates and fittings for 8mm and 25mm samples are included. Installation and training costs quoted separately. **Product Dimensions:** 15x21x26in (381x533x660mm), WxDxH.

HM-90 SmartPave I DSR is designed for everyday QC testing and is supplied without the Peltier temperature controlled hood. This cost-effective model does not fully meet ASTM and AASHTO requirements for total temperature control. The Peltier system in the base provides temperature control for the lower plate.

HM-91 SmartPave II DSR is also configured for routine QC testing, but fully complies with current ASTM and AASHTO requirements for temperature control of the testing environment. The patented active 8 and 25mm plates and fittings included. Peltier temperature hood controls temperatures both above and below the sample, eliminating temperature gradients and making heating and cooling rates much faster. Test times are reduced, while reproducibility is improved. With no water flow around the sample, set up and testing takes place in a completely dry environment. Temperature range is -5°–200°C, with temperature gradients less than 0.1°C.

Silicone Rubber Specimen Molds are purchased separately. HMA-355 2.7 million centipoise Viscosity Standard fluid in 55mL bottles is NIST traceable and designed specifically for the DSR.

Anton Paar Dynamic Shear Rheometers

SmartPave I DSR, 115 or 230V, 50/60Hz	HM-90
SmartPave II DSR, 115 or 230V, 50/60Hz	HM-91

Accessories

Silicone Specimen Mold, 25mm	HMA-356A
Silicone Specimen Mold, 8mm	HMA-356B
Silicone Specimen Mold, 4mm	HMA-356C
Silicone Specimen Mold Set, one 25mm and one 8mm	HMA-356
Viscosity Standard Fluid, 55mL	HMA-355



LP-16



MS-66



MS-62

RING & BALL SOFTENING POINT APPARATUS

ASTM D36; AASHTO T 53

Ring and Ball Apparatus is used for determining the softening point of asphalt, coal tar pitch, and other viscoelastic bitumens in the range of 30°–157°C (86°–315°F). Steel balls are placed on top of bitumen specimen discs in test rings in a bath. Temperature of the bath is increased gradually until the specimens soften and fall under the ball weight to the shelf 1in (25.4mm) below. The assembly provides for simultaneous testing of two specimens as suggested in standard test procedures and includes two square-shouldered brass test rings, two 0.375in (9.5mm) steel balls, two brass ball-centering guide rings, an 800mL heat-resistant beaker (bath), and a brass ring holder suspension assembly with cover and shelf to fit beaker. ASTM Softening Point Thermometers and a Beaker Stand Assembly should also be purchased. The Beaker Stand Assembly includes metal support stand, ring clamp, wire gauze, and thermometer clamp. **Product Dimensions:** 4x6in (102x152mm), dia.xH.

Ring & Ball Softening Point Apparatus

Ring & Ball Softening Point Apparatus	LP-16
---------------------------------------	-------

Accessories

Beaker Stand Assembly	LP-18
800mL Beaker	GW-38
Steel Balls, set of 15	SSA-44

STAINLESS STEEL MELTING POTS

Stainless Steel Melting Pots are designed for performance in harsh lab environments and include precise, long-lasting digital controllers. Increasingly popular in asphalt labs, these units can also be used for dispensing of other materials like waxes or adhesives. The rugged melting pots are fitted with heated, no-drip ball dispenser valves to aid material flow and prevent clogs. Sturdy powder-coated steel stands are included and have adjustable height. Stands bolt securely to the benchtop, raising the pots up to 16in (406mm) over the bench.

The electronic digital controller regulates independent temperature settings for pot and dispenser valve. The menu-driven controller is easy to set up and has passcode-actuated lockout settings to guard against accidental changes. The controller can be field calibrated by user if needed. Readout is selectable for °F or °C display. The 18-gauge crucible is housed in a 20-gauge stainless steel shell and insulated with 3in (76mm) of fiberglass. The multi-circuit blanket heater assures uniform temperatures. Maximum operating temperature is 350°F (177°C). The loose aluminum cover has a heat resistant knob. The pots are supplied with a 6ft (1.8m) power cord.

MS-66 Stainless Steel Melting Pot has 4qt (3.8L) capacity and crucible is 6.75x7.25in (171x184mm), dia.xH. **Product Dimensions:** 10.375x12in (264x305mm), dia.xH. Heating element is 600 Watts.

MS-67 Stainless Steel Melting Pot has 12qt (11.4L) capacity and crucible is 10.9x9.75in (277x 248mm), dia.xH. **Product Dimensions:** 15x17in (381x482mm), dia.xH. Heating element is 1,200 Watts.

Stainless Steel Melting Pots

Melting Pot, 4qt, 110V, 60Hz	MS-66
220V, 50Hz	MS-66F
Melting Pot, 12qt, 110V, 60Hz	MS-67
220V, 50Hz	MS-67F

DISPENSING MELTING POTS

Timesaving melting pots simplify dispensing of asphalt binder for laboratory testing and mix-design applications. Pots are available in 4 or 10qt (3.8 or 9.5L) capacities and are also useful for dispensing waxes, adhesives, and other compounds. A heavy pipe single-column support mounts easily to a benchtop. Height and angle are quickly adjusted with set screws on the sliding boss attached to the column. A manual dispensing lever operates a needle valve that is adjusted to obtain desired flow rate. The dial thermostat controls heating range from 150° to 550°F (66° to 288°C).

The heavy painted-steel housing is insulated from the cast-aluminum inner pot by thick thermal insulation. Blanket-type heating element uniformly heats the pot across the bottom and for 75% of the wall height. An aluminum cover is provided to retain heat and control fumes.

MS-62 Dispensing Melting Pot has 4qt (3.8L) capacity and 880 Watt heating element. Footprint is 10x15in (254x381mm) and maximum height is 18in (457mm). Maximum clearance below dispensing valve is about 7in (178mm). **Product Dimensions:** 10x18in (254x457mm), dia.xH.

MS-64 Dispensing Melting Pot has 10qt (9.5L) capacity and 1,540 Watt heating element. Footprint is 14x19in (356x483mm) and maximum height is 19in (483mm). Maximum clearance below dispensing valve is about 7in (178mm). **Product Dimensions:** 14x19in (356x483mm), dia.xH.

Dispensing Melting Pots

Melting Pot, 4qt, 120V, 60Hz	MS-62
240V, 50Hz	MS-62F
Melting Pot, 10qt, 120V, 60Hz	MS-64
240V, 50Hz	MS-64F

also available

For ASTM Bituminous Softening Point Thermometers, see our Thermometers and Timers section.





PT-82

SAYBOLT VISCOMETER BATH

ASTM D88, D7496; AASHTO T 72

The Saybolt Viscometer Bath determines viscosity of petroleum liquids at temperatures from ambient to 464°F (240°C). PID controller maintains ±0.05°F (±0.03°C) temperature uniformity throughout operating range and provides quick temperature stabilization with protection of an over-temperature control. Set-point temperatures are displayed in °F/°C. Circulate tap water or refrigerated coolant through the built-in cooling coil for operation at near-ambient temperatures.

The enameled steel cabinet has specimen-area backlighting, leveling feet, and sliding draft shields. Insulated stainless steel bath with 5gal (19L) capacity has overflow pipe and drain valve to simplify filling to required level. Flasks for the 60mL samples are easily centered on the removable, chemical-resistant alignment plate. The unit comes with four thermometer supports, four chained corks, withdrawal tube, tube nut and orifice wrenches, two port closures and four port covers, and oil strainer. Saybolt tubes, flasks, orifices, and withdrawal pipettes must be selected based on specimen properties.

Order Regular Bath Oil separately for use up to 275°F (135°C), or Hi-Temperature Silicone Fluid with 621°F (327°C) flash point. **Product Dimensions:** 29x25x34in (737x635x864mm), WxDxH.

Saybolt Viscometer Bath

Saybolt Viscometer Bath, 115V, 50/60Hz	PT-82
220–240, 50/60Hz	PT-82F

Accessories

Brass Saybolt Tube	PTA-176
Stainless Steel Saybolt Tube	PTA-177
Universal Orifice	PTA-178
Furol Orifice	PTA-179
Road Oil Orifice	PTA-180
Wrench for Universal and Furol Orifices	PTA-162
Wrench for Road Oil Orifices	PTA-163
Socket Wrench	PTA-166
Bath Oil Hi-Temperature Silicone, 1gal	PTA-165
Saybolt 60mL Receiving Flask	PTA-168
Saybolt 60mL Withdrawal Pipette	PTA-169



PT-106 with PTA-119

ZEITFUCHS® CROSS-ARM VISCOMETERS

ASTM D445, D446, D2170; AASHTO T 201; ISO 3104, 3105

Zeitfuchs® Cross-Arm Viscometers measure kinematic viscosity of bitumen and road oils at 140°F (60°C), and asphalt cements at 275°F (135°C). Ten Cross-Arm Viscometer models test a wide range of product viscosities from 0.6 to 100,000 centistokes (cSt), each with ±0.2% precision of the stated viscosity range. The small sample volume of 1–3mL allows the viscometers to easily be filled or cleaned while immersed in a Constant Temperature Viscosity Bath. Minimum immersion depth of 9in (230mm) is required. Each unit is supplied with a Certificate of Calibration. A 2in (51mm) diameter PTA-119 Plastic Viscometer Holder is required and purchased separately. **Product Dimensions:** 12x2x2in (305x51x51mm), WxDxH.

Zeitfuchs® Cross-Arm Viscometers

Size	Viscosity Range, Centistokes	Approx. Constant, cSt/s	Model
1	0.6–3	0.003	PT-101
2	2.0–10	0.01	PT-102
3	6.0–30	0.03	PT-103
4	20.0–100	0.1	PT-104
5	60.0–300	0.3	PT-105
6	200.0–1,000	1.0	PT-106
7	600.0–3,000	3.0	PT-107
8	2,000.0–10,000	10	PT-108
9	6,000.0–30,000	30	PT-109
10	20,000.0–100,000	100	PT-110

Accessories

Plastic Holder for Zeitfuchs® Cross-Arm Viscometer	PTA-119
--	---------



PT-114

ASPHALT INSTITUTE VACUUM VISCOMETERS

ASTM D2171; AASHTO T 202

Gilson offers five sizes of Asphalt Institute Viscometers to determine viscosity of highly viscous materials such as bitumen at 140°F (60°C). The user measures elapsed time for a fixed volume of liquid to be drawn by vacuum through the graduated capillary tube. Time is multiplied by the viscometer constant to obtain absolute viscosity. Measurement requires a minimum sample size of 3mL and a bath depth of 7in (178mm). Certificate of calibration is supplied with each viscometer. PTA-100 Neoprene Rubber Holder to fit a 2in (51mm) diameter hole is ordered separately. Inquire if fixed metal holder preferred. **PT-111, 114, and 115 Product Dimensions:** 12x2x-2in (305x51x51mm), WxDxH. **PT-112 and 113 Product Dimensions:** 10.25x1.625in (260x41mm), WxH.

Asphalt Institute Vacuum Viscometers

Size	Viscosity Range, Poise	Model
25	42–800	PT-111
50	108–3,200	PT-112
100	600–12,800	PT-113
200	2,400–52,000	PT-114
400	9,600–200,000	PT-115

Accessories

Viscometer Neoprene Holder	PTA-100
----------------------------	---------



PT-62



PT-53



PT-6A Shown with MA-212C

VACUUM REGULATORS

ASTM D2171; AASHTO T 202

Solid state mercury-free digital regulators are designed for precise measurement and control for a range of laboratory vacuum applications. As needed for viscous asphalt testing with Asphalt Institute, Cannon-Manning, and Modified Koppers vacuum viscometers, the Vacuum Regulators are preset to control at 300mm below atmospheric pressure; they may also be user reset to control anywhere in the range from 1 to 410mm below atmospheric pressure. An LCD screen displays vacuum in, mm, Hg, or any of nine other units. The vertical configuration is designed for convenient display and keypad access while minimal counter space is used.

Two models are available. Model PT-61 100 Watt is for regulation of user's existing vacuum system. Model PT-62 175 Watt is equipped with an internal vacuum pump and requires no external vacuum source. Both have housings of enameled steel supported with rubber feet. **Product Dimensions:** 6.75x18x18.5in (172x458x470mm), WxDxH.

Vacuum Regulators

Vacuum Regulator, 115V, 50/60Hz	PT-61
230V, 50/60Hz	PT-61F
Vacuum Regulator, 115V, 50/60Hz	PT-62
230V, 50/60Hz	PT-62F

CONSTANT TEMPERATURE VISCOSITY BATH

ASTM D445, D2170, D2171; AASHTO T 201, T 202

The Constant Temperature Viscosity Bath is designed for use with capillary viscometers, but is well-suited for general laboratory work requiring precise temperature control. The bath uses 12x12in (305x305mm), DxH Pyrex bath jars for easy visibility.

PT-53 Viscosity Bath conforms to ASTM D445 temperature stability requirements and has selectable temperature presets and a variable control to set temperature at any point. A stainless steel encased thermistor in the bath senses temperature. Bath covers have seven 2in (51mm) diameter holes for viscometers and two 0.375in (10mm) holes for ASTM thermometers. Temperature range is 20°–100°C. Control is proportional ±0.01°C. Mixing features a motor-driven stirrer. **Product Dimensions:** 16x14.25x24in (406x362x610mm), WxDxH.

The Viscosity Bath includes safety features with a second thermistor and three automatic shut-off functions. The second thermistor provides fault protection for over-temperature conditions; the unit will shut off until user resets the circuit limit, if the control thermistor is disconnected, or if the bath liquid falls below the safe operating level.

PTA-61 Bath Oil is recommended when testing to 100°C (212°F). Bath jars hold about 5gal (19L). Order viscometers and thermometers separately. PTA-70 Drawer fits under unit for storing viscometers and accessories. ASTM 9C Pensky Martens and Tag Closed High Thermometer are ordered separately.

Constant Temperature Viscosity Bath

Viscosity Bath, 115V, 50/60Hz	PT-53
230V, 50/60Hz	PT-53F

Accessories

Bath Oil, 5gal	PTA-61
ASTM 9C Thermometer	MA-210C
ASTM Equivalent S9C Non-Mercury Thermometer	MA-510C
Drawer Unit	PTA-70

CLEVELAND FLASH TESTER

ASTM D92; AASHTO T 48

The Cleveland Flash Point Tester is used in the Cleveland Open Cup method to measure the flash point of asphalt binder between 175°F (80°C) and 752°F (400°C). The variable control 10 amp, 1,250 Watt nickel-chromium heater ensures accurate rate-of-rise temperature settings. A separate gas supply is required to connect to the pivoting test-flame burner. The thermometer positioning bracket is adjustable and can be raised for clearance to remove and install the included flash cup. A rugged stainless steel housing with cooling vents encloses the heater and the open flash cup rests on an insulated platform. An ASTM 11C Thermometer is required and is ordered separately as MA-212C. **Product Dimensions:** 12x5x4in (305x127x102mm), WxDxH.

Cleveland Flash Tester

Cleveland Flash Tester, 115V, 60Hz	PT-6A
230V, 50/60Hz	PT-6AF

Accessories

ASTM 11C Thermometer	MA-212C
Platinum RTD Thermometer	MA-270




GILSON NEWSLETTER

Sign up for the Gilson newsletter at globalgilson.com and never miss a thing!






LP-10

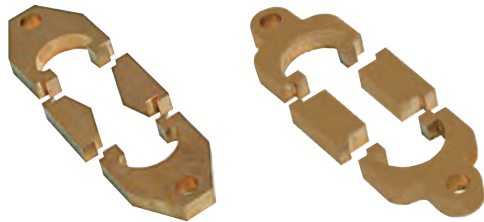

LPA-20

LPA-21

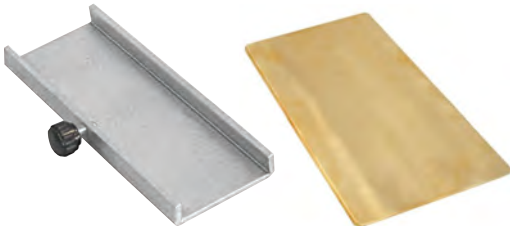

LPA-24

LPA-26

DUCTILITY TESTER

ASTM D113, D6084; AASHTO T 51, T 300, T 301


Ductility tests of bituminous materials measure elongation of a binder specimen before failure. The ends of a molded specimen are pulled apart in a liquid-filled trough at specified speed and temperature. The Ductility Tester features a heating and cooling circulator for complete temperature control. Tensile strength and ductility of specimens can be measured concurrently with addition of the Force Ductility Kits.

Ductility Tester	
Description	Model
<p>Temperature-Controlled Ductility Tester is mounted in a stainless steel water bath to precisely control test temperatures and can test three standard ductility specimens simultaneously. The heating/cooling fluid circulation system uses an immersion heater and refrigerating unit to digitally regulate temperatures from 5° to 25°C ±0.5° (41° to 77°F ±0.9°). Temperature set points are programmed through the digital controller/display. Dual safety thermostats prevent temperature over-runs. Operation is vibration-free with a maximum stroke of 1,500mm and constant travel speed of 50mm per minute maintained via a direct-drive motor. Maximum force is 300 ±0.1N (67 ±0.02lbf) A traveling pointer indicates exact position of the carriage on a fixed scale. LPA-20 Standard Ductility Molds and LPA-24 Standard Base Plates are purchased separately. Painted enamel outer steel case and fiberglass insulated interior stainless steel walls. Product Dimensions: 74x14x27in (1,880x356x686mm), LxWxH. The unit also accommodates components to conduct force ductility testing.</p>	<p>Temperature-Controlled Ductility Tester, 115V, 60Hz 230V, 50Hz</p> <p>LP-10 LP-10F</p>
<p>LPA-20 Standard Ductility Mold meets ASTM D113 requirements and is precision-machined brass consisting of two side pieces and two end clips with mounting holes. LPA-24 Base Plate is purchased separately for each mold. LPA-26 Large Base Plate is 5x8x0.1in (127x203x3mm) and allows placing three molds on same base. LPA-21 Force Ductility Mold is also machined brass, includes two end clips and two sides designed to meet AASHTO T 300 Force Ductility, ASTM D6084, and AASHTO T 301 Elastic Recovery requirements. Order additional molds and base plates to save setup time with high-volume testing.</p>	<p>Standard Ductility Mold LPA-20 Standard Base Plate LPA-24 Large Base Plate LPA-26 Force Ductility Mold LPA-21</p>
<p>Force Ductility Kit adapts most standard ductility machines for single-specimen force measurement. Components fit easily without tools or modifications. The kit consists of a load measuring adapter, 0.01lbf two-channel digital display, RS-232 interface, cables, and software. Three pairs of straight-side mold pieces are also provided to convert standard ductility molds to force ductility molds. A calibration stand, weight hanger assembly, and six weights (30lb total) for calibration in English or metric units are also included. For testing two force measurement specimens simultaneously, order an additional LPA-31 Load Measuring Adapter. Single-channel Chart Recorder is a multiple-range flatbed unit for 7.9in (201mm) paper that accepts analog data input.</p>	<p>Force Ductility Kit LPA-30 Load Measuring Adapter LPA-31 Chart Recorder LPA-182</p>



MOBILE FRIENDLY

globalgilson.com is mobile friendly so you can view on any device.

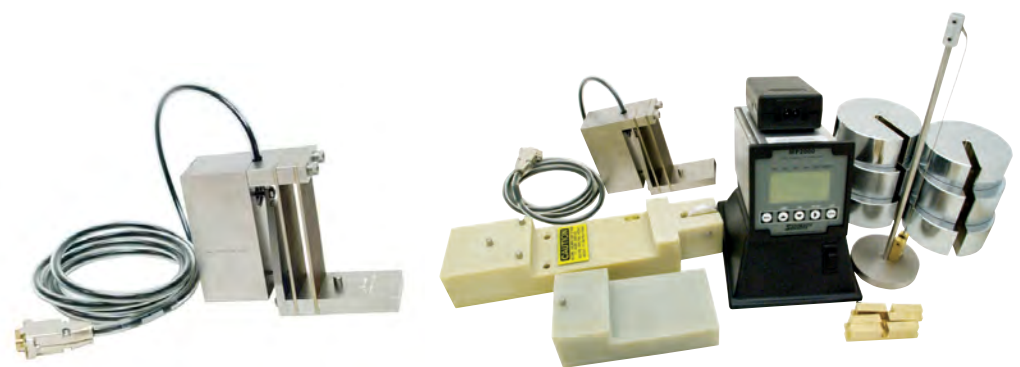

LPA-31

LPA-30



HM-320



HM-322



HM-322D



HMA-180



HMA-183



HMA-188

UNIVERSAL PENETROMETERS

ASTM D5, D217, D937, D1168, D1321, D1403, D1831, D2884, D5329; AASHTO T 49

Universal Penetrometers test a wide variety of materials by penetration of weighted needles or cones. Main applications are for bituminous materials, but waxes, greases, foods, and pharmaceuticals are among other products tested. Penetration is read from a digital display or a 5in (127mm) diameter indicator dial of 400 divisions, each representing 0.1mm of penetration. Gilson offers heavy-duty units for manual and automatic use and a lighter, portable model for field work or users with a limited work load or budget. All meet ASTM and AASHTO standards when fitted with proper needle or cone.

HM-320 Manual Penetrometer is ruggedly constructed for accurate, sensitive measurements. The aluminum base has a machined, grooved table with leveling screws and rubber inserts to protect tips of needles and cones. Two stainless steel rods act as support guides for a cast aluminum head with coarse/fine adjustments and a calibrated friction-free plunger mechanism. Indicator dial has instant zero reset. Any needle or cone with standard 0.125in (3mm) diameter stem may be mounted to the 47.5g plunger assembly. A standard 2.5g ASTM D5 Needle (HMA-180) and two additional Loading Weights (50g and 100g) are included. Order needles or cones for other tests separately as needed. **Product Dimensions:** 10.5x13x22in (267x330x559mm), WxDxH.

HM-322 Automatic Penetrometer is the same as the HM-320, but has a button release mechanism with digital timer to automatically stop the plunger when the preset time from 0.1 to 9.9 seconds expires. **Product Dimensions:** 10.5x13x22in (267x330x559mm), WxDxH.

HM-322D Digital Automatic Penetrometer is based on the HM-320 and HM-322 Penetrometers but uses a digital penetration gauge for precise readings. This model will also start the test with a single button push and stop it after a preset duration. **Product Dimensions:** 10.5x13x22in (267x330x559mm), WxDxH.

HMA-180 Penetration Needle for bituminous materials is smooth, hardened, tempered stainless steel with brass ferrule and weighs 2.5g to give 50g total

when mounted with plunger assembly. Stainless steel wax penetration needle HMA-181 is also 2.5g but has truncated cone-shaped tip with approximately 4mm maximum diameter tapered to 0.15mm diameter end. Several types of grease cones detailed in ASTM D217 have polished 90° cone with 30° removable hardened steel tip. Other types of Needles and Cones are available. Transfer Dish HMA-188 is clear plastic, 3.75x3.25in (95x82mm), dia.xD, suitable for holding 3 or 6oz sample containers for transferring samples from bath to penetration testing. Flat bottom of dish has metal centering lugs and a magnet cemented to the bottom to secure sample boxes.

Universal Penetrometers

Manual Universal Penetrometer	HM-320
Automatic Universal Penetrometer, 110V, 60Hz	HM-322
220V, 50/60Hz	HM-322F
Digital Automatic Universal Penetrometer, 110V, 60Hz	HM-322D
220V, 50/60Hz	HM-322DF

Accessories

Bituminous Materials Needle ¹	HMA-180
Bituminous Materials Needle with Certification ¹	HMA-180C
Wax Penetration Needle ¹	HMA-181
Wax Penetration Needle with Certification ¹	HMA-181C
Standard Grease Penetration Cone, Solid Magnesium ¹	HMA-182
Grease Penetration Cone, Hollow Brass ¹	HMA-183
Grease Penetration Cone, Hollow Stainless ¹	HMA-183S
Transfer Dish	HMA-188
Tinned Sample Boxes, 3oz, 55x35mm dia.xH, carton of 12	SC-500
Tinned Sample Boxes, 6oz, 74x48mm dia.xH, carton of 12	SC-504

¹ Inquire for other needles and cones.



MA-66



MA-67

PORTABLE MIXERS

Portable Asphalt/Concrete Mixers are ideal for sample or small batch mixing in just about any setting. The enameled-steel mixer holds a utility bucket securely in place. As the bucket rotates at 60rpm, a stationary Mixing Paddle scrapes sides and bottom of the bucket to ensure thorough mixing. All 115V, 60Hz mixers are supplied with a 1/2hp motor, On/Off switch, fuse protection, and an 8ft cord with three-prong plug. For 230V, 50Hz mixer, add "F" suffix to model number. The 10 gallon "F" model is supplied with a 1hp motor.

MA-66 Light-Duty Stationary Mixer includes a removable 5gal Utility Bucket and Standard Mixing Paddle. A Deluxe Mixing Paddle with extra fins is available for heavy loads. MA-66 is powered by a constant speed motor and belt pulley. Other heavy-duty models are recommended for asphalt mixes. **Product Dimensions:** 12x18x24in (305x457x610mm), WxDxH.

MA-67 and MA-68 Heavy-Duty Portable Mixers use 5gal and 10gal Utility Buckets, respectively, and are equipped with 8in wheels for maximum mobility. A direct drive motor generates more mixing power. Mixing paddles not included. Gilson recommends MA-67 Mixer with either MAA-146 Paddle for asphalt or MAA-148 Paddle for concrete applications. The 5gal bucket can be preheated in ovens if necessary. Inquire for other available paddles. **Product Dimensions:** 24x21x35in (610x533x889mm), WxDxH.

Portable Mixers

Light-Duty Stationary Mixer, 5gal, 115V, 60Hz	MA-66 ¹
Heavy-Duty Portable Mixer, 5gal, 115V, 60Hz	MA-67 ¹
Heavy-Duty Portable Mixer, 10gal, 115V, 60Hz	MA-68 ¹

Accessories

Bucket and Cover for MA-66, 5 gal	MAA-141
Replacement Paddle for MA-66	MAA-142
Deluxe Paddle for MA-66	MAA-143
Utility Bucket for MA-67, 5gal	MAA-144
Utility Bucket for MA-68, 10gal	MAA-145
Asphalt Paddle for MA-67, 5gal	MAA-146
Asphalt Paddle for MA-68, 10gal	MAA-147
Concrete Paddle for MA-67, 5gal	MAA-148
Concrete Paddle for MA-68, 10gal	MAA-149

¹Add "F" to model number to order mixers or heating adapters to operate on 230V, 50Hz electrical supplies



MA-52

LABORATORY MIXERS

ASTM C109, C227, C305; AASHTO T 106, T 162

Industrial-grade Laboratory Mixers have planetary action for thorough mixing and blending of materials. Direct gear drives and heavy-duty motors assure constant mixing speeds under load. Locking hand lever raises and lowers bowl. All mixers are supplied with stainless steel bowl, wire whip, dough hook, and aluminum flat beater. MA-52 and MA-52X include an MAA-266 stainless steel flat beater. MA-52X includes modifications to meet ASTM and AASHTO specifications. Add "F" suffix to any mixer or heating adapter model number for similar unit that operates on 230V, 50Hz power supply.

MA-52 Laboratory Mixer has 5qt (4.7L) capacity and a 1/6hp motor with selectable operating speeds of 139, 285, and 591rpm. Additional MA-266 Heavy-Duty Stainless Steel Flat Beater is included, as well as a 6ft (1.8m) power cord. The MAA-30A Clearance Adjustment Bracket can be purchased separately to meet ASTM and AASHTO requirements. MAA-31 Acrylic Bowl Lid is also available for all 5qt (4.7L) bowls. **Product Dimensions:** 10.5x15x17in (267x381x432mm), WxDxH.

MA-52X Laboratory Mixer with clearance bracket has the same specifications as MA-52, but has been modified to meet the requirements of ASTM C305, C227, C109, AASHTO T 162, and T 106 and certain other tests for mortar and cement. **Product Dimensions:** 10.5x15x17in (267x381x432mm), WxDxH.

MA-54A Laboratory Mixer is a 12qt (11.4L) capacity benchtop mixer for larger batch requirements. This unit is supplied with a 1/2hp motor for selectable mixing speeds of 107, 198, and 365rpm. A 6ft (1.8m) power cord is included. **Product Dimensions:** 19x23x29in (483x584x737mm), WxDxH.

Heating Adapter Kits maintain elevated temperatures when preparing hot-mix asphalt specimens in Laboratory Mixers. Heating mantles mount under mixing bowls with hook and loop fasteners. Electronic proportional controller with built-in circuit breaker attaches with a twist-lock connector on 4ft (1.2m) cable.

Laboratory Mixers

5qt Laboratory Mixer, 115V, 60Hz	MA-52 ¹
5qt Laboratory Mixer with Clearance Bracket, 115V, 60Hz	MA-52X ¹
12qt Laboratory Mixer, 115V, 60Hz	MA-54A ¹

Accessories

Wire Whip for MA-52	MAA-260
Heavy-Duty Stainless Steel Flat Beater for MA-52	MAA-266
Bowl for MA-52	MAA-32
Bowl for MA-54A	MAA-34A
Clearance Adjustment Bracket for MA-52	MAA-30A
Heating Adapter for MA-52, 250 Watts	MAA-28 ¹
Heating Adapter for MA-54A, 600 Watts	MAA-64 ¹

¹Add "F" to model number to order mixers or heating adapters to operate on 230V, 50Hz electrical supplies



GILSON AUTOMATIC CONCRETE COMPRESSION MACHINES

ASTM C39, C78, C109, C293; AASHTO T 22, T 97, T 177; BS 1610, 1881

Gilson Automatic Concrete Compression Machines perform complete strength tests for concrete cylinders, beams, cubes, cores, and other sample types with minimal operator input. After positioning the specimen in the machine, a single button initiates the automated test cycle. The machine, following the specification requirements for the selected tests, controls specimen contact, pre-loading, rate of load, break detection, data collection, and return of the piston to the home position. Operators are required only for sample preparation and positioning, and for removal of samples after test completion. This feature allows the operator to complete other tasks while testing is in progress without impacting the results. Variations in load rates and test procedures are eliminated, ensuring accurate, repeatable, and documented results that strictly conform to ASTM, AASHTO, and other testing specifications. The automated testing and documentation of results also leads to higher rates of productivity with fewer errors, as the operator no longer has to verify that the data is correctly transcribed from the machine.

Sample type, entry of specimen data, and test parameters are selected on the Windows-based human machine interface (HMI) controller. The controller displays force, stress, and rate of load simultaneously during a test, with the option to show real-time graphing of load vs time or stress vs strain. Load rate and applied force are precisely regulated by feedback during sample loading. USB and LAN ports, along with Wi-Fi capability, allow immediate printing of tests, or easy data collection and transfer to the user's PC for reporting of results using a USB flash drive.

Reports for each test can be printed individually, or test data can be transferred in summary form. Testing laboratory, sample ID, and client information are entered and stored for error-free reporting and distribution. Diagnostics feature instantly displays status of the emergency stop button, drive system, data communication, pressure transducer, and over-travel limit switch. An indication of a fault condition in any of the systems must be resolved before testing can proceed.

Rugged welded steel frames with solid steel crossheads exceed ACI 363 requirements for system rigidity. Excessive long-term wear to the hydraulic loading system is prevented by mounting the piston in the top of the frame, where it is unaffected by accumulated test debris. The integrated electric motor and hydraulic pump system operate at variable speeds depending on loading demands to achieve and maintain required pressures. This energy-efficient configuration reduces heat build-up and extends the service life of the hydraulic components.

Safety features include a large emergency stop button that instantly releases the hydraulic pressure and shuts down the machine when activated, a hydraulic safety relief valve to prevent loading beyond machine capacity, and a limit switch that stops the piston from advancing beyond limits. Hinged fragment guard doors latch securely and are made from clear Lexan® to enhance safety while still permitting the operator to view the sample during testing.

All Automatic Concrete Compression Machine units are supplied ready for compression testing of 6x12in (152x305mm) concrete cylinders with user-supplied unbonded neoprene capping pads and steel retainers. The standard frame may be outfitted with accessories to accommodate additional testing, which can be found in the Accessories chart. The available component sets have the ability to test 6x12in (152x305mm) cylinders with sulfur caps or ground ends, cylinders of different sizes, splitting tensile strength of cylinders, 6x6in (152x152mm) flexural beams, 2in (51mm) and 6in (152mm) cubes, and various sizes of drilled cores.

Special factory-modified models are outfitted with a different manifold, optional proportional valve for controlled piston retraction, and either one or two LVDT

NEW




AC-250



PRODUCT VIDEOS, DIY VIDEOS, AND 360° VIEWS

Look for the icons at the left throughout our catalog to see more in-depth details on select products.

NEW

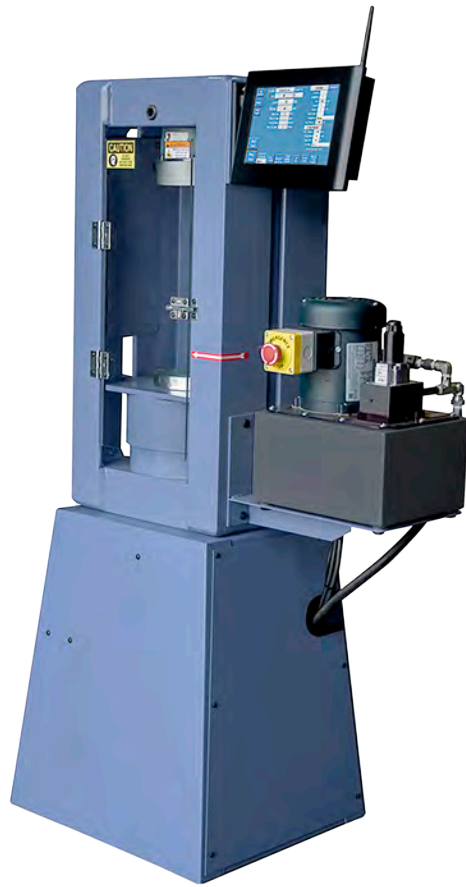

AC-325

NEW



AC-450

inputs required to determine ASTM C469 modulus of elasticity (MOE), or MOE and Poisson's ratio on 4 or 6in (102 or 152mm) cylinders. These modified models are also capable of determining compressive, flexural, and splitting tensile strength tests by using the same component sets (based on test type and frame capacity) as the standard forms. Compressometer and Compressometer/ Extensometer testing fixtures for MOE and Poisson's ratio testing must be purchased separately.

Automatic Concrete Compression Machines operate on 110V, 60Hz power supplies. For models that operate on 230V, 50Hz electrical systems, add "F" suffix to model number when ordering.

Gilson Automatic Concrete Compression Machines

Test Type	Model	Total Capacity, lbf (kN)	Maximum psi, 6x12in Cylinder	Openings with Platens, WxH, in	Dimensions, WxDxH, in	Standard Test Methods (Accessories Sold Separately)	
						ASTM	AASHTO
Concrete Compression and Flexural	AC-250	250,000 (1,112)	7,000	9.25x19.625	30x17x58	C39, C78, C109, C293	
	AC-325	325,000 (1,446)	9,200	9.5x19.25	33x17x58		
	AC-450	450,000 (2,002)	12,700	9.5x19.125	34x24x60		
Concrete Compression, Flexural & Modulus of Elasticity	AC-250M	250,000 (1,112)	7,000	9.25x19.625	30x17x58	C39, C78, C109, C293, C496, C469	T 22, T 97, T 177, T 106
	AC-325M	325,000 (1,446)	9,200	9.5x19.25	33x17x58		
	AC-450M	450,000 (2,002)	12,700	9.5x19.125	34x24x60		
Compression, Flexural, Modulus of Elasticity, and Poisson's Ratio	AC-250MR	250,000 (1,112)	7,000	9.25x19.625	30x17x58	C39, C78, C109, C293, C496, C469	
	AC-325MR	325,000 (1,446)	9,200	9.5x19.25	33x17x58		
	AC-450MR	450,000 (2,002)	12,700	9.5x19.125	34x24x60		

didyouknow?

AC-201 Automatic Controller Retrofit allows a Manual Compression Machines to be easily upgraded to an automatic system. AC-201 is prewired and preassembled; simply remove the existing hydraulics and display interface, connect the new hydraulics and limit switch. Frame capacity and piston diameter for the manual machine is required to properly size the pressure transducer and perform calibration.



ACA-140



ACA-161




ACA-163



ACA-200



ACA-320

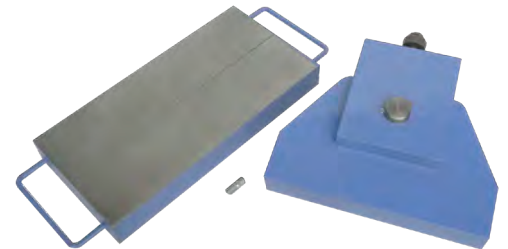

ACA-460

Accessories for Automatic Compression Machines

Description	AC-250 Series	AC-325 Series	AC-450 Series	ASTM Standards	AASHTO Standards
<p>Cylinder Test Sets adapt Automatic Compression Machines for compressive strength testing of cylindrical specimens of concrete or other materials. Set components properly support and position samples of specified sizes for testing that complies with ASTM/AASHTO standards. Separate models are available to test specimens prepared with capping compound or ground ends (bonded caps) or those with neoprene pad caps and retainers (unbonded caps).</p> <p>2x4in for use with Bonded Caps 2x4in for use with Unbonded Caps 3x6in for use with Bonded Caps 3x6in for use with Unbonded Caps 4x8in for use with Bonded Caps 4x8in for use with Unbonded Caps 6x12in for use with Bonded Caps 6x12in for use with Unbonded Caps</p>	ACA-122 ACA-120 ACA-132 ACA-130 ACA-142 ACA-140 ACA-162 ACA-160 ¹	ACA-122 ACA-120 ACA-132 ACA-130 ACA-142 ACA-140 ACA-162 ACA-160 ¹	ACA-123 ACA-121 ACA-133 ACA-131 ACA-143 ACA-141 ACA-163 ACA-161 ¹	C39	T 22
<p>Flexural Test Set measures flexural strength and determines the modulus of rupture for 4x4in or 6x6in concrete beams. The assembly is used in Automatic Compression Machines and adjusts to test beam spans from 12 to 30in (305 to 762mm) with center or third-point loading. Includes an upper platen assembly with locking stem and a base with mountings for 12, 18, 24, and 30in bearing points.</p>	ACA-200	ACA-200	ACA-200	C78 C293 C1609	T 97 T 177
<p>2in Cube Test Set consists of a pedestal with hardened steel top bearing surface for cube specimens and an upper platen assembly with locking stem for installation in Automatic Compression Machines.</p>	ACA-320	ACA-320	ACA-321	C109	T 106
<p>6in Cube Test Set includes a correctly sized upper platen with locking mounting stem and a spacer for compressive strength testing of 6in or 150mm cubes.</p>	ACA-360	ACA-360	ACA-362	—	—
<p>Tensile Cylinder Splitting Sets include a steel bearing bar head with mounting stem for loading of horizontally positioned 6x12in concrete cylinders.</p> <p>Tensile Splitting Set, 4x8in Cylinders Tensile Splitting Set, 6x12in Cylinders</p>	ACA-440 ACA-460	ACA-440 ACA-460	ACA-441 ACA-460	C496	T 198

¹Included with compression machine.

Accessories for Automatic Compression Machines

Description	AC-250 Series	AC-325 Series	AC-450 Series	ASTM Standards	AASHTO Standards
<p>Compressometers measure deformation and strain of concrete cylinders under compression to determine static modulus of elasticity (MOE). These units integrate with “M” or “MR” versions of Gilson Automatic Compression Machines. Two horizontal aluminum alloy yokes surround the specimen and are connected by a fixed rod. The bottom yoke is rigidly fixed to the cylinder and the upper yoke attaches at two points to permit pivoting.</p> <p>Compressometer, 4x8in Cylinders Compressometer, 6x12in Cylinders</p>	ACA-540 ACA-560	ACA-540 ACA-560	ACA-540 ACA-560	C469	—
<p>Compressometer/Extensometers measure deformation and strain for MOE determinations, plus horizontal extension of the sample to calculate Poisson’s ratio. An additional yoke assembly attached to the test specimen allows the measurement and calculation of both properties. These units integrate with “MR” versions of Gilson Automatic Compression Machines.</p> <p>Compressometer/Extensometer, 4x8in Cylinders Compressometer/Extensometer, 6x12in Cylinders</p>	ACA-640 ACA-660	ACA-640 ACA-660	ACA-640 ACA-660	C469	—
<p>Grout Prism Test Set adapts the Automatic Compression Machines for testing 3x3x6in (76x76x152mm) Grout Prisms. The components include top and bottom platens with mounting stems and necessary spacer.</p>	ACA-730	ACA-730	ACA-731	C1019	—
<p>Proppant Crush Testing Set adapts the Automatic Compression Machines for proppants resistance to crushing and degradation used in the hydraulic fracturing for oil and gas recovery industry. Proppant Crush Testing Set includes top and bottom platens with mounting stems and spacer and allows testing to be performed in accordance, API RP 19C, and ISO 13503-2. Precision-machined, 3.5in (89mm) OD, PRA-14 Proppant Crush Cell and Piston is sold separately.</p>	ACA-820	ACA-820	ACA-821	—	—
<p>Perpendicularity Verification Devices (PVD) verify proper perpendicular alignment of concrete cylinders during compressive strength testing. Specifications require verification that alignment is within $\pm 0.5^\circ$ of vertical when using Unbonded Caps. The PVD is held on the lower platen and manually positioned against the cylinder. An included Gap Measurement Tool checks the gap between the device and cylinder for compliance. Models feature unique designs for use with 4x8in or 6x12in cylinders and are simple, lightweight, and easy to use. A recess cut at the bottom eliminates interference from retaining rings and spacers during use. Sturdy machined aluminum construction. Product Dimensions: 4.5x11.75in (114x298mm), WxH.</p> <p>PVD for 4x8in Cylinders with 4in Spacers PVD for 4x8in Cylinders without Spacers PVD for 6x12in Cylinders 4x8in Gap Measurement Tool 6x12in Gap Measurement Tool</p>	MCA-44 MCA-44N MCA-46 MCA-41 MCA-42	MCA-44 MCA-44N MCA-46 MCA-41 MCA-42	MCA-44 MCA-44N MCA-46 MCA-41 MCA-42	C39	T 22



ACA-560



ACA-660



PRA-14



MCA-44

 **360° PRODUCT VIEWS**
See more details from all angles with hi-res 360° images at globalgilson.com

CONCRETE COMPRESSION TESTING MACHINES

ASTM C39, C78, C109, C293; AASHTO T 22; BS 1610, 1881

Gilson makes it easy to configure a machine that best fits your application. Select a load frame from our 250, 300, 400, or 500 Series with capacities from 250,000 to 500,000lbf (1,112 to 2,224kN) and equip it with a state-of-the-art electronic controller. Our Pro and Pro-Plus Controllers cover application needs from basic to sophisticated. We will also help you design a custom machine with capacity up to 1,000,000lbf (4,448kN) for testing a wide range of sample types and sizes.

With solid steel cross-heads from 3 to 6in (76 to 152mm) thick on our standard frames, Gilson Compression Machines meet the stringent ACI 363 rigidity recommendations. Standard frames are equipped for testing 6x12in (152x305mm) cylinders, but may be outfitted with accessories to accommodate testing of other size cylinders as well as different sized cubes, cores, and beams. The 400P and 500P Series frames can also accommodate two-block masonry prisms. Mounting stands place the lower platen at the correct height for safe, efficient handling of specimens and are included with 400 series and higher. All frames include latchable steel Fragment Guard Doors and side mounted controller.

Bottom mounted hydraulic rams apply compression force upward, except for the 250 Series, which are mounted in the top crosshead. Precision ground pistons with O-Ring seals and Teflon backup rings rest in a polished steel cylinder. Spherically-seated upper platen assemblies are ground, hardened, nickel plated, and scribed with concentric circles. Lower platens for 250 Series are 6.5in (165mm) diameter and other series have oversized rectangular compression tables. Locking stems hold upper platen assemblies securely in place, yet allow for quick substitution of accessory components.

Two-stage, oil-immersed pumps drive hydraulic systems on all frames. The first high volume, low pressure stage rapidly advances the piston. The pump automatically switches at 135psi of pressure to the second stage of low volume, high pressure flow used during testing to maintain a continuous rate of loading from 2,000 to 200,000lbf per minute with the value set in its metered advance position. Hold feature pauses pressure advance indefinitely and retract position releases pressure to allow return of piston to starting position. A high-pressure hydraulic safety valve prevents use beyond maximum machine capacity. A pressure bleed hole in the piston helps avoid overextension of the ram. Our unique 1/2hp system on the 250 and 300 Series runs cooler, offers better load control, and is the quietest available. The 400 and 500 Series use a more powerful 3/4hp motor. Both systems operate on 115V, 60Hz power supply. Specify 230V, 50Hz operation by adding an "F" suffix to the model number.

A piston over-extension limit switch is an accessory for Gilson's Concrete Compression Machines that provides additional safety by preventing over-extension of the hydraulic ram. The limit switch can be user-installed on an existing concrete compression machine or factory-installed at time of new



MC-250P



purchase. Select MCA-61 designed for use with 250 Series limit switch, MCA-62 for 300 Series, MCA-63 for 400 Series, and MCA-64 for use with 500 Series concrete compression machines.

Pro Controllers have practical designs with high-end features. These units simultaneously display both live load and rate of load during testing. Peak load and average rate of load are displayed automatically at test conclusion and held until reset. Up to 600 tests can be stored in memory with date and time, sample ID, peak load, and average rate of load data.

A high sampling rate and digital filtering result in smooth, uniform control of load pacing. Accuracy is better than $\pm 0.5\%$ of indicated load from 1 to 100% capacity, exceeding ASTM C39 and E4 requirements. The 5.3in (135mm) wide backlit VGA liquid crystal screen has a 240x64 pixel display area and adjustable contrast settings. Test data is displayed in user-selectable engineering units of lb, kN, kg, or N, and rate of load is shown in force units per second.

MCA-29 Able Cable® allows direct transfer of test data from the controller to user's computer via a USB port. The Pro Controller can also be configured to output data from memory to a serial printer.

The Pro Controller is made in the USA, features a two-year manufacturer's warranty and is housed in a sturdy stainless steel, NEMA-4 rated moisture and dust-

proof enclosure to resist the harshest environments. The Pro is UL, CUL, CE, and Measurement Canada listed. Inquire for Pro Controller as a field-installed retrofit package on your existing compression machine. **Product Dimensions:** 10.5x3.3x7.3in (267x84x185mm), WxDxH.

Pro-Plus Controllers offer the most accurate and advanced system available today for the testing and documentation of concrete strengths. Ease of operation and dependability are two important features of this new system. All information is clearly displayed on the 4.6x3.4in (117x86mm), WxH back-lit VGA graphic panel. The large 320x240 pixel screen with large alphanumeric characters has adjustable contrast to make it easily readable under any lighting conditions.

Soft-key menus allow fast and easy set up. A sample type menu lists six common specimen and test types: cylinder, cube, third-point or center-point beams, splitting tensile strength, and cross-sectional area. Test results are automatically stored for hard-copy documentation. In case of accidental data loss, a calibration restore feature allows the original factory calibration to be uploaded to the controller via a communication port. The original calibration data file is maintained at the factory.

During a test cycle, load, stress, and rate of load in the time units selected are displayed simultaneously.



MC-300P



MC-400PR

At test completion, peak stress, load, and if activated, the average loading rate during the test, are automatically displayed. Selectable display units include Force: lb, kN, kg, and N; Stress: psi, mPa, kg/cm², and kPa; Size: in, mm, and cm; Time: seconds or minutes.

The controller automatically stores test results to memory for later downloading to a computer. Up to 500 tests can be stored to memory and printed in a spreadsheet format listing test date and time,

sample ID number, sample type, specimen area, and length, peak load and peak stress. Data includes average rate of load, C39 cylinder correction factor, break type, cylinder cap type, sample age, weight, and operator ID number. Spanish or English language menus can be toggled in the settings. Inquire for other options to store and download test data.

The Pro-Plus has a two-year warranty and is built for harsh laboratory environments and features a stain-

less steel NEMA-4 enclosure that is both moisture and dust-proof. Heavy-duty tactile keys are tested to over five million actuations. Accuracy is achieved through a five-point linear calibration program to exceed ASTM C39 and E4 requirements and in general, is better than ±0.5% of indicated load from 1 to 100% capacity. The Pro-Plus Controller is also UL, CUL, CE, and Measurement Canada listed. **Product Dimensions:** 10.5x4.5x8.5in (267x114x216mm), WxDxH.

Concrete Compression Testing Machines

Controller	Model ²	Total Capacity, lbf (kN)	Maximum psi, 6x12in Cylinder	Overall Size with Stand, WxDxH, in	Opening with Platens, WxH, in	Lower Platen Dimensions, WxDxH, in
Pro	MC-250P	250,000 (1,112)	7,000	27x17x58	9.3x13.4	6.5dia.x1.9
	MC-300P	300,000 (1,335)	8,500	31x167x58	9.5x14.4	9x12x1.9
	MC-400P	400,000 (1,780)	11,300	40x20x61	13.3x14.3	12x18x2
	MC-500P	500,000 (2,224)	14,100	30x23x60	14x14.3	13x18x2
Pro-Plus	MC-250PR	250,000 (1,112)	7,000	27x17x56	9.3x13.4	6.5dia.x1.9
	MC-300PR	300,000 (1,335)	8,500	32x17x58	9.5x14.4	9x12x1.9
	MC-400PR	400,000 (1,780)	11,300	39x20x61	13.3x14.3	12x18x2
	MC-500PRP ¹	500,000 (2,224)	14,100	30x24x69	14x26.8	13x18x2
	MC-500PR	500,000 (2,224)	14,100	30x23x60	14x14.3	13x18x2

¹ Frames configured for 2-Block masonry prisms. ² Specify 230V, 50Hz operation by adding an "F" suffix to the model number.





Pro Controller




Pro-Plus Controller

Concrete Compression Machine Controller Comparison

	Pro Controller	Pro-Plus Controller
Accuracy	Exceeds ASTM C39 requirements through a calibration program with seven linearization points. Accuracy is better than $\pm 0.5\%$ of indicated load from 1 to 100% capacity.	Exceeds ASTM C39 requirements through a calibration program with five linearization points. Accuracy is better than $\pm 0.5\%$ of indicated load from 1 to 100% capacity.
Features	<ul style="list-style-type: none"> ▶ Simultaneously displays both live load and rate of load during a test ▶ Automatically displays peak load and average rate of load at the end of a test ▶ Available as a field-installed retrofit package for an existing compression machine 	<ul style="list-style-type: none"> ▶ Simultaneously displays live load, rate of load, sample stress, and sample size and type during a test ▶ Menu selection for six common specimen types: cylinder, cube, beam third point, beam center point, cylinder split tensile, and cross-sectional area. ▶ English or Spanish language menus ▶ Calibration restore feature allows uploading of factory calibration in case of accidental data loss ▶ Automatically calculates and displays peak stress at the end of a test ▶ Can be used with multiple transducer/load cell combinations with one or more load frames ▶ Available as a field-installed retrofit package for an existing compression machine
Display	5.3in (135mm) wide, 240x64 pixel backlit VGA liquid crystal display with adjustable contrast settings.	4.6x3.4in (117x86mm) back-lit VGA graphic panel display with 320x240 pixel screen and adjustable contrast settings.
Test Documentation	Transfer data from memory to a computer using the optional MCA-29 Able Cable, or print tests stored in memory to the optional MCA-28 Serial Printer.	Tests stored in memory can be downloaded to a computer using optional MCA-29 Able Cable, or printed to optional MCA-28 Serial Printer. Load and time data can be sent directly to a PC during a test using the Able Cable for later analysis on a spreadsheet and X-Y plotting of load vs. time.
Memory	600 tests with test date and time, sample ID number, peak load, and average rate of load.	500 tests with test date and time, sample ID, sample type, sample area and length, peak load, peak stress, average rate of load in lb and psi, cylinder correction factor, cylinder break type, cylinder cap type, sample age and weight, and operator ID number.
Engineering Units	lb, kN, kg, and N	lb, kN, kg, N, psi, MPa, kg/cm ² , and kPa
Housing	Stainless steel NEMA-4 rated housing is dust and moisture proof	Stainless steel NEMA-4 rated housing is dust and moisture proof
Housing Size, without Bracket	10.5x3.3x7.3in (267x84x185mm), WxDxH	10.5x4.5x8.5in (267x114x216mm), WxDxH
Ratings	UL, CUL, CE, and Measurement Canada listed	UL, CUL, CE, and Measurement Canada listed



MCA-4

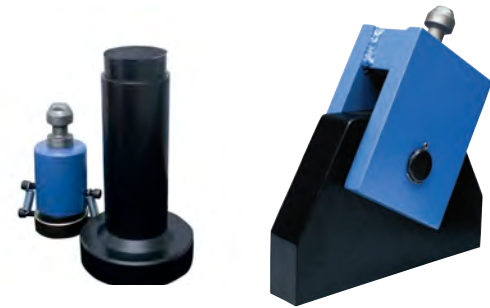

MCA-7

MCA-11



MCA-52

MCA-55



MCA-13R

MCA-14



MCA-16



MCA-24



MCA-29

ACCESSORIES FOR CONCRETE COMPRESSION MACHINES

Accessories are compatible with Gilson and other concrete compression machines and comply with test standards indicated. Upper components are attached to machines by a locking stem system. Additional spacers for special testing are available.

Accessories for Concrete Compression Machines					
Description	250lbf Frame	300lbf Frame	400/500lbf Frame	ASTM	AASHTO
Universal Flexural Set attachment for compression machines measures flexural strength and determines modulus of rupture for 6x6in and 4x4in concrete beams with 12 to 30in (305 to 762mm) span for center or third-point loading. Includes head assembly with locking stem and base with fixed bearing points on 18 or 12in centers.	MCA-4	MCA-34	MCA-4	C78 C293	T 97 T 177
2in Cube Test Set includes pedestal for cubes and spherically-seated upper platen assembly. Upper platen assembly attaches to compression machine with locking stem system and can also be used to test 3x6in cylinders.	MCA-6	MCA-5	MCA-7	C109 C109M	T 106M T 106
6in Cube Test Set includes spherically-seated upper platen and spacer for compressive strength testing of 6in or 150mm cubes. Models for 250 and 300 series machines also include lower platen.	MCA-8	MCA-3	MCA-9	—	—
Cylinder Splitting Set includes 2x12in, WxL steel bearing bar head for loading of horizontally positioned 6x12in concrete cylinders. Models for 250 and 300 series machines also include lower platen.	MCA-10	MCA-30	MCA-11	C496	T 198
Masonry Test Set for 400/500 series compression machines includes upper platen assembly and tests up to 12in wide block. Set for 250/300 series machines includes lower platen and tests 8in block.	MCA-12R	MCA-32	MCA-13R	C1314 C140 (MCA-13R Only)	—
Carrier Bracket allows safe handling and positioning of the heavy upper platen used for masonry block testing. The heavy-duty bracket is mounted on the rear of the load frame and pivots on two hinged joints, allowing the complete assembly to rotate smoothly into and out of the load frame. When not in use, the block platen and bracket stow out of the way at the rear of machine.	—	—	MCA-51 400 Frame MCA-52 500 Frame	C39	T 22
Draw Rod allows easy and safe adjustment of the vertical working height of compression machines for testing multiple sample sizes and types. The steel hand wheel with internal ball bearings raises and lowers a threaded rod to adjust height of platens, breaking heads and other accessories. Once at the desired height with proper spacers in place, the assembly is simply tightened up against the cross-head.	—	—	MCA-55	C39	T 22
4in Spacer is installed between the upper platen and cross head and allows testing of 4x8in cylinders in compression machines set up for 6x12in cylinders. The machined steel spacer maintains parallel alignment between test platens and is painted to resist corrosion.	MCA-14	MCA-19	MCA-15	C39	T 22
3x6in Cylinder Test Set includes spherically-seated upper platen and spacer, properly sized for testing 3x6in cylinders. Upper platen is the same used in the 2in Cube Test Set.	MCA-16	MCA-18	MCA-17	C39	T 22
Concrete Compression Machine Mounting Stand positions lower platens of compression machines at optimal specimen loading height. Mounting stands are recommended for all compression machines and are included on all 400 Series and above frames.	MCA-24	MCA-27	Included	—	—
Printer with cable allows data to print directly from Pro or Pro-Plus controllers.	MCA-28	MCA-28	MCA-28	—	—
Able Cable is a serial/USB cable to transfer data from Pro or Pro-Plus controllers into a computer spreadsheet or Word document.	MCA-29	MCA-29	MCA-29	—	—



HM-130



HM-131D



MAA-82



MCA-46

MCA-44



HM-239


Accessories for Concrete Compression Machines

Description	Model	ASTM
<p>Compressometers measure deformation and strain of concrete cylinders during compression for determination of modulus of elasticity. The units consist of two yokes mounted around the specimen. The bottom is rigidly attached and the upper yoke is hinged to permit pivoting. A fixed rod connects the two. Yokes are aluminum alloy; other parts are cadmium-plated steel. A mechanical dial or digital indicator measures specimen deformation. Indicators have 0.2in (5.08mm) range and 0.0001in (0.0025mm) divisions. Models with either mechanical dial or digital indicators fit standard 4in (102mm) or 6in (152mm) concrete cylinders.</p>	<p>4x8in Compressometer with Mechanical Dial 4x8in Compressometer with Digital Indicator 6x12in Compressometer with Mechanical Dial 6x12in Compressometer with Digital Indicator</p>	C469
<p>Compressometer/Extensometers are similar to compressometers, but a third center yoke attaches to the specimen to measure horizontal extension. This allows a combined determination of both modulus of elasticity and Poisson's ratio. A second indicator between yoke segments measures the transverse deformation simultaneously. Models are available with either mechanical dial or digital indicators to fit standard 4in (102mm) or 6in (152mm) concrete cylinders.</p>	<p>4x8in Compressometer/Extensometer with Mechanical Dial 4x8in Compressometer/Extensometer with Digital Indicator 6x12in Compressometer/Extensometer with Mechanical Dial 6x12in Compressometer/Extensometer with Digital Indicator</p>	C469
<p>Digital Dial Indicator Data Collection System allows the simultaneous measurement and logging of compressometer/extensometer deformation data, increasing testing efficiency and accuracy. The system consists of a multiplexer unit and a remote display tablet with an Android application for measurement monitoring and collection. Real-time measurements are displayed on the easy to read 7in (178mm) color tablet. Data input connectors are compatible with the digital indicators supplied with the HM-131D and HM-207D Compressometer/Extensometers. A Type B USB port allows data transfer to a PC. Measurement data can be manually requested for each digital dial indicator or requested and logged automatically at user-specified intervals. Saved data is stored as a CSV file and can be transferred via microSD card, USB connection to a PC, or to email/cloud storage if the tablet is connected to the internet. Unit power is supplied by USB connection or by the included power adapter. The MAA-82 Tablet comes with data collection software, multiplexer box with cable, and power adapter.</p>	MAA-82	—
<p>Digital Dial Indicator 10-pin Cable allows seamless data transfer from Digital Dial Indicators to the MAA-82 Data Collection System. The 6ft (1.8m) cable plugs into the Digimatic connector of the dial indicator and one of four available 10-pin receptors on the data collection system. For data collection, one cable is required for each dial indicator.</p>	MAA-75	—
<p>Perpendicularity Verification Devices (PVD) verify proper perpendicular alignment of concrete cylinders during compressive strength testing. Specifications require verification that alignment is within $\pm 0.5^\circ$ of vertical when using Unbonded Caps. The PVD is held on the lower platen and manually positioned against the cylinder. An included Gap Measurement Tool is used to check the gap between the device and cylinder for compliance. Models feature unique designs for use with 4x8in or 6x12in cylinders and are simple, lightweight, and easy to use. A recess cut at the bottom eliminates interference from Retaining Rings and spacers during use. Sturdy machined aluminum construction. Product Dimensions: 4.5x11.75in (114x298mm), WxH.</p>	<p>PVD for 4x8in cylinders with 4in Spacer PVD for 4x8in cylinders without Spacer PVD for 6x12in Cylinders 4x8in Gap Measurement Tool 6x12in Gap Measurement Tool</p>	C39
<p>Piston Over-Extension Limit Switch provides additional safety and minimizes operational errors by preventing the over-extension of the hydraulic ram on Concrete Compression Machines. Factory-installed if purchased with a Gilson Concrete Compression Machine.</p>	<p>For 250 Series For 300 Series For 400 Series For 500 Series</p>	—
<p>Portable Beam Tester transports and sets up easily for non-specification field testing of 6x6in (152x152mm) concrete beam specimens with minimum length of 20in (508mm). Test results compare favorably with standard laboratory tests. Components are provided for both center-point and third-point loading and conversion is quick and easy. Bearing points for third-point testing are 6in (152mm) center-to-center. Lower bearing points on the load frame are 18in (457mm) on-center and pivot as the test beam deflects. The manually operated pump assembly with 6in (152mm) diameter gauge is attached by a 4ft (1.2m) quick-disconnect hose to the hydraulic cylinder and load frame. The high-quality, direct-reading gauge features $\pm 0.25\%$ accuracy and is graduated from 0 to 1,500psi. Product Dimensions: 22x8x14in (559x203x356mm), WxDxH.</p>	HM-239	—

NEW



HM-716A



HMA-1054

GILSON CONCRETE CYLINDER END GRINDERS

ASTM C39; CSA A23.1-04, A23.2-04; AASHTO PP 89, T 22

- Four to six specimens can be prepared at once; as many as 100 per day
- Preferred end preparation method for high-strength concrete
- Eliminates qualification testing of capping materials
- Reduces health and safety concerns and is much less labor intensive

The Gilson Concrete Cylinder End Grinder is an essential tool for concrete laboratories that test high-strength concrete cylinders. This multi-sample preparation unit eliminates the need for qualification testing or documentation of common capping methods when testing design strengths exceeding 7,000psi (48.3mPa). It eliminates time consuming and labor intensive sulfur-capping and reduces health hazards and safety concerns. It can also “save” samples with damaged or poorly finished ends that would otherwise be unusable for testing. Large laboratories with heavy sample volumes will find this machine cost-effective for processing their regular concrete samples on a daily basis. More than 100 cylinders can be processed in a typical workday and can be tested immediately. No plumbing or drains are required and dust hazards are eliminated. Technicians are free to perform other duties during grinding cycles.

After the cylinders are mounted in the carousel and the grinding cycle is started, the operation is entirely automated until a preset 4mm of material has been removed from each sample. The machine then polishes the cylinder ends and automatically shuts down. The included water tank and pump circulate water to the diamond grinding head for cooling and flushing of cuttings. Replacement Diamond Grinding Heads are available as HMA-1050. Other accessories include HMA-1051 Mobile Cart for Water Tank, HMA-1052 Tool Set for measuring planeness of sample ends, and HMA-1053 Inspection Jig for checking perpendicularity and alignment. The Cylinder End Grinders require 30A power supply at 208–220V, 60Hz single phase. Inquire for units wired for 50Hz power supply. **Product Dimensions:** 48x48x60in (1,219x1,219x1,524mm), WxDxH.

HM-714A Gilson Concrete Cylinder End Grinder is designed for 4in (102mm) cylinders and is equipped to handle up to six 4in (102mm) samples in each cycle.


HM-716A Gilson Concrete Cylinder End Grinder accommodates four 6in (152mm) diameter test cylinders and includes adaptors to accept four 4in (102mm) cylinders. The unit is capable of grinding one size cylinder at a time and is recommended in labs where both 4in (102mm) and 6in (152mm) sample sizes are to be tested. The HMA-1054 Carousel can be fitted to this unit to allow grinding of six 4in diameter cylinders only.

Gilson Concrete Cylinder End Grinders

Gilson Concrete Cylinder End Grinder, for 4in Cylinders	HM-714A
Gilson Concrete Cylinder End Grinder, for 4in or 6in Cylinders	HM-716A

Accessories

Replacement Grinding Head	HMA-1050
Water Tank Cart with Wheels	HMA-1051
Planeness Tool Set	HMA-1052
Alignment Inspection Jig	HMA-1053
Carousel for Six 4in Cylinders	HMA-1054

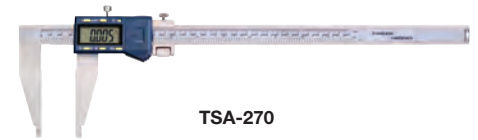

TSA-270

12IN DIGITAL CALIPERS

Digital Calipers easily and accurately measure dimensions of concrete, asphalt, or soil specimens with a resolution of 0.0005in (0.01mm). Each is constructed of high-quality stainless steel, has a smooth-moving jaw with locking knob, is selectable in inches or millimeters, includes zeroing button, and measurement values are displayed on an LCD screen. Protective carrying case, and battery are included. Battery is a standard button type and easily replaceable.

TSA-268 12in Digital Caliper provides accurate inside or outside measurements over a range of 0–12in (0–300mm), readable to 0.0005in (0.01mm) and has a jaw depth of 2.5in (63.5mm). TSA-292 Caliper Accessory Kit allows the TSA-268 jaws to be extended to 3.15in (80mm) so it can be used to measure drilled concrete cores in accordance with ASTM C1542. **Product Dimensions:** 16x4.25in (406x108mm), LxW.

TSA-270 12in Heavy-Duty Digital Caliper provides accurate inside or outside measurements over a range of 0–12in (0–300mm), readable to 0.0005in (0.01mm) and has a jaw depth of 3.5in (89mm). The Heavy-Duty Digital Caliper meets ASTM C1542, and easily reaches the center of larger 6in (150mm) diameter concrete, asphalt, or soil specimens. **Product Dimensions:** 17.75x4.25in (451x108mm), LxW.

12in Digital Caliper

12in Digital Caliper	TSA-268
12in Heavy-Duty Digital Caliper	TSA-270

Accessories

Caliper Accessory Kit for TSA-268	TSA-292
-----------------------------------	---------



HM-162




DIAMETER MEASURING TAPES

The Pi Tape® brand measuring tapes quickly give direct readings of average diameter with micrometer accuracy simply by placing tape around circumference of the specimen. The 0.10in (2.5mm) thick spring steel tape has graduations etched on a ground surface. Vernier scale reads to 0.001in (0.025mm) diameter. Furnished with certificate of calibration traceable to NIST. Graduated in English units, for measuring diameters from 2 to 12in. Metric Pi Tape reads from 50 to 300mm with 0.01mm accuracy.

Diameter Measuring Tape

Diameter Measuring Tape, Inches	HM-162
Diameter Measuring Tape, Metric	HM-162M



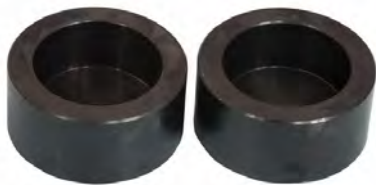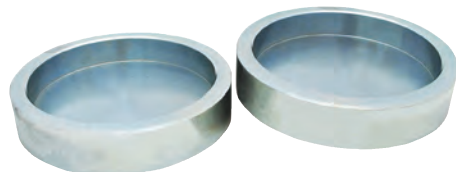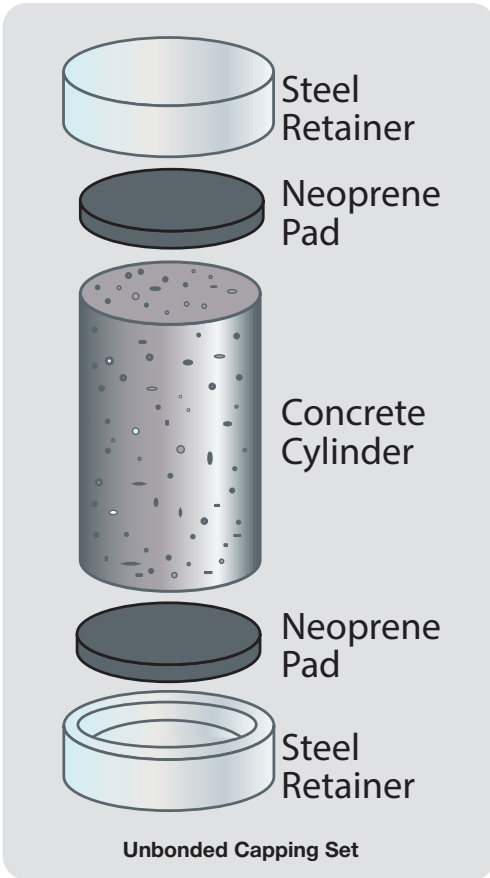

UNBONDED CAPPING PADS & RETAINERS

ASTM C1231; AASHTO T 22

Unbonded capping of concrete cylinders saves time, labor, and expense for compression testing. Choose capping pads and retainers for 6, 4, 3, and 2in diameter cylinders. Retainers and pads for 2in specimens are also suitable for use on 2.125in diameter rock cores.

A steel retainer ring holding a tough 0.5in (12.7mm) thick neoprene pad is placed at each end of the cylindrical specimen. Retainers last for years with proper care and Neoprene Pads are reusable for up to 100 tests. Retainers and Pads are ordered separately.

Steel Retainers are alloy steel, precisely machined to specified dimensions and plated inside and out to resist corrosion. All bearing surfaces are plane to within 0.002in (0.05mm). The Retainers meet ASTM and AASHTO requirements and do not require acceptance testing. Retainers are sold in sets of two.

Neoprene pads flow during compression to fill irregularities in cylinder ends and assure load uniformity. Pads comply with the latest version of ASTM C1231 and are precisely sized to fit Gilson Steel Retainers.

- 50 Durometer Neoprene Pads meet tensile strength and durometer requirements of AASHTO T 22 and are appropriate for compressive strengths from 1,500 to 6,000psi (10 to 40mPa)
- 60 Durometer Neoprene Pads are used for strengths from 2,500 to 7,000psi (17 to 50mPa)
- 70 Durometer Neoprene Pads are used for strengths from 4,000 to 7,000psi (28 to 50mPa), but can be used for concrete strengths up to 12,000psi (80mPa) with additional qualification testing by owner
- 90 Durometer High-Strength Neoprene Pads are typically used when testing cylinders with compressive strengths greater than 12,000psi (80mPa). These high strength neoprene pads are only available in 4in diameter and are supplied in sets of two. They have been used successfully to determine concrete strengths above 15,000psi (103mPa) when the owner or testing facility has developed comparative qualifying data for review and approval by the project engineer.

Unbonded Capping Pads and Retainers

Description	Model	Diameter, in	Compressive Strength Range, psi (mPa)
Steel Retainers			
Retainers are alloy steel, precisely machined to specified dimensions and plated inside and out to resist corrosion. All bearing surfaces are plane to within 0.002in (0.05mm). Steel retainer rings holding a 0.5in (12.7mm) thick neoprene pad is placed at each end of the cylindrical specimen. Retainers last years with proper care and meet ASTM C1231 and AASHTO T 22 requirements and do not require acceptance testing. Retainers are sold in sets of two.	HM-180	6	—
	HM-181	4	—
	HM-182	3	—
	HM-183	2	—
Neoprene Pads			
Neoprene Pads flow during compression to fill irregularities in cylinder ends and assure load uniformity. Pads comply with the latest version of ASTM C1231 and are precisely sized to fit Gilson Steel Retainers. Pads can be reused for up to 100 times. Add "CS" suffix to order in a package of 12.	50 Durometer	HM-363	1,500–6,000 (10–40)
		HM-360	
		HM-366	
		HM-369	
	60 Durometer	HM-364	2,500–7,000 (17–50)
		HM-361	
		HM-367	
	70 Durometer	HM-365	4,000–7,000 (28–50) <i>Up to 12,000 (80) with additional qualification testing</i>
		HM-362	
		HM-368	
		HM-370	
	90 Durometer (sold in sets of 2)	HM-490	4





HM-166

Vertical Cylinder Cappers

Description	Model	Cylinder Size, in (mm)	Base Thickness, in (mm)
<p>Vertical Cylinder Cappers Vertical Cylinder Cappers are the most popular design for capping concrete test cylinders. These units maintain the cylinder's orientation perpendicular to the bottom plate assuring end surfaces that are parallel to each other when loaded in a concrete compression machine.</p> <p>The retaining ring is filled with molten capping compound, and the cylinder is placed into the compound-filled ring and held against the upright guides until the capping compound solidifies. Each bottom plate is ground to 0.002in (0.05mm) planes, and the vertical guides are removeable to permit re-grinding to proper planes after extended use. The cylinder cappers are also equipped with corner mounting holes for securing to work surface if desired. Product Dimensions: 8x9x15in (203x229x381mm), WxDxH.</p> <p>HMA-21 Replacement Retaining Ring is available to help further extend the life of HM-166.</p>			
Vertical Cylinder Capper, 6x12in	HM-166	6x12 (152x305)	1 (25.4)
Vertical Cylinder Capper, 4x8in	HM-264	4x8 (102x203)	0.625 (15.875)
Vertical Cylinder Capper, 3x6in/2x4in	HM-263	3x6 (76x152) and 2x4 (50.8x102)	0.625 (15.875)

NEW



HM-263

NEW



HM-264

ORDER ONLINE



Conveniently shop and place orders at globalgilson.com using your phone, tablet, or computer.

MONTHLY BLOG



Stay informed and learn from the experts at Gilson. Subscribe to our monthly blog at globalgilson.com.



HM-186



HM-187



HM-189



VIDEO ONLINE

GILSON GRAY IRON 9000 CAPPING COMPOUND

ASTM C287, C617; AASHTO T 231

Gilson Gray Iron 9000 is a sulfur mortar capping compound blended especially for concrete strength testing. Ultra-thin flakes are carefully formulated from sulfur and mineral filler for guaranteed consistency and faster melting times. Gray Iron melts quickly at 230°–240°F (110°–115°C), with a wide optimum pouring range of 265°–290°F (129°–143°C) and low odor. Set time is about one minute and shrinkage is minimal. If accidental overheating occurs, the compound remains usable after cooling and solidified material can be remelted with no loss of properties. Compressive strength exceeds 8,000psi at two hours for ASTM C617 tests of 2in cubes and bond strength is 150psi or more. Strength and bond properties of capped specimens does not degrade over time, even when stored in humid conditions. Special plasticizer additives ensure even load distribution during testing. Gray Iron can be used for testing of much higher strength concretes with additional aging. Gray Iron 9000 is supplied in 50lb moisture-resistant bags. Order 40 or more bags for best pricing at pallet shipping quantity.

Gilson Gray Iron 9000 Capping Compound

Gilson Gray Iron 9000, 1–39 bags
 Gilson Gray Iron 9000, 40+ bags

HM-186
 HM-187

VITROBOND INGOT CAPPING COMPOUND

ASTM C287, C617; AASHTO T 231

Vitrobond Ingot Capping Compound is sometimes preferred for ease of storage and handling. Dark grey compound is carbon-filled, sulfur-based, and melts and pours smoothly for consistent results. Compressive strength exceeds 5,000psi (34.4kPa) at two hours and increases to 7,000psi (48.3kPa) at seven days. Ingots come in 50lb (23kg) cartons, each with ten 5lb ingots. Pieces break easily for melting to pouring temperature of 280°–300°F (138°–140°C). Physical strength ratings are 600psi tensile strength and 1,300psi modulus of rupture by ASTM C307 methods. The compound must not be heated above 320°F (160°C). Using excessive release oil may affect cap strength.

Vitrobond Ingot Capping Compound

Vitrobond Ingot, 1–4 cartons
 Vitrobond Ingot, 5+ cartons

HM-189
 HM-190





HM-200



HM-202



HM-205



HM-204



HM-210

MELTING POTS

ASTM C617; AASHTO T 231

Melting pots are useful for preparing capping compounds, wax, tars, asphalt, and other materials in the lab. Each has precision temperature control for 38°–160°C (100°–320°F) range that holds to set point. A high limit control turns pots off at 182°C (360°F). The cast aluminum inner liner encases the helically wound element from top to bottom to provide uniform heat distribution throughout the melting pot. Durable polished stainless steel outer case assures long, dependable service. Molten capping compound is placed into capping fixture with 8oz (237mL) stainless steel HM-210 Ladle.

technote.....

Gilson Gray Iron 9000 is a custom blended formula for concrete cylinder compression testing. Wide pouring range, low odor, and fast set times. ASTM C617 strengths of 8,000psi in two hours.

Melting Pots				
Model	Capacity, qt (L)	Dimensions IDxDepth, in (mm)	Electrical V, Hz	amps
HM-200	4	7.5x7	115, 60	6
HM-200F	(3.8)	(191x178)	220, 50/60	3
HM-201	8	10x6	115, 60	10
HM-201F	(7.6)	(254x152)	220, 50/60	5
HM-202	12	10x9	115, 60	11
HM-202F	(11.4)	(254x229)	220, 50/60	5.5
HM-205	20	14x7	115, 60	13
HM-205F	(18.9)	(356x178)	220, 50/60	6.5
HM-206	24	14x9	115, 60	14
HM-206F	(22.7)	(356x229)	220, 50/60	7
HM-204	28	14x11	115, 60	15
HM-204F	(26.5)	(356x279)	220, 50/60	7.5

contactus.....

SIGN UP TODAY for your personal "MY GILSON" account at globalgilson.com and enjoy these features and more:

- Easy Reorder
- Quick Order
- Order Status
- Order History
- Saved Carts
- Favorites List

Accessories

Ladle, 0.25qt (0.24L)

HM-210



HM-30



VIDEO ONLINE



DIY VIDEO



HMA-108



HMA-108S



HM-30 Air Meter Only

GILSON CONCRETE AIR METERS

ASTM C231; AASHTO T 152

- **High-quality, accurate, and easy to use**
- **New Gorilla Gauge features rugged plastic housing and safety glass**
- **Sturdy plastic carrying case is fitted to carry all required components**

Gilson's high-quality Type B Air Meters measure concrete air content and include many value-adding improvements. Our standard HM-30 model now features the exclusive Gilson Gorilla Gauge. The new, more affordable HM-30S offers an American-made stainless steel gauge. Other features of the two units are identical. Long-lasting, easy-operating stainless steel clamps adjust quickly and are less expensive to replace. The Gilson Air Pump with large, easy-grip handle builds pressure quickly and is shielded to keep dirt and water out of the piston area. Quality check-valve lasts longer for fewer maintenance issues. Brass petcocks use stainless steel ball valves for accuracy and durability. Petcock handles are vinyl coated for more comfortable operation.

Dimensions and accuracy of the Gilson meters meet ASTM requirements. Calibration Vessel, Calibration Tubes, 24in (610mm) Tamping Rod, Aluminum Straightedge, Syringe for water, Carrying Case, and operating instructions are all included. Cast aluminum chamber volume is 1/4ft³ and can also be used for unit weight and yield determinations. Sturdy plastic carrying case holds meter with all accessories securely in die-cut foam padding. **Product Dimensions:** 27x14x14in (686x356x356mm), WxDxH.

HM-30 Concrete Air Meter features our exclusive Gorilla Gauge, a rugged German-engineered gauge with precision jeweled movement and a high-strength Polymid B molded housing that is waterproof and rustproof. Micro-

Adjustable calibration screws ensure superior accuracy and save time during calibration and maintenance procedures. The Gorilla Gauge is ANSI rated B40 Grade 2A with accuracy $\pm 0.5\%$ of full scale. The dual-layer safety glass lens is sealed behind a threaded bezel with O-Ring.

HM-30S Concrete Air Meter uses an American-made gauge with stainless steel housing. The sturdy industrial rack and pinion mechanism is accurate to $\pm 1\%$ of full scale. A threaded bezel with gasket seals the safety glass lens.

The Gorilla Gauge, Stainless Steel Gauge, and Gilson Air Meter Pump are all available separately as replacement parts or upgraded retrofit parts for Gilson and other popular brand Type B concrete air meters.

Gilson Concrete Air Meters

Gilson Concrete Air Meter with Gorilla Gauge	HM-30
Gilson Concrete Air Meter with Stainless Steel Gauge	HM-30S

Accessories

Gilson Gorilla Gauge	HMA-108
Gilson Stainless Steel Gauge	HMA-108S
Gilson Air Meter Pump	HMA-107R

technote

Calibration and repair services are available from Gilson for the HM-30 and HM-30S Concrete Air Meter. Please call 800.444.1508 for pricing and scheduling.



HMA-108



HMA-108S



HMA-107R



HM-24



HM-27



HM-25

CONCRETE AIR METER REPLACEMENT GAUGES

ASTM C231; AASHTO T 152

Replacement Gauges from Gilson fit most Type B Concrete Air Meters on the market today. Rugged precision gauges are a step up in quality and help restore accuracy and dependability to used Air Meters.

HMA-108 Gilson Gorilla Gauge is a durable, accurate, and long-lasting upgrade for most popular Type B Concrete Air Meters. Features not found on lower quality gauges include a wide-profile phosphor bronze Bourdon tube and a rugged German-engineered precision mechanism for dependable accuracy. Fine adjustment screws on the dial face are micro-adjustable for easy “tweaks” during calibration, saving time and making calibration and maintenance easier. Accuracy is $\pm 0.5\%$ of full scale.

The high-strength Polymid B housing is waterproof, rustproof, and resists impact forces. Threaded bezel has an O-Ring gasket, sealing the gauge from moisture and dust. Durable dual-layer safety glass lens resists scratches and breakage and is easily replaceable. 1/4in NPT brass threads fit most concrete air meters. **Product Dimensions:** 4.25x2in (108x51mm) dia.xH, with a 3.5in (89mm) dial face.

HMA-108S Gilson Stainless Steel Gauge is a dependable and accurate replacement gauge. This American-made gauge has a stainless steel housing and sturdy industrial grade rack and pinion mechanism. Accuracy is $\pm 1\%$ at full scale. The acrylic lens is break-resistant and sealed behind the gasketed bezel to protect from moisture and dust. 1/4in NPT brass threads fit most concrete air meters. **Product Dimensions:** 4x1.5in (102x38mm), dia.xH, with a 3.5in (89mm) dial face.

Concrete Air Meter Replacement Gauges

Gilson Gorilla Gauge	HMA-108
Gilson Stainless Steel Gauge	HMA-108S

GILSON AIR METER PUMP

Gilson Air Meter Pump is the same pump supplied on our popular Concrete Air Meters. It also fits most other popular brands of Type B Concrete Air Meters as an upgraded replacement part. Sturdy brass construction uses quality components throughout for dependability and long service life. Large rubber ball-shaped handle is easier to grip and the smooth operation is less tiring to use. The long, effortless stroke pressurizes faster for more efficient testing. A built-in protective shield around the shaft keeps dirt out and a reliable, long-lasting check valve means fewer maintenance issues.

Gilson Air Meter Pump

Gilson Air Meter Pump	HMA-107R
-----------------------	----------

MONTHLY BLOG

Stay informed and learn from the experts. Subscribe to our monthly blog at globalgilson.com.

ONE STOP

globalgilson.com is your one stop resource for materials testing equipment and expert knowledge.

CONCRETE AIR METER CALIBRATORS

ASTM C231; AASHTO T 152

Calibrators quickly field-check accuracy of concrete air meters. With a calibrator in the 0.25ft³ water-filled base, the air meter gauge should read 5%. Two calibrators can be used to verify 10% air content accuracy.

HM-24 Brass Calibrator is of precisely machined brass. 7.5x2.125in (191x54mm), dia.xH with 0.5in (13mm) thick base.

HM-25 Plastic Calibrator is rugged plastic with metal weighted ring. 3.75x4in (95x102mm), dia.xH.

HM-27 Lightweight Aluminum Calibrator is accurately machined to exact dimensions. They are sturdier than plastic, and less expensive than brass models. 5.63x3.25in (143x83mm), dia.xH.

Air Meter Calibrators

Brass Calibrator	HM-24
Plastic Calibrator	HM-25
Lightweight Aluminum Calibrator	HM-27



HM-345



HM-345 Super Air Meter Only



HMA-482

SUPER AIR METER

ASTM C231; AASHTO T 152, TP 118

- **Determines total air content and air void spacing factor**
- **Eliminates wait time of conventional air void testing**
- **Preprogrammed user prompts**

The HM-345 Super Air Meter (SAM) determines both total air content and air void spacing factor in fresh concrete specimens. The test takes less than 10 minutes to run and the meter provides both the conventional air content as noted in ASTM C231/AASHTO T 152 and a new value called the SAM number that correlates with air void spacing. Overall quality of the air void system is built on the presence of small and well dispersed bubbles. Spacing of the voids has proven to be a better indicator of freeze-thaw durability than total air content alone and SAM measurements make durability much easier to predict. This rapid test can be performed in the field at the point of placement of the fresh concrete, eliminating the need to wait weeks for results of traditional tests on hardened concrete.

The Super Air Meter is a modified version of a conventional Type B Concrete Air Meter. For the SAM procedure, two sequential pressurizations are applied to the concrete sample. For each sequence, increments of 14.5, 30, and 45psi (1, 2.1, and 3.1bar) are applied to the concrete and a deformation value is obtained. The SAM number is the difference between these values and correlates to the average size and spacing between air voids. A higher SAM number indicates increased susceptibility to freeze-thaw deterioration. Extensive research during development shows that a SAM value of 0.20 indicates 90% certainty that the

spacing meets ACI durability recommendations. Optimum spacing of air voids can also reduce the overall air content required for the concrete to resist freeze-thaw damage.

The optional HMA-482 CAPE Tank accessory can be pre-filled with compressed air to reduce the effort required to pressurize the SAM to higher testing pressures. Three attached inflation chucks with regulators are easily attached to the pressurization valve of the SAM.

HM-345 Super Air Meter is constructed of rugged cast aluminum and features a 1/4ft³ (7.1L) chamber and reinforced cover with six stainless steel clamps. The unique electronic digital gauge is highly accurate and pre-programmed to prompt the user through the required steps. Also included are a 5/8x16in (16x400mm), dia.xL tamping rod, brass calibration vessel, 12x12in (305x305mm) chemical-resistant plastic strike-off plate, 16oz (454g) rubber mallet, water syringe, plastic bucket, and funnel. All components are packed in a heavy-duty water-tight molded resin case with fitted foam insert. The case features secure latches, built-in wheels, and telescoping handle. **Product Dimensions:** 14x14x-27in (356x356x686mm), WxDxH.

Super Air Meter

Super Air Meter	HM-345
Accessories	
CAPE Tank	HMA-482



HM-32L



HM-33

LIGHTWEIGHT CONCRETE ROLL-A-METER

ASTM C173; AASHTO T 196, T 196M

- **Volumetric Air Meters test any concrete mix, but are required for lightweight mixes**
- **Anodized aluminum model is less than half the weight of original bronze unit**

The popular Roll-A-Meter is a simple and accurate device for measuring air content of concrete mixes containing lightweight aggregates. The anodized aluminum version is less than half the weight of earlier bronze models. Hard-anodized aluminum bowl and neck are highly scratch and wear resistant.

The base and top are fastened with quick acting stainless steel clamps after concrete sample is placed in base. Water and isopropyl alcohol are added to zero mark on neck and meter is inverted, rolled, and rocked until air is removed from concrete. Percent of air is read directly from liquid level on scale.

HM-32L Lightweight Roll-A-Meter may also be used as a pycnometer for determining specific gravity of sand, gravel, and cement. Unit is supplied in foam-lined plastic carrying case with straight edge, tamping rod, syringe, baffle-bottom funnel, and instructions. Volume of base is 130in³ (2,130mL). Overall height: 22in (559mm); Maximum diameter: 8in (203mm).

Lightweight Concrete Roll-A-Meter	
Lightweight Concrete Roll-A-Meter	HM-32L

VOLUMETAIR AIR METER

ASTM C173; AASHTO T 196, T 196M

- **Lightest Volumetric Air Meter**
- **Best for occasional use**

Volumetair Concrete Air Meter accurately and economically measures volumetric air content in any type of concrete, including lightweight aggregate concrete mixes. The unit weighs only 5.5lb (2.5kg) and is made of dimensionally stable PVC and fiberglass-reinforced plastic. The Volumetair is much lighter than brass or aluminum units.

Base and top housing fit together with a leakproof O-Ring seal and stainless steel over-center clamp assembly. Parts are easily cleaned with water. Base volume is 134in³ (2,200mL) and sight tube is graduated from 0 to 9.0in with 0.25% increments. The meter comes complete with Funnel, Syringe, Tamper, Strike-Off Bar, Calibrated Cup, and Mallet in a plastic case. **Product Dimensions:** 27x7.25in (686x184mm), Hxdia.

Volumetair Air Meter	
Volumetair Air Meter	HM-33

also available

Compact Field Scales for determining concrete unit weight and yield are listed in this section and our Scales & Balances section.





CP-75 shown with
HM-30 (Not Included)



OB-165

COMPACT FIELD SCALES

- Portable, affordable solution for field weights of soil, concrete, and asphalt specimens
- kg, lb, oz, and lb:oz selectable weighing units
- Large, easy-to-read LCD display
- Wall mount bracket for display
- Large, 11.8x11.8in (300x300mm) stainless steel weighing platform
- RS-232 interface
- Aluminum carrying case with fitted foam interior
- Compliant with ASTM C29, C138 and AASHTO T 19, and T 121 for field unit weights and yield tests
- Hold function allows continuous display of weight readings
- Powered by included AC adapter or six AA batteries (not included)
- One-year warranty
- **Outside Case Dimensions:** 18.63x14.25x6in (473.2x361.95x152.4mm), WxDxH
- **Product Dimensions:** 11.8x11.8x2in (300x300x51mm), WxDxH

Compact Field Scales		
Model	Capacity x Readability, kg (lb)	Repeatability, g
CP-6	6x0.002 (13x0.005)	2.0
CP-15	15x0.005 (33x0.01)	5.0
CP-35	35x0.01 (75x0.02)	10.0
CP-75	75x0.02 (165x0.05)	20.0
CP-150A	150x0.05 (330x0.1)	50.0
CP-200	200x0.05 (440x0.1)	50.0

OHAUS DIGITAL FIELD TEST SCALE

- Portable, precision field weighing of concrete, asphalt, aggregate, and soil samples
- 165lb (75kg) capacity with 20g readability
- Three second stabilization time
- Selectable weighing units of lb, oz, lb:oz, kg, and g
- Large, easy-to-read LCD display with backlight
- Selectable auto-shutoff
- Large, 11x12.4x1.8in painted diamond plate steel platform
- RS-232 interface
- Aluminum carrying case with fitted foam interior for all components
- Meets ASTM C29, ASTM C138, AASHTO T 19, and AASHTO T 121 for field weights and yield test
- Flexible coiled cable (extendable up to 9ft.)
- Operates on 70-hour rechargeable battery or included AC adapter
- One year warranty
- **Outside Case Dimensions:** 15x13.5x7in (381x343x178mm), WxDxH
- **Product Dimensions:** 11x12.4x1.77in (280x315x45mm), WxDxH

Ohaus Digital Field Test Scale	
Ohaus Digital Field Test Scale	OB-165

technote

ASTM C31 now requires a unit weight determination (C138) for each set of concrete strength test specimens.



360° PRODUCT VIEWS

See more details from all angles with hi-res 360° images at globalgilson.com



HM-12



HM-28



HMA-491



VIDEO ONLINE

UNIT WEIGHT MEASURES

ASTM C29, C138; AASHTO T 19, T 19M, T 121, T 121M

Cylindrical measures are used for determining unit weight of concrete or aggregates. Measures can also be used to determine void content of aggregates. All measures are watertight with top and bottom true and even and constructed to retain shape under rough usage.

Cast Aluminum Measures meet ASTM C29, C138, AASHTO T 19, T 121 specifications and are machined for superior accuracy. Integral handles are formed into the castings. The measures resist corrosion from cement paste and are preferred in unit weight and yield testing of fresh concrete.

Steel Measures with bail handles are roll-formed, seam-welded, and painted. They are suitable for non-specification checks for unit weight and void content of aggregates when calibrated for volume by end-user.

Square Strike-Off Plates are rugged 0.25in (6.4mm) thick corrosion-proof aluminum and useful for various volume and mass determinations in aggregate and concrete testing. ASTM and AASHTO standards typically require dimensions 2in (50.8mm) greater than diameters of unit weight measures. Model HMA-491 is popular for use with concrete air meter base. HM-48 5/8in Tamping Rod meets requirements for consolidation of concrete with slump greater than 3in.



HM-34



HMA-1A

Unit Weight Measures				
Model	Material	Inside Dimensions, dia.xH, in (mm)	Capacity, ft ³ (L)	Aluminum Strike-Off Plate
HM-10	Cast Aluminum	14x11.2 (356x284)	1 (28.3)	HMA-493
HM-11		10x11 (254x279)	1/2 (14.2)	HMA-492
HM-12		8x11.5 (203x292)	1/3 (9.4)	HMA-491
HM-29		8x8.8 (203x224)	1/4 (7.1)	HMA-491
HM-13		6x6.1 (152x155)	1/10 (2.8)	HMA-490
HM-20	Painted Steel	14x11.2 (356x284)	1 (28.3)	HMA-493
HM-21		10x11 (254x279)	1/2 (14.2)	HMA-492
HM-22		8x11.5 (203x292)	1/3 (9.4)	HMA-491
HM-28		8x8.8 (203x224)	1/4 (7.1)	HMA-491
HM-23		6x6.1 (152x155)	1/10 (2.8)	HMA-490

CHACE AIR INDICATOR KIT

The inexpensive Chace Air Indicator is used for quick estimations of air content in fresh concrete. Method is ideal for rapid field checks to supplement air meter tests. A sample of cement paste and fine aggregate is placed in the measuring cup, then inserted into the glass tube and the tube is filled with isopropyl alcohol. Percent air is determined by number of lines the alcohol drops in the stem of the vial after agitation. Kit includes vial, rubber stopper, cup, cleaning brush, alcohol squeeze bottle, instructions, and Plastic Case. **Product Dimensions:** 6.25x1.125in (159x29mm), Lxdia.

Chace Air Indicator Kit	
Chace Air Indicator Kit	HM-34
Accessories	
Glass Vial, Brass Cup with Stopper	HMA-1A
Glass Vial	HMA-2

technote

ALUMINUM STRIKE-OFF PLATES

Model	Fits Unit Weight Measures	Size, in (mm)
HMA-490	HM-13, HM-23	8x8 (203x203)
HMA-491	HM-12, HM-28, HM-29	10x10 (254x254)
HMA-492	HM-11, HM-21	12x12 (305x305)
HMA-493	HM-10, HM-20	16x16 (406x406)



HM-40



HM-401



HM-410



HM-403

SLUMP TEST SETS

ASTM C143, C143M; AASHTO T 119, T 119M; BS 1881

Concrete slump is a basic test of fresh concrete to measure workability and indirectly indicate water/cement ratio. The slump test is often used for acceptance. Gilson Slump Test Sets combine all the required components into convenient field kits. Individual components are also available separately.

Slump Test Sets

Description	Model
Slump Test Set includes a heavy-gauge spun steel Slump Cone, cast aluminum Base Plate, and 5/8x24in (16x610mm) stainless steel Tamping Rod. Clamps on the base swivel to hold foot tabs of Slump Cone securely. The Carrying Handle can be rotated over the specimen as a measuring reference. Test Set components assemble compactly for easy transport.	HM-40
EZ-Clean Slump Cone, Base and Rod Set includes a Slump Cone, a high-density polyethylene Base Plate, and 5/8x24in (16x610mm) steel Tamping Rod. HM-403 set features our heavy-gauge spun steel Slump Cone, and HM-403P is supplied with the easy to clean Plastic Slump Cone. Adjustable clamps secure Slump Cone and spring-loaded rod clamps allow easy transport of set components. Concrete is easily cleaned off of plastic base plate.	HM-403 HM-403P
Deluxe Slump Test Set includes all components from HM-40 Set, plus a 58oz (1,715mL) capacity polished aluminum Round-Bowl Scoop, aluminum Filling Funnel, a 12ft (3.6m) measuring tape, and a sturdy, acid-resistant scrub brush with 10in (254mm) handle.	HM-401
Deluxe EZ-Clean Slump Test Set includes all HM-403 components, plus a 58oz (1,715mL) capacity polished aluminum Round-Bowl Scoop, aluminum Filling Funnel, a 12ft (3.6m) measuring tape, and a sturdy, acid-resistant scrub brush with 10in (254mm) handle. The plastic base plate is easy to cleanup after use and will not corrode. Components meet specification requirements. Choose from sets with steel or plastic Slump Cones.	HM-410 HM-410P



ONE STOP

globalgilson.com is your one stop resource for materials testing equipment, supplies, & expert knowledge.



HM-45



HM-39



HM-68



HM-31

SLUMP CONES, RODS, AND BASES

ASTM C143, C143M; AASHTO T 119, T 119M; BS 1881

Spun steel or molded plastic concrete slump cones meet all specification requirements. Convenient Slump Bases provide a clean, stable testing surface for slump testing anywhere. Tamping Rods are required for manual consolidation for slump, air content, and molding of strength specimens.

Slump Cones, Bases, and Rods	
Description	Model
<p>Steel Slump Cones are seamless, heavy-gauge spun steel, plated for rust resistance with welded foot tabs and handles. Steel Slump Cones are available to meet inch (4x8x12in) or metric (100x200x300mm) dimensional requirements.</p> <p style="text-align: right;">Steel Slump Cone, Inch Steel Slump Cone, Metric</p>	<p>HM-45 HM-45M</p>
<p>Plastic Slump Cones are constructed of durable, high-density material and comply with current ASTM and AASHTO specifications. These economical inch or metric models are dimensionally stable, easy to clean, and will not dent or rust. Plastic Slump Cones are available to meet inch (4x8x12in) or metric (100x200x300mm) dimensional requirements.</p> <p style="text-align: right;">Plastic Slump Cone, Inch Plastic Slump Cone, Metric</p>	<p>HM-39 HM-39F</p>
<p>Cast Aluminum Slump Base has swivel clamps to secure foot tabs and a carrying handle that rotates up to use as a measuring reference. Use with either steel or plastic slump cones. Rod and cone attach to the base for convenient carrying. Product Dimensions: 15x17in (381x432mm), WxH.</p>	<p>HM-68</p>
<p>EZ - Clean Slump Base is high-density polyethylene and acceptable for use in the specifications. Adjustable clamps secure slump cone and spring-loaded rod clamps allow easy transport. Base cleans easily and will not corrode. Rod and slump cone purchased separately. Base is 18x18in (457x457mm).</p>	<p>HM-31</p>
<p>5/8in Tamping Rod is stainless steel with hemispherical tips on both ends. HM-48 has engraved measuring scale in 1/4in increments. HM-48A is plain with no markings. Product Dimensions: 5/8x24in (16x610mm), dia.xL, size is specified for 6x12in concrete cylinders, air content, and slump tests.</p> <p style="text-align: right;">5/8 Tamping Rod, Engraved Measuring Scale 5/8 Tamping Rod, Plain</p>	<p>HM-48 HM-48A</p>
<p>3/8in Small Tamping Rod is stainless steel and is required for molding of 4x8in concrete cylinder specimens. Product Dimensions: 3/8x12in (10x305mm), dia.xL.</p>	<p>HM-47</p>
<p>3/8in Long Tamping Rod is stainless steel and meets both Canadian and ASTM standards for consolidation of 4x8in (102x203mm) concrete cylinders. Product Dimensions: 3/8x18in (10x457mm), dia.xL.</p>	<p>HM-63</p>



HM-47, HM-63, & HM-48



HM-48 close-up



FRESH CONCRETE ACCESSORIES

ASTM C143, C143M; AASHTO T 119, T 119M; BS 1881



HMA-309



HMA-301



HMA-303



HMA-305



TSA-188



TSA-189



TSA-233



HMA-368



HMA-306



TSA-275



HM-53

Fresh Concrete Accessories	
Description	Model
Redwood Hand Float is an economical solution for finishing tops of concrete beam molds or cylinder samples. Made of 0.625in (16mm) thick clear heart redwood. Made in the USA. Product Dimensions: 12x5in (305x127mm), LxW.	HMA-309
Magnesium Hand Float is lightweight and provides a precise, smooth finish to ensure even sample loading during compressive strength testing. The extruded magnesium blade is corrosion-resistant and has a painted finish for increased durability. Beveled edges and smooth, rounded corners allow precise maneuverability. Textured soft-grip handle increases grip and reduces hand fatigue. Made in the USA. Product Dimensions: 12x3.25in (305x83mm), LxW.	HMA-305
Finishing Trowel features a durable, ground carbon steel blade for smooth finishing after repeated use. Sturdy aluminum mounting with wood handle. Soft grip handle covering for extended use. Product Dimensions: 11x4.5in (279x114mm), LxW.	HMA-303
Carbon Steel Hand Trowel features rugged construction and a high quality, cross ground, carbon steel blade for precision finishing work. The soft-grip handle reduces hand strain and the textured ribbing ensures dexterity even when wet. Made in the USA. Product Dimensions: 12x4in (305x102mm), LxW.	HMA-301
Round Bowl Scoops are cast and polished aluminum with integral handles for filling slump cones, air meters, or cylinder molds.	Round Bowl Scoop, 38oz (1,124mL) Capacity Round Bowl Scoop, 58oz (1,715mL) Capacity
	TSA-188 TSA-189
Scrub Brushes are available in 20in (508mm) long-handled, or 8in (203mm) short-handled versions and stand up to heavy everyday field use. Both feature durable, solid plastic handles and sturdy, acid-resistant synthetic fibers.	Scrub Brush, 8in (203mm) Handle Scrub Brush, 20in (508mm) Handle
	TSA-232 TSA-233
Mortar Trowel has wooden handle and 6in long flat steel blade. Product Dimensions: 10.75x3in (273x76mm), LxW.	HMA-306
Measuring Tapes have retractable blades in sturdy cases with belt clips and offer a choice of measuring scales in feet and inches or centimeters. Tapes have 0.75in (19mm) blade widths.	16ft/5m Measuring Tape in Inches and Centimeters 12ft Measuring Tape in Feet and Inches
	TSA-275 TSA-279
Slump Cone Filling Funnel is a convenient accessory for fast and easy filling of slump cones. Product Dimensions: 6x3.75x8.125in (152x95x206.4mm), H x bottom dia. x top dia.	HM-53
Strike-Off Bar is used to remove excess material from a concrete cylinder mold, air meter vessel, slump cone, or unit weight measure. Made from 304 stainless steel. Product Dimensions: 12.0x0.75x0.12in (305x19x3mm), LxWxH.	HMA-368



ONE STOP

globalgilson.com is your one stop resource for materials testing equipment, supplies, and expert knowledge.

NEW



HM-64

SELF-CONSOLIDATING CONCRETE PENETRATION APPARATUS

ASTM C1712

Self-Consolidating Concrete (SCC) Penetration Apparatus rapidly assesses the likelihood of static segregation of SCC. Poor segregation resistance can cause uneven aggregate distribution and blocking of flow around reinforcing bars or other obstacles, making the Penetration Apparatus useful during mixture development and before placing the SCC in the field.

The Apparatus is placed on top of an inverted slump cone filled with normal-weight, freshly mixed SCC. The penetration depth of the hollow cylinder is then used to correlate the degree of static segregation resistance. Apparatus conforms to ASTM C1712 and includes a replaceable measuring scale marked in 1mm increments. **Product Dimensions:** 12x8x8in (305x203x203mm), LxWxH.



HM-78



HM-80

CONCRETE PENETROMETERS

Concrete Penetrometers provide an estimate of when concrete mixes have reached initial set. Concrete at initial set can no longer be effectively consolidated and is nearly ready for final finishing operations. ASTM defines the initial set of concrete mortar as when 500psi (3.4mPa) of force is required to embed a penetration probe to a depth of 1in. Both penetrometer models are equipped with 1/20in² (32.3mm²) penetration plungers, which are simply pushed into fresh concrete at a constant rate to the mark scribed at 1in (25mm). Both can also be used in evaluations of mortars for unit masonry when equipped with the 2.7in (68.58mm) diameter HMA-295 Adaptor Foot.

HM-80 Concrete Pocket Penetrometer is a rugged, lightweight unit using a calibrated reaction spring for resistance. Plated steel construction resists rust and stands up under harsh field conditions. 0–700psi scale is etched into barrel of piston. A snug-fitting indicator band slides on the piston to register maximum readings. **Product Dimensions:** 0.75x7in (19x178mm), dia.xH.

HM-78 Concrete Dial Penetrometer is a compact instrument fitted with an easy-to-read 2.25in (57mm) diameter dial gauge. Dual scales of 0–700psi and 0–50kg/cm² indicate resistance. Maximum readings are locked in until released by push button. The instrument can be calibrated using an ordinary platform balance and adding or removing the register plates provided. Plastic case, factory certification, and instructions are included. Overall length is 6in (152mm).

Concrete Penetrometers	
Concrete Pocket Penetrometer	HM-80
Concrete Dial Penetrometer	HM-78
Accessories	
Concrete Penetrometer Adaptor Foot	HMA-295

NEW



HM-65

K-SLUMP TESTER

Newly redesigned K-Slump now has improved ruggedness and manufacturing tolerances to improve accuracy of K-Slump results. Approximate concrete slump and workability readings can be determined prior to or after placement in less than a minute.

The hollow-tube probe has two groups of side openings through which wet concrete enters. The measuring rod is lowered, and an estimate of concrete slump is provided by the reading on the graduated scale. Workability is indicated by the measured height of concrete retained in the tester after removal. Readings are reliable when 6in (152mm) or more of concrete surrounds the tester. Instructions and correlation chart included. **Product Dimensions:** 0.75x12in (19x305mm), dia.xH.


K-Slump Tester	
K-Slump Tester	HM-65




SCC PASSING ABILITY SET (J-RING)

For ASTM C1611 slump flow test, self-consolidating concrete (SCC) flows out of the bottom of a modified slump cone and across the baseplate. Its final measured diameter is an indication of the concrete's slump flow.

In ASTM C1621, the J-Ring fixture is added to the test to measure passability of the mix around reinforcing steel and other obstructions. Each test provides two methods to fill the modified slump cone mold. Method A uses an upright mold and Method B uses an inverted mold.

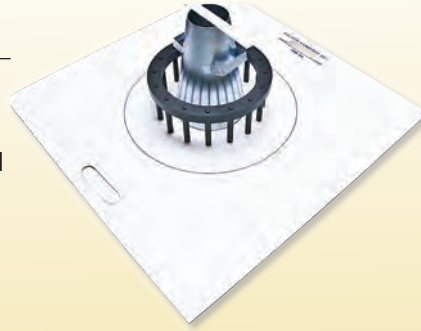


Method A

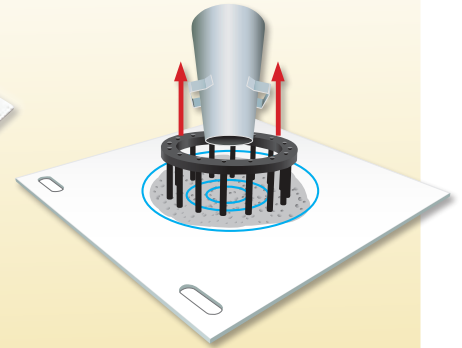

Method B



VIDEO ONLINE

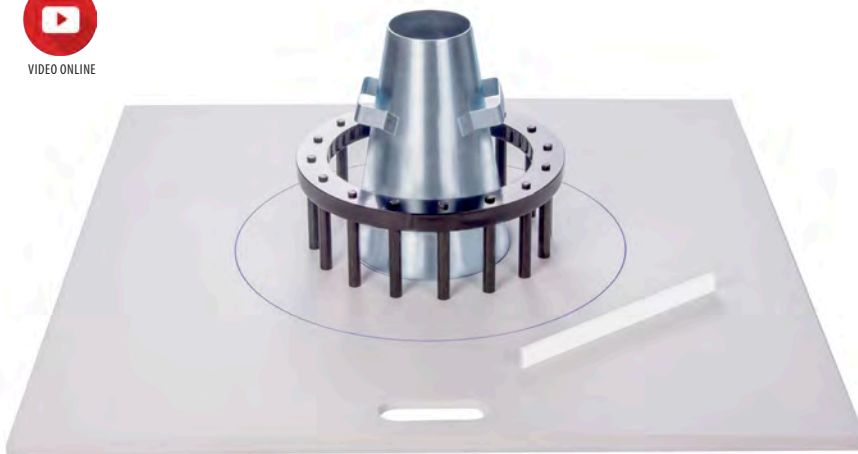

HM-55



HM-42



HMA-145



HM-43

SCC PASSING ABILITY SET (J-RING)

ASTM C1611, C1621; AASHTO T 345, T 347

Structures designed with congested reinforcing steel often require self-consolidating concrete (SCC) mix designs to prevent voids and honeycombing. The J-Ring test, in conjunction with the Slump-Flow test, determines the passing ability of SCC, defined as the ability of the concrete to flow under its own weight.

Depending upon the procedure selected, a modified slump cone is positioned either inverted or upright in the middle of the J-Ring and filled with concrete. The cone is then lifted straight up and the diameter of the resulting circular flow of concrete is measured. A similar test is then run without the J-Ring in place and the difference in the flow diameters is recorded as the passing ability. Additional measurements or visual classifications may also be determined at the conclusion of the test.

Gilson offers this equipment as a set or as individual components. The complete HM-55 set includes the J-Ring assembly, Modified Slump Cone, high-

density polyethylene Strike-Off Bar, and a plastic Base Plate with convenient cut-out carrying handles. The Base Plate is 36x36x0.5in (914x914x12mm) and is inscribed with concentric circles for use when performing the slump flow procedure described in ASTM C1611. **Product Dimensions:** 12.75x5in (324x127mm), dia.xH, with sixteen 0.625in (16mm) bars around 12in (305mm) circumference of the ring.

SCC Passing Ability Set (J-Ring)

SCC Passing Ability Set (J-Ring)	HM-55
Accessories	
J-Ring	HM-42
Modified Slump Cone	HM-43
Base Plate	HM-54
HDPE Strike-Off Bar	HMA-145



HM-35



HMA-368

L-BOX FOR SELF-CONSOLIDATING CONCRETE

The L-Box offers an alternate method of determining flow and passing ability of self-consolidating concrete (SCC) mixes. This method is in use in Europe and some DOTs in the United States have adopted or are examining it. An ASTM procedure is still pending.

The HM-35 is constructed of stainless steel with welded joints and consists of a vertical hopper with a sliding gate at the bottom. There are three bars representing reinforcing steel and a horizontal trough in front of the gate. Fresh concrete is placed in the vertical hopper without consolidating. Lifting the slide gate allows the concrete to flow past the bars into the horizontal trough. Final depth of the concrete at the gate and at the end of the trough is measured and the proportional difference expressed as a blocking ratio. Some versions of this procedure require timing the flow with a stopwatch. The HMA-368 12x0.75in (305x19mm) Strike-Off Bar is recommend for striking-off the concrete surface.

Product Dimensions: 8x24x32.5in (203x610x826mm), WxDxH.

L-Box for Self-Consolidating Concrete	
L-Box for Self-Consolidating Concrete	HM-35
Accessories	
Strike-Off Bar	HMA-368



HM-597



STATIC SEGREGATION COLUMN

ASTM C1610 – Pending

Static Segregation Column for Self-Consolidating Concrete (SCC) measures the resistance of fresh SCC mixes to static segregation of normal-weight coarse aggregate. With these free-flowing mixes, coarse aggregate segregation can reduce flowability and block the passing ability during placement in vertical columns and wall sections. Voids and flaws form if concrete cannot flow properly around reinforcement and into restricted formwork.

A three-section column is filled with concrete and allowed to rest for 15 minutes. Concrete from the top and bottom sections is recovered and washed over a 4.75mm No.4 sieve to recover the coarse aggregate fractions. Concrete from the middle section is discarded. The mass of the coarse aggregates from the two sample sections are compared to determine the percent static segregation.

The unique, innovative design of the HM-597 allows efficient, one-person operation with no loss of sample material. Once the full-height main column is filled with concrete and struck off, the top tier is pushed aside horizontally to deposit the top sample into the collection vessel.

After the collection vessel is retrieved, the middle tier is moved over the waste vessel to discard the middle section of the concrete sample. The bottom sample remains in the lower tier of the column, ready for retrieval and testing.

The rugged frame and moving parts of the Static Segregation Column are fabricated with 1in (25mm) thick high-density polyethylene plastic, and the column is constructed of schedule 40 PVC, providing fast and easy cleanup and corrosion-free durability. **Product Dimensions:** 26x13x35.25in (660x330x 895mm), WxDxH.

Static Segregation Column	
Static Segregation Column	HM-597



HM-144

HM-142



HM-143



HM-149

HM-169



VIDEO ONLINE



HM-154, HM-153, HM-151 and HM-152



HM-157



HM-146, HMA-190, and HMA-191



HM-160

CONCRETE CYLINDER MOLDS

ASTM C31, C192, C470, C1090; AASHTO M 205, M 205M, T 23, T 126, T 197, T 197M, R 39

Concrete Cylinder Mold	
Description	Model
<p>Steel Concrete Cylinder Molds are heavy-duty and reusable many times over. 0.25in (6.4mm) thick walls are split longitudinally to allow easy specimen removal. When clamps are released, the mold springs apart slightly. Detachable base plate is tight-fitting. All parts are plated for rust resistance and are nonreactive to cement constituents. Steel molds give uniform results and are dimensionally stable under severe use. HM-144 6x12in Mold has a built-in handle for easier handling of specimens. Available in 6x12in (152x305mm) or 4x8in (102x203mm) sizes.</p>	<p>Steel Concrete Cylinder Mold with Handle, 6x12in HM-144 Steel Concrete Cylinder Mold, 6x12in HM-142 Steel Concrete Cylinder Mold, 4x8in HM-143</p>
<p>Cast-Iron Concrete Cylinder Molds are heavy castings, machined to exact dimensions and serial numbered for long-term repeated use. Sidewalls are approximately 0.25in (6.4mm) thick with molded-in 0.5in (12.7mm) reinforcing ribs to resist any deformation under rough use. Mold is assembled using toggle bolts with large wing nuts to securely fasten pieces. Joints are closely fitted and can be coated with grease for completely waterproof seal. Fast disassembly for stripping and cleaning. Base is 0.75in thick (19mm). Product Dimensions: HM-149 Mold for 4x8in (101.6x203.2mm) specimens are 6.5x6.5x8.75in (165x165x222mm), HM-169 Mold for 6x12in (152.4x304.8mm) specimens are 9x9x13in (229x229x330mm), WxDxH.</p>	<p>4x8in Cast-Iron Concrete Cylinder Mold HM-149 6x12in Cast-Iron Concrete Cylinder Mold HM-169</p>
<p>Biodegradable Plastic Cylinder Molds for single-use applications are nonabsorptive and molded as single piece units for dimensional uniformity. Rugged molds have unlimited shelf life and are weather-resistant, but contain a unique additive that allows microbes present in landfills and composting facilities to break down plastic. Molds are unaffected by heat, light, or cement paste. Built-in lip helps retain round specimen shape. Writable surface allows reordering of data. Tight-fitting Plastic Lids are purchased separately.</p> <p>For quantities of 25 cases or more of 4x8in or 6x12in molds, add "D" suffix to model number. These models have price savings and lower per-case shipping charges in 25+ case quantities. Dimensions shown are Diameter x Height.</p>	<p>Plastic Cylinder Molds, 20/case, 6x12in HM-151 Plastic Cylinder Molds, 36/case, 4x8in HM-152 Plastic Cylinder Molds, 80/case, 3x6in HM-153 Plastic Cylinder Molds, 520/case, 2x4in HM-154</p>
<p>Biodegradable Plastic Cylinder Mold Lids are purchased separately to fit Gilson Biodegradable Plastic Cylinder Molds. Slight dome shape with internal ridge snaps tightly over lip of molds. Use of tight-fitting lids assures moisture retention.</p>	<p>Plastic Cylinder Mold Lids, 250/case, 6in HM-156 Plastic Cylinder Mold Lids, 300/case, 4in HM-157 Plastic Cylinder Mold Lids, 100/case, 3in HM-158 Plastic Cylinder Mold Lids, 200/case, 2in HM-159</p>
<p>Reusable Cylinder Molds are 0.25in (6.4mm) heavy-wall plastic for extended use and significant cost savings over single-use molds. With proper care, these 4x8in (102x203mm) molds can be used dozens of times. Inexpensive, multi-use Cylinder Saver Liners and Disc Inserts allow easy removal of molded cylinders, often by just sliding them out. If necessary, a small, user-supplied handheld air pump will quickly release specimens. The molds meet the requirements of ASTM C470 and produce exceptionally consistent specimens. Supplied in packages of four, each with a domed Plastic Lid, Liner, and Insert. Replacement Liners and Disc Inserts are available as accessories.</p>	<p>Reusable 4in Plastic Cylinder Molds, 4/case, HM-146 Cylinder Saver Liners, 36/case HMA-190 Disc Inserts, 36/case HMA-191</p>
<p>Cylinder Stripping Tool is an easy to use and inexpensive device for removing single-use cylinder molds from all sizes of concrete cylinders.</p>	<p>HM-160</p>



HM-114



HM-116



HM-112



HM-179



HM-178



HM-161 shown with 6in Concrete Cylinder



HM-141 shown with 6in Cylinder Mold



HM-188

Concrete Sample Handling & Transport

Description	Model
4in Cylinder Transport Rack holds eight 4x8in (102x203mm) concrete cylinders with or without molds for curing and transport. Durable plastic rack resists moisture damage and allows easier handling of multiple cylinder specimens. Two HM-114 Racks will fit in the HM-112 Field Storage Chest. Product Dimensions: 19x9.5x5.4in (483x241x137mm), WxDxH.	HM-114
6in Cylinder Transport Rack holds eight 6x12in (152x305mm) concrete cylinders with or without molds for initial curing and transport. This sturdy molded plastic rack is lightweight and waterproof. Fits inside the HM-112 Storage Chest. Product Dimensions: 24x24x8in (610x610x203mm), WxDxH.	HM-116
Field Curing Chest is collapsible and easily fits behind a truck seat or in a car trunk until needed. Lightweight folding zippered chest protects concrete specimens from harsh weather conditions and eliminates the time and expense of fabricating wooden curing boxes at each job site. Rigid floor maintains a flat and level surface for specimens and doubles as a slump test base. Holds eight 6x12in (152x305mm) or sixteen 4x8in (102x203mm) concrete cylinders and has 0.5in (12.7mm) of polymer foam insulation. Product Dimensions: 24x24x14in (610x610x356mm), WxDxH.	HM-112
Ring Concrete Cylinder Carrier is handy for moving heavy 6x12in (152x305mm) concrete cylinders and loading/unloading curing tanks. Sliding ring lifts to allow easy placement of bottom pad under cylinder, then slides down until locked in position by a locating pin. Fits cylinders in plastic molds with lids or bare cylinders. Constructed of stainless steel with rubber hand grip. Product Dimensions: 7.5x8x16in (191x203x406mm), WxDxH.	HM-161
Cylinder Lifting Handle holds concrete cylinders by a hand-grip pincer action for secure carrying and handling. For 4in (102mm) or 6in (152mm) diameter cylinders. HM-188 Product Dimensions: 16x8.5in (406x216mm), LxW. HM-192 Product Dimensions: 14x6in (356x152mm), LxW.	HM-188 HM-192
Cylinder Wraps Canvas-nylon Cylinder Wraps for 4in and 6in diameter concrete test cylinders prevent damage to the cylinder in transit and minimize shattering when a cylinder is broken in compression tests. Especially useful with unbonded capping systems. Wraps are secured by velcro strips.	4in Cylinder Wrap 6in Cylinder Wrap
Plastic Concrete Cylinder Carrier fits 6in (152mm) diameter plastic cylinder mold with a wide lip and can be used with lids in place. Flexible plastic ring slides onto mold from bottom and is held in place by top lip. When ready to transport, carrier handles are turned up and snap together in the middle. Carriers are packaged in cartons of 50.	HM-178 HM-179
	HM-141





VIDEO ONLINE



HM-279



HM-281



HM-280



HM-287



HM-331

CONCRETE BEAM MOLDS

ASTM C31, C78, C192, C403; AASHTO T 23, T 97, R 39

Concrete Beam Molds

Description	Model	Sample Size, in (mm)
Hinge-Free Steel Molds are lightweight and collapse into individual parts for easy stripping and cleaning. They are compact when broken down and assemble quickly with plated bolts, wing nuts, and stainless steel U-bolt carrying handles.	HM-279	6x6x20 (152x152x508)
	HM-281	6x6x21 (152x152x533)
One-Piece Hinged Steel Molds are fabricated with the side plates hinged to both the base and end plates. Wing nuts fasten sides and ends. Wide selection of sample lengths available.	HM-280	6x6x21 (152x152x533)
	HM-282	6x6x24 (152x152x610)
	HM-284	6x6x30 (152x152x762)
	HM-286	6x6x36 (152x152x914)
Heavy-Gauge Steel Mold casts 4x4in (102x102mm) specimens. Simple hex bolts secure the sides for ease of stripping, cleaning, and assembly. The unique design requires no tools.	HM-287	4x4x14 (102x102x356)
Plastic Interlocking Mold is durable copolymer plastic, one-quarter the weight of steel and easier to strip and clean. Ribbed interlocking parts hold dimensions and shape securely. Assembled with thumb screws for easy stripping, cleaning, and set-up. Inside surfaces are smooth and grease or sealant can be used to ensure a watertight seal.	HM-331	6x6x21 (152x152x533)
One-Piece Plastic Mold produces lighter and easier to handle 4x4in (102x102mm) beam samples. Lightweight, durable mold is constructed from heavy-duty plastic and engineered with reinforcing ribs. Specimen removal is simple, fast, and easy. Remove the plug from the hole in the bottom of the mold and apply compressed air.	HM-288	4x4x15 (102x102x381)



HM-288



GILSON NEWSLETTER

Sign up for the Gilson newsletter at globalgilson.com and never miss a thing!

didyouknow?

Methods of consolidation and preparation of concrete cylinders and beam specimens often depends on the consistency of the concrete. As a rule of thumb, unless the method of consolidation is stated in the project specifications, then rodding is the preferred method when the concrete's slump is greater than 3in (76mm). Rodding or vibrating concrete strength specimens with slump between 1–3in (25–76mm) is recommended. And internal or external vibrating concrete is suggested when the concrete's slump is less than 1in (25mm).



HM-140



HM-133

VIBRATING TABLE

ASTM C192; AASHTO R 39, T 23

Vibrating Table consolidates fresh concrete in cylinder and beam molds. Large platform is 20x20x10in (508x508x254mm). Included separate control box has On/Off switch and rheostat knob to adjust amplitude of 3,600 vibrations per minute (VPM). Power cable supplied by user. Load capacity is up to 300lb (136kg). **Product Dimensions:** 20x20x10in (508x508x254mm), WxDxH.

Vibrating Table	
Vibrating Table, 115V, 60Hz	HM-140
230V, 50Hz	HM-140F

CONCRETE VIBRATOR

ASTM C31, C138, C192; AASHTO R 39, T 23, T 121, T 121M

A Concrete Vibrator is used in the lab or field to consolidate freshly molded concrete specimens. These electric-powered units deliver high-amplitude vibrations via the included 3ft (0.9m) flexible shaft and vibrating head which operates at 11,000–12,000VPM. The 1-1/4hp, 9 amp power unit is housed in a lightweight aluminum body and protected by a wrap-around chrome-plated tubular frame. The unit features a waterproof switch and self-contained quick-disconnect system. Shock absorbers protect the motor from damage from falls or drops. Fitted with adjustable shoulder strap.

HM-133 models include a 3/4in (19.1mm) diameter x 12in (304.8mm) long vibrating head to meet ASTM and AASHTO standards.

HM-135 has a 1.0in (25.4mm) diameter x 12in (304.8mm) long vibrating head to meet applicable Canadian standards.

Concrete Vibrator	
3/4in (19.1mm) diameter Concrete Vibrator, 115V, 50/60Hz	HM-133
3/4in (19.1mm) diameter Concrete Vibrator, 230V, 50/60Hz	HM-133F
1.0in (25.4mm) diameter Concrete Vibrator, 115V, 50/60Hz	HM-135



HM-47, HM-63, and HM-48

Tamping Rods

Description	Model
5/8in Tamping Rod is stainless steel with hemispherical tips on both ends. HM-48 has engraved measuring scale in 1/4in increments. HM-48A is plain with no markings. Product Dimensions: 5/8x24in (16x610mm), dia.xL, size is specified for 6x12in concrete cylinders, air content and slump tests.	HM-48 HM-48A
3/8in Small Tamping Rod is stainless steel and is required for molding of 4x8in concrete cylinder specimens. Product Dimensions: 3/8x12in (10x305mm) dia.xL.	HM-47
3/8in Long Tamping Rod is stainless steel and meets both Canadian and ASTM standards for consolidation of 4x8in (102x203mm) concrete cylinders. Product Dimensions: 3/8x18in (10x457mm), dia.xL.	HM-63



CUBE & PRISM MOLDS

Gilson offers a wide selection of cube and prism molds for use with cement, mortar, grout, concrete, and capping compound. Metal molds meet ASTM and AASHTO specifications. Lighter, easy-to-clean, plastic molds are economical for internal QC programs. All molds are three-gang except for single specimen, 6in (152mm) and 5.9in (150mm) single specimen cube molds, and grout sample boxes.



HM-294



HM-299



HM-294C



HM-296



HM-296C

Cube & Prism Molds

Description	Model	Specimen Size	ASTM	AASHTO		
Bronze Cube Molds feature rugged quality construction and are available in 2in (51mm) or 50mm sizes. The forged bronze casting is precision machined to produce three cubes diagonally. Several Cover Plates are available for the HM-294 and HM-294M Cube Molds: HM-307 Standard Brass Cover Plate, HM-309, 0.5in thick Plastic Cover Plate and HM-299 Brass Cover Plate with Holes for casting sulfur mortar capping compound cubes. The HM-294C Cube Mold with Cover has machined alignment guides for accurate positioning of the included 0.25in (96.4mm) thick brass base and cover plates. Wing nuts and studs secure the mold halves together and clamp the base and cover to the mold body. A hard rubber tamper 5.5x1x0.5in (139.7x25.4x12.7mm) is included. This mold is ideal for casting expansive grout samples as well as for conventional grouts and mortars and is easily flipped over to compensate for worn top surfaces. Specially machined extra cover plates are available as HM-308C. Product Dimensions: 11x4.5x2.5in (279x114x64mm), WxDxH.	Bronze Cube Mold, 2in	HM-294	2x2x2in	C617 C109 C109M C87 C91 C141 C311 C472 C579 C942 C1012	T 231 T 106M R 64	
	Bronze Cube Mold, 50mm	HM-294M	50x50x50mm			
	Brass Standard Cover Plate	HM-307	—			
	Brass Cover Plate with Holes	HM-299	—			
	Plastic Cover Plate	HM-309	—			
	Bronze Cube Mold with Cover Plate, 2in	HM-294C	2x2x2in			
	Extra Cover Plate for HM-294C	HM-308C	—			
	Stainless Steel Cube Molds are accurately machined for casting 2in (51mm) and 50mm cubes in diagonal position. Stainless steel construction resists corrosion, cleans easily, and stands up to rough handling. HM-308 Standard Stainless Steel Cover Plate attaches to the top of the HM-296 and HM-296M Cube Molds with included clamps. HM-296C Stainless Steel Cube Mold with Cover has machined alignment guides on both the top and bottom for accurate positioning of the included 0.25in (6.4mm) thick stainless steel base and cover plates. Wing nuts and studs secure mold halves together and clamp the base and cover to the mold body. This mold is appropriate for casting expansive grout samples. A hard rubber tamper, 5.5x1x0.5in (139.7x25.4x12.7mm), is included. Precision machined extra cover plates for the HM-296C are available as HM-308C. Product Dimensions: 11x4.5x2.5in (279x114x64mm), WxDxH.	Stainless Steel Cube Mold, 2in	HM-296	2x2x2in	C617 C109 C109M C87 C91 C141 C311 C472 C579 C942 C1012	T 231 T 106M R 64
		Stainless Steel Cube Mold, 50mm	HM-296M	50x50x50mm		
		Stainless Steel Standard Center Plate	HM-308	—		
2in Stainless Steel Cube Mold Set with Cover		HM-296C	2x2x2in			
Extra Cover Plate for HM-296C		HM-308C	—			



MONTHLY BLOG

Stay informed and learn from the experts. Subscribe to our monthly blog at globalgilson.com.



HM-297



HM-335



HM-340



HMA-140



HM-298

Cube & Prism Molds				
Description	Model	Specimen Size	ASTM	AASHTO
<p>Econ-O-Cube Mold is three-piece plastic. This unit meets size tolerances only for ASTM C109. The molds are held together by self-aligning thumb screws. Includes HM-298 Hard Rubber Tamper. Product Dimensions: 11x4.5x3.5in (279x114x89mm), WxDxH.</p>				
Econ-O-Cube Molds	HM-297	2x2x2in	—	—
Plastic Cover for HM-297	HMA-143	—	—	—
<p>HDP Plastic Cube Mold is machined of high-density polyethylene strips that assemble easily and are held together with heavy rubber straps. Corrosion-proof, easy to clean and store. The set includes a tamper and mold cover. Product Dimensions: 9x4x3in (229x102x76mm), WxDxH.</p>				
	HM-335	2x2x2in	—	—
<p>Cube Maker System utilizes disposable polypropylene mold liners in a three-gang stainless steel frame. Cured cubes are lifted out of the frame and the liners are stripped away. The reusable frame never needs cleaning. The system includes 27 Poly Liners, four polyurethane unbonded caps for compression testing, and two stainless steel retainers. Two red caps are for strengths up to 4,000psi (27.6mPa) and two amber caps for strengths exceeding 4,000psi. The caps may be reused up to 300 times. This inexpensive, timesaving system is reliable for in-house quality control and other non-specification applications. Liners, pads, and extra mold frames are available as accessories. Product Dimensions: 2x2in (51x51mm), WxH.</p>				
Cube Maker System	HM-340	2x2x2in	—	—
Frame for HM-340	HMA-139	—	—	—
Poly Liners for HM-340, case of 196	HMA-140	—	—	—
Polyurethane Caps for HM-340, pkg. 4	HMA-141	—	—	—
<p>Hard Rubber Tamper is required by specification for consolidating mortar or grout specimens into molds. Product Dimensions: 5.5x1x0.5in (139.7x25.4x12.7mm), WxDxH.</p>	HM-298	—	C617 C109, C109M C87, C91, C141, C311, C472, C579, C942	T 231 T 106M R 64
<p>Trowels are used in a variety of lab and field-testing procedures. Each has a flat blade and a wooden handle.</p>				
<p>HMA-306 Mortar Trowel has a curved side and often used for mixing and handling samples. The handle length is 4.75in (120.6mm) and the blade length is 6in (152.4mm).</p>			C311, C472, C579, C942, C109, C109M, C141, C141M, C87, C87M, C91, C91M; BS 1881	T 106M T 106 R 64
<p>HMA-307 ASTM Straight-Edge Trowel meets various ASTM/AASHTO standards with its straight-edged sides to ensure proper consolidation and strike-off of mortar and grout specimens. The handle length is 4.5in (114.3mm) and the blade length is 5.5in (139.7mm).</p>				
ASTM Straight-Edge Trowel	HMA-307			
Mortar Trowel	HMA-306			



HMA-306



HMA-307



HM-252



HM-250D



HM-250



HM-256



HM-257



HM-259



HM-254



HM-270



HM-268

LENGTH CHANGE APPARATUS

ASTM C151, C157, C227, C490, C1260; AASHTO R 70, T 107, T 107M

Length Change Apparatus measures changes in length of cast prism specimens due to alkali-silica reactivity (ASR), autoclave curing, alkali reactivity, and other causes not related to applied load. Methods are applicable to testing of hardened Portland cement paste, mortar, concrete, or evaluation of hydraulic hydrated lime for structural purposes.

Length Change Apparatus

Description	Model	ASTM	AASHTO
<p>Cement Autoclave provides accelerated curing to estimate expansion of hydraulic cement caused by hydration. Test Bars are cured in controlled steam pressure and constant temperature. Vessel is capable of pressures from 60 to 350psi (0.4 to 2.4MPa) and includes pressure regulator, gauge (0–600 x 5psi), air vent valve, a Safety Pop Valve set at 350psi, ASTM 2F thermometer, wrench, and package of five gaskets. Replacement gaskets and Pop Valves are available as accessories. Safety Pop Valves are set at 350psi and include a certificate of calibration. Autoclave chamber is 6.1x16in (155x406mm), dia.xH. 115V, 50/60Hz, 1,800 Watts. For use with 230V service, order TR-3002 Transformer.</p> <p>Product Dimensions: 17x48x28in (432x1,219x711mm), WxDxH.</p> <p>Cement Autoclave, 115V, 50/60Hz Gaskets, pkg. 100 Safety Pop Valve ASTM 2F Thermometer, 20°–580°F ASTM 2C Thermometer, -5°–300°C 3,000 Watt Step-Up/Step-Down Transformer</p>	HM-252	C151	T 107 T 107M
<p>Length Comparators with 0.0001in (0.0025mm) divisions determine precise length changes in 10in (254mm) specimens. Recommended HM-250D has a quick-reading 0.5in (12.7mm) range LCD digital indicator with in/mm switch, RS-232 port, and replaceable 200 hour battery. Analog HM-250 has a 0.4in dial indicator. Comparators include a heat treated, hardened Invar Reference Bar for periodic calibration. Sturdy upright metal support is attached to a solid base. Specimens up to 4x4x10in (102x102x254mm) may be tested, but 1x1x10in (25x25x254mm) prisms are normal. Inquire for special adapter and shorter Invar Reference Bar if 5in (127mm) long prism samples are tested.</p> <p>Product Dimensions: 11x11.5x17in (279x292x432mm), WxDxH.</p> <p>Digital Length Comparator Length Comparator</p>	HM-250D HM-250	C151 C157 C227 C490 C1260	T 107 T 107M R 70
<p>Prism Molds are corrosion-resistant steel (HM-258 is stainless) with base plate, removable partitions, and end plates to provide required length of 10in (254mm) between innermost ends of HM-268 Gauge Studs cast in ends of bars. Dimensions from outside ends of Gauge Studs are 11.625in (295mm); specimens are 11.25in (286mm) long. Select molds for specimen cross sections of 1x1in, 2x2in, or 3x3in. Inquire for 5in (127mm) length specimen molds.</p> <p>Prism Mold 1x1x10in (25x25x254mm), Single Prism Mold 1x1x10in (25x25x254mm), 2-Gang Stainless Steel Prism Mold 1x1x10in (25x25x254mm), 2-Gang Prism Mold 2x2x10in (51x51x254mm), 2-Gang Prism Mold 3x3x10in (76x76x254mm), Single</p>	HM-256 HM-257 HM-258 HM-255 HM-259	C151 C157 C227 C490 C1260	T 107 T 107M R 70
<p>Gauge Studs are knurled stainless steel and threaded to be cast into specimen ends. Gauge ends precisely fit contact points in the bottom and top anvils of the Length Comparators. Sold in a package of ten. Product Dimensions: 0.25x0.8125in (6.35x20.64mm), dia.xL.</p>	HM-268	C151, C157, C227, C490, C1260	T 107 T 107M R 70
<p>Test Bar Holder holds up to eight 1x1x10in (25x25x254mm) bars for suspension inside the Autoclave. Bars are held vertically above water level to expose all specimens to Autoclave steam. Product Dimensions: 5.75x5.75x11.75in (146.1x146.1x298.5mm), WxDxH.</p>	HM-254	C151	T 107 T 107M
<p>Mortar Bar Container is stainless steel with wicking liner and tight fitting cover to seal in water vapor. Vertically supports up to 36 mortar bars in container with lower end above water surface. Product Dimensions: 9x11x15.5in (229x279x394mm), WxDxH.</p>	HM-270	C227	

PENETROMETERS FOR CEMENT, MORTAR, AND GROUT

Vicat, Gillmore Needle, and Mortar Penetrometers determine consistency, set times, and false set of hydraulic cement, mortar, and grout.

Penetrometers for Cement, Mortar and Grout

Description	Model	ASTM	AASHTO
<p>Standard Vicat has a reversible 300g stainless steel rod with a 10mm plunger on one end and a 1mm double-threaded needle at the other. The adjustable indicator on the rod may be set to indicate in either orientation on a 0–50 x 1mm scale. A conical plastic mold, 60/70mm top/base ID x 40mm high, and glass plate are included. Threaded Adapter Weight modifies the HM-300 to a HM-302 Modified Vicat. Product Dimensions: 12x5x4in (305x127x102mm), WxDxH.</p> <p>Standard Vicat Apparatus Conical Plastic Mold Stainless Steel Needle with reversible threaded end Threaded Adapter Weight, modifies HM-300 to HM-302</p>	HM-300 HMA-290 HMA-292 HMA-293	C187 C91 C451 C141 C191 C308	T 129 T 131 T 186
<p>Modified Vicat for False Set is used for false set (early stiffening) determination of Portland cement mortar; this unit has a 400g plunger assembly. A conical plastic mold, 60/70mm top/base ID x 40mm high, and glass plate are included. Product Dimensions: 12x5x4in (305x127x102mm), WxDxH.</p> <p>Modified Vicat Apparatus False-Set Container, 50x50x150mm 400mL Cylindrical Unit Measure Conical Plastic Mold</p>	HM-302 HMA-296 HMA-136 HMA-290	C359	T 185
<p>Gillmore Needle Apparatus determines initial and final set times of Portland cement, masonry cement, hydraulic hydrated lime, and certain mortars. The adjustable support has horizontal arms guiding two weighted needles with flat-end cylindrical stainless steel tips. The initial-set needle is 1/4lb (113.4g) and 1/12in (2.12mm) diameter; final-set needle is 1lb (453.6g) and 1/24in (1.06mm) diameter. Base has ample flat shelf for positioning specimens. Product Dimensions: 6x3.5x4in (152x89x102mm), WxDxH.</p>	HM-310	C266 C414	T 154
<p>Acme Penetrometer measures penetration resistance to determine set times of concrete mixes, mortars, and grouts. A 200lb (890N) capacity load cell displays loads on a dial gauge in 1lb divisions. Product Dimensions: 10x13x31in (254x330x787mm), WxDxH.</p>	HM-570	C403	T 197M
<p>Manual Mortar Penetrometer is operated with a downward force to penetrate 1in (25mm) into a sample. Pressure is indicated on a scale located on the handle stem with a sliding ring indicator. Unit comes with convenient carrying case and includes six stainless steel penetration needles with 1, 1/2, 1/4, 1/10, 1/20, and 1/40in² (645, 323, 161, 65, 32, and 16mm²) bearing areas. Replacement needles available on request. Product Dimensions: 24x9x3in (610x229x76mm), WxDxH.</p>	HM-571	C403	T 197M




HM-300



HMA-290



HMA-296



HM-310




HM-570



HM-571

MOBILE FRIENDLY

globalgilson.com is mobile friendly so you can view on any device.

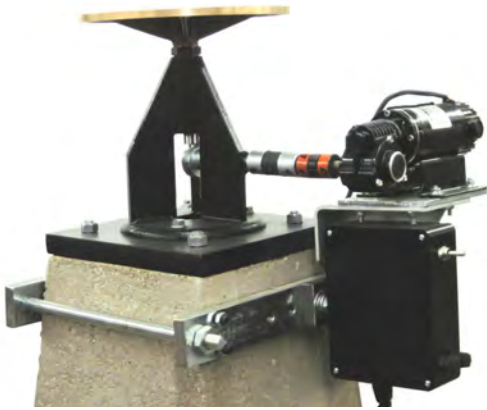

HM-273

FLOW TABLES

ASTM C87, C109, C110, C185, C230, C348, C593, C860; AASHTO M 152M, T 71, T 106M, T 137

Flowtables are used for determining consistency (flow) and for preparing mortars of standard consistency for testing. Flow is determined as percent increase in diameter of a conically-molded mortar. The sample is subjected to a required number of cam-actuated 0.5in (12.7mm) table drops at a fixed 100rpm rate.

All flow tables have the 10in (254mm) diameter rigid cast bronze table supported on a cast iron frame. Base and special drive motor bracket are mounted to a concrete pedestal provided by user. A Flow Mold is included with all tables; extras are available as HMA-133. Mold is cast bronze, 2.75/4in (70/102mm) top/bottom ID with collar. The HMA-134 Percent Flow Caliper has special scale to give the average flow directly by adding four readings. A 12in (305mm) long Strike-Off Bar (HMA-368) for striking off specimens in containers, measures, or molds is included.

HM-272 and HM-273 Motorized Flow Tables have rates controlled precisely in accordance with ASTM and AASHTO standards. **Product Dimensions:** HM-272: 18x15x20in (457x381x508mm), WxDxH. HM-273: 19x22x24in (483x559x610mm), WxDxH.

HM-274 Manual Flow Table gives reliable results and is recommended for applications where strict adherence to standards is not essential. **Product Dimensions:** 14x14x14in (356x356x356mm), WxDxH.

Flow Tables

Motorized Flow Table w/ Counter, 115V, 60Hz	HM-272
230V, 50Hz	HM-272F
Motorized Flow Table	HM-273
230V, 50Hz	HM-273F
Manual Flow Table	HM-274

Accessories

Flow Mold	HMA-133
Percent Flow Caliper	HMA-134
Strike-Off Bar	HMA-368
Hard Rubber Tamper	HM-298



VIDEO ONLINE



HM-372 shown with MA-48



HM-371



HMA-146



HMA-147

GROUT FLOW CONE SETS

ASTM C939, D6449

Grout Flow Cones measure the flowability of hydraulic grout used in preplaced aggregate concrete. Flowability is measured by time of discharge of a 1.725L sample of grout through a 0.5in (12.7mm) ID discharge tube orifice in the cone. The cast aluminum Flow Cone has 7in (178mm) top ID and comes with an adjustable point gauge assembly to indicate initial sample level. **Product Dimensions:** 7x12in (178x305mm), IDxH. (Flow Cone only)

HM-372 Grout Flow Cone Set is supplied as a Flow Cone with replaceable 0.5in (12.7mm) Orifice, a three-legged Steel Stand, and a 2,000mL (2.1qt) Stainless Steel Beaker receiving container. Meets ASTM C939.

HM-373 Grout Flow Cone Set is similar to the HM-372, but the Flow Cone is fitted with a special 0.75in (19.1mm) Orifice for less flowable grouts. Meets ASTM D6449.

Flow Cones, Orifices, and other set components can be purchased separately. Flow Cone models include the point gauge measurement assembly and are available with or without 0.5 or 0.75in Orifices. Both Orifice sizes are replaceable and available separately. The sturdy painted Steel Stand is 20.5in (521mm) high. The 2,000mL (2.1qt) Stainless Steel Beaker is sized to receive grout from a single test and graduated in oz and cc. The 5,700mL (6qt) Beaker can collect grout from up to three tests.

Grout Flow Cone Sets

Grout Flow Cone Set, with 0.5in Orifice	HM-372
Grout Flow Cone Set, with 0.75in Orifice	HM-373

Accessories


Flow Cone Only, No Orifice	HM-371
Flow Cone with 0.5in Orifice	HM-372B
Flow Cone with 0.75in Orifice	HM-373B
Flow Cone Stand Only	HM-372A
0.5in (12.7mm) Orifice Only	HMA-146
0.75in (19.1mm) Orifice Only	HMA-147
Stainless Steel Beaker, 2,000mL (2.1qt)	MA-42
Stainless Steel Beaker, 5,700mL (6qt)	MA-48
Large Display Digital Stopwatch	MA-30

technote

Gilson's new flow cone design now allows for you to interchange the 0.5in (12.5mm) and 0.75in (19.1mm) orifices with each other, improving the versatility of your grout testing capabilities.



MA-10

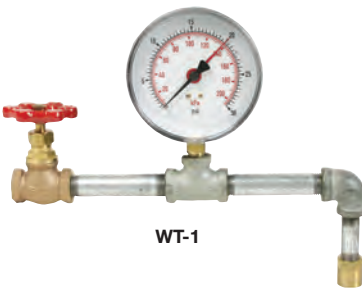

WT-1



WT-23ESB



WT-62 shown with WTA-49



BS-50

CEMENT FINENESS

ASTM C204, C430, D1514; AASHTO T 153, T 192

Gilson Cement Fineness Apparatus meets standard test methods for fineness of Portland and other hydraulic cements, fly ash, natural pozzolan, masonry cement, and similar materials.

Description	Model	ASTM	AASHTO
<p>Blaine Air Permeability Apparatus determines the fineness of cement by measuring the rate of flow for a quantity of air drawn through a prepared specimen with a known surface area. The characteristics of the pore structure are controlled by the particle size of the sample and determine the rate of air flow. The apparatus consists of a calibrated U-Tube manometer, rubber aspirator, and bulb mounted on a sturdy wooden panel and base. The stainless steel test cell includes a plunger and perforated disc. An 8oz bottle of red spirit manometer fluid, package of grade 597 filter paper, and a wood block for holding the cell are also included. Additional filter paper discs and manometer fluid are ordered separately. Order NIST Portland Cement standard reference materials separately for calibration. Product Dimensions: 16x16x6in (406x406x152mm), WxDxH.</p>	<p>Blaine Air Permeability Apparatus MA-10 12.7mm Filter Paper Discs, Grade 597, pkg. 1,000 MA-11 Replacement Glass U-Tube MA-12 Manometer Fluid, 8oz (236mL) MA-13</p>	<p>C204 - - -</p>	<p>T 153 - - -</p>
<p>Fineness Spray Assembly meets ASTM/AASHTO requirements for measuring cement fineness by sieve and is useful for any wet sieving application. Assembly includes valve with 3/4in female threaded inlet, pressure gauge, piping, and specified spray nozzle. 4.5in (114mm) diameter gauge is graduated up to 30psi max. A red pointer indicates maximum reached.</p>	WT-1	C430	T 192
<p>Spray Connector Accessory is a 2ft flexible hose with 3/4in threaded male connection to fit WT-1. The opposite end fits a standard garden hose outlet and includes a clamp fitting for attachment to a sink faucet.</p>	WT-1A	-	-
<p>Cement Fineness Test Sieve is a one-piece brass frame, 2in (50.8mm) diameter and 3in (76.2mm) deep from rim to cloth, with permanently mounted No.325 stainless steel wire cloth. Meets ASTM and AASHTO specifications when user-calibrated with BS-46 or BS-50 NIST Portland Cement standard reference materials, purchased separately. Verification to ASTM E11 Inspection Grade or Calibration Grade is optional.</p>	<p>Cement Fineness Test Sieve WT-23ESB Inspection Test Sieve Verification GV-60 Calibration Test Sieve Verification GV-65</p>	<p>C430 E11 E11</p>	<p>T 192 - -</p>
<p>Two-Piece Cement Fineness Sieve Frame meets ASTM/AASHTO test method requirements when fitted with WTA-49 No.325 Mesh Disc, and user-calibrated with BS-46 or BS-50 NIST Portland Cement standard reference materials, all purchased separately. The nickel-plated frame is easily disassembled with three screws to replace the disc. Verification of the WTS-49 Discs to ASTM E11 Inspection Grade or Calibration Grade is optional.</p>	<p>Two-Piece Cement Fineness Sieve Frame WT-62 No. 325 Stainless Steel Mesh Disc for WT-62 WTA-49 Inspection Test Sieve Verification GV-60 Calibration Test Sieve Verification GV-65</p>	<p>C430 C430 E11 E11</p>	<p>T 192 T 192 - -</p>
<p>NIST Portland Cement, No. 46h standard reference material (SRM) validates 45µm (No.325) sieves for the cement fineness and air jet cement fineness tests. It consists of a coarser cement than 114q and is certified for use as an alternative in Blaine air permeability, Wagner turbidity, and particle size distribution by laser diffraction. Supplied with NIST certificate of analysis in ten sealed vials, each approximately 5g of cement.</p>	BS-46	<p>C430 C115 C204 C1891</p>	<p>T 192 T 98 T 153</p>
<p>NIST Portland Cement No.114q standard reference material is used in the verification and calibration of equipment for the Blaine air permeability test, cement fineness by sieve test, cement fineness by air jet sieve, and the Wagner turbidimeter test. The material is supplied with NIST certificate of analysis in 20 vials of approximately 5g each of cement.</p>	BS-50	<p>C430 C115 C204 C1891</p>	<p>T 192 T 98 T 153</p>



HM-290



HM-291



HM-292



HM-295



HMA-306



HMA-307



HM-295 shown with HMA-349



HMA-349

Cube & Prism Molds


Description	Model	Size	ASTM	AASHTO
Steel Single Cube Mold has an all steel construction 6x6in (152x152mm) and produces concrete specimens for compression testing or serves as a container for mortar penetration tests. Sides are hinged to the base and ends are hinged to the sides so the mold is collapsible. Wing nut fasteners secure the assembly in place.	HM-290	6x6x6in	C403	T 197M T 197
Premium Single-Cube Mold is a rugged one-piece plastic 150x150x150mm (5.9x5.9x5.9in) mold for concrete compressive strength specimens and can be used as a container for mortar penetration tests. Reinforced plastic construction is 0.75–1.25in (19–32mm) thick for added rigidity and long service life. Cured specimens are easily demolded using compressed air injected through the base.	HM-291	150x150x150mm	C403	T 197M T 197
Lightweight Single-Cube Mold for concrete compressive strength cube specimens and mortar penetration tests is durable one-piece plastic with reinforcing ribs. A hole in the base with included plug permits quick demolding using a compressed air source. Internal dimensions are 150x150x150mm (5.9x5.9x5.9in).	HM-292	150x150x150mm	C403	T 197M T 197
Grout Sample Box (GSB) meets requirements of ASTM C1019 and UBC 21-18. Field samples are efficiently molded, protected, and shipped, all in one container. Cardboard material duplicates absorption characteristics of concrete masonry units and compressive strength values are comparable to traditional molding methods, as well as much more consistent and repeatable. Single-use cardboard boxes ship and store flat, taking only seconds to set up for molding. Each box yields four 3.125x3.125x6.25in (79x79x159mm) mortar samples. 25 boxes per carton. Optional Grout Sample Box Fixture reinforces the sidewalls of the cardboard GSB to maintain square shape, assuring more consistent specimens. Sturdy ventilated steel construction allows excess moisture to escape.	HM-295 HMA-349	3.125x3.125x6.25in —	— C1019	— —
ASTM Straight-Edge Trowel has straight sides as specified for proper consolidation and strike-off of mortar and grout specimens. Regular Trowel is convenient for mixing and handling of samples.	HMA-307 HMA-306	5.5in 6in	C311, C472, C579, C942, C109, C109M, C141, C141M, C87, C87M, C91, C91M; BS 1881	T 106M T 106 R 64

NEW




HM-678 shown with Masonry Block

NEW

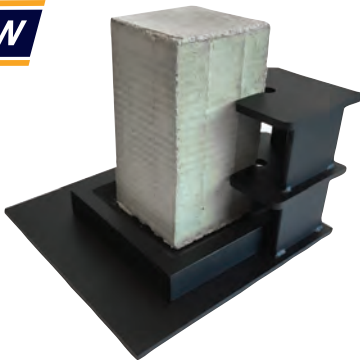

HMA-359 shown with Grout Prism

NEW



HMA-460

NEW



HMA-465 and HM-466

Masonry Block Caps and Grout Prism Steel Retainers and Pads

Description	Model
<p>Masonry Block Caps offer a unique unbonded capping method for comprehensive strength testing of masonry units. This cost-effective alternative to sulfur capping reduces time, labor, expense, and equipment such as ladles and melting pots. The fibrous composite is laminated to the tough plastic sheeting, providing rigidity, proper load distribution, and protection of the machine platens. Composite material flows during compression to fill irregularities in the concrete masonry unit, distributing test loads uniformly.</p> <p>This method is comparable in accuracy to capping with hydrocal gypsum but is not noted in the ASTM C140 method. Block Caps are ideal for internal QC testing applications and eliminate the need for mixing, cutting, or measuring. Each set of caps is designed for single use. Each carton contains ten sets of caps.</p> <p style="text-align: right;">Masonry Block Caps, 8x16in (203x406mm) Masonry Block Caps, 12x16in (305x406mm)</p>	<p>HM-678 HM-679</p>
<p>Grout Prism Capping Stand accepts specimens of masonry grout for compressive strength testing up to 3.5in (89mm) square. Vertical guides ensure samples are perpendicular when capping with the sulfur mortar compound. The capping plate and recess with beveled sides meet ASTM C1019 requirements for hardness and depth. Caps formed with Gilson Gray Iron 9000 or other sulfur mortar compounds will properly distribute loads for accurate strength results. Two-piece construction made of solid steel.</p>	<p>HMA-359</p>
<p>Grout Prism Steel Retainers are made of steel and plated to prevent rust. Steel retainer cups are machined plane within 0.002in. Retainers are the size designed for specimens yielded from the “pinwheel” method of forming prism samples. A retainer holding a Grout Capping Pad is placed at each end of the rectangular sample. Sold in sets of two.</p>	<p>HMA-460</p>
<p>Grout Capping Compression Pads Grout Capping Compression Pads correlate to ASTM C1231 and AASHTO T 22 and are made within the same tolerances as the round pads. Sold in packages of ten.</p> <p style="text-align: right;">50 Durometer 60 Durometer 70 Durometer</p>	<p>HMA-465 HMA-466 HMA-467</p>



MOBILE FRIENDLY

globalgilson.com is mobile friendly for any device.



GILSON MONTHLY BLOG

Learn from the experts. Subscribe to our monthly blog at globalgilson.com

NEW



HM-494



HM-49

PERFA-CURE CONCRETE CURING BOXES

ASTM C31; AASHTO T 23

Lightweight Perfa-Cure Curing Boxes maintain required initial curing temperatures of 60°–80°F (16°–27°C) and provide portable storage and protection for concrete test specimens. Users simply plug in the unit and set the thermostat to the desired temperature. Models with heating only are designed for cold conditions in fall and winter seasons. Model with both heating and cooling functions can be used year-round and automatically switch from heating to cooling based on temperature conditions. The heating panel uses a safe, aluminum base to radiate heat. Model with cooling features a blower fan to circulate cool air inside the box. The green indicator light illuminates when the unit is in operation.

Models comply with current ASTM C31 and AASHTO T 23 standards for initial curing of concrete test specimens in the field. The durable hard-sided insulated curing box has tie-down slots for secure transport and the rubber lid gasket keeps internal temperatures stable. The Heater Panel and Cooling Units on the inner lid are easily replaceable. A max/min registering thermometer mounted inside the box monitors temperature conditions. Perfa-Cure boxes operate on 120V, 60Hz electrical supply. Capacity specifications are based on cylinders using flat plastic lids.

HM-493 Perfa-Cure Mini Concrete Curing Box is heat-only and holds four 6x12in (152x305mm) cylinders or twelve 4x8in (102x203mm) cylinders. **Product Dimensions:** 24x12x14in (610x305x356mm), WxDxH.

HM-494 Perfa-Cure Elite Concrete Curing Box provides heat-only and the 165qt interior accommodates up to twelve 6x12in (152x305mm) cylinders or fifty 4x8in (102x203mm) cylinders. Empty weight is approximately 75 pounds. **Product Dimensions:** 47.75x19.62x22.75in (1,213x498x578mm), WxDxH.

HM-496 Perfa-Cure Elite Xtreme Concrete Curing Box features both heating and cooling functionality and accepts ten 6x12in (152x305mm) or forty-eight 4x8in (102x203mm) concrete cylinders. Empty weight is approximately 75 pounds. **Product Dimensions:** 47.75x19.62x22.75in (1,213x498x578mm), WxDxH.

Perfa-Cure Concrete Curing Boxes

Perfa-Cure Mini Concrete Curing Box, 120V, 60Hz	HM-493
Perfa-Cure Elite Concrete Curing Box, 120V, 60Hz	HM-494
Perfa-Cure Elite Xtreme Concrete Curing Box, 120V, 60Hz	HM-496

THERMOCURE CONCRETE CURING BOXES

ASTM C31, C192, C511; AASHTO M 201, R 39, T 23

For true field portability and on-the-job convenience, lightweight Thermocure models are unbeatable for storing concrete test specimens within standard humidity/temperature conditions. Up to twenty-two test specimens of 6x12in (152x305mm) or forty-six 4x8in (102x203mm) cylinders can be stored at 73°±3°F (23°±2°C) over an ambient range of -10°–100°F (-23°–37.8°C).

HM-49 Deluxe Concrete Curing Box has a recirculating heating and cooling temperature control unit for easy use, especially in high ambient temperature applications. Controls for this model include temperature set buttons, digital water temperature readout (°F or °C), and indicator lights to show when heating or cooling modes are on. **Product Dimensions:** 75x25x21in (1,905x635x533mm), WxDxH.

HM-50 Economy Concrete Curing Box has a 1,500 Watt heater (cooling is accomplished by fresh water circulation only), an adjustable temperature control and a 3in (76mm) dial thermometer. **Product Dimensions:** 68x25x21in (1,727x635x533mm), WxDxH.

Both models have the same tough, insulated plastic rustproof box with removable galvanized rack. The cover has a gasket, stainless steel hinges, and plated buckles with padlock loops. Lifting handles are provided on each end of the box for transport. Shipped via motor freight only. **Interior Dimensions** for Both Models: 54x18x17in (1,372x457x432mm), WxDxH.

Thermocure Concrete Curing Boxes

Deluxe Concrete Curing Box, 115V, 60Hz	HM-49
Economy Concrete Curing Box, 115V, 60Hz	HM-50

360° PRODUCT VIEWS

See more details from all angles with hi-res 360° images at globalgilson.com

CURING TANK HEATERS & CIRCULATORS

ASTM C192, C511; AASHTO M 201, T 23



HM-651



HM-648



HM-655

Description	Model	Control	Accuracy	Minimum Immersion
Curing Tank Heater has an Incoloy shielded element attached to a sealed stainless housing. A dial-type proportional controller regulates temperatures to required 73.4°F ±3°F (23°C ±1.7°C) in curing tanks up to 350gal (1,325L) when ambient temperatures are above 53°F (12°C). The 1,000 Watt unit operates on 120V, 60Hz power supplies and requires a 15 amp circuit. The heater is equipped with a three-prong grounded plug, fuse, run light, and mounting bracket. Heating element is 19in (483mm) long. Order TR-3002 Transformer for operation on 230V power supplies. Product Dimensions: 9x5x25in (228.6x127x635mm), WxDxH.	HM-651	Analog Dial	±3°F (±1.7°C)	12in (305mm)
Clamp-on Heater/Circulator provides highly accurate temperature control to ±0.09°F (±0.05°C) for fluid tanks and baths up to 7.4gal (28L) from ambient +9° to 302°F (ambient +5° to 150°C). Heating capacity also easily controls temperatures for most larger concrete curing tanks to specified levels. Temperature range and stability for large tanks is dependent upon tank volume, surface area, and ambient temperatures. The PID controller features a LED display that reads out in °C or °F, adjustable overtemperature protection, and low-liquid level cut-off. A two-speed circulator switches from 2.4 to 4gal per minute (9 to 15L) to adapt to a wide range of tank sizes and types. All contact parts are stainless steel. The 1,100 Watt, 7.5in (191mm) long coiled heating element requires only 3in (76mm) immersion, ideal for shallower tanks. 1/2in ID tubing can be attached to the adjustable flow director for external circulation. The Circulator clamps to tank walls up to 1.2in (30.5mm) thick. Two-year manufacturer's warranty. Supplied with a 6ft power cord with grounded plug. Product Dimensions: 5.8x4.6x12.3in (147x117x312mm), WxDxH.	Heater/Circulator, 120V, 60Hz Heater/Circulator, 240V, 50Hz	PID Microprocessor	±0.09°F (±0.05°C)	3in (76mm)
Curing Tank Circulator is a 36 Watt submersion pump with 3 (11.4L/min.) rating. Steady, gentle circulation from the 1/4in (6.4mm) MNPT discharge may be aimed by placing the housing on any of four sides. Two or more HM-655 Circulators are recommended for larger tanks. Working parts are epoxy-encapsulated in the glass-filled nylon housing and a 6ft (1.8m) grounded cord is included. Operates on 115V, 60Hz. Product Dimensions: 4x4x3in (102x102x76mm), WxDxH.	HM-655	—	—	Total

CONCRETE CURING TANKS

ASTM C192, C511; AASHTO M 201, T 23



HM-621



HM-623

Gilson offers steel and plastic tanks for lab or field curing of cylinders, beams, and other concrete specimens. Curing Tanks filled with lime-saturated water and maintained to proper temperatures meet all field and laboratory curing requirements specified in ASTM and AASHTO with less expense and greater adaptability than full-scale moist curing rooms. Straight sides with round ends make most efficient use of floor space. Curing Tanks are oversized and must be shipped via motor freight.

Steel Tanks have straight sides and a pipe-reinforced top for strength. Sturdy rolled seam with enclosed sealant prevents leaks. Side panels are 22-gauge, zinc-coated galvanized steel with corrugations for additional strength. Bottom is 20-gauge, zinc-coated galvanized steel. All tanks have a drain plug.

Plastic Tanks have heavy, seamless construction and are formed from recycled materials. Tough and flexible tanks are impact and UV resistant, rustproof, leakproof, and chemically neutral. Sides are sloped, allowing partial nesting for storage or during transport. Smaller HM-623 is a great solution for 4x8in or smaller cylinders and for cores or mortar and grout samples. All except HM-623 feature a built-in drain plug.

Concrete Curing Tanks			
Model	Material	Dimensions, WxDxH, in (mm)	Capacity, gal (L)
HM-620	Galvanized Steel	24x48x24 (610x1,219x610)	100 (379)
HM-621	Galvanized Steel	24x72x24 (610x1,829x610)	169 (640)
HM-626	Galvanized Steel	36x96x24 (914x2,438x610)	300 (1,136)
HM-623	Heavy Recycled Plastic	38x27x13 (965x686x330)	40 (151)
HM-624	Heavy Recycled Plastic	53x36x20 (1,346x914x508)	110 (416)
HM-625	Heavy Recycled Plastic	58x40x24 (1,473x1,016x610)	180 (681)



HM-630

MOISTURE ROOM CONTROL PANEL

ASTM C192, C511; AASHTO M 201, T 23

This wall-mounted Control Panel automatically blends hot and cold water supplies to keep your concrete specimen curing environment at $73.4 \pm 3^\circ\text{F}$ ($23 \pm 1.7^\circ\text{C}$) and approximately 100% humidity. The system is a stand-alone device to be used with HMA-298 Atomizing Spray Heads. The panel system does not integrate with other foggers, misting devices, compressed air, or HVAC units. A dedicated hot water tank is recommended to assure constant temperatures.

The easy-to-read digital controller display allows easy input of temperature set points for automated control. A manual bypass system assures continuous maintenance of specified temperature and humidity levels if power is interrupted. The panel has space for a temperature chart recorder or data logger. Quick-connect water line fittings are fast and easy to install. Inquire for custom design of a closed-loop layout with atomizing spray head pattern for your cure room based on room dimensions and water temperatures and pressures. One-pass water chillers also available as required. **Product Dimensions:** 30x8x20in (762x203x508mm), WxDxH.

Moisture Room Control Panel

Moisture Room Control Panel, 115V, 60Hz HM-630

Accessories

Atomizing Spray Head HMA-298

technote

ASTM C511 notes that the proper humidity level in a moist room for curing concrete samples occurs when the surfaces of all specimens both look and feel moist. Proper humidity levels can be influenced by room size and shape, operation of heating and cooling systems, outside temperature and humidity, window and door openings, and other factors.



HM-633

AQUAFOG® FOGGING FANS

ASTM C511; AASHTO M 201, T 23

AquaFog® Fogging Fans humidify concrete curing rooms up to 40ft (12m) long. The self-flushing system forces water through the fan blades, atomizing as the liquid exits the blades. High-speed centrifugal force and powerful air flow produce a high quality fog with uniform distribution. The Foggers operate on ordinary water supplies with 10–100psi pressures, even well water, without the risk of clogging. Specialized pumps and filtering equipment are not needed.

AquaFog Fans are engineered for extreme conditions of 100% RH in corrosive environments. Units are constructed with stainless steel hardware, polyethylene enclosures, and anodized aluminum. NEMA-4 connections are standard and the units are powered by continuous-duty wash-down rated motors.

Flowmeter capacity is adjustable to suit coverage needs and models are available in 1–5, 1–11, and 1–15GPH (4–19, 4–42, and 4–57LPH) output. Higher capacity flowmeters increase fog output in larger rooms. A fogger with too much output may saturate wall surfaces while humidification remains inadequate. Proper humidification can also be affected by heating and ventilation systems, room air exchange rate, and other factors. Contact Gilson for advice on correct sizing for your application.

HM-633 AquaFog® models have a 1–5gal (4–19L) per hour fog output with a coverage area up to 680ft² (63m²). 50Hz “F” model coverage area is up to 581ft² (54m²).

HM-653 AquaFog® models have a 1–11gal (4–42L) per hour fog output with a coverage area up to 1,400ft² (130m²). 50Hz “F” model coverage area is up to 1,163ft² (108m²).

HM-673 AquaFog® models have a 1–15gal (4–57L) per hour fog output with a coverage area up to 1,600ft² (149m²). 50Hz “F” model coverage area is up to 1,324ft² (123m²).

2,000CFM AquaFog® Fogging Fans are available in 115V, 60Hz, 240V, 60Hz “F” models, and 230V, 50Hz “V” models. Fan output for all models is 2,000CFM (57cmm). Each unit is equipped with a hanger and U-bolt, 15ft (4.6m) heavy-duty power cord, 30ft (9m) water line, 16ft (4.9m) drain line, and a Visual Flowmeter Panel. Rooms wider than 24ft (6m) will have more uniform humidification with use of the HMA-402 Oscillator, adjustable for up to 360° rotation. **Product Dimensions:** 21x17.5x25in (533x445x635mm), WxDxH.

AquaFog® Fogging Fans

Model	Motor, hp	Electrical	Flowmeter Capacity, GPH (LPH)	Coverage
HM-633	1/4	115V, 60Hz	1–5 (4–19)	Up to 680ft ²
HM-633V	1/4	230V, 60Hz	1–5 (4–19)	Up to 680ft ²
HM-633F	1/5	240V, 50Hz	1–5 (4–19)	Up to 581ft ²
HM-653	1/4	115V, 60Hz	1–11 (4–42)	Up to 1,400ft ²
HM-653V	1/4	230V, 60Hz	1–11 (4–42)	Up to 1,400ft ²
HM-653F	1/5	240V, 50Hz	1–11 (4–42)	Up to 1,163ft ²
HM-673	1/4	115V, 60Hz	1–15 (4–57)	Up to 1,600ft ²
HM-673V	1/4	230V, 60Hz	1–15 (4–57)	Up to 1,600ft ²
HM-673F	1/5	240V, 50Hz	1–15 (4–57)	Up to 1,324ft ²
Accessories				
Oscillator		115V, 50/60Hz 240V, 50/60Hz		HMA-402 HMA-402F



MA-324



HM-134

CONCRETE MATURITY METERS

ASTM C918, C1074; AASHTO T 276, T 325

Concrete maturity is a widely practiced and effective method for estimating the strength of concrete in place based on its age and temperature history. Accurate strength prediction saves time and money by allowing efficient scheduling for form removal and reshoring or prestressing and post-tensioning operations. Mathematical equations compare a maturity index to previous physical tests of the same mix design. Easy-to-use data logging meters log times and temperatures from pre-placed probes and maturity values can be calculated for periods from a few hours to a few months.

Concrete Maturity Meters	
Description	Model
<p>Four-Channel Data Logging Thermometer displays data from four probes simultaneously on a backlit LCD screen in °C or °F, using standard Type K thermocouples and stores up to 16,000 time-temperature data prints. Features include automatic shut-off, auto ranging, Max/Min, and hold functions. Accuracy is ±0.5% of reading +1°C or 2°F, full-scale. Time and temperature data points can be exported to an ASCII format spreadsheet with included USB cable and free downloadable software for calculation. Software supplied does not calculate maturity values, but time and temperature data can be used within Excel to do so. Includes foam-lined case, two beaded-wire probes, and 9V battery.</p> <p>Product Dimensions: 2.5x1.25x7.25in (64x32x184mm), WxDxH.</p>	<p>Four-Channel Data Logging Thermometer MA-324 Four-Channel Data Logging Thermometer, NIST Traceable MA-324C Type K Thermocouple Wire, 100ft (30m) HMA-324 Type K Male Connector HMA-323 Micro USB Cable MAA-224 Water-Resistant Instrument Pouch MAA-228</p>

Four-Channel Concrete Maturity Meters have internal memory for over ten months of continuous recording of half-hour interval readings. Datum temperature and activation energy are user programmable. One to four locations can be monitored at once and all data is accessed via membrane keyboard and alphanumeric display. Maturity can be checked directly from the meter at any time. Standard meter is operated by included 9V lithium battery for three weeks or more. Rechargeable meter has a NiCad battery and charger for more battery life or operation directly from 115V AC. Both meters include Type T thermocouple wire, four connectors, RS-232 cable for downloading to a PC, and a plastic carrying case.

Product Dimensions: 7.8x4.7x2.9in (198x119x74mm), WxDxH.

Four-Channel Maturity Meter, Standard	HM-136
Four-Channel Maturity Meter, Rechargeable	HM-134
Type T Thermocouple Wire, 100ft Roll	HMA-20
Serial Printer Cable	HMA-82

technote

Concrete maturity testing is a valuable tool that increases efficiency and streamlines productivity for many different job site applications:


- Forms can be stripped as soon as strength is proven by an actual maturity value.
- Pavements can be opened to traffic flow sooner, eliminating tie-ups and fast-tracking projects.
- Reshoring operations for multi-story concrete structures are easily scheduled with greater confidence and documented safety.
- Post-tensioning operations take place more efficiently and with less risk when maturity values are documented.

CONNECT WITH US!

Follow us on Facebook, Twitter, YouTube, Instagram, and LinkedIn.

GLOBALGILSON.COM


SALES • SERVICE • SUPPORT

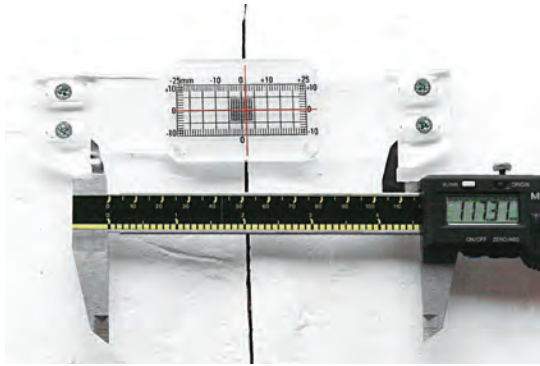


HM-634 shown with TSA-271




VIDEO ONLINE

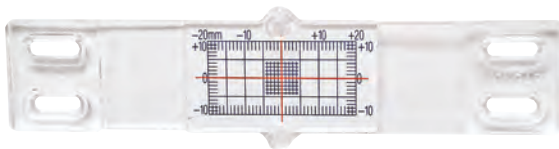


HM-637



HM-635

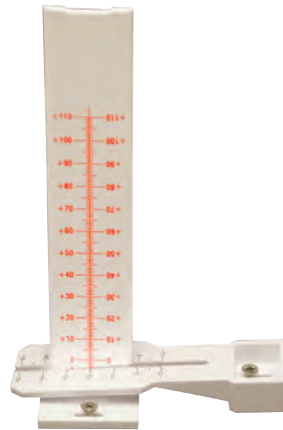

HM-638



HM-636



HM-639

NEW



HM-654

CONCRETE CRACK MONITORS

Monitoring of crack width and movement in concrete roads and structures is easy and reliable with Gilson Concrete Crack Monitors. Opening, closing, and differential movement can be continuously monitored and recorded. Monitors are affixed with available screws or two-part epoxy adhesive.

Concrete Crack Monitors

Description	Model
Crack Monitor Plus consists of two overlapping polycarbonate plates. The white bottom plate has a grid graduated in millimeters and the transparent top plate is marked with a crosshair. Movement range is 25mm horizontally and 10mm vertically. The monitor can be installed using user-supplied screws or HMA-804 Rapid-Set Epoxy, purchased separately. Temporary pegs are removed after placement so plates move independently. Integral raised points on both plates enable exact measurement to 0.01mm using TSA-271 Caliper, sold separately. A second Crack Monitor may be positioned for monitoring in three dimensions. Product Dimensions: 1x3in (25x76mm), WxH.	HM-634
Standard Crack Monitor has a simpler design. The white bottom plate has graduations of 20mm horizontally and 10mm vertically. There are no integral raised points for use with calipers. Readability is 1mm. Product Dimensions: 5.8x1.2x0.24in, (147x30x6mm), WxDxH.	HM-637
Corner Adapter enables Plus or Standard series Crack Monitors to be positioned in internal or external corners with angles from 70° to 180°. Product Dimensions: 1x6in (25x152mm), WxH.	HM-635
Displacement Monitor measures differential movement across a crack, such as settling of a floor slab. It also measures opening and closing of the crack itself. White plastic with easy to read divisions. Displacement range is 110mm. Horizontal range is -10–50mm. Product Dimensions: 1x7.5in (25x191mm), WxH.	HM-638
Crack Width Gauge assists those who survey and report on damaged buildings. This durable acrylic Gauge has graduations for direct comparison to cracks from 0.1 to 7mm on one edge and a scale of 0 to 165x1mm increments on the other. The Gauge is very useful for preliminary measurements prior to ongoing monitoring and for quick field measurements. Product Dimensions: 6.5x1.4in (165x36mm), LxW.	HM-636
Economy Crack Comparator is a handy, credit card-sized field reference that slips easily into your pocket or wallet. Clear plastic card is marked with inch and metric scales as well as a range of crack widths from 0.1 to 7.0mm. Product Dimensions: 2x4in (51x102mm), LxW.	HM-639
Wireless Concrete Crack Data Loggers precisely measure and record linear displacements of cracks and joints in concrete, masonry, and other solid structures. The logger is mounted on one side of a crack or joint, and a 3.15in (80mm) long stainless steel cable is secured to an eye bolt on the opposite side. Optional Extension Cables span larger gaps, with cable lengths from 12 to 78in. As the cable coils or uncoils from its mounting on a rotary potentiometer, movements and ambient temperatures are time-stamped and logged. A Concrete Crack Data Logger records up to 51,062 displacement and temperature measurements at user-defined intervals from 1 minute to 91 hours. Resolution of linear movement readings is 0.00012in (0.003mm). Ambient temperature range is -4°–176°F (-20°–80°C) with 1°C resolution. The HMA-660 Wireless Communication Module is included with the HM-654 System or available separately. The module connects to the USB port of a Windows PC or tablet to allow Wi-Fi data transfer from data loggers at distances of 492ft (150m). Up to 32 HM-652 Data Loggers can be monitored with a single communication module. The HM-654 Kit includes one data logger with a communication module. Operating software, mounting hardware, and a user guide are included with each data logger. A 1/2AA, 3.6V battery provides up to four years of service. Product Dimensions: 3.5x2.1x2.9in (88x52x75mm), WxDxH.	HM-652 HM-654 HMA-660 HMA-666 HMA-669 HMA-679 HMA-680

Wireless Concrete Crack Data Logger
Wireless Concrete Crack Data Logging System
Wireless Communication Module
12in (300mm) Extension Cable
20in (500mm) Extension Cable
39in (1,000mm) Extension Cable
78in (2,000mm) Extension Cable

NEW



HM-644

NEW



HM-645

NEW



HM-646

Concrete Crack Monitors	
Description	Model
<p>Crack Monitoring Kit assembles components necessary to establish a crack monitoring program. Five HM-634 Crack Monitor Plus units, two Corner Crack Monitors, and a HM-636 Crack Width Gauge to determine initial crack widths are included. The complete kit also provides twenty-eight 1in (No.8) Philips fixing screws and HMA-804 Rapid-Set Epoxy. All is packaged in a sturdy carrying bag with shoulder strap with an illustrated instruction booklet and recording sheets. All the components are also available as separate items. Product Dimensions: 17.7x12.6x4.3in (450x320x110mm), WxDxH.</p>	HM-644
<p>Digital Monitoring Essentials Kit provides basic instrumentation for monitoring of cracks where precise determinations are required. The included Digital Caliper measures movement precisely between established measuring points with a resolution of 0.0005in (0.01mm). Each kit includes a Digital Caliper, 100 Stainless Steel Discs, Rapid-Set Epoxy, Crack Width Gauge, instruction booklet, and recording sheets. All components are contained in a handy carrying bag with a shoulder strap. Product Dimensions: 17.7x12.6 x 4.3in (450x320x110mm) WxDxH.</p> <p>Digital Monitoring Essentials Kit with TSA-271 6in Digital Caliper Digital Monitoring Essentials Kit with TSA-268 12in Digital Caliper</p>	HM-645 HM-645S
<p>Digital Monitoring Professional Kit includes all the contents of the Essential Kit, plus a pair of Corner Adapter for monitoring corner cracks and a HM-641 100 pack of Plastic Measuring Pegs. All is packed in a sturdy carry bag with shoulder strap with instructions and recording sheets. Product Dimensions: 17.7x12.6x4.3in (450x320x110mm), WxDxH.</p>	HM-646
<p>Rapid-Set Epoxy is a quick and convenient method of affixing Crack Monitors, Plastic Measuring Pegs, and Stainless Steel Monitor Discs. The two-part epoxy adhesive bonds to almost any surface and eliminates the need to drill holes. Handy 0.85oz (25mL) double-tube pack dispenses and mixes at the same time. Working time is about five minutes. Product Dimensions: 2.8x8.8in (71x224mm), WxH.</p>	HMA-804
<p>Plastic Measuring Pegs provide solid reference points for consistent and accurate measurements. They are quickly and easily affixed to most surfaces on either side of a crack using HMA-804 Rapid-Set Epoxy. Polycarbonate pegs are supplied in packages of 100. Product Dimensions: 0.4x0.3in (10x8mm), dia.xH.</p>	HM-641
<p>Stainless Steel Crack Monitor Discs are easily attached with HMA-804 Rapid-Set Epoxy to any flat surface on either side of a crack. Small cavities in the center of each disc precisely locate jaws of TSA-271 Digital Calipers for accurate and reliable monitoring measurements. Package of 100 Discs. Product Dimensions: 0.265x0.046in (6.7x1.2mm), dia.xThickness.</p>	HM-640



HMA-804




HM-641




HM-640



TSA-271

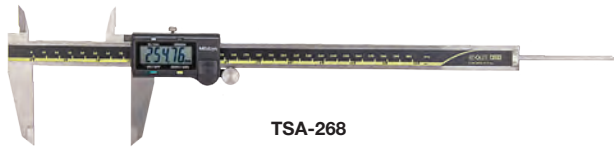

TSA-268

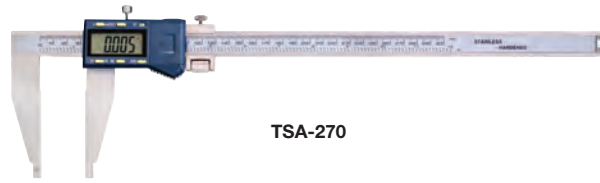

TSA-270



HM-642 shown with HM-643

NEW

360°



HM-647

Concrete Crack Measurement

Description

Digital Calipers measure movement precisely between integral raised points on crack monitors or stainless steel measuring discs with a resolution of 0.0005in (0.01mm). Each is constructed of high-quality stainless steel, has a smooth-moving jaw with locking knob, is selectable in inches or millimeters, includes zeroing button, and displays measurement values on an LCD screen. Protective carrying case and battery are included. Battery is a standard button type and easily replaceable.

6in Digital Caliper provides accurate inside or outside measurements over a range of 0–6in (0–150mm), readable to 0.0005in (0.01mm). Jaw depth is 1.5in (38mm). The TSA-292 Caliper Accessory Kit allows the jaws to be extended to 3.15in (80mm) **Product Dimensions:** 9.5x3in (241x76mm), LxW.

12in Digital Caliper provides accurate inside or outside measurements over a range of 0–12in (0–300mm), readable to 0.0005in (0.01mm) and has a jaw depth of 2.5in (63.5mm). The TSA-292 Caliper Accessory Kit allows the TSA-268 jaws to be extended to 3.15in (80mm) **Product Dimensions:** 16x4.5in (406x114mm), LxW.

12in Heavy-Duty Digital Caliper provides accurate inside or outside measurements over a range of 0–12in (0–300mm) readable to 0.0005in (0.01mm) and jaw depth is 3.5in (89mm). **Product Dimensions:** 17.75x4.25in (451x108mm), LxW.

6in Digital Caliper TSA-271
12in Digital Caliper TSA-268
12in Heavy-Duty Digital Caliper TSA-270

Model

Scratch-A-Track Motion Monitor is mounted over a crack or joint to provide continuous tracking of relative movement. The Recording Pad is coated with a white film and is bonded to one surface using HMA-804 Rapid-Set Epoxy (purchased separately). The spring steel Finger assembly is mounted on the opposing surface. A thumb screw adjusts pressure on the Finger so the stainless steel Scriber leaves a thin, well-defined black scratch on the pad for a permanent visual record. The unit is lightweight, inexpensive, and weather resistant. The Pad has space for written data such as date, location, etc. The Recording Pads are single-use, but the Finger and Scriber assembly can be used repeatedly. **Product Dimensions:** 1x5.5x1in (25x140x25mm), WxDxH.

Scratch-A-Track Motion Monitor HM-642
Recording Pads, pkg. 10 HM-643

Crack Width Microscope measures and monitors cracks in concrete and masonry materials precisely. Repeated measurements are performed in the same spot to track very small movements of the structure. There are no extra steps required to embed measuring points or anchoring screws that could deface the surface. The microscope is positioned over the crack and a knurled knob on the side focuses the view. A battery powered adjustable lamp provides proper illumination, and the eyepiece rotates 360° to align the measuring grid with the crack.

40x image magnification and measuring range of 4.00mm ensure highly accurate measurements. The dual optical scale features coarse divisions of 0.2mm with fine graduations of 0.02mm. Rugged metal housing and sturdy construction stand up to harsh field conditions. The Crack Width Microscope is supplied with a wooden storage case, crack record sheet, and a spare lamp bulb. A calibration certificate from the UK National Measurement Accreditation Service (NAMAS) is also included. **Product Dimensions:** 5.1x3.1x1.4in (130x79x36mm), WxDxH.

HM-647

SHIP WEIGHT INDEX



The estimated ship weight for every product is easy to find in the Ship Weight Index.



GILSON NEWSLETTER

Sign up for the Gilson newsletter at globalgilson.com and never miss a thing!



WP-532A

WINDSOR PROBE TEST SYSTEMS

ASTM C803; BS 1881-207

Windsor Probe Systems provide reliable concrete strength information. A powder-actuated driving unit fires steel probes into hardened concrete. The average penetration of three probes is used to confirm laboratory tests results, measure compressive strength, and assess uniformity. ASTM recommends compressive strength correlation with the particular mix design tested. A redesigned actuating template ensures more reliable operation. The driver cannot be discharged unless pushed firmly against the actuating template. Systems are supplied with a sturdy carrying case and all accessories for preparation, positioning, and measuring. Also included is a kit for determining Mohs Hardness of coarse aggregate. Probes with power loads are purchased separately. **Product Dimensions:** 20x16x14in (508x406x356mm), WxDxH.

WP-530 Windsor Probe Manual Test System is supplied with a manually operated penetration gauge to measure probe length and a printed chart for estimating concrete strength. This system is an economical choice for users with limited needs. Probe lengths can be measured in either inches or millimeters. Manual systems can be upgraded with WP-700 Electronic Measuring Upgrade.

WP-532A Windsor Probe Electronic Test System features electronic acquisition and calculation of probe penetration data. Readings are automatically stored in memory with date and time. Calculated strengths are displayed in pounds per square inch (psi) or megaPascal (mPa) units. Data can be uploaded to a PC with included software cables. Electronic system measures in either psi or mPa units.

Probes are purchased separately in kits of three probes and three power loads, enough to run one test, or in cases containing 25 kits. Inquire for pricing of case quantities of ten or more.

Silver Probes measure normal weight concrete with strengths from 3,000 to 17,000psi (21 to 117mPa). Probes are high-strength steel alloy hardened to

Rockwell C48. An included adapter tool can reposition the probe further down the barrel for low-power testing of concrete with compressive strengths less than 3,000psi (21mPa).

Gold Probes have 56% greater cross-sectional area and are recommended for testing lightweight concrete mixes with densities less than 125lb/ft³ (2,003kg/m³).

Windsor Probe Test Systems	
Windsor Probe Manual Test System	WP-530
Windsor Probe Electronic Test System	WP-532A
Accessories	
Electronic Measuring Upgrade	WP-700
Silver Probes, One Set of Three Probes	WPA-1
Silver Probes, 1-9 Cases of 25 Kits	WPA-1B
Gold Probes, One Set of Three Probes	WPA-3
Gold Probes, 1-9 Cases of 25 Kits	WPA-3B

contactus.....

Contact our technical support staff to find the right equipment for your application. **800.444.1508**

NEW



VIDEO ONLINE



HM-705



HM-84



HM-75



HM-89

CONCRETE TEST HAMMERS

ASTM C805/C805M, C5873; BS 1881-202, EN 12504-2, 13791

Concrete test hammers are part of any comprehensive concrete assessment toolkit, providing fast, nondestructive evaluations of the strength and consistency of hardened concrete. Rebound numbers, or R values, reveal areas of inconsistent quality, estimate in-place compressive strength, isolate areas damaged by freezing or fire, and indicate areas requiring more advanced nondestructive evaluation or testing. Rock Schmidt Hammers for specific geological and geotechnical applications assess strength and soundness characteristics of rock formations.

Gilson offers concrete test hammers meeting ASTM, British, and European standards in two levels of impact energy:

- **Type N** hammers provide an impact energy of 1.63ft-lbf (2.207Nm) for non-destructive testing on standard concrete elements with thicknesses greater than 3.9in (100mm).
- **Type L** hammers with an impact energy of 0.54ft-lbf (0.735Nm) provide more repeatable values and less cosmetic or structural damage when testing items less than 3.9in (100mm) in thickness. L models are ideal for thin section applications like precast pipe or for testing early-age concrete for form removal or post-tensioning operations.

HM-705 Gilson Concrete Test Hammer is a reliable, economical Type N model meeting standard test method requirements. This quality hammer features a machined aluminum case and gives accurate and consistent performance. A durable nylon carrying case with loop handle, a carborundum stone for surface preparation, and impact energy charts are included. HM-76B Concrete Test Hammer Calibration Anvil is recommended to verify calibration after every 1,000–2,000 impacts. **Product Dimensions:** 2.1x14in (53x356mm), dia.xH.

HM-75 Original Schmidt Concrete Test Hammers are traditional Type N and Type L analog models produced by the original manufacturer and have been a trusted solution since the 1950s. Quality materials, rugged design, and meticulous craftsmanship make these models stand out from the competition. The Type L model meets ASTM D5873 for assessment of rock hardness. A plastic carrying case, carborundum stone, reference chart, and certificate of conformity are included. HMA-864 Original Schmidt Calibration Anvil is recommended to periodically verify the calibration of Original Schmidt test hammers. This calibration anvil has a solid steel hammer guide, 6in (152mm) diameter anvil, and hardened alloy steel rebound plate. **Product Dimensions:** 2.1x14in (53x356mm), dia.xH.

HM-84 Original Schmidt Live Concrete Test Hammers are available in Type N and Type L models. Both use a traditional impact mechanism with a steel plunger,

but R value measurements are captured with an accelerometer and electronically processed to make strength and uniformity assessment more accurate, repeatable, and efficient. The digital Schmidt Live system features cloud-based connectivity for instant jobsite reporting of test results in PDF or CSV formats. Lag time required to record readings and calculate R values is eliminated. Rebound values, number of impacts, impact angle correction, and series identification are automatically recorded and calculated. The free Schmidt Live app for iOS and Android enhances data management and information sharing and includes text-to-speech functions to optimize testing efficiency. The app allows real-time sharing of test data with off-site personnel. A logbook feature allows GPS positioning, notes, images, and audio comments to be added to the reports. The Schmidt Live Test Hammers are effective on concrete with compressive strengths from 1,450 to 10,152psi (10 to 70MPa) and the Type L version meets ASTM D5873 for rock testing. They can also be used in stand-alone operation as digital or analog hammers. Included with each Schmidt Live Test Hammers is a Bluetooth module, carrying bag, carrying strap, Micro USB cable, Rechargeable AAA battery, carborundum stone, conversion curve label, and certificate of conformity. HMA-864 Original Schmidt Calibration Anvil is recommended to periodically verify calibration. HMA-866 Hard Plastic Carrying Case is also available, purchased separately. **Product Dimensions:** 10.8x3.3x2.4in (274.3x83.8x61mm), WxDxH.

HM-89 Silver Schmidt Concrete Test Hammers use precision optical encoders to measure impact and rebound energy of the lightweight aerospace alloy impact plunger. This system in the Type N and Type L models features automatic position correction and is unaffected by internal friction, maximizing accuracy and repeatability over traditional systems. Rebound numbers are expressed as Q values, better suited for testing high-strength concretes. The Silver Schmidt meets ASTM and International standards and is optimized for use with pulse velocity instruments in sonic rebound (SONREB) methods for improved compressive strength estimates. Data logging capabilities and intuitive menu-guided operation allow more efficient testing and reporting. Up to 20,000 data points can be recorded in series of 70 impacts each, and preset statistical programs further enhance accuracy. The free Schmidt Live app for iOS and Android enhances data management and information sharing and includes text-to-speech functions to optimize testing efficiency. The app allows real-time sharing of test data with off-site personnel, and generates instantaneous reports in PDF and CSV formats. A logbook feature allows GPS positioning, notes, images, and audio comments to be added to the reports. The unit features a backlit, 100x100 pixel display and a rugged, fiber-reinforced shell. Power is supplied by alkaline or rechargeable AAA batteries with an estimated life of 20,000 impacts between charges. Both models are effective for testing concrete with compressive strength from 1,450 to 14,500psi (10 to 100MPa). With user-generated correlation curves, ultra-high performance concrete (UHPC) with compressive strengths up to 17,405psi.



HMA-866



HM-82



HM-76B



HMA-864

(120MPa) can be tested. Combining the optional HMA-860 Mushroom Plunger accessory with the Type L hammer allows testing of lower strength or green concretes with strengths from 725 to 4,351psi (5 to 30mPa). The HM-89L can also be used in ASTM test method D5873 for determination of rock core strengths. Silver Schmidt Test Hammers include a carrying bag, battery charger with USB cable, carborundum stone, basic software, and a certificate of conformity. **Product Dimensions:** 2.16x10.04in (55x255mm), dia.xH.

HM-82 Rock Schmidt Test Hammers for geological applications measure hardness, strength, and consistency of rock formations for evaluation of engineering properties. Rebound values assess age and weathering or estimate penetration rates for excavation or tunnel boring. The Rock Schmidt Type N or Type L models meet ASTM D5873 requirements and feature intuitive menu-guided operation, electronic data processing, automatic correction for testing positions, and test data storage. Rock Schmidt test hammers have a memory capacity for up to 400 complete tests. The included RockLink software enables data downloads to a computer for analysis and reporting and supports creation of correlation curves

to estimate unconfined strength. Estimated battery life for 5,000 or more impacts between charges. The Type L test hammer is suitable for testing rock cores or in-place formations less than 4in (102mm) thickness. A carrying bag, carborundum stone, battery charger with USB cable, Rocklink software, and certificate of conformity are included. **Product Dimensions:** 2.16x9.84in (55x250mm), dia.xH.

The HMA-861 Calibration Anvil verifies performance of Type N and Type L Silver Schmidt and Rock Schmidt models. For economic performance monitoring, the optional HMA-863 Anvil Adapter accessory allows the HMA-864 Calibration Anvil to be used with Silver Schmidt and Rock Schmidt models as well as the Original Schmidt.

Callibration Anvils are 6in (152mm) diameter solid steel cylinders with guides to fit the exact dimensions of the prescribed test hammer models. A concave hardened alloy steel rebound insert gives consistent impact values to verify hammer performance.

Concrete Test Hammers

Model	Description	Compressive Strength	Impact Energy
HM-705	Gilson Concrete Test Hammer	1,450–10,152psi (10–70mPa)	1.63ft-lbf (2.207Nm)
HM-75	Original Schmidt, Type N	1,450–10,152psi (10–70mPa)	1.63ft-lbf (2.207Nm)
HM-75L	Original Schmidt, Type L	1,450–10,152psi (10–70mPa)	0.54ft-lbf (0.735Nm)
HM-84	Original Schmidt Live, Type N	1,450–10,152psi (10–70mPa)	1.63ft-lbf (2.207Nm)
HM-84L	Original Schmidt Live, Type L	1,450–10,152psi (10–70mPa)	0.54ft-lbf (0.735Nm)
HM-89	Silver Schmidt, Type N	1,450–14,500psi (10–100mPa) ¹	1.63ft-lbf (2.207Nm)
HM-89L	Silver Schmidt, Type L	1,450–14,500psi (10–100mPa) ²	0.54ft-lbf (0.735Nm)
HM-82	Rock Schmidt, Type N	2,900–21,750psi (20–150mPa)	1.63ft-lbf (2.207Nm)
HM-82L	Rock Schmidt, Type L	2,900–21,750psi (20–150mPa)	0.54ft-lbf (0.735Nm)

¹Up to 17,405psi (120mPa) with user-defined correlation. ²725–4,351psi (5–30mPa) when using HMA-860 Mushroom Plunger.


Accessories

Model	Description	Supports Models
HM-76B	Test Hammer Calibration Anvil	HM-705, HM-75, HM-75L, HM-84, HM-84L
HMA-864	Original Schmidt Calibration Anvil	HM-75, HM-75L, HM-84, HM-84L
HMA-863	Adapter for HMA-864 Calibration Anvil	HM-82, HM-82L, HM-89, HM-89L
HMA-861	Silver Schmidt Calibration Anvil	HM-82, HM-89, HM-82L, HM-89L
HMA-860	Mushroom Plunger	HM-89L
HMA-866	Hard Plastic Carrying Case	HM-84, HM-84L





HM-196

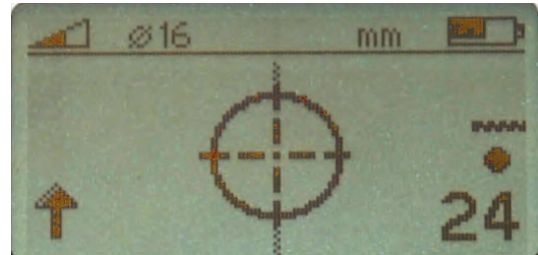

Close-up of HM-196 screen



HM-196 in use

PROFOSCOPE REBAR LOCATORS AND COVER METERS

BS 1881-204

The Profoscope and Profoscope Plus by Proceq are versatile, fully-integrated rebar detectors and cover meters with detection capabilities to a maximum depth of 7in (179mm). A single No. 5 reinforcing bar can be located to a depth of 5.5in (140mm). Both models are designed for one-handed operation and feature rebar-proximity indicators with visual and acoustic locating aids for location and minimum cover alert.

The detectors identify the mid-point between bars as well as their orientation. Rebar diameter is estimated within the specified testing range. These unique features and Proceq's intuitive user interface to make the task of locating reinforcing steel efficient and straightforward. The icon-based menu system shows all settings, detection, and navigation information. A simple crosshair icon shows the relative location of the strongest signal beneath the meter. An included start-up test kit consists of two short lengths of rebar in a cardboard box with a lid. The kit allows simple user orientation and training for all functions in a comfortable environment before using it on a job site.

All values switch easily between metric and imperial units of measure. The display itself has a switchable backlight for low-light environments. 30-second sleep mode and


120-second auto shutdown features extend battery life. Profoscope units are powered by two AA batteries with a battery life of up to 50 hours when the backlight is off. **Product Dimensions:** 8x3.6x1.6in (203x91x41mm), WxDxH.

HM-196 Profoscope requires manual notation of measurements and data and includes a canvas carrying bag, carrying strap, two AA batteries, and marking chalk.

HM-197 Profoscope Plus increases efficiency and eliminates the need for manual notation with data storage for 500 measurements. Manual storage mode saves rebar diameters and cover values. An automatic mode records cover depths from surface scans. Up to 99 measurements can be recorded for each object. Included ProfoLink software enables data transfer to a PC for later analysis. The Profoscope Plus also includes a memory card, a canvas carrying bag, carrying strap, two AA batteries, and marking chalk.

Profoscope Rebar Locators and Cover Meters

Profoscope Rebar Locator and Cover Meter	HM-196
Profoscope Plus Rebar Locator and Cover Meter	HM-197

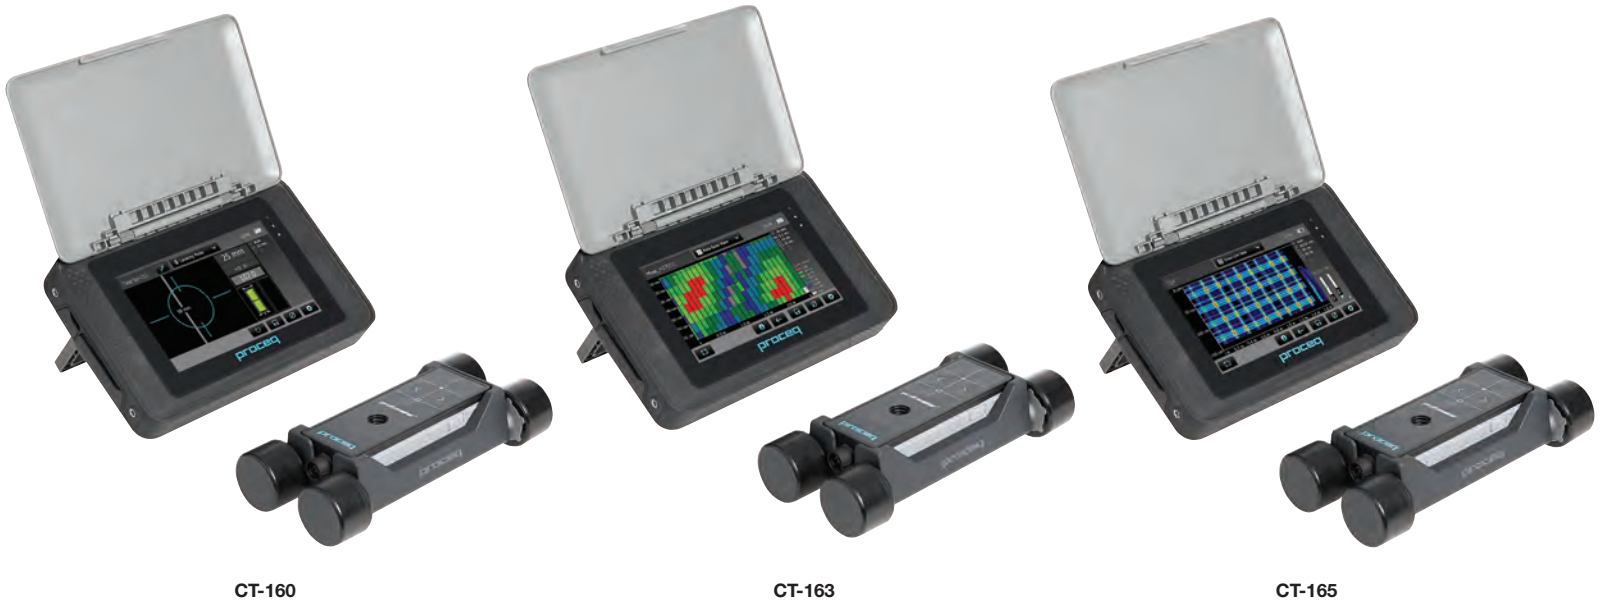

CT-160

CT-163

CT-165

PROFOMETER® 6 COVER METERS

BS 1881-204

Profometer® 6 Cover Meters by Proceq are the sixth generation in over forty years of quality instruments designed for location and measurement of concrete reinforcing steel. These models offer flexibility, productivity, and advanced technology, with high-resolution color touchscreen operation, internal 8GB flash memory, dual-core processors, and instant model upgrades through purchase of an activation key.

Profometer models have superior detection range and accuracy. Bar location can be detected and concrete cover measured up to 7.3in (185mm) deep, with cover accuracy of less than ± 0.16 in (4mm). Shallower depths can produce diameter accuracy of ± 1 mm. Diameter of No. 12 (40mm) bars can be identified at depths up to 2.5in (64mm) with accuracy of ± 1 mm. Detection and measurement limits and accuracy are affected by cover depth and bar diameter. 7in (178mm) IP54 rated color touchscreen display is 800x480 pixels.

All models feature a color touchscreen in a ruggedized housing for harsh field conditions, a universal probe with integrated spot probe and detachable wheeled scanning cart, a 5ft (1.5m) probe cable, power supply, carrying strap, and carrying case. Profometer Link software is also included and allows downloading of data and creation of customized reports with detailed charts and graphs. Optional CTA-85 Extension Handle makes data collection on floors or overhead areas more efficient and less tiring. All Profometer 6 units share the same hardware and basic electronics, differing only in available software features. Upgrade Kits are available separately and consist of activation keys to unlock features converting the CT-160 to CT-163 and the CT-163 to CT-165. Each model can also be converted directly to the CT-170 Profometer 600 Corrosion Meter (listed separately) with purchase of the CTA-91 Conversion Kit and desired Corrosion Electrode. 3.6V internal battery is rated for up to eight-hour use in standard mode. **Product Dimensions:** 9.8x6.4x2.4in (249x163x61mm), WxDxH.

CT-160 Profometer 600 precisely locates reinforcing steel and provides accurate assessments of cover depths. It is ideal for avoiding damage to the reinforcement matrix when drilling, coring, or cutting concrete, as well as determining adequate concrete cover over steel in large areas or for spot checks.

Operation in locate mode detects rebar location and direction, while measuring bar diameter and cover depth. On-screen visual prompts offer control over signal strength and speed. Integral spot probe features increased definition in corners or areas of congested reinforcement. Settings are directly accessible on the measurement screen. Inclined rebars are automatically detected.

Snapshot and statistics views display a comprehensive graphic of measured data on the screen. Cover and diameter for each rebar is shown in snapshot, while statistics view presents a graphical display of cover depth distribution. Measured values are easily assessed directly on the screen. Simply reopen stored files to continue measurements. Stored data is easily exported to a PC through the USB port using the Profometer-Link software.

CT-163 Profometer 630 AI features enhanced functionality over the CT-160 by adding Single-Line, Multi-Line, and Area Scan Modes, and advanced statistical capabilities. Single-line and multi-line scans allow continuous recorded measurements of cover over long distances with or without bar diameter measurements. Colors indicating cover and bar diameter parameters can be assigned to quickly highlight areas of concern. The area scan feature produces a simplified view of cover data over a large area. This makes it easy to assess conformity of slabs and structural walls to required codes for corrosion protection and fire resistance.

CT-165 Profometer 650 AI offers the full reporting features of the CT-163 and adds Proceq's unique Cross-Line Scan measuring mode and analysis functions. The 2D Cross-Line Scan feature adds the ability to combine linear scans in the X and Y axis into a single representation of first and second layers of reinforcing bars. Details of cover, bar diameter, and signal strength are all displayed. Adjustments to signal strength gain and offset can be made to define specific features, for instance; allowing display of only the first layer of rebars.

Profometer® 6 Cover Meters

Profometer® 600 Cover Meter	CT-160
Profometer® 630 AI Cover Meter	CT-163
Profometer® 650 AI Cover Meter	CT-165

Accessories

Upgrade Kit, CT-160 to CT-163	CTA-81
Upgrade Kit, CT-163 to CT-165	CTA-82
Telescopic Extension Rod with Cable, 5.6ft (1.7M)	CTA-85
Conversion Kit converts to Profometer® 600 Corrosion Meter	CTA-91





CT-170



CTA-95

CTA-96

CTA-97

PROFOMETER® 600 CORROSION METER

ASTM C876; BS 1881

The Profometer® 600 Corrosion Meter uses half-cell electrical measurement technology for detection and mapping of steel reinforcing corrosion in reinforced concrete. A cable is connected to the rebar grid and electrical potential is measured through fluid-saturated copper/copper sulfate electrode probes. Data is collected in the ruggedized touchscreen controller and processed for mapping and reporting with the included Profometer Link software. Extent of active corrosion activity is easily measured and documented and corrosion hot-spots are quickly isolated.

This advanced instrument features a 7in (178mm) 800x480 pixel color touchscreen display with an intuitive user interface, illustrative display and assisted workflow. The dual-core processor and 8GB flash memory allows for efficient post processing of measured data and storage for later download to user's PC. Customizable graphic screen views and a pre-defined, ASTM compliant layout enable fast, on-site data interpretation. Measurement range is from -1000 to +1000mV with 1mV resolution. Sampling rate is 900Hz and impedance is 100MΩ. The Profometer Corrosion Meter can also be configured to use third-party silver/silver chloride electrodes.

The CT-170 includes the Profometer touchscreen, interface box, charger, 82ft (25m) cable with clamp, USB cable, software, carrying case, and strap. The unit

requires a Corrosion Electrode Probe, purchased separately, for operation. The conventional Electrode Rod probe is used for single readings or on a manually-defined grid pattern. Available Single-Wheel and Four-Wheel Electrodes improve data collection accuracy and maximize productivity for assessing large areas. Both wheeled electrodes include a 5.6ft (1.7m) telescopic handle, encoder, and required cables.

The Corrosion Meter is designed to be an all-in-one instrument and shares hardware and electronics with the Profometer® 6 series of Cover Meter. The CTA-92 Conversion Kit converts the CT-170 Corrosion Meter to a CT-160 Profometer 600 Cover Meter, complete with a universal probe (see separate listing). **Product Dimensions:** 9.8x6.4x2.4in (249x163x61mm), WxDxH.

Profometer® 600 Corrosion Meter

Profometer® 600 Corrosion Meter	CT-170
Accessories	
Rod Corrosion Electrode	CTA-95
Single-Wheel Corrosion Electrode	CTA-96
Four-Wheel Corrosion Electrode	CTA-97
Conversion Kit to CT-160 Cover Meter	CTA-92



HM-246

CONCRETE CORROSION MAPPING SYSTEM

ASTM C876; BS 1881

The Corrosion Mapping System rapidly scans concrete surfaces for the presence of or tendency for chloride-induced corrosion in reinforcing steel. Operating on the half-cell potential method, this instrument is used for assessment of bridge decks, pavement, walls, and other structures.

Steel buried in concrete is normally passive to corrosion until chlorides from the environment permeate the concrete and create anodic and cathodic areas, starting the flow of corrosion currents. Half-cell measurements are an indicator of corrosion activity. The half-cell probe electrically connects to the concrete through a water-saturated foam sponge. A separate cable from the meter is attached to a rebar in the structure, completing the electrical circuit. The resulting potential reading can be correlated to corrosion activity of the steel in the vicinity of the probe. Readings can be plotted on paper or on the structure itself to provide an easy to interpret graphic assessment of the structure. Probable corrosion areas and the total area of the structure subject to corrosion can be determined.

The System includes a specialized voltmeter in a protective pouch, copper/copper sulfate electrode with surfactant reservoir and dispensing sponge, a separate electrode for overhead readings, two 15in (381mm) extensions, reel with 250ft (76m) of wire, surfactant solution, copper sulfate crystals, and operating manual, all in a sturdy plastic case. The probe can attach to a long handle for ceilings. A rebar locator is also recommended to reference bar position. **Product Dimensions:** 19.75x15.75x7.5in (502x400x191mm), WxDxH.

Concrete Corrosion Mapping System	
Concrete Corrosion Mapping System	HM-246
Accessories	
Surfactant Reservoir with CuSO ₄ Electrode	HMA-385
Concrete Surfactant Solution	HMA-386
Replacement Dispensing Sponge	HMA-387



HM-952

RESIPOD CONCRETE RESISTIVITY METER

AASHTO T 358; ASTM Pending

Electrical resistivity of concrete surfaces correlates directly to permeability, the likelihood and rate of reinforcing steel corrosion, as well as chloride diffusion rate. The Resipod meter by Proceq features a four-probe Wenner array fully integrated into an electronic meter with digital display, ready to use for laboratory or field resistivity applications. This simple new test method is based on resistivity readings from standard concrete test cylinders and is a fast, accurate, and economical alternative to ASTM C1202 Rapid Chloride Permeability. The same cylinder can be used for compressive strength testing and structural elements in the field can be checked with the same meter for comparative values. Specific mix designs can be evaluated in the lab and areas within an existing structure can be quickly mapped for their susceptibility to chloride induced corrosion of reinforcing steel.

The Resipod meter is available in two versions, the HM-952 with probe spacing fixed at 38mm (1.5in) as required in AASHTO T 358 and the HM-954 with 50mm (1.97in) probe spacing. The wider spacing allows a greater sampling size, but is still narrow enough to avoid interference from reinforcing steel in most cases. Resistance is measured from 1 to 1,000 kΩcm and current is supplied at a variable 10–50μA or a full 200μA. The nonvolatile memory stores up to 500 measured values for transfer to a PC using the included Resipod Link software.

The one-piece, handheld Resipod provides instantaneous and reliable readings on the large, 3.5-digit LCD display and is housed in a rugged, IP67 rated waterproof enclosure. Each contact point of the probe array carries a small water reservoir to assure reliable electrical contact with the specimen surface.

HMA-844 Geometric Accessory is a four-probe Wenner array attachment with variable probe spacing from 40 to 70mm (1.57 to 2.76in) for testing of a wide range of concrete sample types and mix designs. HMA-843 Bulk Resistivity Accessory is used to measure resistivity on 4x8in concrete cylinders and includes measurement plates with conductive foam contact pads and an instrument stand with cable connections. Both accessories connect to the Resipod Meter for operation. The Resipod meter kit includes a test strip, foam contact pads, a charger with USB cable, Resipod Link software, carrying strap, documentation, and case. ResipodLink Windows-based software is used to download all measurements from the device to PC for analysis and reporting. User-defined correction factors can also be defined in the software and uploaded to the device. The charger connects to standard USB ports on computers and laptops. **Product Dimensions:** 7.1x2.1x2.7in (180x53x69mm), WxDxH.

Resipod Concrete Resistivity Meter	
Resipod Concrete Resistivity Meter, 38mm Probe Spacing	HM-952
Resipod Concrete Resistivity Meter, 50mm Probe Spacing	HM-954
Accessories	
Geometric Accessory	HMA-844
Bulk Resistivity Accessory	HMA-843
Replacement Foam Contact Pads, pkg. 20	HMA-846
Resipod Test Strip	HMA-847
Bulk Resistivity Contact Pads, pkg. 10	HMA-848



CT-130



CT-130 Field Application



PUNDIT ULTRASONIC PULSE VELOCITY TESTERS

ASTM C597; ISO 1920; EN 12504

Proceq Pundit Ultrasonic Pulse Velocity (UPV) Instruments provide an accurate and reliable means of assessing the quality of concrete. Transmission and receiving transducers send and receive a timed pulse of ultrasonic energy through the concrete to be tested. The time the signal takes to get through the concrete is used to determine its homogeneity and integrity. Pulse velocity measurements measure concrete uniformity, detect cracks and voids, track changes over time, and determine dynamic physical properties. Compressive strength can be estimated using the SONREB (SONic-REBound) method, the combined ultrasonic pulse velocity/rebound value from a Schmidt concrete test hammer. Measurement modes include crack depth, pulse velocity, surface velocity, data logging, and E-modulus. A range of additional transducers are available to allow more depth of penetration or better resolution.

CT-130 Proceq Pundit PL-200 is designed for harsh environments and features industry-leading components. A rugged housing encloses the 7in color touchscreen, the highest-resolution screen of any UPV tester on the market. A dual-core processor allows the best possible analysis of measured waveforms and the modular, expandable design ensures compatibility with future peripherals and accessories. 8GB of memory stores up to 100,000 Area Scans. Settings are directly accessible on the measurement screen. The PL-200 additionally has Line Scan and Area Scan measurement modes. Area scan mode assesses 2D structural uniformity with an adjustable grid pattern and user-definable color classification by material thickness. E-Modulus can be directly determined on the instrument and Poisson's Ratio is calculated by the PL-Link software. A dual cursor mode measures and displays P and S-wave velocities simultaneously. Data logging features include an automated countdown timer to the next measurement and graphical pulse velocity development. Included firmware updates throughout the instrument's lifespan extends versatility and service life. The Pundit PL-200 comes with a carrying case, rechargeable batteries, battery charger with USB cable, two 54kHz transducers, two 1.5m BNC cables, couplant, calibration rod, and PL-Link software. **Product Dimensions:** 9.8x6.4x2.4in (249x163x61mm), WxDxH.

CT-133 Proceq Pundit Lab+ Ultrasonic Testing Instrument features online data acquisition, waveform analysis, and remote control of all transmission parameters and data logging functionality. An integrated gain stage eliminates the need for an external amplifier when using long cables. A real-time measurement stamp captures the precise measurement time and the data review list provides on-site review on the 3in OLED display. On-board data storage captures up to 500 readings. A USB interface and PL-Link software allows analysis or export to spreadsheet applications. Power is supplied with rechargeable batteries or by PC via USB cable. The Pundit Lab+ comes with a carrying case, rechargeable batteries, battery charger with USB cable, two 54kHz transducers, two 1.5m BNC cables, couplant, calibration rod, and data carrier with software. **Product Dimensions:** 6.8x8.7x2.2in (172x221x56mm), WxDxH.

CT-135 Proceq Pundit Lab+ has identical features to the CT-133, but does not include transducers.

Pundit Ultrasonic Pulse Velocity Testers

Pundit PL-200	CT-130
Pundit Lab+	CT-133
Pundit Lab+ (No Transducers)	CT-135

Accessories

24kHz Transducers	CTA-30
54kHz Exponential Transducers with Calibration Rod	CTA-33
150kHz Transducers	CTA-35
250kHz Transducers	CTA-36
500kHz Transducers	CTA-37
Transducer Holder	CTA-38
Pundit Lab Carrying Bag	CTA-39



CT-150 Field Application

NEW



CT-150



PROCEQ GP8000 GROUND PENETRATING RADAR LIVE

ASTM D4748, D6087, D6432; AASHTO R 37-04; EN 302066

Proceq GPR Live handheld ground penetrating radar features ultra-wideband detection for unparalleled subsurface evaluation of concrete bridges, buildings, pavements, and other concrete construction. Using Stepped Frequency Continuous Wave (SFCW) technology, GPR Live real-time scanning covers all frequencies from 0.2 to 4.0GHz. This versatility allows fast integrity assessment, as-built verification, single-side thickness measurement, and hit prevention to accurately mark drilling, cutting, and coring locations. Operation modes include line scan and 24x24in (60x60cm) area scan. Review modes include non-migrated scan, migrated heatmap, and time-slice/depth-slice. **Product Dimensions:** 8.7x7.1x5.6in (221x180x142mm), WxDxH.

CT-150 GPR Live Basic provides data storage up to 512GB and can be used with any iPad with iOS 9.0 and higher. When connected to an iPad Pro, the GPR Live offers the highest-resolution and largest 12.9in (328mm) display in the industry. The intuitive interface provides sound feedback and object identification when performing area scan, clearly identifying rebars up to a maximum reading depth of 28in (711mm).

The GPR Live probe is housed in a four-wheel scan car with 8mm of ground clearance and laser guidance for accurate data acquisition. Powered by rechargeable or easily replaceable AA batteries, the unit can operate up to 3.5 hours under continuous use. The Wi-Fi module provides completely independent operation from the iPad and has a wireless range up to 20m.

CT-153 GPR Live Pro adds additional functionality, including the Live Wire Kit, which detects any electrical lines with live current, pro time-slice view for adjustable surface depth and onsite-3D view, and cloud connectivity for live data sharing and reporting. When using iOS 12 or higher and an Augmented Reality-capable iPad, the tomographic time-slice and 3D visualization is overlaid on the real-world environment when looking through the iPad to provide real time, in-situ imaging.



CT-155

GPR Live Pro data is tracked and secured in the cloud using the Proceq Logbook. In addition to live data sharing, this allows post processing and data review from any iPad when signed into the connected Proceq account. All measurements, changes, and gain and filter settings are tracked and included with the scan. Geo-location, photos, audio notes, and comments can be also be added to the scan for quick reporting of details to off-site personnel.

Pro software functionality requires a subscription. The first year of the Pro Software subscription is included with the purchase of CT-153 or CT-155 Full Package. Year two and subsequent two-year subscriptions are purchased directly from Proceq. Basic software functionality is included with all models and can be used for the life of the unit at no additional cost.


CT-155 GPR Live Pro Full Package includes the GPR Live Pro, Proceq account with Logbook reporting, an on-device tablet holder that allows one-handed use and adjustable screen viewing positions, and a telescopic rod with tablet holder that enables access to hard-to-reach areas. A carrying case, wrist loop, battery pack, chalk, and two sizes of grid paper are included with all models.

Proceq GP8000 Ground Penetrating Radar

GP 8000 Live Basic	CT-150
GP 8000 Live Pro	CT-153
GP 8000 Live Pro Full Package	CT-155

Accessories

Grid Paper 60x60cm, 5cm grid (pkg. 5)	CTA-50
Grid Paper 60x60cm, 10cm grid (pkg. 5)	CTA-51
Grid Paper 24x24in, 2in grid (pkg. 5)	CTA-52
Grid Paper 24x24in, 4in grid (pkg. 5)	CTA-53
Chalk, Marking (pkg. 10)	CTA-54

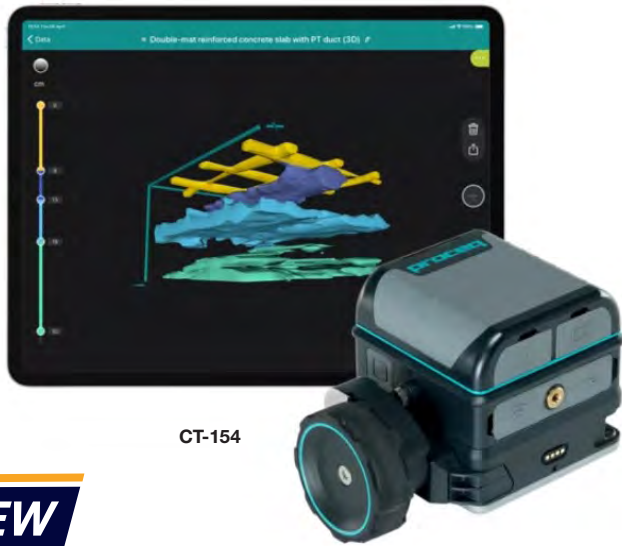

CT-154

NEW



CT-154 Field Application

PROCEQ GP8800 GROUND PENETRATING RADAR

ASTM D4748, D6087, D6432; AASHTO R 37-04; EN 302066

The ultra-compact GP8800 from Proceq fills the need for a powerful GPR unit that easily scans in tight spaces, on curved surfaces, overhead, and close to the walls of concrete bridges, structures, and pavements. This handheld model operates with Proceq's Stepped Frequency Continuous Wave (SFCW) technology, sweeping through a wide range of frequencies during scanning instead of the one-channel operation of pulsed-radar units. The 0.4–6.0GHz SFCW operation achieves penetration depths to 25.6in (65cm) with high-resolution characterization from a single antenna.

The GP8800 detects reinforcing bars and steel mesh, secondary layers of reinforcement, tendon ducts, cables, conduits, and other embedments. Voids, inclusions, and discontinuities are also identified, and slab or wall thicknesses are measured from a single side. Ground penetrating radar is the ideal technology for structural investigation, as-built verification, rebar detection, and thickness measurement.

The exclusive wireless tracking wheel adjusts between trailing and sidecar configurations for flexibility in cramped environments, and to permit cross-polarized scanning. The cross-polarization method combines data from two scans in perpendicular directions from the same area, greatly increasing instrument sensitivity and resolution. For scanning in narrow areas with as little as 2.5in (64mm) of clearance, the battery pack can be removed and tethered to the scan unit with a USB-C cable.

Like other GPR Live models, the GP8800 connects wirelessly over encrypted Wi-Fi to the user's Apple iPad® with iOS 12 or higher operating system. Proceq's Live Pro software uses the powerful post-processing capacity, high visual resolution, and reporting and collaboration features built into the iPad as an ideal platform to view, collect, and distribute results. Visualizations, graphics, and report data can be shared instantly to the cloud from any location.

Data migration processing displays results with Realistic 2D and 3D imagery throughout the detection depth. Using Apple's ARKit™, augmented reality (AR) images can be overlaid on the real-world environment when viewed through the iPad, providing real time, in-situ imaging of subsurface elements. iPad hardware and operating systems can be upgraded at any time for improved performance and new features with no need to replace the GPR sensing unit.

Memory and display capabilities allow straight-line scans up to 3,281ft (1,000m), but the unit is better suited ergonomically for shorter line scans and defined area scans up to 47.2x47.2in (120x120cm).

The GP8800 antenna is completely contained within the compact housing. The wireless tracking wheel attaches to any side of the housing to allow scanning in any

direction and easy cross-polarized measurements. Powered by four rechargeable flight-safe, or readily available alkaline AA batteries, the unit operates up to 2.5 hours under continuous use. A tethered after-market 5VDC, 2A power bank can also be hot swapped for the battery pack to extend operating times to eight hours on large projects. Wi-Fi connection to the iPad allows independent operation with no cables at ranges up to 65ft (20m). Optional accessories include an extra battery pack with rechargeable AA batteries, and an ultralight telescoping alloy rod for hard-to-reach areas. **Product Dimensions:** 3.5x3.5x3in (89x89x76mm), WxDxH.

CT-154 GPR Live Pro includes the GP8800 sensing unit and Pro software with one-year subscription. A Wi-Fi module, USB-C cable, carrying case, wrist loop, battery pack, chalk, and two sizes of grid paper are also included.

CT-156 GPR Live Pro Full Package includes the GP8800 sensing unit and Pro software with one-year subscription, and a telescopic rod with tablet holder that enables convenient access to hard-to-reach areas. A Wi-Fi module, USB-C cable, carrying case, wrist loop, battery pack, chalk, and two sizes of grid paper are also included.

GPR Live Pro data is tracked and secured in the cloud through the Proceq Logbook. In addition to live data sharing, this allows post processing and data review from any iPad when signed into the connected Proceq account. All measurements, changes and gain and filter settings are tracked and included with the scan. Geolocation, photos, audio notes and comments can be added to the scan for quick reporting of details to off-site personnel.

GPR Live Pro software is subscription based. A one-year subscription is included with the purchase of CT-154 or CT-156 Full Package models. Subsequent two-year subscription packages purchased from Proceq include updates.

Proceq GP8800 Ground Penetrating Radar

GPR Live Pro GP8800	CT-154
GPR Live Pro GP8800 Full Package	CT-156
Accessories	
Grid Paper 60x60cm, 5cm grid (pkg. 5)	CTA-50
Grid Paper 60x60cm, 10cm grid (pkg. 5)	CTA-51
Grid Paper 24x24in, 2in grid (pkg. 5)	CTA-52
Grid Paper 24x24in, 4in grid (pkg. 5)	CTA-53
Chalk, Marking, (pkg. 10)	CTA-54
Telescopic Rod with iPad Mount	CTA-63
Extra Battery Pack	CTA-64

NEW



CT-180



CT-180 Details



PROCEQ GS8000 SUBSURFACE GROUND PENETRATING RADAR (GPR)

ASTM D6432; ASCE 38-02

Proceq's GS8000 GPR unit is an ideal solution for larger-scale subsurface applications like underground utility location and mapping, geophysical investigations, infrastructure asset inspection, and forensic and archeological studies. The walk-behind cart is well-suited for scans of pavements, bridge decks, and slabs, as well as "off-road" terrain. Stepped Frequency Continuous Wave (SFCW) technology sweeps over an ultra-wide 0.2–3.4GHz band width, balancing signal penetration depth and object resolution in one antenna without the compromises of single frequency pulsed-radar systems.

Scan data at speeds up to 22mph (35kmh) is displayed on the fly, in real time. Maximum penetration depth is 33ft (10m). In average soil conditions, penetration is approximately 12ft (3.7m). A 0.4in (10mm) metallic object can be detected at up to 305mm (12in) deep. Specifications listed apply to units sold in North America.

An encrypted Wi-Fi connection to the user's Apple iPad® provides the ideal platform to view, collect, and distribute results. The included GS8000 Pro software leverages the iPad's powerful post-processing capacity, high visual resolution, and reporting and collaboration features. Instantly upload scan data, graphics, and report information to the cloud from any location for immediate sharing with stakeholders everywhere. The subscription-based software provides free updates and releases.

Data is displayed in real-time during a scan. Raw scan data is migrated to display realistic 2D or 3D images, and with Apple's ARKit™, augmented reality (AR) images can be overlaid on real-world views through the iPad. Real time, in-situ images of subsurface elements do not require extensive interpretation by experts.

Separating the data processing and display hardware and software from the sensing unit helps to future-proof the system and ensure upgradeable performance for years to come. Any iPad or iPad Pro unit can be used. The iPad Pro®

WiFi + Cellular model with 1TB storage capacity and current iOS operating system is recommended.

An onboard multiband GNSS (Global Navigation Satellite Systems) antenna provides accurate positioning and receives signals from GPS, Glonass, Galileo, and Beidou system satellites. With an active internet connection, SSR (State Space Representation) augmentation further refines geolocation data and records it automatically with corrected precision of 0.5–2in (1–5cm). Tags, marks, photos, notes, and voice note observations with precise locations are added to the report data during scanning.

The complete wireless system is fully integrated with a collapsible and ergonomically adjustable rolling cart that easily rolls over varied terrain. The antenna quickly changes between ground-coupled, dual-axis floating alignment to air gap positioning with 1in (25mm) clearance. The maximum length for straight-line scans is 9.3mi (15km), and grid scans can be performed to a size of 260x260ft (80x80m).

Power is provided for a full working day by eight rechargeable flight-safe NiMH C-batteries (not included) in battery packs that can be hot-swapped, or a user-supplied USB-PD compatible power bank.

The GS8000 Subsurface CT-180 GPR unit is supplied with a one-year subscription to the GS8000 Pro software, Wi-Fi Module, a GNSS geolocation antenna, and collapsible push-pull cart. A power supply, AR marker, basic tools, and USB cables are also included. GS8000 Pro software is subscription based. Additional two-year subscriptions are available directly from Proceq. **Product Dimensions:** 24x22x15in (610x559x381mm) WxDxH.

Proceq GS8000 Subsurface Ground Penetrating Radar (GPR)

GS8000 Subsurface GPR

CT-180

NEW

PULL-OFF TESTER

ASTM D4541, D7234, D7522, C1583; ISO 4624; EN 1542, 1015-12, 1348

- Covers a wide range of pull-off applications
- Fully automated operation with constant loading rate removes operator influence
- Every test parameter is recorded and verifiable

Proceq Pull-Off Testers produce accurate, repeatable results when testing bond, adhesion or tensile strength of coatings, overlays, and substrate surfaces. The Testers are fully automated, with one touch operation after programming and test disc preparation are complete. Feedback controlled motors provide a constant, verifiable load rate that eliminates operator influence on load measurements.

Every test parameter is verifiable and recorded by the included DY-Link software. The compact size of the Testers allows use in spaces with restricted access and easy operation on walls and overhead surfaces. Applications include the bond and strength assessment of concrete repairs and overlays, pull-off and adhesion strength of coatings bonded to concrete, tensile strength of concrete surfaces, and adhesive strength of asphalt.

Programming is simple and can be performed on a horizontal surface prior to use on walls and overhead. Simply select the units of measure, test disc size, and load rate. To conduct the test, a specialized coring bit is used to cut the substrate material to match the size of the test disc. A standard epoxy-based adhesive adheres the disc to the surface. The Pull-Off Tester is connected and applies perpendicular force until the test disc is pulled off and the maximum force required is recorded. Total testing time is less than 100 seconds for all applicable standards. Up to 80 tests can be performed on a single battery charge. Internal memory can store up to 100 measurements.

The Pull-Off Testers begin to measure as soon as any load is applied, and the load rate can be viewed in real-time when connected to a PC. The Testers provide a complete record of the pull-off test, confirming that the test was carried out in accordance with the applicable standard. Recorded parameters include the time/date of the test, test disc size, maximum load applied, calculation of bond strength, applied load rate, test duration time, and failure mode. Failure modes include failure in the coating layer, between the coating layer and substrate, and failure in the substrate.

CT-140 Pull-Off Tester has a maximum pulling force of 16kN (3,597lbf) and is suitable for most pull-off applications.

CT-143 Pull-Off Tester has a maximum pulling force of 25kN (5,620lbf) for high-strength applications, including the tensile strength of concrete renovation and the bond and tensile strength of cementitious repairs and overlays.

The Test Disc required varies according to material and application. The feet on the Pull-Off Testers are configured differently to accommodate the different sizes of Test Discs. Smaller test discs use a tripod configuration, a two-legged arrangement for larger test discs, and the accessory CTA-56 Adapter Plate is needed to accommodate 75 and 100mm test discs. Proceq Test Discs require a M10 Draw Bolt. M8 and M12 Draw Bolts are available for Test Discs supplied by other manufacturers.

A comprehensive range of test discs, draw bolts, and an adapter plate are available. Included with both models are a carrying case, battery pack, battery charger with USB cable, 50mm aluminum test disc, M10 draw bolt, Torx screwdriver, DY-Link software, operating instructions, and calibration certificate. **Product Dimensions:** 4.3x9.4x8in (109x239x203mm), WxDxH.

Pull-Off Tester

Pull Off Tester, 16kN (3,597lbf)	CT-140
Pull Off Tester, 25kN (5,620 lbf)	CT-143

Accessories

Test Disc, Steel, 50mm dia., pkg. 10	CTA-40
Test Disc, Aluminum, 50mm dia., pkg. 10	CTA-41
Test Disc, Aluminum, 20mm dia., pkg. 10	CTA-42
Test Disc, Aluminum, 50x50mm, pkg. 10	CTA-43
Test Disc, Aluminum, 40x40mm, pkg. 10	CTA-44
Test Disc, Aluminum, 100mm dia., pkg. 3	CTA-45
Test Disc, Aluminum, 100x100mm, pkg. 3	CTA-46
Test Disc, Aluminum, 75mm dia., pkg. 5	CTA-47
Draw Bolt, M10 Short	CTA-48
Draw Bolt, M8 Short	CTA-49
Draw Bolt, M12 Short	CTA-55
Adapter Plate for Large Test Discs	CTA-56



HM-723



HMA-278



HMA-279



HMA-299



HMA-283



HMA-286



HMA-287

RAPID CHLORIDE PERMEABILITY TESTER

ASTM C1202; AASHTO T 277

Chloride permeability characteristics of concrete can be reliably determined with the Proove'it system by Germann Instruments. The simple Rapid Chloride Permeability Test (RCPT) is performed on concrete specimens taken from cores or test cylinders. Electrical current flow is measured across a 4x2in (102x51mm) dia.xH specimen positioned in a test cell with fluid reservoirs at each end. The negative end is immersed in a 3% sodium chloride solution and the positive end in a 0.3N sodium hydroxide solution. The specimen is subjected to a 60V DC potential across the ends for six hours. The more permeable the concrete, the higher the total charge or Coulombs passed across the specimen.

HM-723 Rapid Chloride Permeability Tester includes a microprocessor power supply module that distributes precisely controlled voltage to as many as eight RCPT specimens simultaneously. Windows®-based software installed on the user's PC controls test parameters, stores test data, and prepares professional quality reports that can be customized with a company logo. Electrical current readings are updated every five seconds and a predicted six-hour Coulomb value is generated every five minutes. Test results can be exported to Excel for comprehensive statistical analyses of the results. Software, power cord, serial cable, and manual are included. Testing time and parameters are programmable as required. The system can also be adapted for ASTM C1760 Bulk Electrical Conductivity Testing (inquire) and to determine Chloride Migration Coefficient as described in NordTest Build 492. Voltage settings can be adjusted from 5 to 60V in 5V increments.

HMA-278 Specimen Cells are purchased separately and are ready to use with sealing rings for 4in (102mm) diameter specimens, connecting cables, and temperature probe. Each cell consists of two plexiglass end-caps with embedded

conductive mesh and required electrical connections. HMA-279 Sealing Rings adapt Specimen Cells for use with 100mm (3.9in) specimens. Inquire for a special cell with cooling fins for testing highly permeable concrete or for tests requiring constant temperatures.

For efficient sample conditioning, the HMA-283 Vacuum Chamber saturates 4–6 samples at a time. Larger HMA-286 Vacuum Chamber has capacity for up to 20 specimens. The HMA-287 Vacuum Pump is available for use with it. The HMA-299 Verification Unit verifies output from the Proove'it Controller. Each channel of the Controller is set up for a selected voltage and connected to the Verification Unit. Actual current is displayed on the computer screen. **Product Dimensions:** 15x11x7in (381x279.4x178mm), WxDxH.

Rapid Chloride Permeability Tester

Rapid Chloride Permeability Tester, 115V, 60Hz	HM-723
230V, 50Hz	HM-723F

Accessories

Rapid Chloride Permeability Measuring Cell for 4in Specimens	HMA-278
Rapid Chloride Permeability Measuring Cell for 100mm Specimens	HMA-278M
Sealing Ring for 100mm Specimens	HMA-279
Verification Unit	HMA-299
Standard Vacuum Chamber (4–6 Specimens)	HMA-283
Large Vacuum Chamber (Up to 20 Specimens)	HMA-286
Large Vacuum Pump	HMA-287



NEW

CT-51

CONCRETE HUMIDITY MEASUREMENT KITS

ASTM F2170, F2659

Measurement of relative humidity transmission in concrete floors can prevent mold growth and future moisture damage to expensive floor coverings and coatings. Relative Humidity (RH) measurement provides a complete profile of moisture content throughout the depth of the concrete slab, not just the surface.

To profile the relative humidity in a slab, a 0.625in (16mm) diameter borehole is drilled into the concrete to a depth of 1.9in (48mm) and lined with a plastic sleeve. When conditions reach temperature and moisture equilibrium, a probe is inserted in the borehole and periodically connected to an electronic RH meter to read temperature and humidity levels. Probes are installed below the floor surface and covered with a cap between readings, so they do not interfere with normal construction activities.

Two Concrete Humidity Measurement Kits from Lignomat are supplied with all the components needed for relative humidity testing and both meet ASTM F2170 requirements. Choose from kits that use either the Tec RH Meter or the versatile DuoTec BW Meter to connect to the reusable RH BluePeg® probes. Relative humidity accuracy for both probe and meter systems is $\pm 2\%$ at 10–90% and $\pm 3\%$ at 0–10% or greater than 90%. Temperature accuracy is $\pm 0.5^\circ$ from 32° to 120°F (0° to 49°C), plus $\pm 1^\circ$ from 5° to 32°F (-15° to 0°C) and from 120° to 160°F (49° to 71°C). Both meters also function independently as thermo-hygrometers to measure ambient conditions. Included RH adaptors allow direct measurement of ambient RH and temperature conditions outside of the boreholes.

CT-50 Concrete Humidity Measurement Kit with Tec RH Meter reads data from the included RH BluePeg Probe using the provided cable or adaptor. The Tec RH meter features a large LCD display that indicates relative humidity, temperature, dew point, and GPP (weight in grains of water per pound

of air) with 0.1 resolution for all ranges. Ten plastic sleeves with caps and a hard plastic carrying case are also included. **Product Dimensions:** 12x8x3.5in (305x203x89mm), WxDxH.

CT-51 Concrete Humidity Measurement Kit with DuoTec BW Meter reads data for ASTM F2170 relative humidity tests from the included RH BluePeg Probe with the provided cable or adaptor. Ten plastic sleeves with caps are included in the kit. The large LCD display indicates relative humidity, temperature, dew point, and GPP (weight in grains of water per pound of air) with 0.1 resolution for all ranges. The DuoTec Meter doubles as a noninvasive moisture meter for near-surface moisture levels on a relative scale on flat surfaces. For surface readings, the meter meets ASTM F2659 and has selectable measuring depths of 0.25 or 0.75in (6 or 19mm) for concrete, gypsum, and wood materials. All components are packed in a hard plastic carrying case. **Product Dimensions:** 12x8x3.5in (305x203x89mm), WxDxH.

Both meters are also available separately in the accessories listing. Additional RH BluePeg Probes, and Plastic Liner Sleeves, in Standard 1.8in (45.7mm) or Extra Long 3in (76mm) lengths, are also available for increased testing efficiency on larger projects. A Calibration Check Solution to verify instrument performance, along with brush and vacuum attachments for borehole cleaning are also offered.

Concrete Humidity Measurement Kits

Concrete Humidity Measurement Kit with Tec RH Meter	CT-50
Concrete Humidity Measurement Kit with DuoTec BW Meter	CT-51



360° PRODUCT VIEWS

See more details from all angles with hi-res 360° images at globalgilson.com



MOBILE FRIENDLY

globalgilson.com is mobile friendly so you can view on any device.



CT-50B



CT-51B



CTA-22



CTA-19



CTA-20



CTA-21



CTA-27



CTA-29



CTA-32




CTA-34

Concrete Humidity Measurement Kit Accessories

Description	Model
<p>CT-50B Tec Meter functions independently as a thermo-hygrometer to read BluePeg probes for ambient relative humidity and temperature conditions. A large LCD display indicates relative humidity, temperature, dew point, and GPP (weight in grains of water per pound of air) with 0.1 resolution for all ranges. The CT-50B includes an RH adaptor and one BluePeg Probe.</p> <p>CT-51B DuoTec BW Meter functions independently as a thermo-hygrometer to measure ambient conditions using the RH BluePeg Probe and Adaptor. The unit also meets ASTM F2659 requirements for noninvasive, near-surface moisture measurements on a relative scale when held on a flat surface. A large LCD display indicates relative humidity, temperature, dew point, and GPP with 0.1 resolution for all ranges. The surface moisture feature can be used on concrete, gypsum, and wood materials, and has a selectable depth range of 0.25–0.75in (6–19mm). The CT-50B includes an RH adaptor and one BluePeg Probe.</p>	<p>Tec RH Meter with RH BluePeg Probe & Adaptor DuoTec BW Meter Only</p> <p>CT-50B CT-51B</p>
<p>RH BluePeg Probes are made for in-situ concrete relative humidity testing with CT-50 and CT-51 measurement kits. Precision RH Probes have 3.5mm connectors and fit Plastic Hole Liner Sleeves. When connected to kit meters, Probes have relative humidity accuracy of $\pm 2\%$ for 10–90% and $\pm 3\%$ for 0–10% or greater than 90%. Temperature accuracy is $\pm 0.5^\circ$ from 32° to 120°F, plus $\pm 1^\circ$ from 5° to 32°F and from 120° to 160°F. Available as single units or in packages of 3, 5, or 10. Additional probes minimize acclimatization time when multiple readings are required over large areas, and probes can be left inside sleeves between readings for even better efficiency. Probes are easily recovered after testing and are reusable.</p>	<p>RH BluePeg Probe, Single Unit RH BluePeg Probes, pkg. 3 RH BluePeg Probes, pkg. 5 RH BluePeg Probes, pkg. 10</p> <p>CTA-22 CTA-24 CTA-26 CTA-28</p>
<p>Plastic Hole Liner Sleeves with Caps are inserted into 0.625in (16mm) boreholes in concrete floor slabs for concrete humidity measurements. 1.8in (45.7mm) length of Standard Sleeves is designed to position probes properly in conventional 4in (101.6mm) thick floor slabs. Top-Extenders are required when testing at shallow depths and probes stick up above concrete surface. The Extender fits into the lip of the Standard Sleeve for a moisture-tight seal. Extra Long Sleeves are 3in (76mm) long for thicker slabs. Either model can be cut to length as required. Included low-profile caps seal the openings. Ten Standard Sleeves are included with the testing kits.</p>	<p>Standard Plastic Hole Liner Sleeves with Caps, pkg. 20 Liner Sleeve Top Extender, pkg. 5 Extra Long Plastic Hole Liner Sleeves with Caps, pkg. 10</p> <p>CTA-18 CTA-19 CTA-20</p>
<p>RH Adapter is a double-ended 3.5mm male connector plug that allows the probes to be connected directly to Tec RH or DuoTec BW Meters for use as handheld thermo-hygrometers. One Adaptor is included in each kit.</p>	<p>CTA-21</p>
<p>RH Depth Adapter is a 3.5mm male/female connector that adds 2in (51mm) to the length of a probe. This allows easy cable connection in holes over 2.4in (61mm) when CTA-20 Extra Long Sleeves are used.</p>	<p>CTA-25</p>
<p>Cleaning Accessories prepare the boreholes for testing by removing cuttings, dust, and other debris before inserting the Liner Sleeves. Brush with total length of 7.5in (191mm) has rounded tip and sturdy bristles. Vacuum Attachment fits standard shop-vac style hoses and can reach approximately 3.5in (89mm) deep.</p>	<p>Clean-Out Brush Vacuum Attachment</p> <p>CTA-27 CTA-29</p>
<p>RH Concrete Cable connects RH BluePeg probes to a RH moisture meter. A seal on the 6ft (1.8m) cable is pushed onto the Sleeve Liner during measurement, sealing the borehole to prevent moisture loss. The seal also allows disconnecting the cable without removing the probe. One cable is included in each kit.</p>	<p>CTA-32</p>
<p>Calibration Check Salt Solution in 75% concentration is used to check RH BluePeg Probes for proper operation. Includes a connection cable with sealing plug.</p>	<p>CTA-34</p>

ORDER ONLINE
Browse & order directly on globalgilson.com from your phone, tablet, or computer.

MOISTURE EMISSION TEST

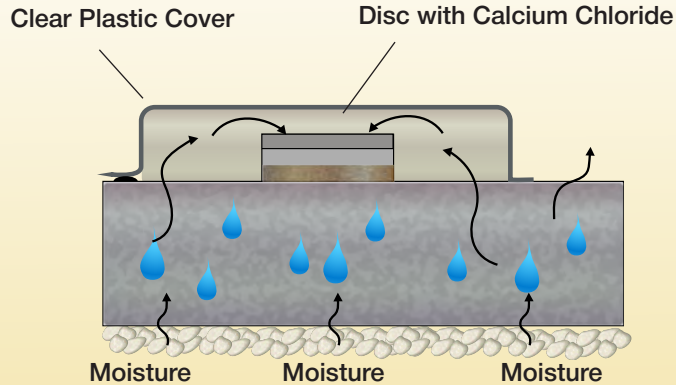

HM-674D

MOISTURE EMISSION TEST KITS

ASTM F1869

Gilson's Concrete Moisture Emission Test Kits are the most recognized method to determine moisture emission through concrete floor slabs. Millions of dollars in damage to coatings and flooring systems occurs every year as a result of moisture migration through concrete slabs and structures. Electronic moisture meters indicate the existing degree of saturation but not the rate of moisture emission.

A container of moisture-absorbing calcium chloride is weighed and placed under a plastic "dome" that is sealed to the concrete surface with a self-adhering gasket. At the conclusion of the 60–72 hour test cycle, the plastic is cut open and the dish of calcium chloride is removed and immediately weighed. The weight gain and exposure time values are used to compute the test result, expressed in pounds of moisture emitted per 1,000ft² in 24 hours. Recommended test frequency is three for the first 500ft² and one test for each additional 500ft² of total area.

Each test kit consists of a sealed calcium chloride dish and a plastic dome with a pre-installed butyl rubber gasket. Three pH test strips with color chart are also included. Test kits are supplied in packs of 3 or 12. For a complete evaluation of the concrete floor surface, see moisture meters and pH meters listed elsewhere in the catalog. OB-205 Balance is recommended for quick evaluations in the field. **Product Dimensions:** 10x10x2in (254x254x51mm), WxDxH.

Moisture Emission Test Kits

Moisture Emission Test Kit, pkg. 3	HM-674D
Moisture Emission Test Kit, pkg. 12	HM-674B

Accessories

Electronic Balance, 220x0.1g	OB-205
------------------------------	--------



HM-668D

HM-669

CONCRETE MOISTURE METER

ASTM F2659

Nondestructive Concrete Moisture Meters measure moisture content instantly on concrete floor surfaces prior to the application of floor coverings. Designed and calibrated specifically for concrete, they can also determine comparative readings on stone, lightweight concrete, gypsum floor screeds, ceramic tiles, and other masonry type materials. The meter is simply pressed firmly onto a clean concrete surface and impedance measurements are obtained by electrodes located on the base of the meter. No drilling is required. Both meters are housed in rugged, ABS Plastic cases and are supplied with batteries.

HM-668D Concrete Moisture Encounter 5 has an analog dial to show readings of 0–6% moisture in concrete or 0–10% moisture in gypsum, with a "Hold" button to freeze the display. The unit is user calibrated at the start of each use for accurate repeatable readings. The meter has a low battery LED indicator. **Product Dimensions:** 6.3x3.5x1.5in (160x89x38mm), WxDxH.

HM-669 CMEXpert II Concrete Meter digital meter determines moisture in a concrete surface. It can also be used with Hygro-I Relative Humidity Probes and an electronic interface cable for ambient RH measurements. Humidity accuracy of between 10–90% is $\pm 1.8\%$ at 25°C (77°F) and $\pm 3\%$ above 90%. It is available individually or as a component of HM-85 Concrete Hygro-i Inspection Kit. **Product Dimensions:** 3x6x2in (76x152x51mm), WxDxH.

HMA-661 Calibration Check Plate is used to monitor proper operation of HM-668D meter. Adjustments or recalibration must be performed by the factory.

Concrete Moisture Meter

Concrete Moisture Encounter 5	HM-668D
CMEXpert II Concrete Meter	HM-669

Accessories

Calibration Check Plate	HMA-661
-------------------------	---------



HM-271 shown with HMA-104

HMA-115

HMA-113

GILSON CONCRETE CTE SYSTEM

AASHTO T 336

Coefficient of Thermal Expansion (CTE) determinations predict thermally induced expansion and contraction movements in concrete pavement. CTE values help in developing concrete pavement mix designs that maximize service life. The NCHRP 1-37A research program found that these thermal movements have a significant impact on concrete pavement performance and integrated the use of CTE values into the Mechanistic-Empirical Pavement Design Guide (MEPDG). AASHTO T 336 is the standard test method for determination of CTE values and other agencies are evaluating its development.

Once the saturated 4x7in (101.6x177.8mm), dia.xL concrete specimen is mounted in the measuring frame and immersed in the water bath, the test is initiated simply by pressing the start button. Precise length change measurements of the specimen are recorded at specified controlled temperatures over a range of 10°–50°C (50°–122°F). At completion, the CTE value is computed and reported.

Gilson CTE System components all work together to achieve significant improvements in accuracy, repeatability, and versatility over currently available systems. Pre-loaded software on the included laptop computer completely automates measuring, recording, and calculating of final CTE values in accordance with AASHTO T 336. The portable benchtop stainless steel water bath has the capacity to test two samples simultaneously with the use of an additional HMA-114 CTE Measuring Frame. A water circulation unit uses a thermistor with 0.01°C resolution and ±0.05°C accuracy to control and record bath temperatures. Water is recirculated every twenty seconds, ensuring uniform temperature levels. The effects of evaporative loss are eliminated by a water level control device that precisely maintains a constant water level throughout the test. The heavy-duty adjustable specimen measuring frame is constructed of Type 304 stainless steel, assuring uniform expansion characteristics. An LVDT securely mounted to the measuring frame has 1.27mm of travel with a resolution of 3.1x10⁻⁸, assuring extremely precise length change measurements of the 4x7in (101.6x177.8mm) specimen.

The HM-271 CTE System includes a laptop computer preloaded with CTE software and required computer interfaces, a benchtop stainless steel water bath with 38L (10gal) capacity and dimensions of 25x15x13in (635x381x330mm), WxDxH, one stainless steel measuring frame with LVDT, a stand-alone water circulating unit with thermistor temperature probe, and a water level control device.

Calibration and Verification Specimens are purchased separately. HMA-104 Calibration Specimen is 304 Stainless Steel and HMA-115 Verification Specimen is 410 Stainless Steel. Grade 5 Titanium Steel and Nickel Calibration Specimens are available and can be certified to ASTM E228 by an ISO 9001 facility for additional confidence, inquire.

An additional HMA-114 CTE Measuring Frame with LVDT, purchased separately, allows testing of two specimens simultaneously for greater sample efficiency. The frames are supplied ready to connect the LVDT directly to the USB port of the computer. HMA-113 LVDT Calibrator with Digital Micrometer can be purchased separately to verify performance of the LVDT.

Gilson Concrete CTE System		
Gilson Concrete CTE System, 115V, 60Hz		HM-271
	230V, 50Hz	HM-271F
Accessories		
Calibration Specimen, 304 Stainless Steel		HMA-104
Verification Specimen, 410 Stainless Steel		HMA-115
CTE Measuring Frame, 304 Stainless Steel		HMA-114
LVDT Calibrator with Digital Micrometer		HMA-113

360° PRODUCT VIEWS
See more details from all angles with hi-res 360° images at globalgilson.com

MOBILE FRIENDLY
globalgilson.com is mobile friendly so you can view on any device.



HM-220



HM-223

CONCRETE MIXERS

ASTM C192; AASHTO R 39

Gilson Concrete Mixers have 3ft³ (85L) batch capacity and are powered by 115V, 60Hz, 1/2hp electric motors. Mixers have rugged construction for long life and a lightweight design for easy portability. Heavy-gauge steel drums with reinforced rims feature replaceable mixing blades, yielding four mixing actions with each drum revolution. One-piece cast iron ring on drums and tapered roller bearings on drive and drum shafts assure smooth, efficient operation. Total drum volume is 5.5ft³ (156L). The Mixers are equipped with a five position drum lock and tilt bar for discharging mix.

HM-220 Portable Concrete Mixer has a handle and 10in (254mm) wheels for easy manual positioning in the lab or on the jobsite. Drum diameter is 26in (660mm), opening size is 15.25in (387mm), and discharge height is 20in (508mm). **Product Dimensions:** 30x46x48in (762x1,168x1,219mm), WxDxH.

HM-223 Stationary Concrete Mixer has similar specifications to Portable Mixers, but is designed for stationary use. This newer model also features a replaceable polyethylene Drum Liner (included) for fast, nonstick cleanup and extended life for the steel drum. The liner is FDA/NSF/USDA approved. Drum diameter is 23in (584mm), opening size is 16.75in (425mm), and discharge height of 20in (508mm). **Product Dimensions:** 30x42x46in (762x1,067x1,168mm), WxDxH.

Concrete Mixers	
Concrete Mixer, Hand Tow, 115V, 60Hz	HM-220
Stationary Concrete Mixer, 115V, 60Hz	HM-223
Accessories	
Replacement Poly Drum Liner for HM-223	HMA-155



HM-107

HM-106

HM-108 shown with TSA-198

STANDARD TEST SANDS

Specially graded sands for ASTM tests are naturally rounded silica sands of nearly pure quartz, mined from the Ottawa, Illinois area. Test Sands meet ASTM and AASHTO standards indicated.

HM-106 Sand Cone Density Sand for field density testing of soils is clean, uniform, uncemented, and free-flowing. Meets ASTM D1556 and AASHTO T 191. Few particles pass No.200 (75µm) or are retained on No.10 (2.00mm) sieves. Uniformity coefficient less than 2.0 and less than 3% passes No.60 (250µm). Bulk density varies less than 1%. 50lb (22.7kg). **Product Dimensions:** 11x5x17in (279x127x432mm), WxDxH.

HM-107 20–30 Standard Tensile Test Sand is manufactured to pass No.20 (850µm) sieve and be retained on No.30 (600µm). Meets ASTM C778 requirements. HM-107 sand also meets former ASTM C190, now a discontinued standard. 50lb (22.7kg). **Product Dimensions:** 9.5x9.5x13in (241x241x330mm), WxDxH.

HM-108 Graded Standard Cube Test Sand is graded between No.30 (600µm) and No.100 (150µm) sieves. Meets requirements for ASTM C109 and C778, as well as AASHTO T 106. 50lb (22.7kg). **Product Dimensions:** 9.5x9.5x13in (241x241x330mm), WxDxH.

Standard Test Sands	
Sand Cone Density Sand	HM-106
20–30 Standard Tensile Test Sand	HM-107
Graded Standard Cube Test Sand	HM-108



MA-66



MA-67



MA-52

PORTABLE MIXERS

The Portable Asphalt/Concrete Mixers are ideal for sample or small batch mixing in just about any setting. The enameled-steel mixer holds a utility bucket securely in place. As the bucket rotates at 60rpm, a stationary Mixing Paddle scrapes sides and bottom of the bucket to ensure thorough mixing. All 115V, 60Hz mixers are supplied with a 1/2hp motor, On/Off switch, fuse protection, and an 8ft cord with three-prong plug. For 230V, 50Hz mixer, add "F" to model number suffix. The 10 gallon "F" model is supplied with a 1hp motor.

MA-66 Light-Duty Stationary Mixer includes a removable 5gal Utility Bucket and Standard Mixing Paddle. A Deluxe Mixing Paddle with extra fins is available for heavy loads. MA-66 is powered by a constant speed motor and belt pulley. Other heavy-duty models are recommended for asphalt mixes. **Product Dimensions:** 12x18x24in (305x457x610mm), WxDxH.

MA-67 and MA-68 Heavy-Duty Portable Mixers use 5gal and 10gal Utility Buckets, respectively, and are equipped with 8in wheels for maximum mobility. A direct drive motor generates more mixing power. Mixing paddles not included. Gilson recommends MA-67 Mixer with either MAA-146 Paddle for asphalt or MAA-148 Paddle for concrete applications. The 5gal buckets can be preheated in ovens if necessary. Inquire for other available paddles. **Product Dimensions:** 24x21x35in (610x533x889mm), WxDxH.

Portable Mixers	
Light-Duty Stationary Mixer, 5gal, 115V, 60Hz	MA-66
Heavy-Duty Portable Mixer, 5gal, 115V, 60Hz	MA-67
Heavy-Duty Portable Mixer, 10gal, 115V, 60Hz	MA-68
<i>Specify 230V, 50Hz by adding "F" suffix to model number.</i>	
Accessories	
Bucket & Cover for MA-66, 5gal	MAA-141
Replacement Paddle for MA-66	MAA-142
Deluxe Paddle for MA-66	MAA-143
Utility Bucket for MA-67, 5gal	MAA-144
Utility Bucket for MA-68, 10gal	MAA-145
Asphalt Paddle for MA-67, 5gal	MAA-146
Asphalt Paddle for MA-68, 10gal	MAA-147
Concrete Paddle for MA-67, 5gal	MAA-148
Concrete Paddle for MA-68, 10gal	MAA-149

LABORATORY MIXERS

ASTM C109, C227, C305; AASHTO T 106, T 162

Industrial-grade Laboratory Mixers have planetary action for thorough mixing and blending of materials. Direct gear drives and heavy-duty motors assure constant mixing speeds under load. Locking hand-lever raises and lowers bowl. All mixers are supplied with stainless steel bowl, wire whip, dough hook, and aluminum flat beater. MA-52 and MA-52X include an MAA-266 stainless steel flat beater. MA-52X includes modifications to meet ASTM and AASHTO specifications.


MA-52 Laboratory Mixer has 5qt (4.7L) capacity and a 1/6hp motor with selectable operating speeds of 139, 285, and 591rpm. Additional MAA-266 Heavy-Duty Stainless Steel Flat Beater is included, as well as a 6ft (1.8m) power cord. The MAA-30A Clearance Adjustment Bracket can be purchased separately to meet ASTM and AASHTO requirements of ASTM C305, C227, and C109. MAA-31 Acrylic Bowl Lid is also available for all 5qt (4.7L) bowls. **Product Dimensions:** 10.5x15x17in (267x381x432mm), WxDxH.

MA-52X Laboratory Mixer has the same specifications as MA-52, but has been modified with a MAA-30A Clearance Bracket to meet the requirements of ASTM C305, C227, and C109 (AASHTO T 162 and T 106) and certain other tests for mortar and cement. **Product Dimensions:** 10.5x15x17in (267x381x432mm), WxDxH.

MA-54A Laboratory Mixer is a 12qt (11.4L) capacity benchtop mixer for larger batch requirements. This unit is supplied with a 1/2hp motor for selectable mixing speeds of 107, 198, and 365rpm. A 6ft (1.8m) power cord is included. **Product Dimensions:** 19x23x29in (483x584x737mm), WxDxH.

Heating Adapter Kits maintain elevated temperatures when preparing hot-mix asphalt specimens in Laboratory Mixers. Heating mantles mount under mixing bowls with hook and loop fasteners. Electronic proportional controller with built-in circuit breaker attaches with a twist-lock connector on 4ft (1.2m) cable.

Laboratory Mixers	
5qt Laboratory Mixer, 115V, 60Hz	MA-52
230V, 50Hz	MA-52F
5qt Laboratory Mixer with Clearance Bracket, 115V, 60Hz	MA-52X
230V, 50Hz	MA-52XF
12qt Laboratory Mixer, 115V, 60Hz	MA-54A
230V, 50Hz	MA-54AF
Accessories	
Wire Whip for MA-52	MAA-260
Heavy-Duty Stainless Steel Flat Beater for MA-52	MAA-266
Bowl for MA-52	MAA-32
Bowl for MA-54A	MAA-34A
Clearance Adjustment Bracket for MA-52	MAA-30A
Heating Adapter for MA-52, 250 Watts, 115V, 60Hz	MAA-28
230V, 50Hz	MAA-28F
Heating Adapter for MA-54A, 600 Watts, 115V, 60Hz	MAA-64
230V, 50Hz	MAA-64F
Stainless Steel Wire Whip for 12qt Laboratory Mixers	MAA-261A
Aluminum Beater for 12qt Laboratory Mixers	MAA-267A

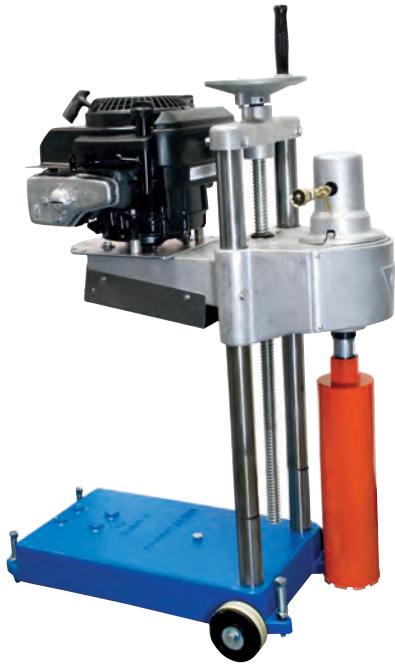

CD-1 shown with CDA-141



CD-6 shown with CDA-141



CDA-50



CDA-142



CDA-243

CORE DRILLING MACHINES

ASTM C42; AASHTO T 24, T 24M, R 67

Gasoline or electric-powered core drilling machines offer easy set up, fast drilling, and low bit wear to give low cost per core. The gasoline-powered unit has a 6in (152mm) diameter bit capacity, while the electric models have a bit capacity of up to 12in (305mm). Inquire for larger, trailer-mounted rigs for bits up to 16in (406mm). Quick-disconnect fittings for water supply are provided. Diamond coring bits are ordered separately. **CD-1 Gasoline-Powered Core Drill** is designed for vertical coring of pavements and slabs. Stable platform with leveling screws, a heavy-duty column and smooth, precision-feed system combine to make this model the ideal choice for large projects. Gasoline-powered drill allows the operator to operate independently of power supplies and have minimal set up time and faster drilling. The unit easily adapts to mount to a pickup truck bed and has a 8.75hp four-cycle manual start engine. Carriage travel is 24in (610mm). **Product Dimensions:** 14x32x46in (356x813x1,168mm), WxDxH.

CD-6 Electric Core Drill adapts to a wide range of drilling jobs in addition to vertical pavement and slab coring. The column rotates 180°, allowing for precise placement of drill bit. The super-duty two-speed (450/900rpm) 3.5hp motor and carriage can be removed or reattached without changing location for ease in retrieving cores and adding extension rods. The 10in (254mm) wide wheeled base has a vacuum anchor to solidly grip smooth pavement or floors. Unit includes oilless vacuum pump, filter, hose, and quick connections. **Product Dimensions:** 12x34x36in (305x864x914mm), WxDxH.

Accessories for the Core Drilling Machines are purchased separately. CDA-20 is a 4gal (15L) manually-

pressurized portable water tank and CDA-22 is a trap-ring and electric pump to recirculate drilling water. CDA-24 9in (229mm) Extension Rod allows drilling to extended depth and CDA-26 18in (457mm) Strap Wrench is for attaching and removing coring bits without damage. CDA-32 is a replacement gasket with mastic for the CD-6 vacuum base.

Core Drilling Machines

Gasoline-Powered Core Drill	CD-1
Electric Core Drill, 115V, 60Hz	CD-6
220V, 50/60Hz	CD-6F

Accessories

Pressurized Water Tank, 4gal (15L)	CDA-20
Water Recirculator	CDA-22
Extension Rod, 9in (229mm)	CDA-24
Strap Wrench, 18in (457mm)	CDA-26
Replacement Vacuum Gasket	CDA-32
Long-Handle Core Retrieval Tongs, 4in Cores	CDA-15
Long-Handle Core Retrieval Tongs, 6in Cores	CDA-16
Core Extractors, 4in Cores	CDA-18
Core Extractors, 6in Cores	CDA-19

DIAMOND CORING BITS

ASTM C42; AASHTO T 24, T 24M, R 67

Open-Head Coring Bits require Expander Sets listed for attachment to drills. These bits are slightly less expensive and the expander sets can be reused many times as the core barrels wear out and are replaced. They are an economical choice for high-output and heavy-use applications.

Closed-Head Coring Bits are one piece construction for convenience and easy, direct attachment to drills. There are no extra parts to buy or lose. These are best suited for light to medium duty, or for occasional use.

Both bit styles are available in designs optimized for asphalt pavements, or for reinforced concrete and other hard materials. All bits are constructed for wet use and are fast-cutting when used according to design applications. Standard length is 14in (356mm) for cutting cores up to 12in long. Our most popular bit sizes are listed here. Please inquire for sizes not shown. All bits may be refurbished when worn.

Diamond Coring Bits

Nominal Bit Size OD, in (mm)	Open-Head Bits			Closed-Head Bits	
	Concrete	Asphalt	Expander Sets	Concrete	Asphalt
2 (50.8)	CDA-120	CDA-220	CDA-40	CDA-121	CDA-221
2-1/4 (57.2)	CDA-122	CDA-222	CDA-41	CDA-123	CDA-223
3 (76.2)	CDA-130	CDA-230	CDA-43	CDA-131	CDA-231
3-1/4 (82.6)	CDA-132	CDA-232	CDA-55	CDA-133	CDA-233
4 (101.6)	CDA-140	CDA-240	CDA-45	CDA-141	CDA-241
4-1/4 (108)	CDA-142	CDA-242	CDA-46	CDA-143	CDA-243
6 (152.4)	CDA-160	CDA-260	CDA-50	CDA-161	CDA-261
6-1/4 (158.8)	CDA-162	CDA-262	CDA-51	CDA-163	CDA-263

NEW



CDA-18 and CDA-19



VIDEO ONLINE

CORE EXTRACTORS

Gilson Core Extractors are efficient and easy to use for the removal of drilled cores from asphalt or concrete pavements. To operate, simply insert the curved blades into the cut area around the core. Adjust the top screw, enabling the blades to grasp the core and lock the device into place by squeezing the handles. Push sharply to break off the core bottom and lift the specimen out. Release lever to free the core.

The lock feature protects cores from damage during extraction and assures laboratory acceptance for testing without repeat drilling. Models for 4in (102mm) or 6in (152mm) core sizes have identical features and operations. Extractors are welded, painted steel with sturdy handle grips. **Product Dimensions:** 12x10x-10in (305x254 x254mm), WxDxH.

Core Extractors

Core Extractors, 4in Cores	CDA-18
Core Extractors, 6in Cores	CDA-19



CDA-15

LONG-HANDLE CORE RETRIEVAL TONGS

Fast, easy-to-use, patented Long-Handle Core Retrieval Tongs remove cores from asphalt or concrete surfaces. Simply insert blades into space from core drill bit, grasp the core with the tongs, and lift. Recovered cores are free of damage that may occur from use of improper tools. Laboratory acceptance for testing is assured without repeat drilling. Models are available for 4in (102mm) or 6in (152mm) core sizes. Tongs are welded, painted steel with plastic handle grips. **Product Dimensions:** 3x4.5x35in (76x114x889mm), WxDxH.

Long-Handle Core Retrieval Tongs

Core Retrieval Tongs, 4in Cores	CDA-15
Core Retrieval Tongs, 6in Cores	CDA-16



HM-60 shown with HMA-234 & HMA-226



HM-62 shown with HMA-234

HUSQVARNA® MASONRY SAWS

Masonry Saws from Husqvarna® are ideal for trimming concrete, asphalt, and masonry specimens to size for testing. Models include a lightweight HM-60 1.5hp Portable unit and the larger HM-62 5hp Heavy-Duty version for high-production applications. Both include reliable high-torque motors and heavy-duty shafts mounted on quality ball bearings. Water distribution by submersible pumps permits wet cutting.

HM-60 Portable Masonry Saw has 2,330 blade rpm from the 1.5hp electric motor. The HM-60 uses 14in (356mm) diameter blades for up to 5in (127mm) cut depth. This saw features a unique, patented water distribution system designed to keep both the work piece and the work area cleaner and drier. The optional HMA-226 Portable Rolling Stand is quickly set up, easily relocated by one person, and has fast adjustment for proper height. The stand folds flat for easy portability. Lightweight, economical HMA-224 Fixed-Leg Stand is also available. A 14in (356mm) Vari-Cut™ blade is included with the saw. **Product Dimensions:** 27.5x39.8x27.5in (699x1,011x699mm), WxDxH. Height with Fixed-Leg Stand is approximately 54in (1,372mm).

HM-62 Heavy-Duty Masonry Saw is equipped with a powerful 5hp high-torque motor with 2,317 blade rpm to assure high-production performance. A convenient crank on the foot pedal sets table height and the patented Sta-level® blade guard controls blade orientation to assure the most accurate cuts possible. The painted integral rigid steel support stand resists flexing. The 20in (508mm) blade capacity permits cutting of 6in (152mm) cylinders or 8in (203mm) blocks in a single pass. Blades are purchased separately. **Product Dimensions:** 22x47.8x57.5in (559x1,214x1,461mm), WxDxH.

High-quality Diamond Blades are ordered separately. Premium grade blades for medium-sized jobs feature fast cutting and long life. Super Premium Blades allow maximum production for the largest jobs and have the lowest cost per cut. All blades listed below can be used wet or dry and cost less in quantities of five or more.

Husqvarna® Masonry Saws

Portable Masonry Saw, including blade, 1.5hp, 100-115V, 60Hz	HM-60
Heavy-Duty Masonry Saw, without blade, 5hp, 208-230V, 60Hz	HM-62
Accessories	
Portable Rolling Stand for HM-60	HMA-226
Fixed-Leg Stand for HM-60	HMA-224
14in Super Premium Blade, qty. 1-4	HMA-234
14in Super Premium Blade, qty. 5+	HMA-234D
20in Premium Blade, qty. 1-4	HMA-232
20in Premium Blade, qty. 5+	HMA-232D
20in Super Premium Blade, qty. 1-4	HMA-236
20in Super Premium Blade, qty. 5+	HMA-236D





Visit Our Video Library

The experts at Gilson know testing! Our exclusive video library allows you to compare products and features, understand test procedures, and learn how to keep your equipment running efficiently. Watch hands-on demonstrations and how-to tutorials on a wide variety of products. The video library can be accessed through our YouTube channel, Gilson Company Inc., or our website at globalgilson.com/gilson-videos



Gilson Sand Equivalent Test Sets (SEA-100)

Explore product features and side-by-side comparisons

- Get answers to your installation, set-up, and maintenance questions
- Watch how-to guides to help you DIY common repair, adjustment, and calibration procedures

Search for a specific topic or product or explore our categories, including:

- Sieving and Screening Equipment
- Sampling and Dividing Equipment
- Aggregate Testing Equipment
- Asphalt Testing Equipment
- Concrete Testing Equipment



Gilson Concrete Pressure Meter
DIY Calibration (HM-30)




Gilson Testing Screens
(TS-1, TS-2, TS-3, TS-4)

Find the video you need!

Check back often, our video library selection is always growing.

➤ GO TO GLOBALGILSON.COM/GILSON-VIDEOS TO VIEW

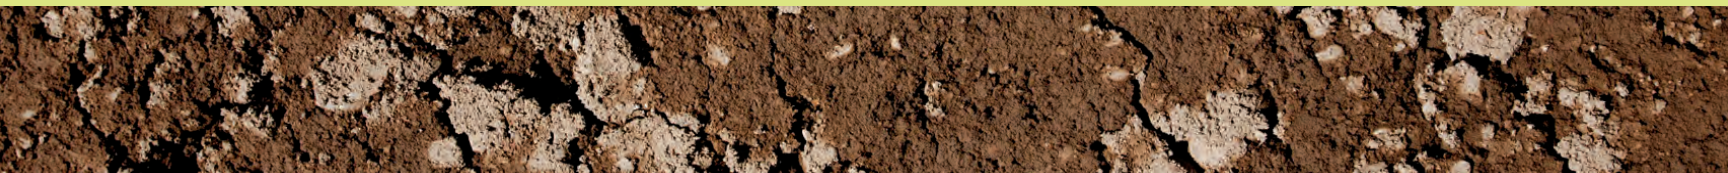



HM-397 shown with HMA-685 and BRA-60



HM-398 shown with HMA-685D, BRA-60, and HMA-94



Manufactured in cooperation with
Karol-Warner



HM-396

CALIFORNIA BEARING RATIO (CBR) AND LIMEROCK BEARING RATIO (LBR) LOAD FRAMES

ASTM D1883; AASHTO T 193; Florida FM 5-515

The California Bearing Ratio (CBR) and Limerock Bearing Ratio (LBR) tests yield relative strength of laboratory-compacted or in-situ soils and base course materials. This laboratory test is based on penetration resistance of the soil sample at a constant loading rate of 0.05in (1.3mm)/min to a standard-sized 1.954in (49.6mm) diameter piston.

Karol-Warner Load Frames from Gilson are ideal for Laboratory CBR and LBR testing when outfitted with CBR/LBR Component Sets. Load Frames feature 11.9x37.3in (302x947mm), WxH daylight openings for a variety of test fixtures. Strain rates are precisely regulated to $\pm 1\%$ of set point and the frames have sturdy 14-gauge powder-coated enclosures. Adjusting nuts on the 1.25in (32mm) coarse-threaded vertical rods allow quick adjustment of the horizontal cross-head height. Platen diameter is 8in (203mm). HMA-94 Rolling Load Frame Cart is sturdy steel and allows mobility in the lab.
Product Dimensions: 18x29x54.5in (457x737x1,384mm), WxDxH.

HM-396 Load Frame is powered by a reliable 1/8hp motor that accurately produces a range of strain rates of 0.001–0.1in/min (0.0254–2.54mm/min). The strain rate range and frame capacity of 10,000lbf (44.5kN) make it well suited for basic soil tests, including Unconfined Compression, CBR/LBR, Soil-Cement, and Triaxial testing. The load frame's horizontal and vertical opening of 11.9x37.3in (302x947mm) easily accommodates triaxial cells and CBR/LBR molds.

HM-397 Load Frame has a reliable 1/8hp stepper motor producing a wider range of strain rates of 0.0001–0.3in/min (0.00254–7.62mm/min). The strain rate range and frame capacity of 10,000lbf (44.5kN) make it ideal for basic soil tests, including Unconfined Compression, CBR/LBR, Soil-Cement, and Triaxial testing. The load frame's horizontal and vertical opening of 11.9x37.3in (302x947mm) easily accommodates triaxial cells and CBR/LBR molds.


HM-397B Load Frame features a 1/8hp stepper motor with accurate strain rate of 0.00001–0.29999in/min (0.000254–7.62mm/min). This versatile, high strain rate range and 10,000lbf (44.5kN) frame capacity unit is well suited for a wide range of basic soil tests, including Unconfined Compression, CBR/LBR, Soil-Cement and Triaxial Testing. Its ability to maintain a superior strain rate sensitivity with precise and repeatable positioning make it ideal for consolidated/undrained triaxial tests on sensitive soils. The load frame's horizontal and vertical opening of 11.9x37.3in (302x947mm) easily accommodates triaxial cells and CBR/LBR molds.

HM-398 Load Frame with a powerful 3/4hp motor accurately produces strain rates of 0.02–2.0in/min (0.508–50.8mm/min). The strain rate range and frame capacity of 10,000lbf (44.5kN) are optimal for many soil and asphalt applications including: Unconfined Compression, CBR/LBR, Soil-Cement, Triaxial testing, Marshall, Lottman, Semi-Circular Bend (SCB), and Tack Coat Shear. The load frame's horizontal and vertical opening of 11.9x37.3in (302x947mm) easily accommodates triaxial cells, CBR/LBR molds, Marshall, Lottman, SCB, and Tack Coat Shear fixtures.






HMA-685D

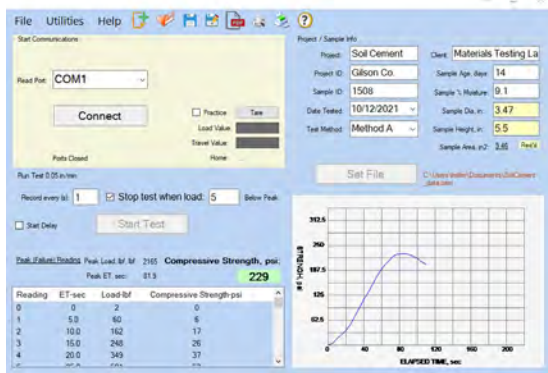

HMA-609

CBR/LBR TESTING

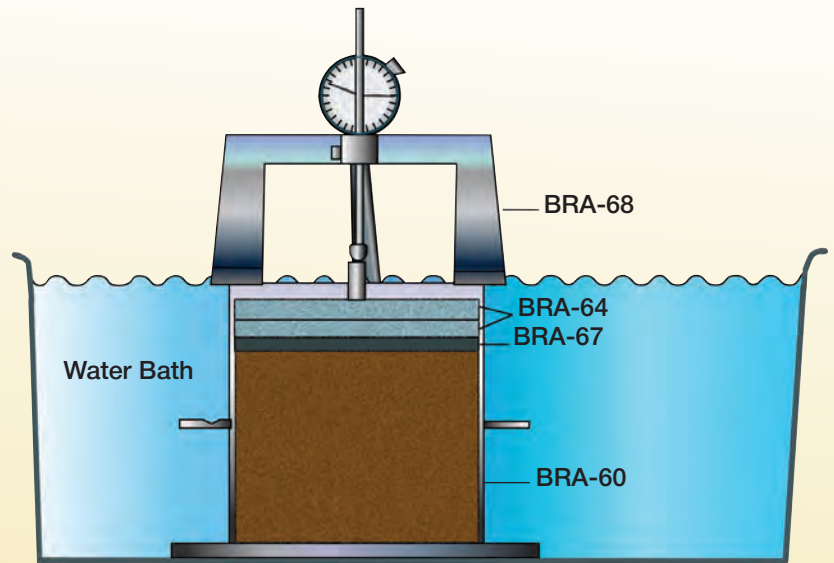

Compacted specimens in the mold are immersed in water for soaking. Surcharge weights are placed on top and the molded specimen is monitored to determine swell.

HM-399 Load Frame has 20,000lbf (89kN) capacity. The stepper motor accurately produces a wide strain rate range of 0.0001–0.29999in/min (0.000254–7.62mm/min) with superior sensitivity. This versatile unit is well suited for a wide range of basic soil tests, including Unconfined Compression, CBR/LBR, Soil-Cement, and Triaxial testing. Increased sensitivity, combined with precise and repeatable positioning make it ideal for consolidated/undrained triaxial tests on sensitive soils. The higher capacity allows testing of larger diameter or higher strength soil samples. The load frame’s horizontal and vertical opening of 11.9x37.3in (302x947mm) easily accommodates triaxial cells and CBR/LBR molds.

Component Sets for CBR and LBR testing are designed for quick installation on Load Frames and feature high-quality instrumentation required to measure load and penetration for bearing ratio tests. Fixtures and brackets are included with the component sets for direct mounting to the load frames.

HMA-685 Analog CBR and LBR Component Set has a 10,000lbf (44.5kN) capacity Load Ring, CBR/LBR Penetration Piston, a 1x0.001in Dial Indicator, and Indicator Clamp. Load Ring is machined from high-strength aluminum alloy plate for repeatable compression measurements and is supplied with a calibration graph.

HMA-685D and HMA-685DF Digital CBR/LBR Component Set includes a HM-418 Two-Channel Data Readout, 10,000lbf (44.5kN) Load Cell, 2in (50.8mm) travel Linear Variable Displacement Transducer (LVDT), and Penetration Piston. The Data Readout shows real-time data on a large, bright display. Front panel keys allow instant taring of channel peak reading on either channel and entry of calibration factors during set up. A mini USB connection is included for data communication. Included GetData 5 software easily downloads load and displacement data from the digital readout to spreadsheet applications on user’s computer and is compatible with Windows® XP and newer operating systems. HMA-609 CBR/LBR Data Acqui-

sition Software, listed separately, works with the HMA-685D and HMA-685DF CBR/LBR Component Set to record specimen and real-time test data, calculate results, and prepare reports following ASTM and AASHTO requirements.

HMA-94 Rolling Load Frame Cart features sturdy bolted steel construction and positions load frames at the proper working height. Rugged casters allow convenient placement. **Product Dimensions:** 25x21.4x24.5in (635x544x622mm), WxDxH.

CBR and LBR Load Frames			
Model	Capacity	Strain Rate	Electrical
HM-396	10,000lbf	0.001 – 0.1in/min	115V, 50/60Hz
HM-396F	10,000lbf	0.001 – 0.1in/min	230V, 50/60Hz
HM-397	10,000lbf	0.0001 – 0.3in/min	115V, 50/60Hz
HM-397F	10,000lbf	0.0001 – 0.3in/min	230V, 50/60Hz
HM-397B	10,000lbf	0.00001 – 0.29999in/min	115V, 50/60Hz
HM-398	10,000lbf	0.02 – 2.0in/min	115V, 50/60Hz
HM-398F	10,000lbf	0.02 – 2.0in/min	230V, 50/60Hz
HM-399	20,000lbf	0.00001 – 0.29999in/min	120V, 50/60Hz
HM-399F	20,000lbf	0.00001 – 0.29999in/min	230V, 50/60Hz

Accessories

Analog CBR/LBR Component Set, 10,000lbf (44.5kN) capacity	HMA-685
Digital CBR/LBR Component Set, 110V, 50/60Hz	HMA-685D
Digital CBR/LBR Component Set, 230V, 50/60Hz	HMA-685DF
Rolling Load Frame Cart	HMA-94
CBR/LBR Data Acquisition Software	HMA-609

CALIFORNIA BEARING RATIO (CBR) AND LIMEROCK BEARING RATIO (LBR) ACCESSORIES

ASTM D1883; AASHTO T 193, Florida FM 5-515



BRA-60



BRA-61



BRA-59

CBR and LBR Accessories	
Description	Model
<p>CBR Molds and Spacer Discs CBR Compaction Molds are 6x7in (152x178mm), IDxH with 2in (51mm) collar and perforated base. CBR Spacer Disc is 5.94x2.416in (151x61mm), dia.xH with threaded opening and "T" handle for easy insertion and removal. Both are rugged and rust-resistant plated steel.</p>	<p>CBR Mold, Complete BRA-60 CBR Spacer Disc BRA-61 CBR Base Only BRA-609B CBR Mold Only BRA-60M</p>
<p>LBR Molds and Spacer Discs LBR Compaction Mold for FM 5-515 Florida Limerock Bearing Ratio test is 6x6in (152x152mm), IDxH with 2.375in (60.3mm) collar. Spacer Disc for LBR is 5.94x1.41in (151x36mm), dia.xH with threaded opening and "T" handle for easy insertion and removal. Plated steel construction.</p>	<p>LBR Mold, Complete BRA-59 LBR Spacer Disc BRA-62 LBR Base Only BRA-59B LBR Mold Only BRA-59M</p>
<p>Penetration Pistons CBR/LBR Penetration Pistons are 7.5x1.954in (191x49.6mm), Lxdia. and fit standard fixtures for use in testing. Choose models with threaded male connectors of 1/2in (12.7mm) diameter for 200–2,500lb load cells and all load rings, or 3/4in (19mm) diameter for load cells with 5,000–10,000lb capacity.</p>	<p>CBR/LBR Penetration Piston, 3/4in Threaded Male Connector BRA-30 CBR/LBR Penetration Piston, 1/2in Threaded Male Connector BRA-31</p>
<p>Swell Plate Perforated Swell Plate is 5.875in (149.2mm) in diameter with forty-two 1/16in (1.59mm) diameter holes equally spaced, and threaded stem. Total weight of Swell Plate is 2.63lb (1.19kg).</p>	<p>BRA-67</p>
<p>Filters Stainless steel woven-wire mesh Filter with No.100 (150µm) openings is 5.94in (151mm) in diameter. Coarse Filter Paper is same diameter and comes in a package of one hundred pieces.</p>	<p>No.100 (150µm) Stainless Steel Mesh Filter BRA-75 Coarse Filter Paper, pkg. 100 BRA-76</p>



BRA-31



BRA-67



BRA-76






BRA-55



BRA-68



BRA-63



BRA-64



BRA-76



BRA-70

CALIFORNIA BEARING RATIO (CBR) AND LIMEROCK BEARING RATIO (LBR) ACCESSORIES


ASTM D1883; AASHTO T 193, Florida FM 5-515

CBR and LBR Accessories	
Description	Model
<p>CBR Accessory Set Convenient CBR Accessory Set includes four each of BRA-60 Molds, BRA-63 Annular Surcharge Weights, BRA-64 Slotted Surcharge Weights, BRA-67 Swell Plates, and BRA-75 Filter Screens. One each BRA-61 Spacer Disc and BRA-68 Swell Tripod are also included for typical CBR lab operation.</p>	BRA-55
<p>LBR Accessory Set Four BRA-59 Molds, BRA-63 Annular Surcharge Weights, BRA-67 Swell Plates, and twelve BRA-64 Slotted Surcharge Weights. One BRA-62 LBR Spacer Disc and one package of BRA-76 Coarse Filter Paper are also included.</p>	BRA-57
<p>Swell Tripod with Dial Indicator Tripod to measure specimen swell includes MA-334 1x0.001in Mechanical Dial Indicator. Metric version includes MA-346 25x0.01mm Mechanical Dial Indicator. MA-334C Mechanical Dial Indicator with Certificate of Calibration is sold separately.</p>	<p>Swell Tripod BRA-68 Metric Swell Tripod BRA-68F Mechanical Dial Indicator with Certificate of Calibration MA-334C</p>
<p>Surcharge Weights Annular type has 2.125in (54mm) diameter center hole. Slotted type has 2.125in (54mm) wide slot. Both are 5.875in (149mm) diameter plated steel and weigh 5lb (2.27kg).</p>	<p>Annular Surcharge Weight BRA-63 Slotted Surcharge Weight BRA-64</p>
<p>Cutting Edge 6x2in (152x51mm), 1DxH plated steel cutting edge fits on end of BRA-60 Mold for field-sampling of in-place soils.</p>	BRA-70
<p>CBR Soaking Tank CBR Soaking Tank is constructed of heavy reinforced polypropylene that is water tight and resists cracking and deforming with temperature fluctuations. It's interior dimensions 22x13.5x22.38in (559x343x568mm), WxDxH, easily accommodates two CBR or LBR molds, and loading and unloading samples for taking necessary measurements during required soaking process is done without disturbance of the other sample.</p>	BRA-80
<p>CBR Support Rack CBR Support Rack supports one CBR or LBR assembled mold with base, sample, swell plate, and weights. Its design supports the mold off the bottom of the soaking tank and allows free access of water to the perforations in the mold's base.</p>	BRA-65

NEW



BRA-80

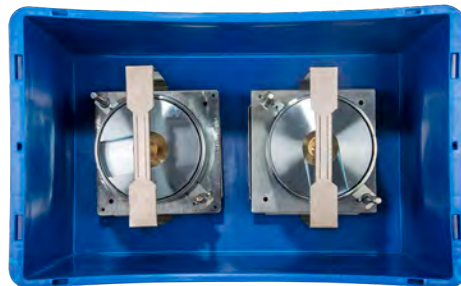


BRA-80 with BRA-65, BRA-64, BRA-67, and BRA-60

NEW



BRA-65

NEW

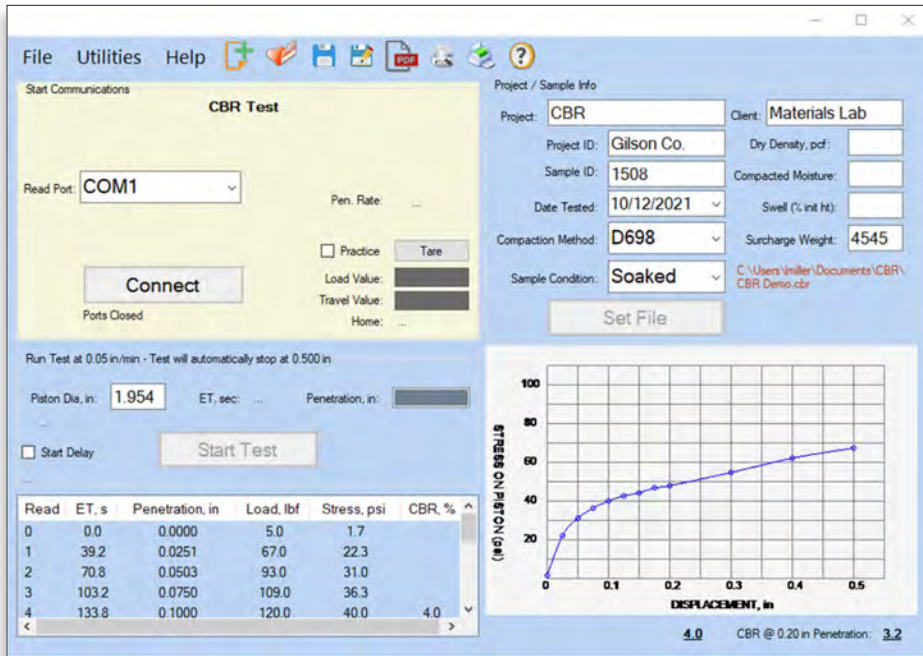

HMA-609 Screen Shot



HMA-685D



Typical CBR/LBR Test Set-up

CBR/LBR DATA ACQUISITION SOFTWARE

ASTM D1883; AASHTO T 193; Florida FM 5-515

- Displays real-time graphing and data throughout test
- Automatically saves final reports to computer, network, or cloud
- Calculations and reports meet ASTM and AASHTO standards
- LBR calculations and reports in accordance with Florida Standards
- Optimized for use with desktop, laptop, or tablet devices

Gilson's CBR/LBR Data Acquisition Software automatically records load and displacement data and generates a real time load-penetration curve for California Bearing Ratio and Florida Limerock Bearing Ratio tests. This intuitive software utilizes clear data entry fields and testing prompts to reduce user error and increase repeatability.

CBR/LBR Software runs on computers with Windows XP or newer operating systems and is designed for convenient use on tablets and laptops. Large popup keyboards can be enabled for touchscreen computers or disabled when a PC with mouse and keyboard are used.

Real-time graphing and calculations are performed throughout the test procedure and the final load-penetration curve is saved automatically at test completion in accordance with ASTM, AASHTO, and Florida DOT specifications. The testing agency information, company logos, sample data, data points, and corresponding load-penetration curve are included in the final testing reports. Test report data and information can also be exported to a spreadsheet application or converted into a PDF document.

CBR/LBR Data Acquisition Software requires a HM-418 Two-Channel or HM-419 Four-Channel Data Readout for operation on 110V, 60Hz power. Specify "F" model suffix for Data Readout units to operate on 230V, 50/60Hz. The HMA-685D and HMA-685DF Digital CBR/LBR Component Set is optimized

technote

Free, fully functional 30-day trial version available for download from globalgilson.com


for use with the software and includes the HM-418, along with a load cell, displacement transducer, and penetration piston. All components and sets are purchased separately.

CBR/LBR Software is available as a fully operational 30-day trial. Download for free from our website. A USB security key and licensing information to unlock the software for permanent operation will be sent upon purchase. Visit globalgilson.com to view our video with complete details of ease of use, intuitive operation, and features of this new software.

CBR/LBR Data Acquisition Software

CBR/LBR Data Acquisition Software	HMA-609
Accessories	
CBR/LBR Component Set, 110V, 50/60Hz	HMA-685D
CBR/LBR Component Set, 230V, 50/60Hz	HMA-685DF
Two-Channel Data Readout, 110V, 50/60Hz	HM-418
Two-Channel Data Readout, 230V, 50/60Hz	HM-418F
Four-Channel Data Readout, 110V, 50/60Hz	HM-419
Four-Channel Data Readout, 230V, 50/60Hz	HM-419F

NEW

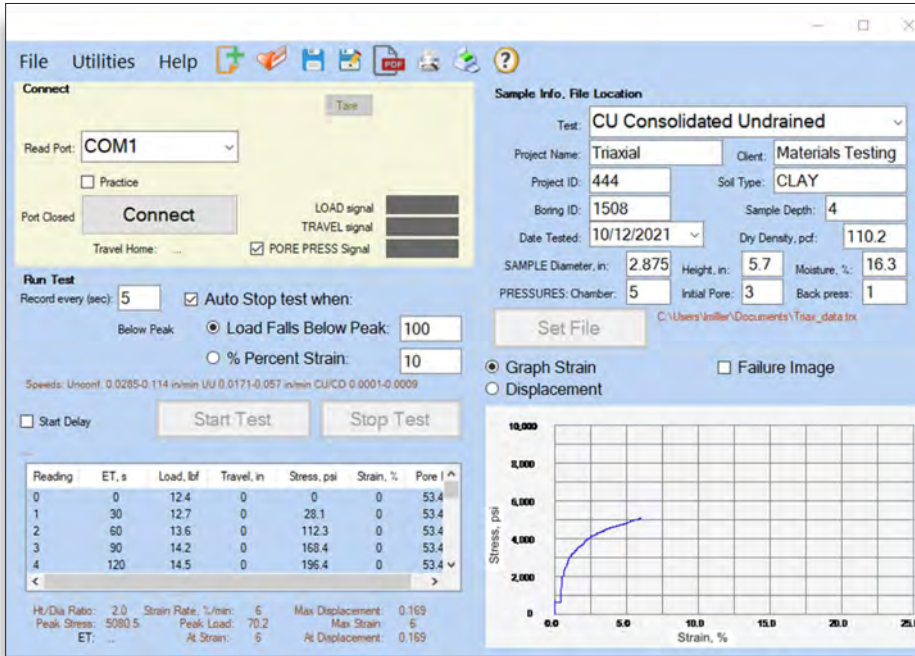

HMA-613 Screen Shot

TRIAXIAL COMPRESSION DATA ACQUISITION SOFTWARE

ASTM D2850, D4767, D7181, D2166; AASHTO T 296, T 297

- ▶ Displays strain and displacement graphs in real-time
- ▶ Automatically saves final reports to computer, network, or cloud
- ▶ Calculations and reports in accordance with ASTM and AASHTO standards
- ▶ Optimized for use with desktop, laptop, or tablet devices
- ▶ Allows import of failure images into test reports

Triaxial Compression Data Acquisition Software automatically records axial load and deformation data of UU, CU, CD, or unconfined soil samples. The user can manually enter pore pressure values from a stand-alone HMA-521 or HMA-521F Pore Pressure Transducer with Digital Readout, or can allow the software to automatically recognize the pore pressure signal from a HMA-525 Pore Pressure Transducer with Deairing Block connected to a HM-419 Four-Channel Data Readout. This intuitive software utilizes clear data entry fields and testing prompts to reduce user error and increase repeatability.

Triaxial Compression Data Acquisition Software is configured to operate with Windows XP or newer operating systems and is designed for convenient use on tablets and laptops. Large popup keyboards can be enabled for touchscreen computers or disabled when a desktop PC with mouse and keyboard are used.

Real-time graphing and calculations are performed throughout the test procedure and saved automatically at test completion in accordance with ASTM and AASHTO specifications. The testing agency information, company logo, sample data, final test results, displacement graph, and stress-strain curve are included in the final testing report. Test data and sample information can be exported to a spreadsheet application or converted into a PDF document.

Triaxial Compression Data Acquisition Software requires a HM-418 Two-Channel or HM-419 Four-Channel Data Readout for operation on 110V,50/60Hz power. Specify



HM-413 Digital Load and Displacement Kit



Typical Triaxial Test Set-up

technote

Free, fully functional 30-day trial version available for download from globalgilson.com

“F” model suffix for Data Readout units to operate on 230V,50/60Hz. The HM-413 Two-Channel Digital Readout Kit is optimized for use with the software and includes the HM-418, along with a 1,000lbf (14.5kN) load cell and 2in (50.8mm) displacement transducer.

Triaxial Compression Data Acquisition Software is available as a fully operational free download from our website for a 30-day trial. A USB security key and licensing information to unlock the software for permanent operation will be sent upon purchase. Visit globalgilson.com to view our video with complete details of ease of use, intuitive operation, and features of this new software.

Triaxial Compression Data Acquisition Software

Triaxial Compression Data Acquisition Software	HMA-613
Accessories	
Two-Channel Digital Readout Kit, 1,000lbf Load Cell, 110V,50/60Hz	HM-413
Two-Channel Digital Readout Kit, 1,000lbf Load Cell, 230V,50/60Hz	HM-413F
Two-Channel Digital Readout Kit, 2,000lbf Load Cell, 110V,50/60Hz	HM-414
Two-Channel Digital Readout Kit, 2,000lbf Load Cell, 230V,50/60Hz	HM-414F
Two-Channel Data Readout, 110V,50/60Hz	HM-418
Two-Channel Data Readout, 230V,50/60Hz	HM-418F
Four-Channel Data Readout, 110V,50/60 Hz	HM-419
Four-Channel Data Readout, 230V,50/60Hz	HM-419F





HM-397 shown with HMA-517, HM-413 and HMA-521

HM-398



HMA-686

HM-413

TRIAXIAL LOAD FRAMES

ASTM D2850, D4767, D7181; AASHTO T 296, T 297

Soil specimens for triaxial tests are mounted in test cells pressurized with water to create a confining pressure. The cells are loaded axially in a load frame to provide information about shear resistance, strength, and cohesion for prediction of slope stability and structural foundation behavior.

Gilson Load Frames by Karol-Warner are outfitted with the analog or digital component set for accurate and effective unconfined compression testing of soil specimens. Precision drive systems control strain rates to $\pm 1\%$ of set point and the 1.25in (32mm) high-strength threaded rods allow easy, continuous adjustment of the horizontal cross head. Test platen diameter is 8in (203mm) and the frames have sturdy 14-gauge powder-coated steel cabinets. These versatile load frames all have a generous 11.9x37.3in (302x947mm), WxH daylight opening and accept a wide range of sample sizes and test fixtures. HMA-94 Rolling Load Frame Cart is sturdy steel with casters for easy positioning. **Product Dimensions:** 18x29x54.5in (457x737x1,384mm), WxDxH.

HM-396 Load Frame has a strain rate of 0.001–0.1in/min (0.0254–2.54mm/min) and is powered by a reliable 1/8hp motor. The strain rate range and 10,000lbf (44.5kN) capacity make it well suited for basic soil tests, including Unconfined Compression, CBR/LBR, Soil-Cement, and Triaxial testing.

HM-397 Load Frame with 0.0001–0.3in/min (0.00254–7.62mm/min) strain rate is powered by a quiet and efficient 1/8hp stepper motor. The strain rate range and 10,000lbf (44.5kN) capacity are ideal for basic soil tests, including Unconfined Compression, CBR/LBR, Soil-Cement, and Triaxial testing.

HM-397B Load Frame with its higher strain rate and sensitivity of 0.00001–0.29999in/min (0.000254–7.62mm/min) is powered by an efficient and reliable 1/8hp stepper motor. This versatile 10,000lbf (44.5kN) capacity unit features a wide strain rate range to suit a wide range of basic soil tests, including Unconfined Compression, CBR/LBR, Soil-Cement, and Triaxial testing. Its superior sensitivity and precise, repeatable positioning also make it ideal for consolidated/undrained triaxial tests on sensitive soils.

HM-398 Load Frame has a strain rate of 0.02–2.0in/min (0.508–50.8mm/min) and is powered by a powerful 3/4hp motor. The strain rate and 10,000lbf (44.5kN) capacity are well-suited for many soil and asphalt applications, including Unconfined Compression, CBR/LBR, Soil-Cement, Triaxial testing, Marshall, Lottman, Semi-Circular Bend (SCB), and Tack Coat Shear.

HM-399 Load Frame features a high-range strain rate of 0.00001–0.29999in/min (0.000254–7.62mm/min) and the 20,000lbf (89kN) load-rated unit has double the capacity of our other Load Frames. The quiet, efficient stepper motor powers the heavy-duty unit to perform a wide range of basic soil tests in higher strength ranges, including Unconfined Compression, CBR/LBR, Soil-Cement,

and Triaxial testing. Superior sensitivity and precise, repeatable positioning also make it ideal for consolidated/undrained triaxial tests on sensitive soils.

An analog digital Triaxial Component Set is required to equip any Load Frame for accurate and reliable triaxial shear testing. The sets measure applied load and sample deformation and feature high-quality instrumentation ready for easy installation and mounting. Other Gilson Component Sets are available for a variety of specific test methods.

HMA-686 Analog Triaxial Load and Displacement Set includes a 1,000lbf capacity Load Ring and a 1x0.001in Dial Indicator. The Load Ring is machined from high-strength aluminum alloy plate for repeatable compression measurements and is supplied with a calibration graph.

HM-413 Two-Channel Digital Readout Kit includes a HM-418 Two-Channel Data Readout, 1,000lbf (4.5kN) Load Cell and 2in (50.8mm) travel Linear Variable Displacement Transducer (LVDT). The Data Readout shows real-time data on a large, bright display. Front panel keys allow instant taring on either channel, capture of peak reading, and entry of calibration factors during set up. A mini USB connection is included for data communication. Included GetData 5 software easily downloads displacement data from the HM-418 Data Readout to common spreadsheet applications on user's computer with Windows® XP and newer operating system. HMA-613 Triaxial Compression Data Acquisition Software, listed separately, works with the Digital Readout Kit to record specimen and real-time test data, calculate results, and prepare reports following ASTM and AASHTO requirements.

Triaxial Data Acquisition Software requires a HM-418 Two-Channel Data Readout or HM-419 Four-Channel Data Readout for operation on 110V, 50/60Hz power. Specify "F" model suffix for Data Readout units to operate on 230V, 50/60Hz.

Triaxial Load Frames			
Model	Capacity	Strain Rate	Electrical
HM-396	10,000lbf	0.001–0.1in/min	115V, 50/60Hz
HM-396F	10,000lbf	0.001–0.1in/min	230V, 50/60Hz
HM-397	10,000lbf	0.0001–0.3in/min	115V, 50/60Hz
HM-397F	10,000lbf	0.0001–0.3in/min	230V, 50/60Hz
HM-397B	10,000lbf	0.00001–0.29999in/min	115V, 50/60Hz
HM-398	10,000lbf	0.02–2.0in/min	115V, 50/60Hz
HM-398F	10,000lbf	0.02–2.0in/min	230V, 50/60Hz
HM-399	20,000lbf	0.00001–0.29999in/min	120V, 50/60Hz
HM-399F	20,000lbf	0.00001–0.29999in/min	230V, 50/60Hz

Accessories

Analog Triaxial Load and Displacement Set	HMA-686
Two-Channel Digital Readout Kit, 1,000lbf Load Cell, 110V, 50/60Hz	HM-413
Two-Channel Digital Readout Kit, 1,000lbf Load Cell, 230V, 50/60Hz	HM-413F
Rolling Load Frame Cart	HMA-94
Triaxial Compression Data Acquisition Software	HMA-613

NEW



HM-350M



HMA-521



HMA-520



HMA-517



HM-350A



VIDEO ONLINE



TRIAXIAL CONTROL PANELS

ASTM D2850, D4767, D7181; AASHTO T 296, T 297

Control Panels for triaxial shear testing use a system of burettes, valves, and regulators to precisely regulate air and fluid pressures in Testing Cells. They provide a central point for supply connections of air, water, and drains with a logical layout and are built with quality components.

Cell and burette pressures are individually adjustable and monitored by a single digital pressure gauge in the Master Panel. Precision regulators and zero-displacement ball valves allow accurate setting of critical pressures during saturation, consolidation, and testing phases. Effective cell pressure and sample back-pressure are controlled through a single regulator. A bias control feature allows the user to set the effective cell pressure and increase both cell and sample back pressure using only one regulator. This minimizes air consumption during saturation and causes no change in effective stress. Two 50cc burettes with 0.1cc graduations for flow measurement and two 4cc pipettes with 0.008cc graduations are included. These are located inside two storage cells which have additional capacity of 400cc each. Cell-water interface utilizes a 20cc burette. The panel and cells are conveniently filled and drained using the front connections. The same panels are also used for ASTM D5084 hydraulic conductivity/flexible-wall permeability testing.

The Control Panels feature sturdy powder-coated aluminum construction, laid out with controls for air pressure located on the upper half and controls for water pressure on the lower half. All connections for the Test Cell are conveniently located on the front of the panel, with air, water, vacuum, and drain connections located in the rear.

HM-350M Master Control Panel is required for connection to a single Tri-axial or Flexible-Wall Permeability Test Cell and is fitted with a digital readout in psi units for setting Test Cell and burette pressures. **Product Dimensions:** 21x6.25x37.25in (533x159x946mm), WxDxH.

HM-350MF Master Control Panel is required for connection to a single Tri-axial or Flexible-Wall Permeability Test Cell and is fitted with a digital readout

in kPa units for setting Test Cell and burette pressures. **Product Dimensions:** 21x6.25x37.25in (533x159x946mm), WxDxH.

HM-350A Auxiliary Control Panel is ideal for adding an additional test cell to the Master Control Panel for simultaneous testing. Once connected to the Master Panel, the Auxiliary Panel uses the Master Panel's digital pressure readout to display confining and cell pressures. Two HM-350A Auxiliary Panels can be connected to each HM-350M or HM-350MF, allowing up to three samples to be tested simultaneously. **Product Dimensions:** 21x6.25x37.25in (533x159x946mm), WxDxH.

HMA-520 Deairing Tank prepares water for use in the testing cells. An air compressor is required to generate confining pressures, but not included. Test Cells and other accessories are ordered separately.

To measure soil pore pressure, two portable, stand-alone Pore Pressure Transducers are available. HMA-521 Pore Pressure Transducer with Digital Readout measures in psi units and HMA-521F Pore Pressure Transducer with Digital Readout measures in kPa units. If using a HM-419 Four-Channel Data Readout, pore pressure can also be measured with a HMA-525 Pore Pressure Transducer with Deairing Block.

Triaxial Control Panels	
Master Control Panel, psi	HM-350M
Master Control Panel, kPa	HM-350MF
Auxiliary Control Panel	HM-350A
Accessories	
Deairing Tank, 1.5gal (5.7L) capacity	HMA-520
Pore Pressure Transducer with Digital Readout, psi	HMA-521
Pore Pressure Transducer with Digital Readout, kPa	HMA-521F
Pore Pressure Transducer with Deairing Block	HMA-525




TRIAXIAL / PERMEABILITY TYPICAL SETUP

Master and Auxiliary Control Panels monitor and regulate test cell and sample pressures during testing, filling, draining, and saturation. They are the central point for connections from pressure, vacuum, and water sources, and output to the cells. Each Master Panel controls a single test cell or can be connected to two Auxiliary Panels, allowing control of up to three test cells.


Test Cells act as a pressure chamber to regulate confining pressures on the sample in the test cell. Pore pressure transducers may also be connected when required.

A Deairing Tank for water and a vacuum pump are available as accessories. Clean, dry compressed air is required for use.

TRIAXIAL/PERMEABILITY TYPICAL SETUP (Front Panel View)

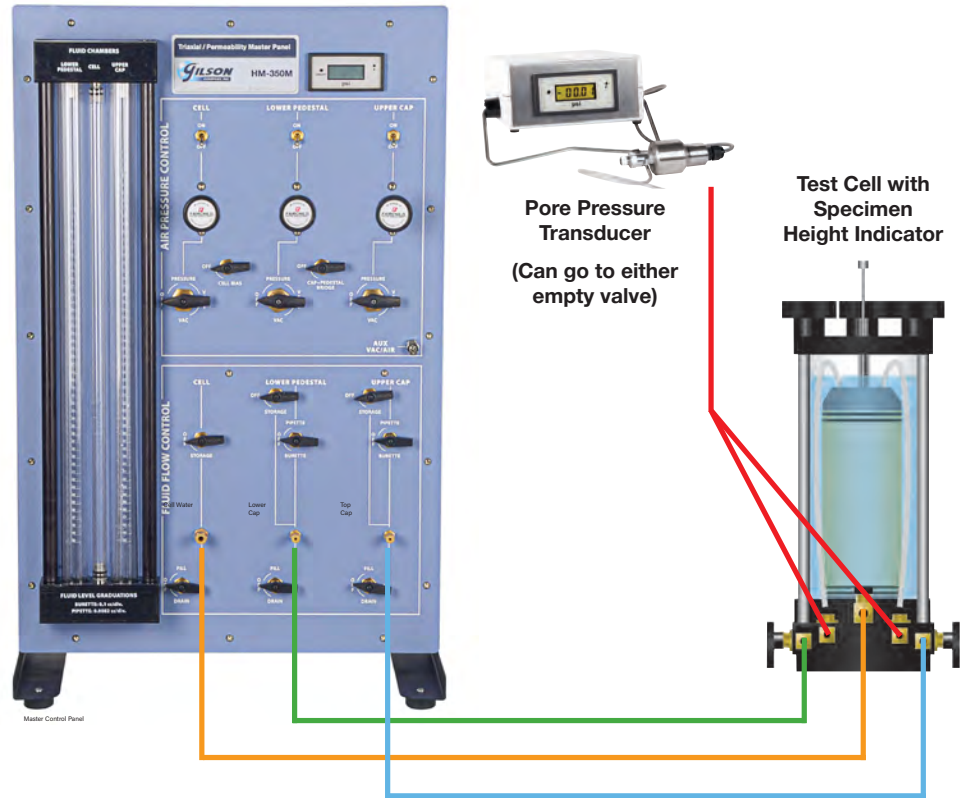


(Back Panel View)

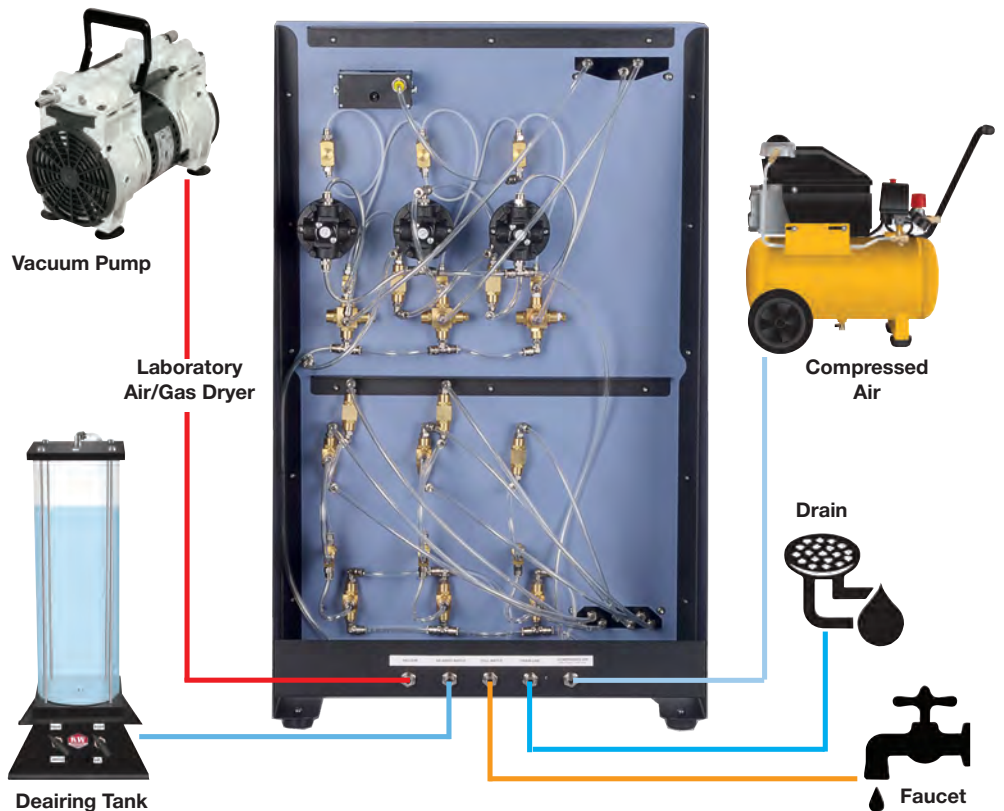

ORDER ONLINE
Browse & order directly from globalgilson.com on your phone, tablet, or computer.



HMA-517S, HMA-518S, HMA-519S, HMA-519, and HMA-519HS

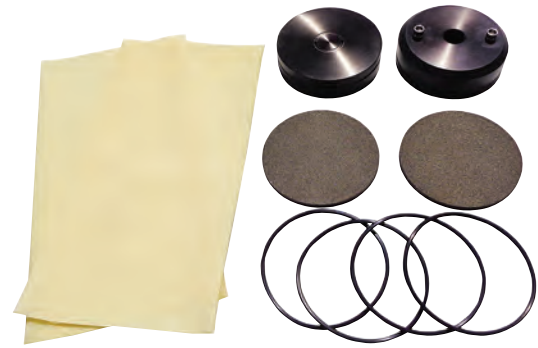

HMA-584



HMA-589A

TRIAXIAL TEST CELLS

ASTM D2850, D4767, D5084, D7181; AASHTO T 296, T 297

Gilson Triaxial Test Cells provide optimum performance with Gilson Load Frames and Master or Auxiliary Control Panels, or integrate with other systems. The Test Cells are constructed with heavy-wall clear acrylic chambers and solid, machined aluminum bases designed for heavy loading. The precision-ground and polished stainless steel load piston features internally lubed and sealed linear ball bearings for very low friction. Cells are fitted with precision zero-volume change ball valves and rugged quality brass fittings. Models equipped with stainless steel valves and fittings resist corrosion and harsh permeant fluids and can be ordered by adding “S” to the model number. The 6in (152.4mm) diameter Triaxial Cell is available in both high-pressure and high-pressure/stainless steel valves variations denoted by adding “H” and “HS” to the model number. The high-pressure Triaxial Cell is reinforced to allow safe triaxial shear testing of soil samples at increased pressures. Maximum operating pressure is 150psi (10.3bar) for models HMA-517 and HMA-518, 100psi (6.9bar) for HMA-519, and 250psi (17.2bar) for the high-pressure HMA-519H and HMA-519HS models. Inquire for aluminum chamber units built for higher test pressures.

HMA-517 and HMA-518 Triaxial Test Cells accommodate a range of sample sizes, but must be equipped with appropriate Triaxial Test Cell Kits. See Test Cell Kit chart for available sizes and cell compatibility. HMA-519 Test Cell models test only 6in diameter samples and must be equipped with HMA-586A Test Cell Kit. Kits contain individual components of a single specimen size required to test a soil sample.

Triaxial Test Cells		
Model	Inside Chamber Dimensions, dia.xH, in (mm)	Specimen Size Range, in (mm)
HMA-517 HMA-517S	4.75x10.75 (121x273)	1.4–3.0 (35.6–76.2)
HMA-518 HMA-518S	5.0x12.125 (127x308)	1.4–4.0 (35.6–101.6)
HMA-519 ¹ HMA-519S ¹ HMA-519H ¹ HMA-519HS ¹	9.625x18 (244.5x457)	6.0 (152.4) Only

¹Tests only 6in diameter samples.

Each kit includes an anodized aluminum specimen cap and pedestal, two aluminum oxide Porous Stones, two Latex Membranes, and four O-Rings. The anodized aluminum caps have two drain ports and are grooved for O-Rings. Keyed pedestals with flow-through lines prevent pinching of tubing during set up. Other available accessories include HMA-525 Pore Pressure Transducer with Deairing Block and HMA-521/HMA-521F Pore Pressure Transducer with Digital Readout to precisely measure soil pore pressure. Triaxial Test Cells can also be used for ASTM D5084 Flexible-Wall Permeability testing.

technote

Gilson Triaxial Test Cells are designed to axial load soil samples, but can also be used for permeability tests where axial loading isn't necessary.

Triaxial Test Cell Kits / Cell Compatibility				
Triaxial Cell Kit		Triaxial Cell		
Sample Diameter, in (mm)	Model	HMA-517	HMA-518	HMA-519
1.4 (35.6)	HMA-587	✓	✓	—
1.5 (38.1)	HMA-587A	✓	✓	—
1.87 (47.5)	HMA-587B	✓	✓	—
2.0 (50.8)	HMA-588	✓	✓	—
2.36 (59.9)	HMA-588A	✓	✓	—
2.42 (61.5)	HMA-588B	✓	✓	—
2.5 (63.5)	HMA-589	✓	✓	—
2.8 (71.1)	HMA-589A	✓	✓	—
3.0 (76.2)	HMA-583	✓	✓	—
4.0 (101.6)	HMA-584	—	✓	—
6.0 (152.4)	HMA-586A	—	—	✓



TRIAXIAL & FLEXIBLE-WALL PERMEABILITY TEST CELL ACCESSORIES

Test Cell
1.4–6in Specimens



Triaxial Test Cell

Test Cell Components



Sample Preparation



Two-Part Compaction
Mold Assembly



O-Ring Placement
Tool



technote

Gilson Test Cells are available in two unique designs to perform triaxial or flexible-wall permeability testing on soil samples. Triaxial Test Cells are equipped to mount in a Load Frame for application of axial loads, but may also be used in flexible-wall permeability testing. Permeability Cells are not designed for axial loading. Triaxial and Flexible-Wall Permeability Cells accommodate soil sample and components for a range of sample sizes.

TRIAXIAL TEST CELL ACCESSORIES

ASTM D2850, D4767, D5084, D7181; AASHTO T 296, T 297

Triaxial Test Cell Accessories											
Description	Sample Diameter, in (mm)										
	1.4 (35.6)	1.5 (38.1)	1.87 (47.5)	2.0 (50.8)	2.36 (60)	2.42 (61.5)	2.5 (63.5)	2.8 (71.1)	3.0 (76.2)	4.0 (101.6)	6.0 (152.4)
Test Cell Kits must be used to outfit Test Cells for specific sample sizes. Kits contain all components of a single size required to perform a test. Each kit includes an anodized aluminum specimen cap and pedestal, two aluminum oxide Porous Stones, two Latex Membranes, and four O-Rings. The anodized aluminum caps have two drain ports and are grooved for O-Rings. Keyed pedestals with flow-through lines prevent pinching of tubing during setup.	HMA-587	HMA-587A	HMA-587B	HMA-588	HMA-588A	HMA-588B	HMA-589	HMA-589A	HMA-583	HMA-584	HMA-586A
Cap & Pedestal Sets include only the anodized aluminum fixtures for the top and bottom of samples. Other accessories are purchased separately.	HMA-947	HMA-947A	HMA-947B	HMA-948	HMA-948A	HMA-948B	HMA-949	HMA-949A	HMA-943	HMA-944	HMA-946A
Latex Membranes fit tightly around prepared soil specimens and provide a barrier against chamber fluids during testing. Supplied in packages of 12. Latex Membranes are available in two thicknesses, 0.012in (0.3mm) or 0.025in (0.6mm). 0.012in Latex Membranes 0.025in Latex Membranes	HMA-527C HMA-527	HMA-527D HMA-527A	HMA-527E HMA-527B	HMA-528C HMA-528	HMA-528D HMA-528A	HMA-528E HMA-528B	HMA-529C HMA-529	HMA-529D HMA-529A	HMA-523C HMA-523	HMA-524C HMA-524	HMA-526C HMA-526
Membrane Stretchers are slightly larger than specimen diameters and use vacuum applied through a tubular fitting to expand the membranes for easy placement. Aluminum construction.	HMA-557	HMA-557A	HMA-557B	HMA-558	HMA-558A	HMA-558B	HMA-559	HMA-559A	HMA-553	HMA-554	HMA-556
O-Rings made of neoprene material seal the Latex Membranes tightly around the Specimen Caps and Pedestals to protect specimen from chamber fluid.	HMA-567	HMA-567A	HMA-567B	HMA-568	HMA-568A	HMA-568B	HMA-569	HMA-569A	HMA-563	HMA-564	HMA-566
O-Ring Placing Tool is a simple design for easy placement of O-Rings without disturbing the sample.	HMA-577	HMA-577A	HMA-577B	HMA-578	HMA-578A	HMA-578B	HMA-579	HMA-579A	HMA-573	HMA-574	HMA-576
Porous Stones provide support of sample and allow two-way passage of water or permeant. These 1/4in thick aluminum oxide stones have a permeability range of 15–18ft ³ of air per minute, per square foot and average pore size of 179µm.	GSA-201	GSA-202	GSA-203	GSA-211	GSA-214	GSA-215	GSA-220	GSA-223	GSA-229	GSA-234	GSA-237
Two-Part Compaction Molds are used to prepare compacted specimens for triaxial or permeability testing. Granular soils are compacted in a mold with a latex membrane held in place by a vacuum source. Cohesive specimens are compacted in molds with no vacuum capability and later fitted in Latex Membranes. Molds for cohesive soils are available as complete assemblies, or as molds only for increased efficiency in sample preparation. Two-Part Compaction Mold w/ Vacuum for Granular Soils Two-Part Compaction Mold Assembly for Cohesive Soils Two-Part Compaction Mold Only for Cohesive Soils	HMA-957 HMA-987 HMA-967	HMA-957A HMA-987A HMA-967A	HMA-957B HMA-987B HMA-967B	HMA-958 HMA-988 HMA-968	HMA-958A HMA-988A HMA-968A	HMA-958B HMA-988B HMA-968B	HMA-959 HMA-989 HMA-969	HMA-959A HMA-989A HMA-969A	HMA-953 HMA-983 HMA-963	HMA-954 HMA-984 HMA-964	HMA-956 HMA-986 HMA-966
Two-Part Miter Boxes are used to trim soil samples to precise lengths for triaxial, permeability, unconfined compression, shear, and other tests.	HMA-977	HMA-977A	HMA-977B	HMA-978	HMA-978A	HMA-978B	HMA-979	HMA-979A	HMA-973	HMA-974	HMA-976
Filter Paper prevents migration of soil fines from samples and blockage of pores in applications where porous stones are used. Ahlstrom grade 55 papers are equivalent to Whatman grade 54 as recommended in a number of ASTM and AASHTO soil test methods. They feature increased wet strength and a tough, smooth surface free of loose fibers. This fast-filtering grade has 15µm retention and a filtration speed of 220mL/min. Supplied as convenient pre-cut circles in packages of 100 in 2.0–6.0in (50.8–152.4mm) diameters.	—	—	—	HMA-772	—	—	—	HMA-773	HMA-774	HMA-775	HMA-776





HM-350M



HM-350A

FLEXIBLE-WALL PERMEABILITY CONTROL PANELS ASTM D5084

Control Panels for flexible-wall permeability testing use a system of burettes, valves, and regulators to precisely regulate air and fluid pressures in Testing Cells. They provide a central point for supply connections of air, water, and drains with a logical layout and are built with quality components.

Cell and burette pressures are individually adjustable and monitored by a single digital pressure gauge in the Master Panel. Precision regulators and zero-displacement ball valves allow accurate setting of critical pressures during saturation, consolidation, and testing phases. Effective cell pressure and cell and sample back-pressure are controlled through a single regulator. A bias control feature allows the user to set the effective cell pressure and increase both cell and sample back pressure using only one regulator. This minimizes air consumption during saturation and causes no change in effective stress. Two 50cc burettes with 0.1cc graduations for flow measurement and two 4cc pipettes with 0.008cc graduations are included. These are located inside two storage cells which have additional capacity of 400cc each. Cell-water interface utilizes a 20cc burette. The panel and cells are conveniently filled and drained using the front connections. The same panels are also used for ASTM D2850 and D4767 triaxial shear test methods.

The Control Panels feature sturdy powder-coated aluminum construction, laid out with controls for air pressure located on the upper half and controls for water pressure on the lower half. All connections for the Test Cell are conveniently located on the front of the panel, with air, water, vacuum, and drain connections located in the rear.

HM-350M Master Control Panel is required for connection to a single Tri-axial or Flexible-Wall Permeability Test Cell, and is fitted with a digital readout in psi units for setting Test Cell and burette pressures. **Product Dimensions:** 21x6.25x37.25in (533x159x946mm), WxDxH.

HM-350MF Master Control Panel is required for connection to a single Tri-axial or Flexible-Wall Permeability Test Cell and is fitted with a digital readout

in kPa units for setting Test Cell and burette pressures. **Product Dimensions:** 21x6.25x37.25in (533x159x946mm), WxDxH.

HM-350A Auxiliary Control Panel is ideal for adding an additional test cell to the Master Control Panel for simultaneous testing. Once connected to the Master Panel, the Auxiliary Panel uses the Master Panel's digital pressure readout to display confining and cell pressures. Two HM-350A Auxiliary Panels can be connected to each HM-350M or HM-350MF, allowing up to three samples to be tested simultaneously. **Product Dimensions:** 21x6.25x37.25in (533x159x946mm), WxDxH.

HMA-520 Deairing Tank prepares water for use in the testing cells. An air compressor is required to generate confining pressures, but not included. Test Cells and other accessories are ordered separately.

To measure soil pore pressure, two portable, stand-alone Pore Pressure Transducers are available. HMA-521 Pore Pressure Transducer with Digital Readout measures in psi units and HMA-521F Pore Pressure Transducer with Digital Readout measures in kPa units. If using a HM-419 Four-Channel Data Readout, pore pressure can also be measured with a HMA-525 Pore Pressure Transducer with Deairing Block.

Flexible-Wall Permeability Control Panels

Master Control Panel, psi	HM-350M
Master Control Panel, kPa	HM-350MF
Auxiliary Control Panel	HM-350A

Accessories

Deairing Tank, 1.5gal (5.7L) capacity	HMA-520
Pore Pressure Transducer with Digital Readout, psi	HMA-521
Pore Pressure Transducer with Digital Readout, kPa	HMA-521F
Pore Pressure Transducer with Deairing Block	HMA-525





HMA-514



HMA-516



HMA-589A

FLEXIBLE-WALL PERMEABILITY TEST CELLS

ASTM D5084

Gilson Flexible-Wall Permeability Test Cells are designed for optimum performance with Master and Auxiliary Control Panels, but are compatible with other systems. The Test Cells are constructed with heavy-wall clear acrylic chambers and solid, machined aluminum bases. Cells are fitted with precision zero-volume change ball valves and rugged quality brass fittings. Models equipped with stainless steel valves and fittings to resist corrosion from harsh permeant fluids can be ordered by adding “S” to the model number. Maximum operating pressure is 150psi (10.3bar). Inquire for units built for higher test pressures.

Permeability Test Cells can test a range of sizes, but must be equipped with Flexible-Wall Permeability Test Cell Kits, purchased separately, for specific specimen sizes. Kits contain individual components for a single specimen size required to test a soil sample. Each kit includes an anodized aluminum specimen cap and pedestal, two Porous Stones, two Latex Membranes, and four O-Rings. The anodized aluminum caps have two drain ports and are grooved for O-Rings. Keyed pedestals with flow-through lines prevent pinching of tubing during set up. Optional accessories include the HMA-506 Specimen Height Indicator to track sample deformation and a Pore Pressure Transducer to precisely measure soil pore pressure. The HMA-521 or HMA-521F Pore Pressure Transducer with Digital Readout are stand-alone units. The HMA-525 Pore Pressure Transducer with Deairing Block connects to a HM-418 Two-Channel or HM-419 Four-Channel Data Readout.

technote

Flexible-Wall Permeability Test Cell Kits / Cell Compatibility

Triaxial Cell Kit		Flex-Wall Cell	
Sample Diameter, in (mm)	Model	HMA-514	HMA-516
1.4 (35.6)	HMA-587	✓	✓
1.5 (38.1)	HMA-587A	✓	✓
1.87 (47.5)	HMA-587B	✓	✓
2.0 (50.8)	HMA-588	✓	✓
2.36 (59.9)	HMA-588A	✓	✓
2.42 (61.5)	HMA-588B	✓	✓
2.5 (63.5)	HMA-589	✓	✓
2.8 (71.1)	HMA-589A	✓	✓
3.0 (76.2)	HMA-583	✓	✓
4.0 (101.6)	HMA-584	✓	✓
6.0 (152.4)	HMA-586A	✗	✓

Flexible-Wall Permeability Test Cells

Model	Inside Chamber Dimensions, dia.xH, in (mm)	Specimen Size Range, in (mm)
HMA-514	4.75x8.25 (121x210)	1.4–4.0 (35.6–101.6)
HMA-516	7.5x10.125 (191x257)	1.4–6.0 (35.6–152.4)

Accessories

Specimen Height Indicator	HMA-506
Pore Pressure Transducer with Digital Readout, psi	HMA-521
Pore Pressure Transducer with Digital Readout, kPa	HMA-521F
Pore Pressure Transducer with Deairing Block	HMA-525

MOBILE FRIENDLY
 globalgilson.com is mobile friendly so you can view on any device.

GLOBALGILSON.COM
 SALES • SERVICE • SUPPORT

FLEXIBLE-WALL PERMEABILITY & TRIAXIAL TEST CELL ACCESSORIES

Test Cell
1.4–6in Specimens



Test Cell

Test Cell Components

Cap



Porous Stone



O-Ring



Membrane



O-Ring



Porous Stone



Pedestal



Sample Preparation

Membrane Stretcher



Two-Part Compaction Mold Assembly



O-Ring Placement Tool



technote

Gilson Test Cells are available in two unique designs to perform triaxial or flexible-wall permeability testing on soil samples. Triaxial Test Cells are equipped to mount in a Load Frame for application of axial loads, but may also be used in flexible-wall permeability testing. Permeability Cells are not designed for axial loading. Triaxial and Flexible-Wall Permeability Cells accommodate soil sample and components for a range of sample sizes.

FLEXIBLE-WALL PERMEABILITY TEST CELL ACCESSORIES

ASTM D5084

Flexible-Wall Permeability Test Cell Accessories											
Description	Sample Diameter, in (mm)										
	1.4 (35.6)	1.5 (38.1)	1.87 (47.5)	2.0 (50.8)	2.36 (59.9)	2.42 (61.5)	2.5 (63.5)	2.8 (71.1)	3.0 (76.2)	4.0 (101.6)	6.0 (152.4)
Test Cell Kits must be used to outfit Test Cells for specific sample sizes. Kits contain all components of a single size required to perform a test. Each kit includes an anodized aluminum specimen cap and pedestal, two aluminum oxide Porous Stones, two Latex Membranes, and four O-Rings. The anodized aluminum caps have two drain ports and are grooved for O-Rings. Keyed pedestals with flow-through lines prevent pinching of tubing during setup.	HMA-587	HMA-587A	HMA-587B	HMA-588	HMA-588A	HMA-588B	HMA-589	HMA-589A	HMA-583	HMA-584	HMA-586
Cap & Pedestal Sets include only the anodized aluminum fixtures for the top and bottom of samples. Other accessories are purchased separately.	HMA-947	HMA-947A	HMA-947B	HMA-948	HMA-948A	HMA-948B	HMA-949	HMA-949A	HMA-943	HMA-944	HMA-946
Latex Membranes fit tightly around prepared soil specimens and provide a barrier against chamber fluids during testing. Supplied in packages of 12. Standard Latex Membranes are 0.012in thick and Premium Membranes are 0.025in (0.6mm) thick. Standard 0.012in Latex Membranes Premium 0.025in Latex Membranes	HMA-527C HMA-527	HMA-527D HMA-527A	HMA-527E HMA-527B	HMA-528C HMA-528	HMA-528D HMA-528A	HMA-528E HMA-528B	HMA-529C HMA-529	HMA-529D HMA-529A	HMA-523C HMA-523	HMA-524C HMA-524	HMA-526C HMA-526
Membrane Stretchers are slightly larger than specimen diameters and use vacuum applied through a tubular fitting to expand the membranes for easy placement. Aluminum construction.	HMA-557	HMA-557A	HMA-557B	HMA-558	HMA-558A	HMA-558B	HMA-559	HMA-559A	HMA-553	HMA-554	HMA-556
O-Rings made of neoprene material seal the Latex Membranes tightly around the Specimen Caps and Pedestals to protect specimen from chamber fluid.	HMA-567	HMA-567A	HMA-567B	HMA-568	HMA-568A	HMA-568B	HMA-569	HMA-569A	HMA-563	HMA-564	HMA-566
O-Ring Placing Tool is a simple design for easy placement of O-Rings without disturbing the sample.	HMA-577	HMA-577A	HMA-577B	HMA-578	HMA-578A	HMA-578B	HMA-579	HMA-579A	HMA-573	HMA-574	HMA-576
Porous Stones provide support of sample and allow two-way passage of water or permeant. These 1/4in thick aluminum oxide stones have a permeability range of 15–18ft ³ of air per minute, per square foot and average pore size of 179µm.	GSA-201	GSA-202	GSA-203	GSA-211	GSA-214	GSA-215	GSA-220	GSA-223	GSA-229	GSA-234	GSA-237
Two-Part Compaction Molds are used to prepare compacted specimens for triaxial or permeability testing. Granular soils are compacted in a mold with a latex membrane held in place by a vacuum source. Cohesive specimens are compacted in molds with no vacuum capability and later fitted in Latex Membranes. Molds for cohesive soils are available as complete assemblies, or as molds only for increased efficiency in sample preparation. Two-Part Compaction Mold w/ Vacuum for Granular Soil Two-Part Compaction Mold Assembly for Cohesive Soil Two-Part Compaction Mold Only for Cohesive Soil	HMA-957 HMA-987 HMA-967	HMA-957A HMA-987A HMA-967A	HMA-957B HMA-987B HMA-967B	HMA-958 HMA-988 HMA-968	HMA-958A HMA-988A HMA-968A	HMA-958B HMA-988B HMA-968B	HMA-959 HMA-989 HMA-969	HMA-959A HMA-989A HMA-969A	HMA-953 HMA-983 HMA-963	HMA-954 HMA-984 HMA-964	HMA-956 HMA-986 HMA-966
Two-Part Miter Boxes are used to trim soil samples to precise lengths for triaxial, permeability, unconfined compression, shear, and other tests.	HMA-977	HMA-977A	HMA-977B	HMA-978	HMA-978A	HMA-978B	HMA-979	HMA-979A	HMA-973	HMA-974	HMA-976
Filter Paper prevents migration of soil fines from samples and blockage of pores in applications where porous stones are used. Ahlstrom grade 55 papers are equivalent to Whatman grade 54 as recommended in a number of ASTM and AASHTO soil test methods. They feature increased wet strength and a tough, smooth surface free of loose fibers. This fast-filtering grade has 15µm retention and a filtration speed of 220mL/min. Supplied as convenient pre-cut circles in packages of 100 in 2.0–6.0in (50.8–152.4mm) diameters.	-	-	-	HMA-772	-	-	-	HMA-773	HMA-774	HMA-775	HMA-776



HM-914



HM-916



HMA-520

Triaxial and Flexible-Wall Permeability Accessories			
Description	Model	ASTM	AASHTO
<p>Toxic Interface Units allow safe flexible-wall permeability testing by providing a barrier against toxic or corrosive chemicals in contaminated samples. Two chambers are required between the Control Panel and Permeability Test Chamber to prevent chemicals from entering the panel and venting to the atmosphere. Contaminants are isolated to the sample and the lower half of each interface chamber. The lower section of the chamber consists of a base, a stainless steel tube, and a zero-volume change ball valve. The tube and base are sealed with a Viton O-Ring and a Viton diaphragm separates the chemical from the water within the test cell. The position of the diaphragm can be viewed through the clear polycarbonate top section. Models are available with 180cc or 500cc capacity. HM-914 Product Dimensions: 5.9x6.3x10.1 (150x160x257mm), WxDxH. HM-916 Product Dimensions: 6.5x7.25x10.1in (165x184x 257mm), WxDxH.</p>	Toxic Interface Unit, 180cc	D2850 D4767 D5084	T 296 T 297
	Toxic Interface Unit, 500cc	HM-914 HM-916	
<p>Deairing Tank is used with Triaxial and Permeability Test Systems to remove entrapped air in the water used in the testing process. The 1.5gal (5.7L) Deairing Tank is constructed of clear acrylic and comes with valves, fitting, and lines for connection to user's vacuum supply.</p>	HMA-520	D2850 D4767 D5084 D7181	T 296 T 297
<p>Pore Pressure Transducer with Digital Readout, psi allows precision measurement of soil sample pore water pressure during triaxial and permeability testing to 150psi with 0.01psi resolution. The unit contains a deairing valve and an easy to read 4.5in (114mm) LCD digital display. For use with Triaxial Cells and HM-350M Master Control Panel in triaxial testing of soils. The display is mounted in a wire stand to place on a table or other flat surface.</p>	HMA-521	D5084 D2850 D4767 D7181	T 296 T 297
<p>Pore Pressure Transducer with Digital Readout, kPa allows precision measurement of soil sample pore water pressure during triaxial and permeability testing to 1034kPa with 0.07kPa resolution. The unit contains a deairing valve and an easy to read 4.5in (114mm) LCD digital display. For use with Triaxial Cells and HM-350MF Master Control Panel in triaxial testing of soils. The display is mounted in a wire stand to place on a table or other flat surface.</p>	HMA-521F	D5084 D2850 D4767 D7181	T 296 T 297
<p>Pore Pressure Transducer with Deairing Block connects directly to a HM-418 Two-Channel or HM-419 Four-Channel Data Readout for precise measurement of soil sample pore water pressure during triaxial and permeability testing. Pore pressure is measured to 150psi (1034kPa) with 0.01psi resolution.</p>	HMA-525	D5084 D2850 D4767 D7181	T 296 T 297



HMA-521



HMA-525



360° PRODUCT VIEWS

See more details from all angles with hi-res 360° images at globalgilson.com

NEW




HM-524



HM-231 shown with HMA-855



HM-232 shown with HMA-856

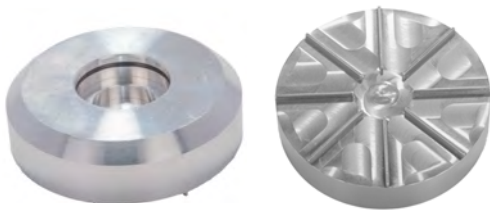

HMA-855



HM-267

Triaxial and Flexible-Wall Permeability Sample Preparation

Description	Model	Dimensions, WxDxH, in
<p>Hydraulic Sample Extruder ejects undisturbed soil samples from thin-walled Shelby Tubes with up to 5,600lbf (24.9kN) of force. Smooth extrusion action in one continuous stroke prevents damage to sensitive soils and makes it easier to divide and preserve small sections for Consolidation, Triaxial, Direct Shear, and other tests. The extruder is set up for 3in (76mm) diameter tubes of 30in (762mm) in length, but easily processes 2in (51mm) diameter tubes using the HMA-282 Adapter, purchased separately. A sample receiving trough (not shown) is included to support the entire length of the specimen during extrusion. Samples are easily logged, cut to length, and prepared for testing in one step. Powerful 1hp electric motor, 1.7gpm (6.4lpm) hydraulic pump, and 2.5gal (47L) hydraulic oil reservoir are mounted to a rugged solid steel frame, with the horizontally mounted piston. The Extruder can be bolted to a benchtop or mounted on the optional HMA-289 Extruder Stand to position at a convenient working height. The stand is rugged bolted steel construction with casters.</p>	<p>Hydraulic Sample Extruder, 115V, 60Hz 230V, 50Hz 2in Tube Adapter Extruder Stand</p>	<p>HM-524 HM-524F — 84.8x18x34.5</p>
<p>Adjustable Soil Trimmers are vertical soil lathes and guide preparation of cylindrical soil samples to desired diameter from 1 to 4in (25.4 to 101.6mm). Top and bottom platens turn freely on low-friction sealed cartridge bearings with no side play, assuring precise dimensioning. The platens feature short pins to grip the specimen and interchangeable Top Platens are mounted to a height-adjustable steel rod. Top Platens are purchased separately for finished diameters desired. Rigid vertical metal frames are mounted on 6in (150mm) square aluminum bases with nonskid rubber feet and an adjustable trimming guide accurately controls diameter. Cost-effective HM-231 Adjustable Soil Trimmer covers the most common soil sample sizes from 1 to 3in (25.4 to 76.2mm) diameter and up to 7.5in (190mm) in length. HM-232 Adjustable Soil Trimmer for larger specimens prepares samples up to 4in (101.6mm) diameter and 9.75in (247.7mm) long.</p>	<p>1–3in Adjustable Soil Trimmer 1–4in Adjustable Soil Trimmer</p>	<p>HM-231 HM-232 6x6x14 6x6x16</p>
<p>Top Platens are interchangeable to fit either Soil Trimmer model for precise control of specimen sizes. Units feature sealed cartridge bearings and can be quickly changed out.</p>	<p>Top Platen, 1.0in (25.4mm) dia. Top Platen, 1.4in (35.6mm) dia. Top Platen, 1.875in (47.6mm) dia. Top Platen, 2.0in (50.8mm) dia. Top Platen, 2.5in (63.5mm) dia. Top Platen, 2.8in (71.1mm) dia. Top Platen, 3.0in (76.2mm) dia. Top Platen, 4.0in (101.6mm) dia.</p>	<p>HMA-850 HMA-851 HMA-852 HMA-853 HMA-854 HMA-855 HMA-856 HMA-857 dia.xH 1.0x0.3 1.4x0.8 1.875x0.8 2.0x0.8 2.5x0.8 2.8x0.8 3.0x0.8 4.0x0.8</p>
<p>Wire Saw with fine-wire blade is the best choice for trimming fine-grained cohesive samples on Adjustable Soil Trimmers. Open End Wire Saw has a deep throat for increased cut sizes on larger samples. The blade mounts in a steel frame that connects to the handle.</p>	<p>HM-267</p>	<p>1.5x7.5x13.75</p>


GILSON MONTHLY BLOG
Learn from the experts. Subscribe to our monthly blog at globalgilson.com



HM-831 through HM-835



HM-891

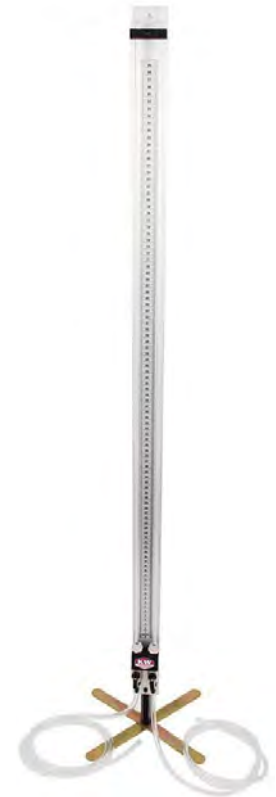

HMA-838

GRANULAR SOIL PERMEAMETERS

ASTM D2434; AASHTO T 215

Permeameters for granular soils are available in versions meeting ASTM/AASHTO constant head requirements, or combination models for use with either constant head or falling-head methods. Both versions feature anodized aluminum end caps and clear acrylic chambers.

ASTM/AASHTO Permeameters determine permeability by constant head method of granular soil samples. Gilson offers permeameters in sizes from 2.5 to 9.0in (63.5 to 228.6mm) diameter, which allows the customer to determine permeability of granular soils with a wide range of particle top sizes.

Clear acrylic sample chambers allow easy viewing during test procedure. Two manometer ports are vertically spaced at a distance equal to the chamber diameter. Stainless steel No.100 mesh screen at each port prevents migration of material into the manometer. Porous stones are included with the 2.5, 3.0, and 4.5in diameter chambers, while the 6 and 9in (152.4 and 228.6mm) diameter chambers are supplied with plastic perforated plates. A compression spring in the top cap applies 5–10lb (2.3–4.5kg) of force to prevent changes in sample density during the test. Anodized aluminum end caps have valves and ports for vacuum and water sources. Tubing is included. Either the HMA-838 Free Standing or HMA-839 Wall Mounted Double-Tube Manometer is required and must be purchased separately. Both feature a 100cm graduated scale and valves. The HMA-836 2in (50.8mm) diameter sliding weight Permeability Compaction Hammer and HMA-837 Acrylic 1000cc Constant Head Reservoir with mounting brackets are available as accessories.

Combination Permeameters are more economical and allow granular samples to be tested by either the constant-head or falling-head methods, but do not strictly meet ASTM and AASHTO requirements. Chamber sizes are similar to the ASTM/AASHTO Permeameters, but they are not equipped with sidewall manometer ports. Constant-head reservoir, free standing single-tube manometer with scale porous stones and all necessary tubing are included.

technote

See separate listing for Filter Paper in the Triaxial or Flexible-Wall Permeability Test Cell Accessories charts.

Granular Soil Permeameters

ASTM/AASHTO Permeameter, 2.5in dia.	HM-831
ASTM/AASHTO Permeameter, 3.0in dia.	HM-832
ASTM/AASHTO Permeameter, 4.5in dia.	HM-833
ASTM/AASHTO Permeameter, 6.0in dia.	HM-834
ASTM/AASHTO Permeameter, 9.0in dia.	HM-835
Combination Permeameter, 2.5in dia.	HM-891
Combination Permeameter, 3.0in dia.	HM-892
Combination Permeameter, 4.5in dia.	HM-893
Combination Permeameter, 6.0in dia.	HM-894
Combination Permeameter, 9.0in dia.	HM-895

Accessories

Permeability Compaction Hammer	HMA-836
Constant Head Reservoir	HMA-837
Free Standing Manometer, Double Tube	HMA-838
Wall Mounted Manometer, Double Tube	HMA-839
Single-Tube Manometer	HMA-840



HM-81



HMA-840



HM-36



HM-37

SHELBY TUBE PERMEAMETER

The Shelby Tube Permeameter allows tests to be performed on undisturbed soil samples in sections of 3in (76mm) diameter Shelby sampling tubes. Supplied apparatus consists of corrosion-resistant top and bottom plates, valves, two porous stones, two stainless steel screens, and three threaded tie rods with tilt nuts for quick repositioning. Inside of top plate is concave for deairing.

Tie rods extend to permit testing in Shelby tubes up to 6in (152mm) long under constant or falling head conditions. Order HMA-840 Single-Tube Manometer to measure head pressure during permeability testing. Features a 1,000mm graduated scale and necessary valves. HMA-49 Filter Paper is useful for keeping fines from blinding porous stones. Paper is 2.95in (75mm) dia. and comes in a pack of one hundred. **Product Dimensions:** 8x6x9.75in (203x152x248mm), WxDxH.

Shelby Tube Permeameter

Shelby Tube Permeameter	HM-81
Accessories	
Filter Paper, pkg. 100	HMA-49
Single-Tube Manometer	HMA-840


COMPACTION PERMEAMETERS

ASTM D5856

Compaction Permeameters measure constant or falling-head properties of compacted soils. The 4in and 6in diameter Permeameters are constructed of plated steel for wear resistance and long life. Inside mold dimensions are 4x4.584in (101.6x116.4mm) and 6x4.584in (152.4x123.3mm), dia.xH, not including collars. These molds are dimensionally identical to Proctor molds, however the upper and lower plates have inlet/outlet connectors to allow the flow of water through the compacted sample. The overflow valve on the top plate is designed for air removal during the test. A porous stone filter is also provided. HMA-840 Single-Tube Manometer is purchased separately and is required to measure head pressures during permeability testing. Both feature a 100mm graduated scale and necessary valves. **Product Dimensions:** HM-36: 7.5x8x10in (191x203x254mm), WxDxH. HM-37: 9.5x9x10.5in (241x229x267mm), WxDxH.

Compaction Permeameters

4in Compaction Permeameter	HM-36
6in Compaction Permeameter	HM-37
Accessories	
Single-Tube Manometer	HMA-840

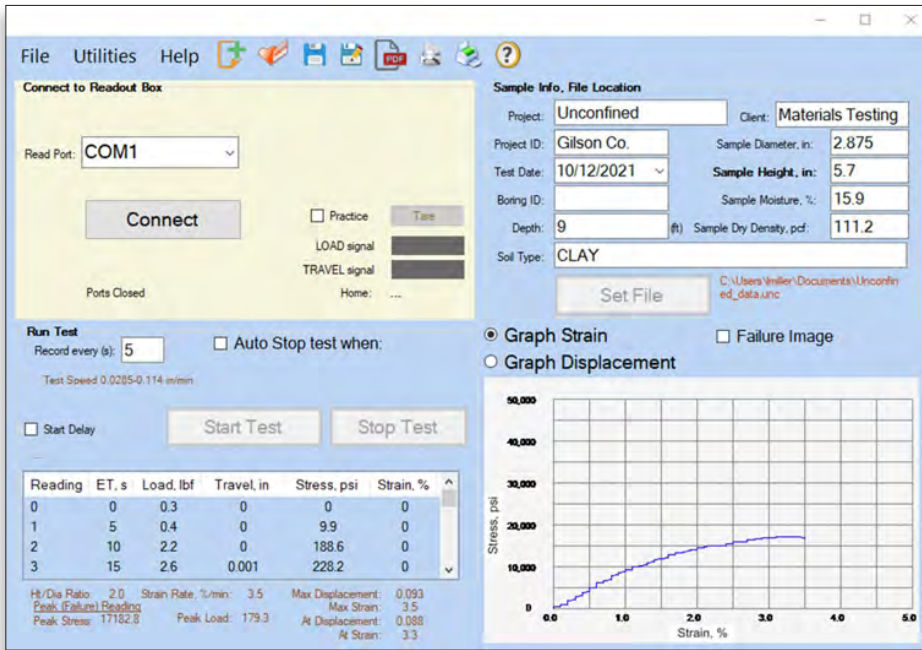NEW

HMA-611 Screen Shot



HMA-683D



Typical Unconfined Compression Test Set-Up

UNCONFINED COMPRESSIVE STRENGTH DATA ACQUISITION SOFTWARE

ASTM D2166; AASHTO T 208

- Displays strain and displacement in real-time
- Automatically saves final reports to computer, network, or cloud
- Calculations and reports meet ASTM and AASHTO requirements
- Optimized for use with desktop, laptop, or tablet devices
- Allows import of failure images into test reports

Gilson's Unconfined Compressive Strength Data Acquisition Software automatically records axial load and rate of deformation for cohesive soil samples. This intuitive software takes the guesswork out of testing with clear data entry fields and testing prompts to reduce user error and increase repeatability.

Unconfined Compressive Strength Software runs on computers with Windows XP or newer operating systems and is designed for convenient use on tablets and laptops. Large popup keyboards can be enabled for touchscreen computers or disabled when a desktop PC with conventional mouse and keyboard are used.

Real-time graphing and calculations are performed throughout the test procedure and saved automatically at test completion in accordance with ASTM and AASHTO specifications. The testing agency information, company logo, sample data, final test results, displacement graph, and strain graph are included in the final testing report. Test data and sample information can be exported to a spreadsheet application or converted into a PDF document.

Unconfined Compressive Strength Data Acquisition Software requires a HM-418 Two-Channel or HM-419 Four-Channel Data Readout for operation. The HMA-683D and HMA-683DF Digital Unconfined Compression Component Set is optimized for use with the software and includes the HM-418, along with a

technote

Free, fully functional 30-day trial version available for download from globalgilson.com

1,000lbf (4.5kN) load cell, 2in (50.8mm) displacement transducer and mounting accessories. All components and sets are purchased separately.

Unconfined Compressive Strength Software is available as a fully operational 30-day trial. Download for free from our website. A USB security key and licensing information to unlock the software for permanent operation will be sent upon purchase. Visit globalgilson.com to view our video with complete details of ease of use, intuitive operation, and features of this new software.

Unconfined Compressive Strength Data Acquisition Software

Unconfined Compressive Strength Data Acquisition Software	HMA-611
Accessories	
Digital Unconfined Compression Component Set, 110V, 50/60Hz	HMA-683D
Digital Unconfined Compression Component Set, 230V, 50/60Hz	HMA-683DF



HM-396



HM-399 shown with HM-683D



Manufactured in cooperation with
Karol-Warner



HMA-94

UNCONFINED COMPRESSIVE STRENGTH LOAD FRAMES

ASTM D2166; AASHTO T 208

Unconfined compression testing quickly provides simple strength values of cohesive soils. This test can be performed on intact, remolded, or reconstituted soil specimens using strain-controlled application of axial loads.

Karol-Warner Load Frames are ideal for unconfined compression testing when equipped with the appropriate analog or digital component set. The frames have sturdy 14-gauge powder-coated steel cabinets and 8in (203mm) diameter test platen. Precision drive systems control strain rates to $\pm 1\%$ of set point. 1.25in (32mm) high-strength threaded rods allow easy, continuous adjustment of horizontal cross head. These Load Frames all have a generous 11.9x37.3in (302x947mm), WxH daylight opening to accept a wide range of sample sizes and test fixtures. HMA-94 Rolling Load Frame Cart is sturdy steel with casters for easy positioning.

Product Dimensions: 18x29x54.5in (457x737x1,384mm), WxDxH.

HM-396 Load Frame has a strain rate of 0.001–0.1in/min (0.0254–2.54mm/min) and is powered by a reliable 1/8hp motor. The strain rate range and 10,000lbf (44.5kN) capacity make it well suited for basic soil tests, including Unconfined Compression, CBR/LBR, Soil-Cement, and Triaxial testing.

HM-397 Load Frame with 0.0001–0.3in/min (0.00254–7.62mm/min) strain rate is powered by a quiet and efficient 1/8hp stepper motor. The strain rate range and 10,000lbf (44.5kN) capacity are ideal for basic soil tests, including Unconfined Compression, CBR/LBR, Soil-Cement, and Triaxial testing.

HM-397B and HM-397BF Load Frame with its high strain rate sensitivity of 0.00001–0.29999in/min (0.000254–7.62mm/min) is powered by an efficient and reliable 1/8hp stepper motor. This versatile 10,000lbf (44.5kN) capacity unit features a wide strain rate range to suit a wide range of basic soil tests, including Unconfined Compression, CBR/LBR, Soil-Cement, and Triaxial testing. Its superior sensitivity and precise, repeatable positioning also make it ideal for testing consolidated/undrained triaxial tests on sensitive soils.

HM-398 Load Frame has a strain rate of 0.02–2.0in/min (0.508–50.8mm/min) and is powered by a powerful 3/4hp motor. The strain rate and 10,000lbf (44.5kN) capacity are well-suited for many soil and asphalt applications including; Unconfined Compression, CBR/LBR, Soil-Cement, Triaxial testing, Marshall, Lottman, Semi-Circular Bend (SCB,) and Tack Coat Shear.

HM-399 Load Frame features a high-range strain rate of 0.00001–0.29999in/min (0.000254–7.62mm/min) and the 20,000lbf (89kN) load-rated unit has double the capacity of our other Load Frames. The quiet, efficient stepper motor powers the heavy-duty unit to perform a wide range of basic soil tests in higher strength ranges, including Unconfined Compression, CBR/LBR, Soil-Cement, and Triaxial testing. Superior sensitivity and precise, repeatable positioning also make it ideal for consolidated/undrained triaxial tests on sensitive soils.

Unconfined Compression Component Sets feature high-quality instrumentation to measure load and displacement values and are easily installed on Load Frames. Fixtures and brackets are included with the sets for direct mounting to the frames. Component sets to perform specific test methods are available for all Load Frames.

HMA-683 Analog Unconfined Compression Component Set includes a 1,000lbf (4.5kN) capacity Load Ring, a 1x0.001in Dial Indicator, Indicator Bracket, and two 2.8x0.25in, dia.xH Plastic Discs. Load Ring is machined from high-strength aluminum alloy plate for repeatable compression measurements and is supplied with a calibration graph.

HMA-683D and HMA-683DF Digital Unconfined Compression Component Set includes a HM-418 Two-Channel Data Readout, 1,000lbf (4.5kN) Load Cell, and 2in (50.8mm) travel Linear Variable Displacement Transducer (LVDT). A Transducer Bracket and two 2.8x0.25in Plastic Discs are also included. The Digital Readout shows real-time data on a large, bright display. Front panel keys allow entry of calibration factors and instant taring on either channel. A mini USB connection is included for data communication. Included GetData 5 software easily downloads load and displacement data from the HM-418 to common spreadsheet applications on user's computer for development of graphs and reports and is compatible with Windows® XP and newer operating systems. HMA-611 Unconfined Compressive Strength Data Acquisition Software, listed separately, works with the HMA-683D and HMA-683DF Component Sets to record specimen and real-time test data, calculate results, and prepare reports following ASTM and AASHTO requirements.

Unconfined Compressive Strength Load Frames

Model	Capacity	Strain Rate	Electrical
HM-396	10,000lbf	0.001–0.1in/min	115V, 50/60Hz
HM-396F	10,000lbf	0.001–0.1in/min	230V, 50/60Hz
HM-397	10,000lbf	0.0001–0.3in/min	115V, 50/60Hz
HM-397F	10,000lbf	0.0001–0.3in/min	230V, 50/60Hz
HM-397B	10,000lbf	0.00001–0.29999in/min	115V, 50/60Hz
HM-397BF	10,000lbf	0.02–2.0in/min	230V, 50/60Hz
HM-398F	10,000lbf	0.02–2.0in/min	230V, 50/60Hz
HM-399	20,000lbf	0.00001–0.29999in/min	120V, 50/60Hz
HM-399F	20,000lbf	0.00001–0.29999in/min	230V, 50/60Hz

Accessories

Analog Unconfined Compression Component Set	HMA-683
Digital Unconfined Compression Component Set, 110V, 50/60Hz	HMA-683D
Digital Unconfined Compression Component Set, 230V, 50/60Hz	HMA-683DF
Rolling Load Frame Cart	HMA-94
Unconfined Compressive Strength Data Acquisition Software	HMA-611



SOIL-CEMENT LOAD FRAMES

ASTM D1632, D1633

Soil-cement, a compacted mixture of soil and Portland cement, stabilizes poor soils for pavement bases. ASTM compressive strength specimens are prepared by method A, using common soil moisture-density (Proctor) equipment, or method B, with the HM-228 Dropping-Weight Compactor and 2.8in (71mm) diameter molds.

Load Frames accept Analog or Digital Soil-Cement Component Sets to test method A or B specimens. Precision drive systems control strain rates to $\pm 1\%$ of set point and 1.25in (32mm) threaded rods allow easy adjustment of horizontal cross heads. Load frames all have sturdy 14-gauge powder-coated steel cabinets, a generous 11.9x37.3in (302x947mm), WxH daylight opening, and an 8in (203mm) diameter platen to accept a wide range of sample sizes and test fixtures. These units are well-suited for Unconfined Compression, CBR, Soil-Cement, and Triaxial testing. Optional HMA-94 Rolling Load Frame Cart features casters for easy positioning. 115V, 60Hz. Add "F" to model number to order 230V, 50Hz units. **Product Dimensions:** 18x29x54.5in (457x737x1,384mm), WxDxH.

HM-396 Load Frame has a strain rate of 0.001–0.1in/min (0.0254–2.54mm/min) and is powered by a reliable 1/8hp motor. The strain rate range and 10,000lbf (44.5kN) capacity make it well suited for basic soil tests, including Unconfined Compression, CBR/LBR, Soil-Cement, and Triaxial testing.

HM-397 Load Frame with 0.0001–0.3in/min (0.00254–7.62mm/min) strain rate is powered by a quiet and efficient 1/8hp stepper motor. The strain rate range and 10,000lbf (44.5kN) capacity are ideal for basic soil tests, including Unconfined Compression, CBR/LBR, Soil-Cement, and Triaxial testing.

HM-397B Load Frame with its high strain rate sensitivity of 0.00001–0.29999in/min (0.000254–7.62mm/min) is powered by an efficient and reliable 1/8hp stepper motor. This versatile 10,000lbf (44.5kN) capacity unit features a wide strain rate range to suit a wide range of basic soil tests, including Unconfined Compression, CBR/LBR, Soil-Cement, and Triaxial testing. Its superior sensitivity and precise, repeatable positioning also make it ideal for consolidated/undrained triaxial tests on sensitive soils.

HM-398 Load Frame has a strain rate of 0.02–2.0in/min (0.508–50.8mm/min) and is powered by a powerful 3/4hp motor. The strain rate and 10,000lbf (44.5kN) capacity are well-suited for many soil and asphalt applications, including Unconfined Compression, CBR/LBR, Soil-Cement, Triaxial testing, Marshall, Lottman, Semi-Circular Bend (SCB), and Tack Coat Shear.

HM-399 Load Frame features a high-range strain rate of 0.00001–0.29999in/min (0.000254–7.62mm/min) and the 20,000lbf (89kN) load-rated unit has double the capacity of our other Load Frames. The quiet, efficient stepper motor powers the heavy-duty unit to perform a wide range of basic soil tests in higher strength ranges, including Unconfined Compression, CBR/LBR, Soil-Cement, and Triaxial testing. Superior sensitivity and precise, repeatable positioning also make it ideal for consolidated/undrained triaxial tests on sensitive soils.



HM-397 shown with
HMA-687



Manufactured in cooperation with
Karol-Warner



HM-398 shown with HMA-94

Soil-Cement Component Sets feature high-quality instrumentation to measure load and deformation. Sets include fixtures and brackets for direct mounting to Load Frames.

Analog Soil-Cement Component Set includes a 10,000lbf capacity aluminum alloy Load Ring with a factory calibration chart. A 1x0.001in Mechanical Dial Indicator with a steel indicator bracket and HMA-129 4.25in (108mm) diameter Swivel Platen.


Digital Soil-Cement Component Set includes a 10,000lbf capacity load cell, two-channel data read-out, 2in travel Linear Variable Displacement Transducer (LVDT), transducer bracket, and HMA-129B 4.25in (108mm) Diameter Swivel Platen. Optional HMA-612 Soil-Cement Data Acquisition Software records specimen and real-time test data, calculates results, and prepares reports following ASTM requirements.

Soil-Cement Load Frames

Model	Capacity	Strain Rate	Electrical
HM-396	10,000lbf (44.5kN)	0.001–0.1in/min	115V, 50/60Hz
HM-397	10,000lbf (44.5kN)	0.0001–0.3in/min	115V, 50/60Hz
HM-397B	10,000lbf (44.5kN)	0.00001–0.29999in/min	115V, 50/60Hz
HM-398	10,000lbf (44.5kN)	0.02–2.0in/min	115V, 50/60Hz
HM-399	20,000lbf (90kN)	0.00001–0.29999in/min	120V, 50/60Hz

Accessories

Analog Soil-Cement Component Set, 10,000lbf capacity (44.5kN)	HMA-687
Digital Soil-Cement Component Set, 110V, 50/60Hz	HMA-687D
Digital Soil-Cement Component Set, 230V, 50/60Hz	HMA-687DF
4.25in Diameter Swivel Platen, 1/2inx20tpi	HMA-129
4.25in Diameter Swivel Platen, 3/4inx16tpi	HMA-129B
6.25in Diameter Swivel Platen, 3/4inx16tpi	HMA-129A
Rolling Load Frame Cart	HMA-94
Soil-Cement Data Acquisition Software	HMA-612

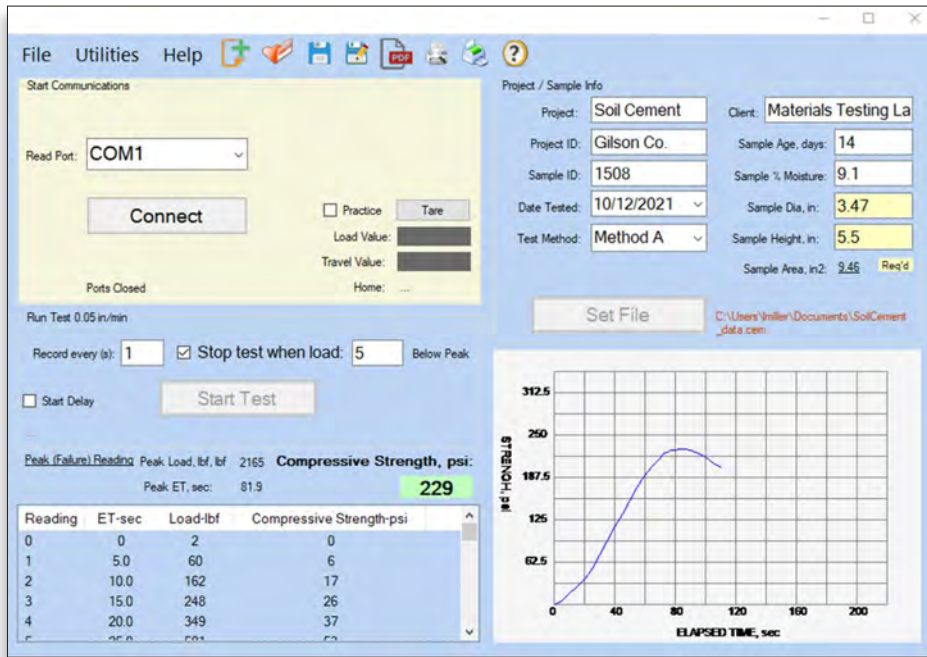

HMA-612 Screen Shot



HMA-687D



Typical Soil-Cement Test Set-up

SOIL-CEMENT DATA ACQUISITION SOFTWARE

ASTM D1633

- ▶ Displays load and displacement graphs in real-time
- ▶ Automatically saves final reports to computer, network, or cloud
- ▶ Calculations and reports meet ASTM and AASHTO requirements
- ▶ Optimized for use with desktop, laptop, or tablet devices

Gilson's Soil-Cement Data Acquisition Software automatically records axial load and vertical deformation data and calculates the unconfined compressive strength of soil-cement samples. This intuitive software utilizes clear data entry fields and testing prompts to reduce user error and increase repeatability.

Soil-Cement Software runs on computers with Windows XP or newer operating systems and is designed for convenient use on tablets and laptops. Large popup keyboards can be enabled for touchscreen computers or disabled when a PC with mouse and keyboard is used.

Real-time graphing and calculations are performed throughout the test procedure and saved automatically at test completion in accordance with ASTM specifications. The testing agency information, company logo, sample data, final test results, and time versus compressive strength graph are included in the final testing report. Test data and sample information can also be exported to a spreadsheet application or converted into a PDF document.

Soil-Cement Data Acquisition Software requires a HM-418 Two-Channel or HM-419 Four-Channel Data Readout for operation. The HMA-687D and HMA-687DF Digital Soil-Cement Component Set is optimized for use with the

technote

Free, fully functional 30-day trial version available for download from globalgilson.com

software and includes the HM-418, along with a load cell and displacement transducer. All components and sets are purchased separately.


Soil-Cement Software is available as a fully operational 30-day trial. Download on our website for free. A USB security key and licensing information to unlock the software for permanent operation will be sent upon purchase. Visit globalgilson.com to view our video with complete details on ease of use, intuitive operation and features of this new software.

Soil-Cement Data Acquisition Software

Soil-Cement Data Acquisition Software	HMA-612
Accessories	
Digital Soil-Cement Component Set, 110V, 50/60Hz	HMA-687D
Digital Soil-Cement Component Set, 230V, 50/60Hz	HMA-687DF



NEW

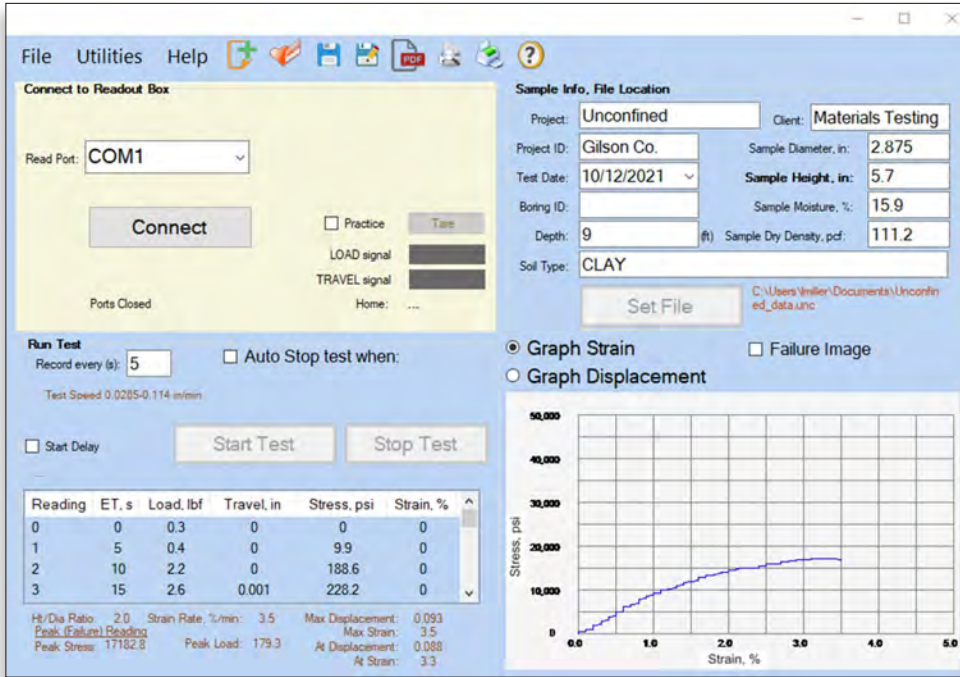

HMA-610 Screen Shot

technote

Free, fully functional 30-day trial version available for download from globalgilson.com

DIRECT/RESIDUAL SHEAR DATA ACQUISITION SOFTWARE

ASTM D3080; AASHTO T 236

- Displays real-time graph and data throughout test
- Final report includes calculated friction angle
- Automatically saves final reports to computer, network, or cloud
- Calculations and reports meet ASTM and AASHTO requirements
- Optimized for use with desktop, laptop, or tablet devices

Gilson's Direct/Residual Shear Data Acquisition Software automatically records data during consolidation and shear phases of direct and residual shear testing. This intuitive software utilizes clear data entry fields and testing prompts to reduce user error and increase repeatability.

Direct/Residual Shear Software runs on computers with Windows XP or newer operating systems and is designed for convenient use on tablets and laptops. Large popup keyboards can be enabled for touchscreen computers or disabled when PC with mouse and keyboard is used.

Real-time calculations are performed throughout the test procedure and saved automatically at test completion in accordance with ASTM and AASHTO specifications. In addition, a friction angle tool allows quick determinations of the friction angle (ϕ) and cohesion intercept (c). The testing agency information, company logo, sample data, and final test results and corresponding graphs are included in the final testing report. Test data and sample information can also be exported to a spreadsheet application or converted into a PDF document.



Typical Direct/Residual Shear Test Set-up

Direct/Residual Shear Data Acquisition Software is optimized for use with the HM-382 and HM-380D Direct Shear Machines, which include the required HM-419 Four-Channel Data Readout, two HM-739 1in Linear Variable Displacement Transducers, and HM-424D 1,500lbf (6.7kN) Load Cell. These components can also be purchased separately to outfit other direct shear machines.

Direct/Residual Shear Software is available for download on our website as a free, fully operational 30-day trial. A USB security key and licensing information to unlock the software for permanent operation will be sent upon purchase. Visit globalgilson.com to view our video with complete details of ease of use, intuitive operation, and features of this new software.

Direct/Residual Shear Data Acquisition Software

Direct/Residual Shear Data Acquisition Software

HMA-610





Manufactured in cooperation with
Karol•Warner



HM-382



PNEUMATIC DIRECT SHEAR MACHINES

ASTM D3080; AASHTO T 236

The direct shear test measures the force and horizontal displacement of a representative specimen that is sheared along a controlled horizontal plane at a constant rate of deformation. Typically three or more tests make up a series and are combined to determine strength properties such as Mohr strength envelopes.

Gilson Pneumatic Direct Shear Machines are tabletop units constructed of 14-gauge, powder-coated steel, and manufactured in cooperation with Karol-Warner and provide direct or direct/residual shear values of soils. Soil specimens are carefully trimmed into a Direct Shear Box, which is horizontally divided, allowing independent movement of the upper and lower halves. A vertical confining load is applied to the specimen and a horizontal shear force is applied to the lower half of the shear box, while the upper half remains stationary. After direct shear failure has been measured, selected models allow the force direction to be reversed to determine residual shear values.

Pneumatic Direct Shear Machines apply vertical confining pressures to the specimen. Confining loads are applied pneumatically using a small, rolling diaphragm piston for light loads of 4–100lbf (0.018–0.44kN) and a larger diameter piston for loads up to 1,500lbf (6.77kN). This design increases the sensitivity and accuracy of the light load system. Loading is controlled using the precision regulator with included calibration chart. Load settings are displayed digitally and are accurate to $\pm 0.25\%$. Both pneumatic direct shear machines are completely self-contained and the need for loading weights is eliminated.

A stepper motor controls strain rates to $\pm 1\%$ from 0.0001 to 0.3in/min (0.0025 to 7.62mm/min) and is easily set with digital thumb wheel controls. Total shear capacity is 1,500lbf (6.67kN). The included water chamber with drainage port is constructed of Teflon-coated, anodized aluminum for corrosion resistance. Round or Square Direct Shear Boxes are available in a variety of sizes and are purchased separately. HMA-739 Shear Box Counterbalance offsets top-half weight of Shear Boxes with specimen dimensions up to 2.5in (63.5mm) and is also purchased separately. HM-95 Rolling Cart for Pneumatic Shear Machines has sturdy all-steel construction offering easy portability in the lab. HM-739 Horizontal and Vertical Linear Variable Displacement Transducers with 1in (25.4mm) range and 0.0001in (0.0025mm) resolution are available separately to replace

analog dial indicators if desired. **Product Dimensions:** 30x14.5x22in (762x368x559mm), WxDxH.

HM-381 Standard Pneumatic Direct Shear Machine uses a S-Type Load Cell connected to a built-in digital display to measure and display load values. Consolidation and direct shear displacement are measured using analog dial indicators.

HM-382 Digital Pneumatic Direct Shear Machine also includes a S-Type Load Cell to measure shear load but adds Linear Variable Displacement Transducers (LVDTs) to measure horizontal and vertical displacement and functionality to perform residual shear testing. A Four-Channel Data Readout with mini USB data output processes and displays measured values. GetData 5 software is included to transfer data in ASCII format to common spreadsheet applications in user's computer using Windows XP or newer operating system. HMA-610 Direct/Residual Shear Data Acquisition Software, listed separately, can be purchased to record specimen and real-time test data, calculate results, and prepare reports following ASTM and AASHTO requirements.

Pneumatic Direct Shear Machines

Standard Pneumatic Direct Shear Machine, 110V, 50/60Hz	HM-381
220V, 50/60Hz	HM-381F
Digital Pneumatic Direct Shear Machine, 110V, 50/60Hz	HM-382
220V, 50/60Hz	HM-382F

Accessories

Rolling Cart for HM-381 and HM-382	HMA-95
Shear Box Counterbalance	HMA-739
Shear Box Counterbalance, 2.5in and Larger	HMA-739B
1in Linear Variable Displacement Transducer	HM-739
Two-Channel Data Readout, 110V, 50/60Hz	HM-418
Two-Channel Data Readout, 230V, 50/60Hz	HM-418F
Four-Channel Data Readout, 110V, 50/60Hz	HM-419
Four-Channel Data Readout, 230V, 50/60Hz	HM-419F
Direct/Residual Shear Data Acquisition Software	HMA-610





HM-380D



Manufactured in cooperation with
Karol-Warner



HMA-735, HMA-745 & HMA-765

DEAD-WEIGHT DIRECT SHEAR MACHINES

ASTM D3080; AASHTO T 236

- Practical, self-contained design uses dead-weight loading
- Simple operation and precise controls
- Options for computerized data collection

Dead-Weight Direct Shear Machines by Karol-Warner are motorized units for direct and direct/residual shear testing of soil samples and use a 10:1 dead-weight beam loading system to apply vertical confining pressures. These compact, self-contained units have similar designs, but differ in instrumentation for data measurement and collection. Both are built for harsh laboratory environments and require little floor space.

Strain rate is precisely controlled from 0.0001 to 0.3in/min (0.0025 to 7.62mm/min) $\pm 1\%$ by an advanced stepper-motor drive system. Settings are easily adjusted using digital thumb wheel controls. Maximum shear displacement is 0.8in (20.3mm). Vertical load capacity is 1,411lb (640kg) and maximum horizontal shear force is 1,500lbf (6.67kN). A solid 1.25in (32mm) base for the Shear Box assembly is mounted on a sturdy 14-gauge powder-coated steel cabinet and stand with heavy-duty casters for easy mobility. Drainage plates, loading block, and a water chamber of Teflon-coated anodized aluminum are included. Round or Square Direct Shear Boxes are available in a variety of sizes and are purchased separately. HMA-739 Shear Box Counterbalance offsets top-half weight of Shear Boxes with specimen dimensions up to 2.5in (63.5mm) and is also purchased separately. Weight Sets are purchased separately and at least one US or Metric weight set is required for proper operation. **Product Dimensions:** 36x14.5x54in (914x368x1,372mm), WxDxH.

HM-380R Standard Dead-Weight Direct Shear Machine features an HM-424D 1,500lbf (6.7kN) Load Cell with Digital Readout to display shear force and Analog Dial Indicators to measure vertical and shear displacement. Options can be purchased separately to upgrade the HM-380R for partial or complete electronic measurement and data collection. HM-739 Linear Variable Displacement Transducers (LVDTs) have 1in (25.4mm) range with 0.0001in (0.0025mm) resolution to measure horizontal and vertical displacement. The LVDTs must be connected to HM-418 Two-Channel or HM-419 Four-Channel Data Readouts. The Readouts

display real-time values on a large bright display and use included GetData 5 software to transfer data to a computer with Windows' operating system. Using the HM-419 Four-Channel Data Readout provides an additional channel to collect force measurements from the Load Cell.


HM-380D Digital Dead-Weight Direct Shear Machine performs both direct and residual shear measurements and is configured for complete electronic measurement and data collection. Data from load cells to measure shear force and LVDTs to measure horizontal and vertical movements are processed through a HM-419 Four-Channel Data Readout. (Specify "F" model suffix for Data Readout units to operate on 230V, 50/60Hz.) The included GetData 5 Software transfers data to the user's Windows-based computer via a mini USB port for analysis from creation of reports and graphs from a spreadsheet application. HMA-610 Direct/Residual Shear Data Acquisition Software, listed separately, works with the Data Readout to record real-time test data, calculate results, and prepare reports following ASTM and AASHTO requirements.

Dead-Weight Direct Shear Machines

Standard Dead-Weight Direct Shear Machine, 115V, 50/60Hz	HM-380R
230V, 50/60Hz	HM-380RF
Digital Dead-Weight Direct Shear Machine, 115V, 50/60Hz	HM-380D
230V, 50/60Hz	HM-380DF

Accessories


32kg Weight Set, Maximum Load 320kg	HMA-730
64kg Weight Set, Maximum Load 640kg	HMA-725
88kg Weight Set, Maximum Load 880kg	HMA-731
54.5lb Weight Set, Maximum Load 545lb	HMA-727
109.1lb Weight Set, Maximum Load 1,091lb	HMA-732
218.2lb Weight Set, Maximum Load 2,182lb	HMA-729
Shear Box Counterbalance	HMA-739
Shear Box Counterbalance, 2.5in and Larger	HMA-739B
1in Linear Variable Displacement Transducer	HM-739
Two-Channel Data Readout, 110V, 50/60Hz	HM-418
Two-Channel Data Readout, 230V, 50/60Hz	HM-418F
Four-Channel Data Readout, 110V, 50/60 Hz	HM-419
Four-Channel Data Readout, 230V, 50/60Hz	HM-419F
Direct/Residual Shear Data Acquisition Software	HMA-610



HMA-735



HMA-745

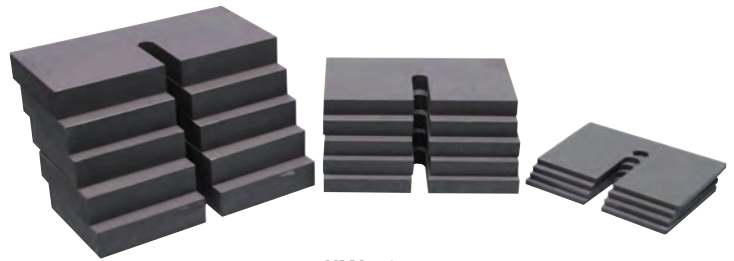

HMA-725



HMA-765



HMA-764SA



GSA-219



HMA-727

DIRECT SHEAR BOXES & ACCESSORIES

ASTM D3080; AASHTO T 236

Direct Shear Boxes are designed for use in Karol-Warner and other dead-weight or pneumatic direct shear machines for determining direct shear values. Precision machined shear boxes are horizontally divided to allow opposing shear forces to be applied to soil specimens that have been carefully trimmed to fit. Models are available in a variety of sizes to test round or square specimens and have fine adjustments to maintain required clearances. Shear boxes are constructed of anodized aluminum with Teflon finish for corrosion resistance. HMA-81 Loading Ball and two porous stones are also included with each shear box. These components are also available separately for each size to enhance sample preparation efficiency. Extruders are purchased separately in each size for easy removal of tested samples.

Direct Shear Boxes & Accessories				
Description	Shear Box	Cutters	Extruders	Porous Stones
Round Direct Shear Boxes				
50mm (1.97in) Diameter	HMA-733M	HMA-743M	HMA-763M	GSA-208
2.0in (50.8mm) Diameter	HMA-733	HMA-743	HMA-763	GSA-210
60mm (2.36in) Diameter	HMA-734M	HMA-744M	HMA-764M	GSA-213
2.42in (61.5mm) Diameter	HMA-734	HMA-744	HMA-764	GSA-217
2.5in (63.5mm) Diameter	HMA-735	HMA-745	HMA-765	GSA-219
100mm (3.94in) Diameter	HMA-737	HMA-747	HMA-767	GSA-231
4in (101.6mm) Diameter	HMA-736	HMA-746	HMA-766	GSA-232
Square Direct Shear Boxes				
50mm (1.97in) Square	HMA-733MS	HMA-743MS	HMA-763MS	GSA-208S
2.0in (50.8mm) Square	HMA-733S	HMA-743S	HMA-763S	GSA-210S
60mm (2.36in) Square	HMA-734MS	HMA-744MS	HMA-764MS	GSA-213S
2.42in (61.5mm) Square	HMA-734SA	HMA-744SA	HMA-764SA	GSA-217S
2.5in (63.5mm) Square	HMA-735S	HMA-745S	HMA-765S	GSA-219S
100mm (3.94in) Square	HMA-737S	HMA-747S	HMA-767S	GSA-231S
4in (101.6mm) Square	HMA-736S	HMA-746S	HMA-766S	GSA-232S

DIRECT SHEAR DEAD-WEIGHT SETS

ASTM D3080; AASHTO T 236

Weight Sets for Direct Shear machines apply vertical loads to the specimen through a loading beam with 10:1 ratio and are purchased separately in pound or kilogram versions. The Pound Weight Set is configured for convenient loading in tons/ft² (tsf) units for a 2.5in (63.5mm) specimen when a 10:1 beam ratio is used.

Direct Shear Dead-Weight Sets					
Kilogram Weight Sets					
Model	Total Mass	Total Load at 10:1 Beam Ratio	Included Weights		
			1kg	4kg	8kg
HMA-730	32kg	320kg	4	3	2
HMA-725	64kg	640kg	4	5	5
HMA-731	88kg	880kg	4	5	8

Direct Shear Dead-Weight Sets								
Pound Weight Sets								
Model	Total Mass	Maximum Load ¹	Included Weights					
			0.852lb (1/8tsf)	1.704lb (1/4tsf)	3.409lb (1/2tsf)	6.818lb (1tsf)	13.635lb (2tsf)	27.270lb (4tsf)
HMA-727	54.5lb	545lbf (8tsf)	2	1	1	1	1	1
HMA-732	109.1lb	1,091lbf (16tsf)	2	1	1	1	1	3
HMA-729	218.2lb	2,182lbf (32tsf)	2	1	1	1	1	7

¹tsf values indicate applied load to a 2.50in diameter specimen at a 10:1 beam ratio.





Manufactured in cooperation with
Karol Warner



HM-384

HIGH-CAPACITY GEOSYNTHETIC DIRECT SHEAR MACHINE

ASTM D5321, D6243

High-Capacity Direct Shear Machines measure the total resistance of large, 12in (305mm) square soil or soil/geosynthetic specimens to horizontal shear forces. The specimens are mounted in a two-piece shear box assembly, divided in half horizontally. The bottom half is held securely in place and a vertical confining force is applied. Horizontal force is then directed against the upper half of the box to shear the specimen.

Loads are applied through pistons driven by a stepper motor and gear box system. Confining loads are applied with small diameter pistons for greater accuracy and sensitivity of lighter loads, up to 1,000lbf (4.4kN) of force. One or two larger pistons generate shearing loads up to 10,000lbf (45kN) or 20,000lbf (90kN), depending on model selected. Horizontal shear rate from 0.002 to 0.2in (0.0508 to 5.08mm) per minute is easily set with thumbwheels on the control panel. Limit switches control the home position and limit total horizontal displacement to 4in (102mm). Vertical loading is controlled through a precision regulator, using the included calibration chart to set the required pressure. Loads are displayed to two decimal places on the digital readout and are accurate to $\pm 0.25\%$. Consolidation and shear displacement are measured by linear variable displacement transducers. Shear load is measured from a load cell attached to the water chamber. The four-channel readout displays all these values while directing data in ASCII format through the mini USB serial port to the user's computer. The included software imports data into common spreadsheet applications for analysis and reporting. Displayed values on the readout can be viewed at anytime.

Loading and unloading the specimen and shear box assembly to and from the water chamber is simplified using the compaction table. Pulling the loaded shear box onto the convenient table rollers allows the entire assembly to slide easily into and out of the chamber. Sample compaction, geotextile placement, and specimen preparation can be performed on the table before placing the assembly directly into the water chamber with little effort.

HM-384 and HM-385 High-Capacity Direct Shear Machines are capable of applying maximum piston loads of 10,000lbf (45kN) and 20,000lbf (90kN) respectively. Both are ruggedly designed for harsh lab environments. All steel parts are powder-coated and hard-coat anodized aluminum components resist corrosion. Casters on the machine and compaction table make for easy portability in the lab. Compaction table and top and bottom shear rings are included. Top ring is 12x12x4in (305x305x102mm) and bottom ring is 12x16x4in (305x406x102mm). Software and data cable is also included. A 120psi (827kPa) source of clean, dry, compressed air is required for operation. Inquire for customization options for specimen sizes and operating options. Operates on 110V, 60Hz. For units operating on 220-240V, 50Hz, add "F" suffix to model number. **Product Dimensions:** 43x23x40in (1,092x584x1,016mm), WxDxH.


High-Capacity Geosynthetic Direct Shear Machine

High-Capacity Geosynthetic Direct Shear Machine, 10,000lbf (45kN), 110V, 60Hz	HM-384
High-Capacity Geosynthetic Direct Shear Machine, 20,000lbf (90kN), 110V, 60Hz	HM-385






HMA-388

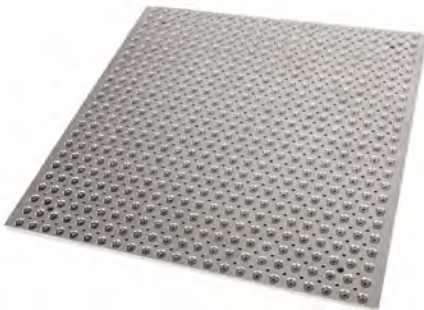

HMA-389

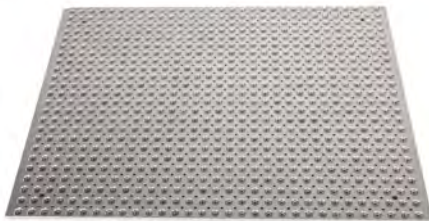

HMA-390

High-Capacity Geosynthetic Direct Shear Machine Accessories

Description	Model	Dimensions (LxW)
Porous Stone , is 0.5in (12.7mm) thick and is placed at the top and bottom of soil specimens during direct shear testing with the High-Capacity Geosynthetic Direct Shear Machine (two included with machine) to allow free flow of fluids through the sample under load. The sturdy stone is made of porous aluminum oxide.	HMA-388	12x12in (304.8x304.8mm)
Bed of Screws is used to mount the geosynthetic liners in the shear box of the High-Capacity Geosynthetic Direct Shear Machine. Two sizes are available; 12x12in (305x305mm) contains 552 screws and fits the top of the shear box and the 12x16in (305x406mm) contains 744 screws and is designed to fit in the bottom.		
Top Shear Box Bed of Screws	HMA-389	12x12in (304.8x304.8mm)
Bottom Shear Box Bed of Screws	HMA-390	12x16in (304.8x406.4mm)
Shear Box Adapters modify the 12in square shear box in the High-Capacity Geosynthetic Direct Shear Machine to test smaller sample sizes. Adapters for 6in (152.4mm) or 8in (203.2mm) square samples are available.		LxWxH
6in (152.4mm) Shear Box Adapter	HMA-376	12x14x5in (305x356x127mm)
8in (203.2mm) Shear Box Adapter	HMA-378	12x14x5in (305x356x127mm)



HMA-376



HMA-378



MOBILE FRIENDLY

globalgilson.com is mobile friendly so you can view on any device.



GILSON MONTHLY BLOG

Learn from the experts. Subscribe to our monthly blog at globalgilson.com



Manufactured in cooperation with
Karol•Warner



HM-354 shown with HMA-83E and MA-333



MA-363



MA-333



HM-739

CONSOLIDATION LOAD FRAMES

ASTM D2435, D4546; AASHTO T 216

One-dimensional consolidation testing of soils provides information for geotechnical engineers to calculate expected settlement of structures and pavements. Karol-Warner's exclusive CONBEL™ Consolidation Frames with pneumatic loading meet the most stringent demands of soil testing labs.

Load Frames are available in three different load capacities. All instantaneously apply and maintain loads for precision consolidation testing and feature low-load functionality for precision application of small confining loads. Loads are applied pneumatically and maintained by a precision pressure regulator. Small cabinet footprint saves valuable bench space. These self-contained devices display applied loads through digital displays and use precision pressure regulators and pressure transducers with a linearity of $\pm 0.1\%$.

The 1in (25.4mm) thick aluminum platforms have adjustable centering pads and are designed to hold any consolidation ring up to 7.25in (184mm) diameter. Platform clearance is 8.25x7.75in (210x197mm), WxH. Stainless steel vertical rods support the cross-head and dial gauge. Sturdy, powder-coated steel cabinets protect the unit. One HMA-81 Loading Ball is included with each load frame. Fixed or floating-ring consolidometers and a dial indicator are required and purchased separately. An air compressor is required for operation and must be supplied by the user. HMA-608 Consolidation Data Acquisition Software is purchased separately and can be used when the Consolidation Load Frame is equipped with either a HM-739 1.0in (25.4mm) Linear Variable Displacement Transducer (LVDT) or MA-363 0.6in x 0.0001in Digital Dial Indicator. This unique software records specimen and real-time test data, calculates results, and prepares reports following ASTM and AASHTO requirements.
Product Dimensions: 12x14.5x21in (305x368x533mm), WxDxH.

HM-356 Consolidation Load Frame has capacity of 16tsf (1,532kPa) and requires a minimum of 62psi (4.3bar) of compressed air.

HM-354 Consolidation Load Frame has capacity of 32tsf (3,064.3kPa) and requires a minimum of 123psi (8.5bar) of compressed air.

HM-355 Consolidation Load Frame has capacity of 64tsf (6,128.7kPa) and requires a minimum of 188psi (13bar) of compressed air.


Consolidation Load Frames

Model	Capacity	Required Air	Electrical
HM-356	16tsf	62psi (4.3bar)	120-220V, 50/60Hz
HM-356F	1,532kPa	62psi (4.3bar)	120-220V, 50/60Hz
HM-354	32tsf	123psi (8.5bar)	120-220V, 50/60Hz
HM-354F	3,064kPa	123psi (8.5bar)	120-220V, 50/60Hz
HM-355	64tsf	188psi (13bar)	120-220V, 50/60Hz
HM-355F	6,128kPa	188psi (13bar)	120-220V, 50/60Hz

Accessories

Mechanical Dial Indicator, 0.5in x 0.0001in	MA-333
Digital Dial Indicator, 0.6in x 0.0001in (15.25 x 0.00254mm)	MA-363
1in Linear Variable Displacement Transducer	HM-739
Two-Channel Data Readout, 110V, 50/60Hz	HM-418
Two-Channel Data Readout, 230V, 50/60Hz	HM-418F
Four-Channel Data Readout, 110V, 50/60Hz	HM-419
Four-Channel Data Readout, 230V, 50/60Hz	HM-419F
USB Cable for Digital Dial Indicator	MAA-81
Consolidation Data Acquisition Software	HMA-608



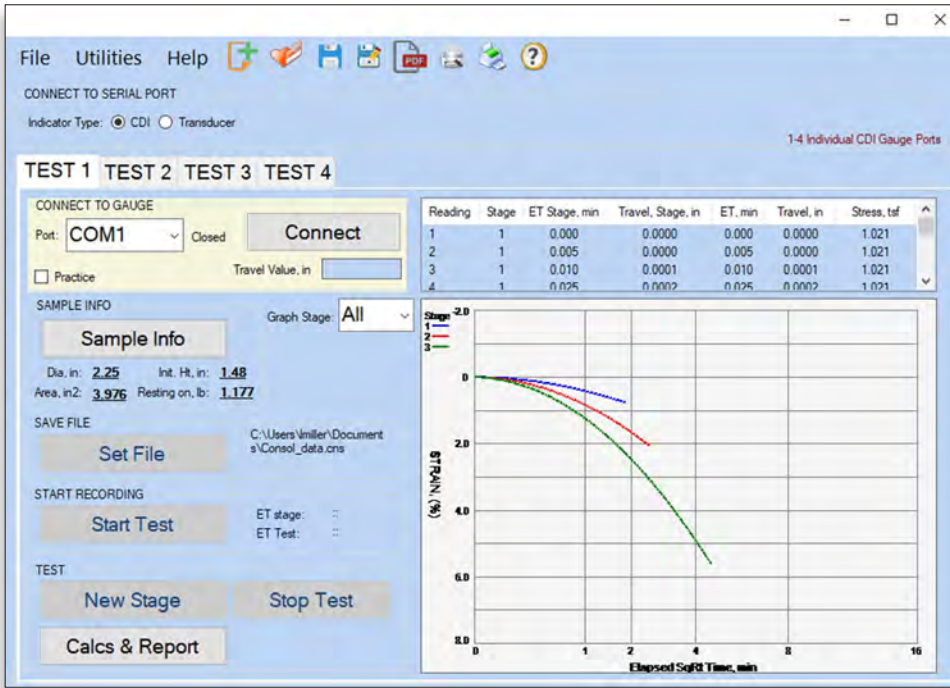

HMA-608 Screen Shot



HM-419



Typical Consolidation Test Set-up

CONSOLIDATION DATA ACQUISITION SOFTWARE

ASTM D2435, D4546, AASHTO T 216

- ▶ Displays real-time graphing during each consolidation stage
- ▶ Allows user to recall previous stages and graph all stages at test completion
- ▶ Automatically saves final reports to computer, network, or cloud
- ▶ Calculations and reports meet ASTM and AASHTO requirements
- ▶ Optimized for use with desktop, laptop, or tablet devices

Gilson's Consolidation Data Acquisition Software automatically records the rate of consolidation during incremental loading of soil samples. This intuitive software utilizes clear data entry fields and testing prompts to reduce user error and increase repeatability.

Consolidation Software runs on computers with Windows XP or newer operating systems and is designed for convenient use on tablets and laptops. Large popup keyboards can be enabled for touchscreen computers or disabled when a PC with mouse and keyboard are used.

Real-time graphing and calculations are performed throughout the test procedure and saved automatically at test completion in accordance with ASTM and AASHTO specifications. The testing agency information, company logo, sample data, and final test results and corresponding graph are included in the final testing report. Test data and sample information can be exported to a spreadsheet application or converted into a PDF document.

Consolidation Data Acquisition Software requires a HM-418 Two-Channel or HM-419 Four-Channel Data Readout equipped with either a HM-739 1.0in (25.4mm) Linear Variable Displacement Transducer (LVDT) or MA-363

technote

Free, fully functional 30-day trial version available for download from globalgilson.com

0.6x0.0001in Digital Dial Indicator. The MAA-81 USB Cable is required when using the MA-363. All components and sets are purchased separately. Specify "F" model suffix for Data Readout units to operate on 230V, 50/60Hz.

Consolidation Software is available for download on our website as a free, fully operational 30-day trial. A USB security key and licensing information to unlock the software for permanent operation will be sent upon purchase. Visit globalgilson.com to view our video for complete details of ease of use, intuitive operation, and features of this new software.

Consolidation Data Acquisition Software

Consolidation Data Acquisition Software HMA-608

Accessories

Two-Channel Data Readout, 110V, 50/60Hz	HM-418
Two Channel Data Readout, 230V, 50/60Hz	HM-418F
Four-Channel Data Readout, 110V, 50/60Hz	HM-419
Four-Channel Data Readout, 230V, 50/60Hz	HM-419F
1in Linear Variable Displacement Transducer	HM-739
Digital Dial Indicator, 0.6x0.0001in (Range x Resolution)	MA-363 ¹
USB Cable for Digital Dial Indicators	MAA-81

¹MAA-81 cable required to transfer data to computer.



Manufactured in cooperation with
Karol-Warner



HM-353



HMA-89




HMA-727



MA-333



MA-363

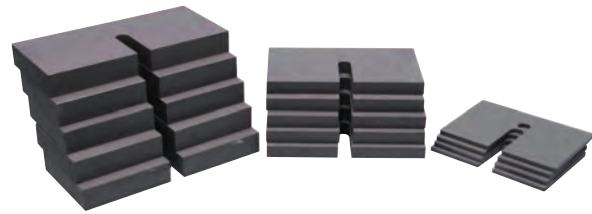

HMA-725

DEAD-WEIGHT CONSOLIDATION LOAD FRAME

ASTM D2435, D4546; AASHTO T 216

The Dead-Weight Consolidation Load Frame from Karol-Warner is a compact table top unit with 48tsf (4597kPa) capacity for application of loads in stress-controlled consolidation testing of soil specimens. The lever-loaded design is simple and efficient to use and the advanced design allows instantaneous loading with minimal impact. A counterbalanced beam assembly can be used at 9:1, 10:1, or 11:1 beam ratios for wider selection of loads with weight sets. Locating pins on the top platform precisely center the consolidometer for loading. The loading platform has vertical x horizontal clearance of 5.25x6.38in (133x162mm) and accepts consolidometers for specimen sizes up to 3in (76.2mm).

The load frame is powder-coated aluminum and the loading table is made from rugged anodized aluminum plate for corrosion resistance in harsh laboratory environments. Beam support rod and vertical rods are made from stainless steel. Weight sets are purchased separately in pound or kilogram versions. The pound weight set is configured for convenient loading in tons/ft² (tsf) for a 2.5in (63.5mm) specimen when a 10:1 beam ratio is used. Consolidometers and analog or digital dial indicators are purchased separately. Order HMA-89 Load Frame Stand if a free-standing unit is desired. **Product Dimensions:** 8x32x20in (203x813x508mm), WxDxH.

Dead-Weight Consolidation Load Frame

Dead-Weight Consolidation Load Frame HM-353

Accessories

Load Frame Stand	HMA-89
Mechanical Dial Indicator, 0.5x0.0001in	MA-333
Digital Dial Indicator, 0.6x0.0001in	MA-363
USB Cable for Digital Dial Indicators	MAA-81
1in Linear Variable Displacement Transducer	HM-739
Two-Channel Data Readout, 110V, 50/60Hz	HM-418
Two-Channel Data Readout, 230V, 50/60Hz	HM-418F
Four-Channel Data Readout, 110V, 50/60Hz	HM-419
Four-Channel Data Readout, 230V, 50/60Hz	HM-419F
Consolidation Data Acquisition Software	HMA-608

Kilogram Weight Sets

Model	Total Mass	Total Load at 10:1 Beam Ratio	Included Weights		
			1kg	4kg	8kg
HMA-730	32kg	320kg	4	3	2
HMA-725	64kg	640kg	4	5	5
HMA-731	88kg	880kg	4	5	8

Pound Weight Sets

Model	Total Mass	Total Load at 10:1 Beam Ratio ¹	Included Weights					
			0.852lb (1/8tsf)	1.704lb (1/4tsf)	3.409lb (1/2tsf)	6.818lb (1tsf)	13.635lb (2tsf)	27.270lb (4tsf)
HMA-727	54.5lb	545lbf (8tsf)	2	1	1	1	1	1
HMA-732	109.1lb	1,091lbf (16tsf)	2	1	1	1	1	3
HMA-729	218.2lb	2,182lbf (32tsf)	2	1	1	1	1	7

¹tsf values indicate force applied to a 2.50in diameter specimen using a 10:1 beam ratio.





HMA-83E



HMA-84E



HMA-90E



HMA-88E



HMA-83E components



HMA-84E components

Consolidometers and Accessories

Description	Consolidometer	Cutting Sample Rings	Calibration Disc	Top Porous Stone	Bottom Porous Stone		
<p>Fixed-Ring Consolidometers by Karol-Warner load the specimen from the top with the base of the sample ring fixed in place. An acrylic inundation ring is attached to a stainless steel base. Stainless steel sample rings have built-in cutting edges for efficient sample preparation. Cutting rings are 1in (25.4mm) high, except 50mm and 2in diameter rings which are 0.75in (19mm) in height. Clamping rings are fitted with lifting knobs for easy removal after the test. Cutting sample ring, loading pad, attached acrylic inundation ring, top and bottom porous stones, and load-bearing ball are included. Components and accessories are also available separately. These consolidometers fit Karol-Warner consolidation load frames as well as most other manufacturer's units.</p>	50.0mm (1.969in)	HMA-83A	HMA-90A	HMA-88A	GSA-207	GSA-230	
	2.0in (50.8mm)	HMA-83B	HMA-90B	HMA-88B	GSA-210	GSA-230	
	60.0mm (2.36in)	HMA-83C	HMA-90C	HMA-88C	GSA-212	GSA-230	
	2.42in (61.5mm)	HMA-83D	HMA-90D	HMA-88D	GSA-216	GSA-230	
	2.5in (63.5mm)	HMA-83E	HMA-90E	HMA-88E	GSA-219	GSA-230	
	70.0mm (2.756in)	HMA-83F	HMA-90F	HMA-88F	GSA-222	GSA-230	
	75.0mm (2.95in)	HMA-83G	HMA-90G	HMA-88G	GSA-226	GSA-230	
	3.0in (76.2mm)	HMA-83H	HMA-90H	HMA-88H	GSA-228	GSA-230	
	100.0mm (3.94in)	HMA-83L ¹	HMA-90L	HMA-88L	GSA-231	GSA-231	
	4.0in (101.6mm)	HMA-83J ¹	HMA-90J	HMA-88J	GSA-232	GSA-232	
	<p>Floating-Ring Consolidometers by Karol-Warner transfer force to the specimen through both the top and bottom. The sample ring is not attached to the base, but supported by the friction of the specimen. Consolidometers have a stainless steel base with attached acrylic see-through inundation ring. The units include a stainless steel sample ring with cutting edge, load pad, load bearing ball, and top and bottom porous stones. Models are designed to fit most manufacturer's testing units.</p>	50.0mm (1.97in)	HMA-84A	HMA-90A	HMA-88A	GSA-207	GSA-207
		2.0in (50.8mm)	HMA-84B	HMA-90B	HMA-88B	GSA-210	GSA-210
		2.42in (61.5mm)	HMA-84D	HMA-90D	HMA-88D	GSA-216	GSA-216
2.50in (63.5mm)		HMA-84E	HMA-90E	HMA-88E	GSA-219	GSA-219	
70.0mm (2.76in)		HMA-84F	HMA-90F	HMA-88F	GSA-222	GSA-222	

¹100.0mm and 4.0in Consolidometers are compatible only with HM-354, HM-355, and HM-356 Consolidation Load Frames



HM-564 shown with MA-333



HM-567



HM-562 shown with MA-333

BASIC SWELL CONSOLIDOMETERS ASTM D4546

Self-contained Basic Swell Consolidometers are used for swell and expansion tests on soil specimens of 2.44 or 2.50in (62 or 63.5mm) diameters. The simple method provides rapid results to predict swell potential for soils with no need for a separate loading frame. Specimens are prepared by compacting soil into a stainless steel compaction ring. The ring with specimen is placed in the consolidometer between two porous stones and loaded to 60psf (2.87kPa) with the loading weight. A dial indicator is set to the initial sample height and the consolidometer is filled with water to begin the test.

The compact, all-in-one design includes the stainless steel base, a compaction specimen ring and loading weight, porous stones, an acrylic ring to contain the water, and an adjustable dial indicator holder. Loading weights and porous stones are also available separately as replacements. A dial indicator is required and purchased separately. Additional stainless steel compaction rings can be purchased to enhance sample preparation efficiency. The HMA-836 Permeability Compaction Hammer is used to compact soil samples into a compaction ring secured in a compaction base and collar assembly. The drop-hammer is supplied with 100g (0.22lb) and 1kg (2.2lb) sliding weights and a 2in (51mm) diameter tamping foot. Drop height is adjustable from 4 to 8in (102 to 203mm). Compaction base and collar for each specimen size and the compaction hammer are all purchased separately for sample preparation. **Product Dimensions:** 5x2.5in (127x63.5mm), dia.xH.

Basic Swell Consolidometer

Basic Swell Consolidometer, 2.44in	HM-564
Basic Swell Consolidometer, 2.50in	HM-565

Accessories

Mechanical Dial Indicator, 0.5x0.0001in	MA-333
Digital Dial Indicator 0.6x0.0001in	MA-363
Compaction Base and Collar for 2.44in dia. Samples HMA-834D	
Compaction Base and Collar for 2.50in dia. Samples HMA-834E	
60psf Loading Weight, 2.44in diameter	HMA-835D
60psf Loading Weight, 2.50in diameter	HMA-835E
Compaction Ring, 2.44x1.0in, dia.xH	HMA-841
Compaction Ring, 2.50x1.0in, dia.xH	HMA-842
Permeability Compaction Hammer	HMA-836
2.405in Top Porous Stone	GSA-217
2.485in Top Porous Stone	GSA-219
3.31in Bottom Porous Stone	GSA-230

BACK PRESSURE CONSOLIDOMETER ASTM D2435; AASHTO T 216

The Back Pressure Consolidometer allows back pressure saturation and pore pressure measurements of soil specimens during one-dimensional consolidation testing. The Consolidometer is mounted in a conventional consolidation device, such as the Karol-Warner CONBEL™ pneumatic load frame, for loading and connected to an HM-350M Master Control Panel for regulation of cell pressures. Permeability values can also be determined. The HMA-521 or HMA-521F Pore Pressure Transducer with Digital Readout or HMA-525 Pore Pressure Transducer with Deairing Block can be used to determine real-time specimen pore pressure values.

The HM-567 Consolidometer transfers loads to the specimen via a stainless steel piston that passes through a top cap with sealed, low-friction linear bearings. Ports with connectors allow for application of confining pressures up to 200psi and a bottom port monitors pressure and flow rate. The unit tests 2.50x1.0in (63.5x25.4mm), dia.xH specimens and includes a sample ring with built-in cutting edge for efficient sample preparation. Also included are two porous stones, flexible tubing, and connectors for pressure and pore pressure lines. Sample rings and porous stones are also available separately for streamlined sample preparation. An optional stainless steel calibration disc is used to measure total system deflection under applied load. **Product Dimensions:** 5.5x6.7in (140x170mm), dia.xH.

Back Pressure Consolidometer

Back Pressure Consolidometer, 2.5in (63.5mm)	HM-567
--	--------

Accessories

Calibration Disc for 2.5in (63.5mm)	HMA-88E
2.485in Top Porous Stone	GSA-219
Cutting Sample Ring, 2.5in (63.5mm) ID	HMA-90E
2.8in Filter Paper	HMA-773
Digital Pore Pressure Gauge, psi	HMA-521
Digital Pore Pressure Gauge, kPa	HMA-521F

EXPANSION INDEX CONSOLIDOMETER ASTM D4829

The Expansion Index test is a simple and effective method for predicting swelling potential of compacted soils. A soil specimen is moisture conditioned to 50% saturation and compacted into a 4in (102mm) diameter mold. After a confining load is applied, the specimen is immersed in water and volumetric swell is recorded for up to 24 hours. The Expansion Index (EI), is calculated from these measurements. A high EI value indicates a need to design structures and pavements for expansive soils.

The unique, self-contained design does not require a separate consolidometer loading device to mount, load and saturate the specimen for testing. After compaction into the 4x1in (101.6x25.4mm), IDxH stainless steel ring, the specimen is placed in the HM-562 Consolidometer with a closely fitting, air-dry porous stone at each end and loaded with the stainless steel weight. After consolidating for ten minutes, the assembly is immersed in distilled water to initiate the test.


All immersed parts are either stainless steel or anodized aluminum for durability and corrosion resistance. Included are an anodized aluminum base and collar with stainless steel hold-down rods, stainless steel specimen ring, 12.6lb (5.7kg) loading weight, and porous stones. MA-363 Digital Dial Indicator or MA-333 Mechanical Dial Indicator is required for the test and purchased separately. Additional porous stones, stainless steel specimen rings, and loading weights can be purchased for more efficient sample preparation. **Product Dimensions:** 6x11in (152x279mm), dia.xH.

Expansion Index Consolidometer


Expansion Index Consolidometer	HM-562
--------------------------------	--------

Accessories


Mechanical Dial Indicator, 0.5x0.0001in	MA-333
Digital Dial Indicator, 0.6x0.0001in	MA-363
Porous Stone, 3.97x0.5in, dia.xH	GSA-331A
Stainless Steel Specimen Ring	HMA-665
Stainless Steel Loading Weight	HMA-667

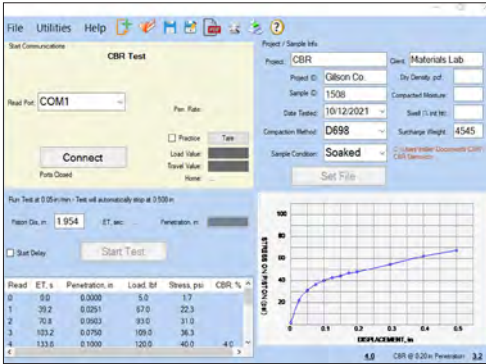


HMA-609

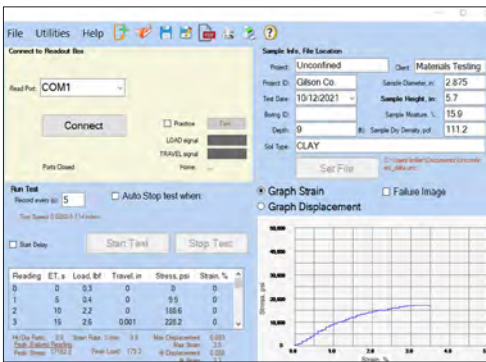

HMA-611

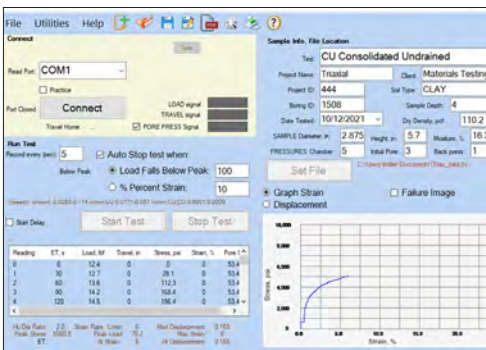


HMA-613

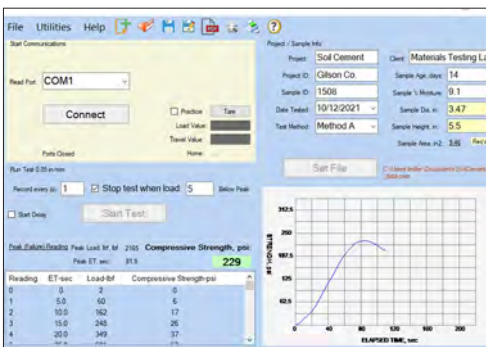


HMA-612

Data Acquisition Software

Description	Model	Test Method
CBR/LBR Data Acquisition Software <ul style="list-style-type: none"> Displays real-time graphing and data throughout test Automatically saves final reports to computer, network, or cloud storage system CBR calculations and reports meet ASTM and AASHTO standards LBR calculations and reports in accordance with Florida Standards Optimized for use with desktop, laptop, or tablet devices 	HMA-609	ASTM D1883 AASHTO T 193 Florida FM 5-515
Unconfined Compressive Strength Data Acquisition Software <ul style="list-style-type: none"> Displays stress and strain graphs in real-time Automatically saves final reports to computer, network, or cloud storage system Calculations and reports meet ASTM and AASHTO standards Optimized for use with desktop, laptop, or tablet devices Allows import of failure images into test reports 	HMA-611	ASTM D2166 AASHTO T 208
Triaxial Compression Data Acquisition Software <ul style="list-style-type: none"> Displays stress and strain graphs in real time Automatically saves final reports to computer, network, or cloud storage system Calculations and reports meet ASTM and AASHTO standards Optimized for use with desktop, laptop, or tablet devices Allows import of failure images into test reports 	HMA-613	ASTM D2850 D4767, D7181, D2166; AASHTO T 296, T 297
Soil-Cement Data Acquisition Software <ul style="list-style-type: none"> Displays stress and strain graphs in real-time Automatically saves final reports to computer, network, or cloud storage system Calculations and reports meet ASTM standards Optimized for use with desktop, laptop, or tablet devices 	HMA-612	ASTM D1633
Direct/Residual Shear Data Acquisition Software <ul style="list-style-type: none"> Displays real-time graph and data throughout test Final report includes calculated friction angle Automatically saves final reports to computer, network, or cloud storage system Calculations and reports meet ASTM and AASHTO standards Optimized for use with desktop, laptop, or tablet devices 	HMA-610	ASTM D3080 AASHTO T 236
Consolidation Data Acquisition Software <ul style="list-style-type: none"> Displays real time primary and secondary consolidation graphs for each consolidation stage Allows user to recall previous stages and graph all stages at test completion Automatically saves final reports to computer, network, or cloud storage system Calculations and reports meet ASTM and AASHTO standards Optimized for use with desktop, laptop, or tablet devices 	HMA-608	ASTM D2435 D4546; AASHTO T 216

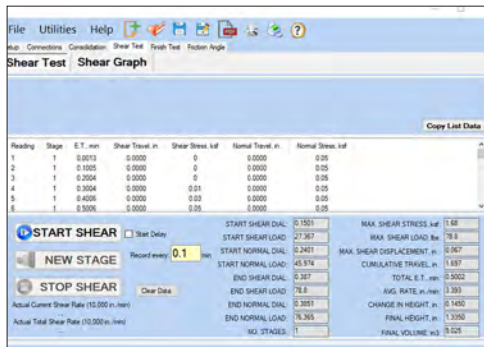

HMA-610

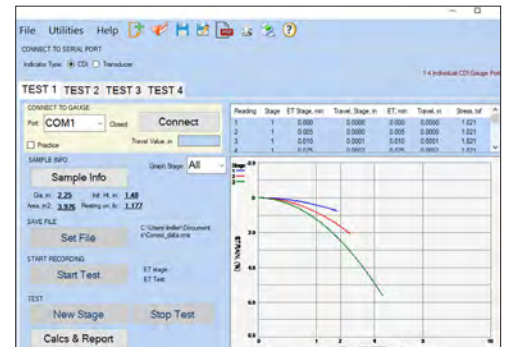

HMA-608



HM-416



HM-430D



HMA-405



HM-740



HM-418



HM-419

Digital Load and Displacement Test Equipment

Description	Model	
<p>Two-Channel Digital Readout Kits include HM-418 Two-Channel Data Readout, Load Cell, and Linear Variable Displacement Transducer. HM-418 transfers load and displacement data via the mini USB port to common spreadsheet applications with included GetData 5 software. Data can be used to create printable graphs. GetData 5 software is compatible with Windows operating systems. The Readout shows real-time data on the large, bright illuminated (vacuum fluorescent) display. The front panel keys allow instant taring of either channel peak reading on the selected channel and entry of calibration factors during setup.</p>		
1,000lbf (4.5kn) Load, 2in (50.8mm), 110V, 50/60Hz	HM-413	
1,000lbf (4.5kn) Load, 2in (50.8mm), 230V, 50/60Hz	HM-413F	
2,000lbf (9kn) Load, 2in (50.8mm), 110V, 50/60Hz	HM-414	
2,000lbf (9kn) Load, 2in (50.8mm), 230V, 50/60Hz	HM-414F	
5,000lbf (22kn) Load, 2in (50.8mm), 110V, 50/60Hz	HM-415	
5,000lbf (22kn) Load, 2in (50.8mm), 230V, 50/60Hz	HM-415F	
10,000lbf (44.5kn) Load, 2in (50.8mm), 110V, 50/60Hz	HM-416	
10,000lbf (44.5kn) Load, 2in (50.8mm), 230V, 50/60Hz	HM-416F	
20,000lbf (89kn) Load, 2in (50.8mm), 110V, 50/60Hz	HM-417	
20,000lbf (89kn) Load, 2in (50.8mm), 230V, 50/60Hz	HM-417F	
<p>S-Type Load Cells are machined of stainless or nickel alloy plated steel and measure compression or tension forces. Loads are measured to an accuracy of $\pm 1.0\%$ of full scale. The S-type load cells are available in seven different capacities ranging from 500 to 20,000lbf. Load cell dimensions range from 2.5x2.0in to 7x5in (63.5x51mm to 178x127mm), WxH depending on capacity of the load cell. Threaded mounting holes on top and bottom of the load cells vary in size; 500–2,000lbf = 1/2inx20tpi, 5,000–10,000lbf = 3/4inx16tpi, 15,000lbf and 20,000lbf = 1.25inx12tpi.</p>		
Capacity	Mounting Threads	
500lbf (2kn)	1inx20tpi	HM-421D
1,000lbf (4.5kn)	1inx20tpi	HM-422D
1,500lbf (6.7kn)	1inx20tpi	HM-424D
2,000lbf (9kn)	1inx20tpi	HM-425D
5,000lbf (22kn)	3/4inx16tpi	HM-428D
10,000lbf (44.5kn)	3/4inx16tpi	HM-430D
20,000lbf (89kn)	1-1/4inx12tpi	HM-438D
<p>Loading Buttons provide a uniform contact point between S-type load cells and testing apparatus to ensure accurate, repeatable measurements. They are required when performing triaxial, Marshall, Lottman, semi-circular bend (SCB), and tack bond shear tests. Available in three diameter and thread sizes for mounting to Gilson Load Cell models. Heavy stainless-steel construction.</p>		
Thread Size	Fits Load Cells	
1inx20tpi	500–2,000lbf	HMA-405
3/4inx16tpi	5,000 and 10,000lbf	HMA-407
1-1/4inx12tpi	20,000lbf	HMA-409
<p>Linear Variable Displacement Transducers (LVDTs) are available in 1 or 2in ranges. Both feature anodized aluminum housing, stainless steel actuating shaft with anti-rotation device, and the industry proven double bearing system on both the actuator shaft and spring to reduce side load errors. Each transducer has a repeatability of 0.002mm and includes two fixing clamps, screws, and gauging head with hardened ball point.</p>		
	1in (25.4mm) LVDT	HM-739
	2in (50.8mm) LVDT	HM-740
<p>Data Readouts are available with two or four channels. Both units are self-contained with large illuminated display and can be paired with load cells and digital transducers listed above. A separate analog to digital (A/D) converter for each channel produces simultaneous readings without time-delay errors. The included GetData 5 software exports data via mini USB port to Excel® or similar programs for review, analysis, and plotting of graphs.</p>		
	Two-Channel Data Readout, 115V, 50/60Hz	HM-418
	Two-Channel Data Readout, 230V, 50/60Hz	HM-418F
	Four-Channel Data Readout, 115V, 50/60Hz	HM-419
	Four-Channel Data Readout, 230V, 50/60Hz	HM-419F
<p>Readout Mounting Bracket allows convenient positioning of Gilson Two-Channel and Four-Channel Digital Readouts on laboratory load frames. The brackets fit load frames from Gilson and other manufacturers with 1.25in (31.8mm) diameter vertical load rods.</p>		HMA-668



MA-366

MA-334



MAA-81



HMA-338



HM-430



HMA-339

Mechanical Load and Displacement Test Equipment

Description	Model																								
<p>Digital Dial Indicators are in/mm switchable and include a "hold" feature which allows the user to lock peak readings on the digital display. All are supplied with batteries designed to provide 250 hours of use. Order MAA-81 Cable for digital output from dial indicator to allow data to be uploaded to computer. Order Extended Contact Points and Magnetic Gauge Holder separately. Product Dimensions: 2.5x2.25x5in (64x57x127mm), dia.xDxH.</p> <table border="1"> <thead> <tr> <th>Range</th> <th>Resolution</th> <th>Model</th> </tr> </thead> <tbody> <tr> <td>0.25in (6.35mm)</td> <td>0.0001in (0.0025mm)</td> <td>MA-360</td> </tr> <tr> <td>0.25in (6.35mm)</td> <td>0.00005in (0.00125mm)</td> <td>MA-361</td> </tr> <tr> <td>0.6in (15.25mm)</td> <td>0.0001in (0.0025mm)</td> <td>MA-363</td> </tr> <tr> <td>0.6in (15.25mm)</td> <td>0.00005in (0.00125mm)</td> <td>MA-364</td> </tr> <tr> <td>1.0in (25.4mm)</td> <td>0.0001in (0.0025mm)</td> <td>MA-366</td> </tr> <tr> <td>1.0in (25.4mm)</td> <td>0.00005in (0.00125mm)</td> <td>MA-367</td> </tr> </tbody> </table>	Range	Resolution	Model	0.25in (6.35mm)	0.0001in (0.0025mm)	MA-360	0.25in (6.35mm)	0.00005in (0.00125mm)	MA-361	0.6in (15.25mm)	0.0001in (0.0025mm)	MA-363	0.6in (15.25mm)	0.00005in (0.00125mm)	MA-364	1.0in (25.4mm)	0.0001in (0.0025mm)	MA-366	1.0in (25.4mm)	0.00005in (0.00125mm)	MA-367				
Range	Resolution	Model																							
0.25in (6.35mm)	0.0001in (0.0025mm)	MA-360																							
0.25in (6.35mm)	0.00005in (0.00125mm)	MA-361																							
0.6in (15.25mm)	0.0001in (0.0025mm)	MA-363																							
0.6in (15.25mm)	0.00005in (0.00125mm)	MA-364																							
1.0in (25.4mm)	0.0001in (0.0025mm)	MA-366																							
1.0in (25.4mm)	0.00005in (0.00125mm)	MA-367																							
<p>Single-Indicator USB Cable collects and routes output data from one Digital Dial Indicator and routes to a computer when used with Gilson software. Logging intervals and measuring units are selectable and CSV files can be converted to spread sheets for later analysis and reporting.</p>	MAA-81																								
<p>Mechanical Dial Indicators have 2.25in diameter, continuous clockwise dial with one hundred divisions per revolution and a revolution counter. Low friction mechanisms react instantly with contact pressure. Backs rotate 90° to adapt to horizontal and vertical mounting. "B" models feature brake to hold maximum position and are recommended for most applications. "C" model gauge includes certificate of calibration. Order Extended Contact Points and Magnetic Gauge Holder separately. Product Dimensions: 2.25x2x5.5in (57x51x140mm), dia.xDxH.</p> <table border="1"> <thead> <tr> <th>Range</th> <th>Resolution</th> <th>Model</th> </tr> </thead> <tbody> <tr> <td>0.2in</td> <td>0.0001in</td> <td>MA-330</td> </tr> <tr> <td>0.2in</td> <td>0.0001in</td> <td>MA-330B</td> </tr> <tr> <td>1.0in</td> <td>0.001in</td> <td>MA-334</td> </tr> <tr> <td>1.0in</td> <td>0.001in</td> <td>MA-334C</td> </tr> <tr> <td>1.0in</td> <td>0.001in</td> <td>MA-334B</td> </tr> <tr> <td>25mm</td> <td>0.01mm</td> <td>MA-346</td> </tr> <tr> <td>25mm</td> <td>0.01mm</td> <td>MA-346</td> </tr> </tbody> </table>	Range	Resolution	Model	0.2in	0.0001in	MA-330	0.2in	0.0001in	MA-330B	1.0in	0.001in	MA-334	1.0in	0.001in	MA-334C	1.0in	0.001in	MA-334B	25mm	0.01mm	MA-346	25mm	0.01mm	MA-346	
Range	Resolution	Model																							
0.2in	0.0001in	MA-330																							
0.2in	0.0001in	MA-330B																							
1.0in	0.001in	MA-334																							
1.0in	0.001in	MA-334C																							
1.0in	0.001in	MA-334B																							
25mm	0.01mm	MA-346																							
25mm	0.01mm	MA-346																							
<p>Gauge Holder and Contact Points uses a powerful Alnico magnetic base for secure fastening of dial indicators to round and flat surfaces. Thumb screw allows easy zeroing of indicators once positioned. Extended contact points adapt dial indicators to various configurations.</p> <table border="1"> <thead> <tr> <th>Magnetic Gauge Holder</th> <th>Model</th> </tr> </thead> <tbody> <tr> <td>0.5in (12.7mm) Ext. Contact Points</td> <td>HMA-338</td> </tr> <tr> <td>1in (25.4mm) Ext. Contact Points</td> <td>MAA-70</td> </tr> <tr> <td>1.5in (38mm) Ext. Contact Points</td> <td>MAA-72</td> </tr> <tr> <td>2in (50.8mm) Ext. Contact Points</td> <td>MAA-74</td> </tr> <tr> <td>2in (50.8mm) Ext. Contact Points</td> <td>MAA-76</td> </tr> </tbody> </table>	Magnetic Gauge Holder	Model	0.5in (12.7mm) Ext. Contact Points	HMA-338	1in (25.4mm) Ext. Contact Points	MAA-70	1.5in (38mm) Ext. Contact Points	MAA-72	2in (50.8mm) Ext. Contact Points	MAA-74	2in (50.8mm) Ext. Contact Points	MAA-76													
Magnetic Gauge Holder	Model																								
0.5in (12.7mm) Ext. Contact Points	HMA-338																								
1in (25.4mm) Ext. Contact Points	MAA-70																								
1.5in (38mm) Ext. Contact Points	MAA-72																								
2in (50.8mm) Ext. Contact Points	MAA-74																								
2in (50.8mm) Ext. Contact Points	MAA-76																								
<p>Load Rings are machined from high strength aluminum alloy plate. Rings are designed for compression measurement only and allow repeated elastic deformation under varying loads. Loads are measured with an accuracy of ±0.5% using the included mechanical dial indicator (0.0001in resolution). Load measurements are plotted on a calibration chart prior to shipment. The load rings are available in eight different capacities varying in capacity from 250 to 10,000lbf. Ring dimensions are 6.25in high x 1.0–2.0in thick depending on capacity of the ring. Mounting holes are 1/2inx20tpi.</p> <table border="1"> <thead> <tr> <th>Capacity</th> <th>Model</th> </tr> </thead> <tbody> <tr> <td>250lbf (1kN)</td> <td>HM-420</td> </tr> <tr> <td>500lbf (2kN)</td> <td>HM-421</td> </tr> <tr> <td>1,000lbf (4.5kN)</td> <td>HM-422</td> </tr> <tr> <td>1,500lbf (6.7kN)</td> <td>HM-424</td> </tr> <tr> <td>2,000lbf (9kN)</td> <td>HM-425</td> </tr> <tr> <td>5,000lbf (22kN)</td> <td>HM-427</td> </tr> <tr> <td>6,000lbf (26kN)</td> <td>HM-428</td> </tr> <tr> <td>10,000lbf (44.5kN)</td> <td>HM-430</td> </tr> </tbody> </table>	Capacity	Model	250lbf (1kN)	HM-420	500lbf (2kN)	HM-421	1,000lbf (4.5kN)	HM-422	1,500lbf (6.7kN)	HM-424	2,000lbf (9kN)	HM-425	5,000lbf (22kN)	HM-427	6,000lbf (26kN)	HM-428	10,000lbf (44.5kN)	HM-430							
Capacity	Model																								
250lbf (1kN)	HM-420																								
500lbf (2kN)	HM-421																								
1,000lbf (4.5kN)	HM-422																								
1,500lbf (6.7kN)	HM-424																								
2,000lbf (9kN)	HM-425																								
5,000lbf (22kN)	HM-427																								
6,000lbf (26kN)	HM-428																								
10,000lbf (44.5kN)	HM-430																								
<p>Dial Indicator/Displacement Transducer Mounting Brackets attach strain measuring instruments to the load frames crosshead. Each mounting bracket includes a slot for threader rod to be attached which allows for adjustable positioning of the Dial Indicator or Displacement Transducer. HMA-339 Mounting Bracket includes 1/2in (12.7mm) diameter through-hole and is compatible with 500, 1,000, 1,500, and 2,000lbf (2, 4.5, 6.7, and 9kN) load cells and load rings up to 10,000lbf (44.5kN). HMA-403 Mounting Bracket includes 1-1/4in (31.75mm) diameter through hole and is compatible with 15,000 and 20,000lbf (67 and 89kN) load cells.</p> <table border="1"> <thead> <tr> <th>Mounting Bracket</th> <th>Model</th> </tr> </thead> <tbody> <tr> <td>Mounting Bracket with 1/2in hole</td> <td>HMA-339</td> </tr> <tr> <td>Mounting Bracket with 3/4in hole</td> <td>HMA-401</td> </tr> <tr> <td>Mounting Bracket with 1-1/4in hole</td> <td>HMA-403</td> </tr> </tbody> </table>	Mounting Bracket	Model	Mounting Bracket with 1/2in hole	HMA-339	Mounting Bracket with 3/4in hole	HMA-401	Mounting Bracket with 1-1/4in hole	HMA-403																	
Mounting Bracket	Model																								
Mounting Bracket with 1/2in hole	HMA-339																								
Mounting Bracket with 3/4in hole	HMA-401																								
Mounting Bracket with 1-1/4in hole	HMA-403																								

NEW

360°



HM-580



HMA-110

HMA-116



VIDEO ONLINE



HMA-135

technote

Gilson Mechanical Soil Compactor includes: 4in (102mm) and 6in (152mm) compaction molds, 5.5lb (2.5kg) round and sector face hammers, and surcharge hammer mass to increase total weight to 10 lb (4.5kg).

switch stops all operation if the door is opened during use and an E-Stop button mounted on the controller stops all operation immediately. The Gilson Mechanical Soil Compactor features heavy steel construction with a durable powder-coated finish. The sturdy Lexan windows allow viewing of operation and confirmation of the selected drop height.

The HM-580 Gilson Mechanical Soil Compactor includes our exclusive programmable digital controller, 4in (102mm), 6in (152mm) diameter compaction molds 2in (51mm) round and 3.14in² (2,025.8mm²) sector-face 5.5lb (2.5kg) hammer assemblies, plus a bolt-on surcharge mass to increase total hammer weight to 10lb (4.5kg). The HMA-581 Base Extension accessory raises the working height of the mechanical compactor by 10.25in (260mm) for improved ergonomics and ease of use. Optional factory-installed HMA-582 Lower Doors enclose the mold and turntable assembly. A safety interlock prevents the doors from being opened until each compaction cycle is complete, or the pause or E-stop buttons are pressed. The Lower Doors are constructed of 11-gauge steel with plexiglass windows to allow viewing during operation. The compactor operates on 115V, 60Hz power supplies and features a 1/4hp main motor and an encoded turntable motor. Specify "F" model suffix for compactor to operate on 230V, 50Hz. **Product Dimensions:** 27.75x21.5x66.25in (705x546x1,683mm), WxDxH.

GILSON MECHANICAL SOIL COMPACTOR

ASTM D558, D559, D560, D698, D1557, D1558, D1883; AASHTO T 99, T 134, T 135, T 136, T 180, T 193, T 220; CTM 216; Florida FM 5-515

The Gilson Mechanical Soil Compactor combines the accuracy and ease of use of a conventional mechanical compactor with new industry-leading safety and convenience features. Testing versatility is increased with the ability to accommodate CBR/LBR Mold Sets. The Gilson programmable digital controller allows easy selection of test types or entry of custom setpoints for blows per interval. Three-button programming is quick and intuitive, and settings are instantly confirmed on the easy to read four line LCD display. Turntable rotation between hammer drops is automatically calculated, eliminating the need for user input. At the end of a programmed compaction cycle, the hammer must be lifted and placed onto the hammer safety arm so additional soil can be added to the mold for the next lift or, if the test is complete, so the soil can be leveled with the top of the mold to determine its mass per volume.

The hammer lift mechanism ensures the correct 12 or 18in (305 or 457mm) drop height of the hammer as additional soil is added to the mold during compaction. Drop height is factory calibrated, but easily adjusted by the user if required. Total mass of the free-falling hammer is quickly changed between 5.5 and 10lb (2.5 and 4.5kg) by addition of a surcharge weight. The conventional 2in (51mm) diameter hammer with a circular face can be used, or the sector (pie)-face hammer with the same 3.14in² surface area and mass can be substituted; both are included. The Soil Compactor can be used with Gilson 4in (102mm) or 6in (152mm) ID soil density, CBR, and LBR Molds.

A pause feature in the programmable controller suspends operation in the middle of a compaction cycle, to allow safe addition of material to the mold if needed. Operation is then resumed with no need to reset the machine. An interlock

Gilson Mechanical Soil Compactor

Gilson Mechanical Soil Compactor, 115V, 60Hz	HM-580
Gilson Mechanical Soil Compactor, 230V, 50Hz	HM-580F

Accessories

Base Extension for Gilson Soil Compactor	HMA-581
Lower Doors for Gilson Soil Compactor ¹	HMA-582
Stainless Steel Straightedge	HMA-135
Stainless Steel Straightedge with Graduations	HMA-135A
4in Soil Density Mold, Complete Set	HMA-110
4in Soil Density Split Mold, Complete Set	HMA-111
6in Soil Density Mold, Complete Set	HMA-116

¹The Lower Door accessory must be factory-installed. Please specify when ordering.





HM-530



HMA-410 installed on compactor



HMA-120



HMA-110



VIDEO ONLINE



HMA-111



MECHANICAL SOIL COMPACTOR

ASTM D558, D559, D560, D698, D1557, D1558; AASHTO T 99, T 134, T 135, T 136, T 180, T 220; CTM 216

HM-530 Mechanical Soil Compactor automatically counts the number of hammer blows and shuts off when a preset number is reached. The Mechanical Soil Compactor brings big improvements in functional accuracy, ease of use, reliability, and safe operation to your laboratory. The HM-530 Compactor eliminates the repetitive operation of manual compaction hammers. Hammer blows are accurately counted and evenly distributed for each soil lift placed in the compaction mold. Automatic indexing of the turntable positions the mold for each new hammer drop. The simple and efficient chain-drive lift system employs a compensating mechanism to adjust hammer drop for soil thickness in the mold during compaction. Hammer mass is concentrated near the bottom for better transfer of energy to the soil specimen. This unit is a safe and efficient method for processing moisture-density samples, assuring uniform compaction and accurate, repeatable test results.

The Compactor can be used with the 4in (102mm) ID molds, 5.5lb (2.5kg) weight with 12in (305mm) drop. The HM-530 also accommodates the 6in (152mm) ID molds using either the standard 5.5lb (2.5kg) weight with 12in (305mm) drop or the modified 10lb (4.5kg) weight with 18in (457mm) drop. The standard 2in (51mm) round hammer can be replaced by one of the same 3.14in² area, but with a pie-shaped face to cover the entire sample surface of 6in molds. The free-fall hammer adjusts easily from 5.5 to 10lb by addition of a surcharge weight.

The HM-530 includes a 2in (51mm) round, 5.5lb (2.5kg) hammer, a pie-faced hammer for use with 6in molds and a surcharge weight to increase total hammer weight to 10lbs (4.5kg). 4in (102mm) and 6in (152mm) standard compaction molds and a digital automatic counter with start/stop switching are also included. Electronic safety interlock automatically shuts down operation if the door is opened. **Product Dimensions:** 12.5x29.5x56in (318x749x1,422mm), WxDxH.

HMA-120 Calibration Kit is ordered separately to comply with ASTM D2168 Method B requirements and includes lead deformation apparatus, a micrometer, and fifty lead cylinders. HMA-121 Replacement Lead Cylinders are available in packages of one hundred.

HMA-410 Mold Safety Cage is ordered separately to fit new or existing machines. The cage offers additional protection from the rotating mold assembly during operation. Order HMA-411 to specify factory installation of the cage on a new compactor.

Mechanical Soil Compactor	
Mechanical Soil Compactor, 115V,60Hz	HM-530
230V,50Hz	HM-530F
Accessories	
4in Soil Density Mold, Complete Set	HMA-110
4in Soil Density Split Mold, Complete Set	HMA-111
6in Soil Density Mold, Complete Set	HMA-116
6in Soil Density Split Mold, Complete Set	HMA-117
CBR Mold	BRA-60
LBR Mold	BRA-59
Stainless Steel Straightedge	HMA-135
Stainless Steel Straightedge, with Graduations	HMA-135A
Calibration Kit	HMA-120
Lead Calibration Cylinders, pkg.100	HMA-121
Mold Safety Cage	HMA-410
Mold Safety Cage, Factory-Installed	HMA-411



HMA-135



HMA-135A

SOIL COMPACTION HAMMERS

ASTM D558, D559, D560, D698, D1557, D1558; AASHTO T 99, T 134, T 135, T 136, T 180

These sliding drop hammers are used to compact soil samples for moisture-density relationship (Proctor) testing. Gilson Hammers feature 100% stainless steel construction for maximum corrosion resistance and long service life. Both models have a 2in (51mm) circular face. Hammer masses are enclosed in guide sleeves with vent holes to ensure unrestricted free-fall. Knurled, hexagonal top allows a secure, comfortable grip and prevents rolling during storage.

HM-550 Standard Soil Compaction Hammer has 5.5lb (2.5kg) mass with 12in (305mm) drop. **Product Dimensions:** 21x2.2in (533x56mm), Lxdia.

HM-551 Modified Soil Compaction Hammer has 10lb (4.5kg) mass and 18in (457mm) drop. **Product Dimensions:** 31x2.2in (787x56mm), Lxdia.

Inquire for old-style U.S. Army Corps of Engineers compaction hammers.

Manual Compaction Hammers

Standard Soil Compaction Hammer, 5.5lb	HM-550
Modified Soil Compaction Hammer, 10.0lb	HM-551

STAINLESS STEEL STRAIGHTEDGES

ASTM C173, C185, C231, D558, D698, D1557; AASHTO T 99, T 137, T 180, T 326

Straightedges from Gilson are quality 304 stainless steel and used in many ASTM and AASHTO soil test methods for trimming and leveling specimens. Stainless steel material with electro-polished finish will not corrode and the precision-ground beveled edge remains straight and true after many uses. Unique HMA-135A model features laser engraved graduations at 0.5in intervals from 0 to 6in (0 to 152.4mm) for convenient measurement of approximate lift depths, mold dimensions, and other references. Graduations are marked with inch and millimeter equivalents. Standard HMA-135 model has no markings. **Product Dimensions:** 11.8x1.6x0.125in (300x40x3.2mm), LxWxD.

Stainless Steel Straightedges

Stainless Steel Straightedge	HMA-135
Stainless Steel Straightedge with Graduations	HMA-135A



MOBILE FRIENDLY

globalgilson.com is mobile friendly so you can view on any device.

technote

See the complete line of Gilson soil density and bearing ratio molds for Proctor, CBR, and LBR testing. Available as solid or split mold assemblies, or as individual components.



SOIL DENSITY AND BEARING RATIO MOLDS

Gilson's rugged steel soil molds comply with numerous specifications and are plated for maximum rust resistance. The molds are available as complete assemblies with base, mold, and collar, or as separate components.



HMA-110



VIDEO ONLINE



HMA-111



HMA-116



BRA-60



BRA-59



MSA-120



MSA-121

Soil Density and Bearing Ratio Molds

Description	Model	Mold Size, IDxH, in (mm)	ASTM	AASHTO/ Other		
<p>Soil Density Molds are used for various methods of soil moisture-density relationship (Proctor) tests. Split molds partially separate longitudinally for easier sample removal. Solid molds require use of sample ejectors. Compaction molds are 4.584in (116.4mm) in height with detachable extension collar and base and are clear zinc-plated for rust resistance. 4in diameter molds have volume of 1/30ft³ (941cm³) and 6in diameter molds are 1/13ft³ (2,124cm³) volume. Gilson Soil Density Molds fit our HM-580 and HM-530 Mechanical Soil Compactors and are also be used with manual soil compaction hammers.</p> <p>4in Soil Density Mold, Complete Set 4in Soil Density Split Mold, Complete Set Mold Only, 4in Solid Mold Only, 4in Split Collar Only for 4in Molds Base Only for 4in Molds</p> <p>6in Soil Density Mold, Complete Set 6in Soil Density Split Mold, Complete Set Mold Only, 6in Solid Mold Only, 6in Split Collar Only for 6in Molds Base Only for 6in Molds</p>	HMA-110 HMA-111 HMA-110M HMA-111M HMA-110C HMA-110B	4x4.584 (102x116.4)	D558 D559 D560 D698 D1557 D1558	T 99 T 134 T 135 T 136 T 180		
	HMA-116 HMA-117 HMA-116M HMA-117M HMA-116C HMA-116B	6x4.584 (102x116.4)				
	<p>California Bearing Ratio (CBR) Molds are 6x7in (152x178mm), IDxH clear zinc-plated steel molds with 2in (51mm) collar and a base perforated with twenty-eight 0.0625in (1.59mm) holes. See separate listing for a complete selection of CBR equipment. CBR Molds are designed to fit HM-580 and HM-530 Mechanical Soil Compactors.</p> <p>CBR Mold, Complete CBR Mold Only Collar Only for 6in Molds Base Only for CBR Molds</p>	BRA-60 BRA-60M BRA-60C BRA-60B	7x6 (178x152)	D1883	T 193	
		BRA-59 BRA-59M BRA-60C BRA-59B	6x6 (152x152)		T 220/ FLORIDA FM 5-515	
		<p>Limerock Bearing Ratio (LBR) Molds for Florida FM 5-515 test are 6x6in (152x152mm), IDxH clear zinc-plated steel molds with 2.375in (60mm) collar. Base is perforated with twenty-eight 0.0625in (1.59mm) holes. See separate listing for a complete selection of LBR equipment. LBR Molds are designed to fit HM-580 and HM-530 Mechanical Soil Compactors.</p> <p>LBR Mold, Complete LBR Mold Only Collar Only for 6in Molds Base Only for LBR Molds</p>	BRA-59 BRA-59M BRA-60C BRA-59B	6x6 (152x152)		T 220/ FLORIDA FM 5-515
	<p>Circular Paper Discs by Gilson are strong and tear-resistant with smooth edges. Choose between the MSA-120 designed for both 4in and 100mm or the MSA-121 for 6in and 150mm Marshall and Gyrotory Molds, and are a popular choice when performing soil compaction tests as well. The discs are 0.007–0.008in thick and made of 100lb paper stock.</p> <p>4in Paper Discs, pkg. 1,000 6in Paper Discs, pkg. 500</p>	MSA-120 MSA-121	3.875in dia. 5.875in dia.	D5581 D6925 D6926	T 245 T 312	



ONLINE PRODUCT VIDEOS

Watch product videos of many Gilson products online at globalgilson.com



NEW



HM-540



SA-45



SAA-24

AUTOMATIC SOIL PROCESSOR

The pneumatically operated HM-540 Automatic Soil Processor greatly reduces the amount of time spent tediously preparing soil samples for testing, freeing the technician to focus on more productive tasks. ASTM and AASHTO specifications for moisture/density relationships (Proctor) and other tests often require large amounts of soil, which requires a fair amount of time and effort from the technician when completed by hand. With the Automatic Soil Processor, it's as simple as loading the screen tray, closing the lid, and flipping a switch, no special training required.

Up to 40lb (18kg) of cohesive soil can be processed in fifteen minutes through the replaceable No.4 screen into our standard SC-3 pan, even when processing fat and lean clays or wet soil. Once the soil sample is placed on the lower No.4 screen, the weighted cover is closed, and the processor is activated, the sample is moved laterally against the upper screen. The vertical force from the weighted cover, along with the back-and-forth motion of the screen tray processes the sample through the screen without grinding the sample and impacting particle integrity. The processor automatically shuts off when the lid is within 1/4in (6mm) of the screen, signaling completion of the processing cycle.

The air-operated technology makes the processor reliable and easy to maintain. Cleanup only requires the operator to use the integrated air hose to blast the screen clean.

Extra pans can be ordered for high sample volume operations, which can be stored within the cabinet when not in use. Unit requires a compressed air source with a minimum of 60psi at 9CFM and 120V,60Hz electrical supply. **Product Dimensions:** 44x30x35in (1,117.6x762x889mm), LxWxH.

Auto Soil Processor	
Automatic Soil Processor, 120V,60Hz	HM-540
220V,50Hz	HM-540F

Accessories	
Galvanized Iron Sample Pan, 40 qt	SC-3
Lower Screen Insert No.4 (4.75mm)	WCA-540
Lower Screen Insert 3/8in (9.5mm)	WCA-541
Lower Screen Insert 3/4in (19.0mm)	WCA-542

SOIL GRINDER

The Soil Grinder quickly prepares dry soil samples for Atterberg limits, particle-size analysis and other standard laboratory tests. It is an efficient method for reducing agglomerations of caked soil to individual grains and less labor intensive than manual mortar and pestle operation. The SA-45 Soil Grinder is designed to preserve the true grain size for accurate and repeatable test results. Most soil types are processed completely in less than 30 seconds per pint.

The hopper has a capacity of 1 pint (0.6L) and features a manually operated gate to control feed rate to the grinding chamber. Operation is simple, just load the hopper, start the grinder, and use the gate to control material feed. A No.10 (2.0mm) perforated stainless steel plate is included to retain oversize particles. No.4 and No.35 stainless steel perforated plates can be purchased separately.

Rugged stainless steel contact parts reduce sample contamination. The grinding unit is driven by a powerful and reliable 1/3hp direct drive motor and mounted on a sturdy painted steel tripod stand. A stainless steel lid covers the hopper during operation. **Product Dimensions:** 12x15x19in (305x381x483mm), WxDxH.

Soil Grinder	
Soil Grinder, 115V,50/60Hz	SA-45
220V,50/60Hz	SA-45F
Accessories	
No.4 Perforated Plate	SAA-22
No.10 Perforated Plate	SAA-23
No.35 Perforated Plate	SAA-24



HM-514

HM-516



HM-560

SAMPLE EJECTORS

ASTM D5581, D6926; AASHTO T 245, R 68

Gilson Sample Ejectors quickly and easily extrude compacted soil or asphalt specimens from 4 and 6in (102 and 152mm) soil-density, CBR/LBR, or Marshall molds. Adapter ring accessories allow soil samples from short lengths of thin-walled (Shelby) tubes of 2, 2.5, or 3in (51, 64, or 76mm) diameter to also be extruded.

A 12,000lbf (53.4kN) capacity hydraulic jack with 5in (127mm) stroke is mounted in a robust three-column reaction frame constructed of plated steel. Molds are positioned vertically over the piston on a load platform that prevents the emptied mold from falling back over the jack. Daylight opening of the frame is adjustable for mold lengths up to 11.75in (298mm). Specimens longer than 5in are extracted by repositioning the Adapter Ring after maximum piston travel. The spring-loaded piston automatically returns to the start position when the stainless steel knob for the release valve is opened. Adapter Rings are quickly changed with just two wing nuts and Extruder Discs rest in place on top of the piston. Accessories for smaller diameter specimens will fit either model. **Product Dimensions:** 9.5x10x24in (241x254x610mm), WxDxH.

HM-514 Sample Ejector is equipped to handle 4in (102mm) soil compaction or Marshall asphalt molds.

HM-516 Combination Sample Ejector extrudes either 4in (102mm) or 6in (152mm) soil or asphalt specimens.

Sample Ejectors

Sample Ejector, 4in (102mm)	HM-514
Combination Sample Ejector, 4 and 6in (102 and 152mm)	HM-516

Accessories

Adapter Ring and Extruder Disc, 2in (51mm) dia.	HMA-219
Adapter Ring and Extruder Disc, 2.5in (64mm) dia.	HMA-220
Adapter Ring and Extruder Disc, 3in (76mm) dia.	HMA-221

PROCTOR PENETROMETER SET

ASTM D1558

The Proctor Penetrometer Set measures penetration resistance of fine grained-soils. The penetrometer consists of a spring dynamometer with a scale on the stem of the handle graduated from 10 to 130lbf (45 to 580N) in increments of 2lbf (9N). A sliding ring on the stem gives shear strength obtained in the test. HM-560 Basic Set includes interchangeable threaded needles with areas in square inches (square centimeters); 1 (6.45), 3/4 (4.84), 1/2 (3.23), 1/3 (2.15), 1/5 (1.29), 1/10 (0.65), 1/20 (0.32), 1/30 (0.22), and 1/40 (0.16). Replacement needles are available. Set comes in attractive foam-lined wooden box with carrying handle. **Product Dimensions:** 24x9x3in (610x229x76mm), WxDxH.

Proctor Penetrometer Set

Proctor Penetrometer Set

HM-560



CONNECT WITH US!

Follow us on Facebook, Twitter, YouTube, Instagram, and LinkedIn.





RELATIVE DENSITY APPARATUS

ASTM D4253, D4254

Apparatus determines relative density of granular soils that do not respond well to Proctor moisture-density tests. Maximum density is determined by placing granular soil in a 0.1 or 0.5ft³ (2.83 or 14.2L) mold and densifying with a vibrating table and surcharge weight. Minimum index density is determined by loose placement in the molds using special pouring funnels, scoop, or shovel, depending on size of soil particles.

HM-315 Vibrating Table has a cushioned steel 30x30in (762x762mm) vibrating deck activated by electromagnetic vibrator with over 100lb (45.5kg) actuator. The table has 750lb (341kg) load capacity and requires 800 Watts, 12 amps at 230V. Table height is 21in (533mm). Vibration rate is 3,600VPM (3,000 at 50Hz) and amplitude adjusts in accordance with ASTM requirements. The solid state circuitry allows precise amplitude control even with fluctuating voltage supplies. **Product Dimensions:** 30x30x21in (762x762x533mm), WxDxH.

HM-317 and HM-318 Cylindrical Mold Sets with 0.1 and 0.5ft³ (2.83 and 14.2L) capacities have attached carrying handles and guide brackets for the Gauge Set. They come complete with detachable guide sleeve with clamp assembly, surcharge base plate with removable handle and surcharge weight with handle. Mold included with HM-317 Set measures 6in (152.4mm) ID x 6.112in (155.2mm) IH; surcharge weight plus base plate has 56.5 ±0.5lb (25.5 ±0.2kg) total weight. Larger mold with HM-318 Set measures 11in (279.4mm) ID x 9.092in (230.9mm) IH with 190 ±2lb (86.2 ±0.9kg) total weight of base plate with surcharge weight.

HM-319 Gauge Set fits guide brackets of either Mold Set to measure distance from top of mold to top of base plate after densification (to compute volume change). Set includes a Dial Indicator with 2in (50.8mm) travel and 0.001in (0.025mm) graduations and a special holder to fit molds. A metal 3x12x1/8in (76x305x3.2mm) calibration bar is also included.

HMA-60 Accessory Pouring Funnel Set is required for loose placement of 3/8in (9.5mm) and finer soil in HM-317 Mold Set. Set includes two 6x12in (152x305mm), dia.xL metal cylinders, each with funnel and 6in (152mm) long delivery spout attached to one end. Spouts are 1in (25.4mm) and 1/2in (12.7mm) in diameter.

Relative Density Apparatus	
Vibrating Table, 230V, 60Hz	HM-315
230V, 50Hz	HM-315F
Accessories	
Mold Set, 0.1ft ³ (3L)	HM-317
Mold Set, 0.5ft ³ (14L)	HM-318
Gauge Set, Complete	HM-319
Pouring Funnel Set	HMA-60



RELATIVE COMPACTION TEST SET

CTM 216

Relative Compaction Test Set is used for determination of the maximum wet density of soils and aggregates by the California impact method. Relative compaction is the ratio of in-place wet density to test maximum wet density of the same soil or aggregate. In-place wet density is determined in the field using sand volume apparatus.

A 10lb (4.54kg) tamper is dropped from 18in (457mm) to compact samples to a length of 10–12in (254–305mm) in a 36in (914mm) long, 2.875in (73mm) diameter split mold. The special steel mold has a removable base and three hinged clamps with quick-release knobs for easy sample removal. Also included in the set are a metal leveling piston and a piston handling rod. Density is easily determined after compaction, based on a reading from the graduated scale on the shaft of the tamper. HM-375R is designed for manual use only. **Product Dimensions:** 8x8x46in (203x203x1,168mm), WxDxH.

Relative Compaction Test Set	
Relative Compaction Test Set	HM-375R

contactus.....

Contact our technical support staff to find the right equipment for your application.

800.444.1508



HM-228



HM-229

SOIL-CEMENT COMPACTION APPARATUS

ASTM D1632, D1633

Soil-Cement Compaction Apparatus prepares soil-cement specimens for compressive strength testing using ASTM D1632 Method B. A pre-weighed sample of soil-cement mixture is consolidated into the mold assembly, first using a Tamping Rod, then a Dropping-Weight Compactor until the required length dimension is achieved.

HM-228 Dropping-Weight Compactor uses a 15lb (6.8kg) falling weight on a 0.75in (19mm) shaft guide to strike the top piston of the mold set. The Compactor base features a locating pin, ensuring precise centering of the Test Mold Set. Drop height is controlled by a clip on the compactor shaft guide.

HM-229 Soil-Cement Mold Set consists of a 2.8x9in (71x229mm), IDxH seamless steel mold, a 6in (152mm) mold extension collar, top and bottom pistons, a split spacer clip and two aluminum 0.062in (1.57mm) separating discs. Additional HMA-122 Molds are recommended for more efficient specimen preparation and curing.

HMA-125 Tamping Rod is required for initial consolidation and sold separately. Rod dimensions: 20x0.5in (508x12.7mm), Lxdia. HM-516 Combination Sample Ejector and HMA-220 2.5in Adapter Ring and Extruder Disc set is recommended for extraction of specimens from molds.

Soil-Cement Compaction Apparatus	
Dropping-Weight Compactor	HM-228
Accessories	
Soil-Cement Mold Set	HM-229
2.8x9in Mold Only	HMA-122
2.8x9in Mold with 6in Extension Collar	HMA-123
Top and Bottom Piston Set	HMA-124
Tamping Rod, 20x0.5in	HMA-125
Combination Sample Ejector	HM-516



HM-536

CALCIUM CARBONATE CONTENT CHAMBER

ASTM D4373

Calcium carbonate (CaCO_3) content of soils can be determined rapidly with this simple, portable test. The test is often used as an indicator of the presence and quantity of calcium carbonate in marine soil specimens, expressed as the percent calcite equivalent.

The method involves treating a one gram soil specimen with hydrochloric acid (HCl) in an enclosed reactor vessel. Carbon dioxide gas is generated from the reaction between the acid and carbonates in the specimen when the chamber is tilted and agitated and the resulting pressure is measured. The 10 psi (69kPa) Bourdon-tube pressure gauge is pre-calibrated with reagent grade calcium carbonate. The 2.5x5.5in (63.5x140mm), IDxH clear acrylic chamber assembly is sealed to the anodized aluminum end caps with O-Rings and secured by threaded rods and knobs. It is supplied with the pressure gauge, bleed valve, and a 20mL cup with handle. **Product Dimensions:** 4x11in (102x279mm), WxH.

Calcium Carbonate Content Chamber

Calcium Carbonate Content Chamber

HM-536



HM-534

PIN HOLE DISPERSION DEVICE

ASTM D4647

The pinhole test identifies the dispersive characteristics of clay soils used in construction of earth embankments and dams by modeling the action of flowing water along a crack in a soil mass. Failures of earthen structures have been attributed to colloidal erosion along cracks or other flow channels formed in dispersive clays. This test evaluates clay soils by directing water through a small hole drilled through the compacted specimen.

An evaluation of effluent cloudiness and final size of the pinhole is used to qualitatively classify soils into categories of dispersiveness. Additional computations of water flow rate may also be required. Comparison of results with other tests indicates that the pinhole test has the best correlation with the actual erosion characteristics of clay soils.

The stainless steel mold is held to the base with a unique clamping ring while the specimen is compacted. Chamber and end-caps, screens, base stand, a constant-head reservoir, tubing, pipette, and a tool for drilling the pinhole are included. The end cap has a pilot hole for drilling the 0.040in (1.0mm) hole through the sample. All aluminum parts are anodized for corrosion resistance. **Product Dimensions:** 3.5x3x5.75in (89x76x146mm), WxDxH (cell); 6.5x9.5x47.5in (165x241x1,207mm), WxDxH (funnel with stand).



Pin Hole Dispersion Device

Pin Hole Dispersion Device

HM-534

SLAKE DURABILITY INDEX

A pre-weighed sample is placed in a partially submerged wire mesh drum, tumbled for ten minutes, then oven dried and weighed. Retained mass is calculated and recorded for each of two cycles.

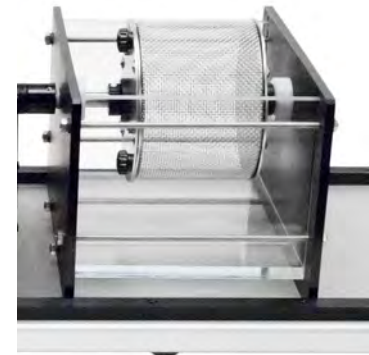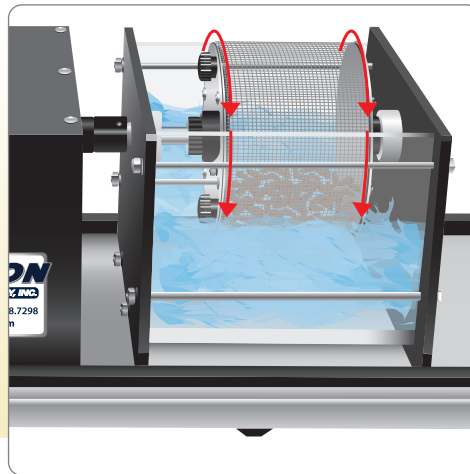

SAA-30

WATER TANK AND DRUM ASSEMBLY
ASTM D4644


SAA-30 Water Tank and Drum Assembly for Slake Durability Device includes two water tanks and two wire mesh drums with solid end plates. Tanks have a built-in quick-release drive connection. Wire mesh drums are 5.5x3.9in (140x99mm), dia.xW and have 0.08in (2mm) openings. This assembly fits on the base of the SA-80 Slake Durability Device and allows for up to twice the testing capacity.

The tank assembly doubles the amount of testing for abrasion resistance that can be done simultaneously and fits securely on base of device.

Water Tank and Drum Assembly

Water Tank Assembly with Drum

SAA-30

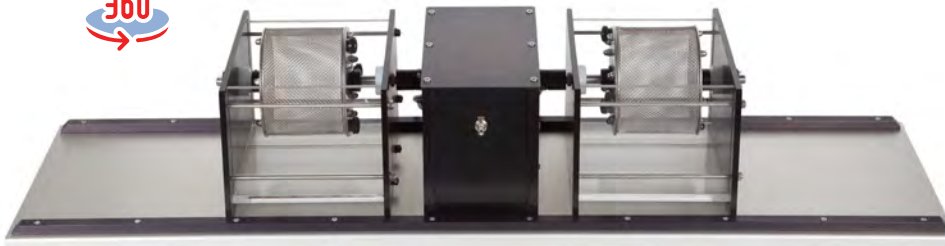

SA-80

SLAKE DURABILITY DEVICE

ASTM D4644

Slake durability is a simulated weathering test to determine durability resistance during wetting and drying cycles of shale and similar soft rocks used in embankments and other construction-related applications. Samples are alternately tumbled in mesh drums through a water medium and oven-dried for two cycles. The percent loss of mass is referred to as the slake durability index.

The SA-80 Slake Durability Device consists of a base-mounted drive unit, two mesh drums, and two water tank assemblies with quick release drive couplers. The 5.5x3.9in (140x99mm), dia.xW drums rotate at a speed of 20 revolutions per minute and are constructed of corrosion-resistant stainless steel mesh with 2mm openings and solid end plates. The 4ft (1.219m) base of the unit can accommodate up to four tank/drum assemblies to allow additional samples to be tested simultaneously. Recommended options for increased sample testing capability include two additional SAA-30 Water Tank Assemblies and two SAA-31 Wire Mesh Drums. **Product Dimensions:** 48x14x9.25in (1,219x356x235mm), LxWxH.



SAA-31

WIRE MESH DRUMS FOR SLAKE DURABILITY DEVICE

ASTM D4644

Wire Mesh Drums for Slake Durability Device are available as a set of two, and can increase sample preparation for more efficient testing. Drum measures 5.5x3.9in (140x99mm), dia.xW with an 0.08in (2mm) opening. For use with SA-80 Slake Durability Device.

The wire mesh drums allow more efficient sample preparation. They are made of durable wire mesh with 2mm openings. **Product Dimensions:** 5.5x3.9in (140x99mm), dia.xW.

Wire Mesh Drums

Wire Mesh Drums, qty. 2

SAA-31

Slake Durability Device

Slake Durability Device, 115V,60Hz
230V,50Hz

SA-80

SA-80F

Accessories

Water Tank Assembly with Drum

SAA-30


Wire Mesh Drums, qty. 2

SAA-31



360° PRODUCT VIEWS

See more details from all angles with hi-res 360° images at globalgilson.com



SA-60



SA-61



SA-62



SAA-8



SAA-10P



SA-65

ATTERBERG LIMITS

ASTM D4318; AASHTO T 89, T 90

Liquid Limit is the water content at which soil changes from liquid to plastic state. It is arbitrarily defined as the point where two halves of a soil sample flow together when jarred 25 times in a specified manner using a Liquid Limit machine.

Gilson offers motorized or hand-crank operated machines with automatic impact counter and a budget hand-crank model without counter. All models consist of a brass cup and carriage designed to control its drop exactly 1cm onto a hard rubber base. Height of drop is adjusted by a nut at the rear of the cup carriage using the gauge at one end of the included plastic SAA-10P Casagrande Grooving Tool or the gauge block included with the metal SAA-10 Grooving Tool. Order separate SAA-8 Grooving Tool for testing to AASHTO T 89. The cup attaches to the carriage by a pin allowing easy removal for cleaning and inspection. All mechanical parts are machined from solid brass. Rubber feet isolate base from work surface. One SAA-10P included with all Liquid Limit Machines. Additional SAA-10 and SAA-10P Casagrande Metal Grooving Tools are available.

Motorized SA-60 with counter uses a special geared motor for accurate operating speed of 1.9–2.1 drops per second. An On/Off switch is provided. **Product Dimensions:** SA-60: 12x7.5x6in (305x191x152mm), WxDxH. SA-61: 6.5x6x5in (165x152x127mm), WxDxH; SA-62: 7x6.5x5in (178x165x127mm), WxDxH.

Plastic Limit is defined as the water content at which a soil can no longer be deformed by rolling to 1/8in (3.2mm) diameter threads without crumbling. Main items needed for this test are SA-66 Glass Plate and SC-400 Aluminum Containers, both included in SA-65 Accessory Set, or available separately.

SA-65 Atterberg Limit Accessory Set provides items necessary to perform liquid and plastic limit tests in accordance with ASTM D4318, including MA-278 Evaporating/Mixing Dish, SA-66 Glass Plate 12x12x3/8in (305x305x10mm) with seamed edges, 24 aluminum containers 2x0.9in (51x23mm), dia.xH with snug-fitting lids, SC-77 Round Stainless Steel Pan, HMA-10 Wooden-Handled Spatula with stainless steel blade 0.75x4in (19x102mm), WxL and a HMA-24 250mL Polyethylene Squeeze Wash Bottle.

Atterberg Limits

Liquid Limit Machine, Motorized, with Counter, 115V,60Hz	SA-60
230V,50Hz	SA-60F
Liquid Limit Machine, Hand Operated	SA-61
Liquid Limit Machine, Hand Operated, with Counter	SA-62

Accessories

Grooving Tool, AASHTO	SAA-8
Grooving Tool, Metal, Casagrande ASTM with Gauge Block	SAA-10
Grooving Tool, Plastic, Casagrande ASTM, pkg. 10	SAA-10P
Brass Cup with Mounting Holes	SAA-11
Brass Cup with Cam Follower	SAA-12
Liquid and Plastic Limits Accessory Set	SA-65
Glass Plate	SA-66



SA-18




SA-56



SA-19



SAA-9

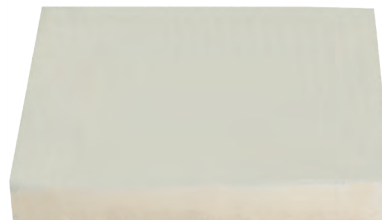

SAA-15



SC-74

PLASTIC LIMIT ROLLER

ASTM D4318; AASHTO T 90; Tex-105-E

Patented Plastic Limit Roller for soils is a unique time-saving device designed to produce consistent results by an easily-repeatable manual technique.

Traditional methods call for repetitive rolling by hand between the palm or fingers and a glass plate while visually estimating the 1/8in (3.2mm) diameter stopping point. Results are highly dependent on technique and judgment of individual operators. The SA-18 Plastic Limit Roller device consists of top and bottom roller plates separated by 1/8in (3.2mm) side rails. Contact surfaces of the plates are covered with sheets of special adhesive-backed absorbent paper that adds no fiber to soil samples. Soil samples are rolled by moving the top plate over the fixed bottom plate. Soil thread diameters are reduced by back and forth action until the top plate contacts the 1/8in (3.2mm) side rails, preventing further thread size reduction.

SA-18 includes top plate with integral handle, bottom plate, 50 sheet pad of adhesive paper, and instructions. The bottom 0.1875in (4.8mm) and top 0.375in (9.5mm) acrylic plates measure 8x4.5x1.25in (203x114x32mm), WxDxH.

Additional adhesive paper for SA-18 Plastic Limit Roller are available as SAA-9, pad of 50 sheets or SAA-9C case of 20 pads.

Plastic Limit Roller	
Plastic Limit Roller	SA-18
Accessories	
Adhesive Paper, pad of 50 sheets	SAA-9
Adhesive Paper, case of 20 pads	SAA-9C

SHRINKAGE LIMIT SET

ASTM D4943

The shrinkage limit of cohesive soils is defined as the water content at which further loss of moisture will not cause a decrease in volume. ASTM recommends this new method as an alternative to the original D427 test method, which was withdrawn due to its use of mercury for volume determinations. This procedure uses similar apparatus for preparation of a soil pat, but requires coating the pat in melted wax prior to immersion in water for mass determination.

Samples for shrinkage limit tests are usually taken from a larger sample prepared for liquid and plastic limit tests. A soil specimen with moisture content above the liquid limit is placed in the shrinkage dish and struck off with the straightedge. The sample is then oven dried. After coating in wax, volume of the soil pat is computed by weighing in water and noting the difference from its weight in air.

The SA-56 Shrinkage Limit Set includes a special Monel shrinkage dish, a 4.75x0.75in spatula used as a straightedge, fine thread to suspend the soil pat, a glass calibration plate, and a tube of petroleum jelly, used when calibrating the dish. The SA-19 Wax Melting Pot is purchased separately. SAA-15 Microcrystalline Wax is available in 5lb (2.3kg) quantities. The Melting Pot has a 2qt (1.9L) capacity and a thermostat to control temperatures between 50°–250°F (10°–120°C). Electrical requirements are 600 Watts at 115V, 60Hz. Other available accessories are the HMA-10 Spatula for mixing and handling and the SC-74 1.3qt Pan for use as a water bath for immersion weighing.

Shrinkage Limit Set	
Shrinkage Limit Set	SA-56
Accessories	
Wax Melting Pot	SA-19
Monel Shrinkage Dish	SA-55A
Microcrystalline Wax, qty. 5lb	SAA-15
Spatula, 4.75x0.75in Blade	HMA-10
Stainless Steel Pan, 1.3qt	SC-74



HMA-25 & HMA-24



HM-109



HM-111



HMA-10, HMA-11, HMA-11A, & HMA-12



MA-275

MA-278



SC-400 through SC-406

Atterberg Limits/Grain Size Accessories			
Description	Model	Dimensions	Capacity
Wash Bottles , polyethylene, squeeze dispensing; adjust flow by cutting tip.	Wash Bottle	HMA-24	—
	Wash Bottle	HMA-25	—
Mortar & Pestles , heavy porcelain 5in dia. mortar bowl has a 320mL capacity, glazed except for sample contact area (small porcelain pestle included). Use rubber tipped wooden pestle to break up agglomerates of soils, etc.	Mortar and Pestle	HM-109	5in (127mm) dia.
	Rubber Tip Pestle	HM-111	8in (203mm) L
Spatulas with mirror-finished stainless steel blades riveted to hardwood handles. HMA-11A meets ASTM C1252 and AASHTO T 304.	LxW of Blade, in (mm)		Overall Length, in (mm)
	6x0.5 (152x13)	HMA-9	11.5 (292)
	4x0.75 (102x19)	HMA-10	7.8 (197)
	6x1 (152x25)	HMA-11	10.5 (267)
	3.9x0.9 (99x23)	HMA-11A	8.25 (210)
	10x1.5 (254x38)	HMA-12	14.75 (374.7)
Evaporating Dishes, Porcelain , MA-275 and MA-276 are glazed inside and out; MA-277 and MA-278 are glazed inside and around rim, bottom is not glazed.	MA-275	MA-275	dia.xH, in (mm) 3.23x1.26 (82x32)
	MA-276	MA-276	3.85x1.5 (98x38)
	MA-277	MA-277	4.1x1.6 (104x40)
	MA-278	MA-278	4.7x1.7 (120x42)
Round Sample Containers, Metal . Round aluminum or tin metal containers with tight-fitting lids prevent moisture loss in samples. All have straight sides and flat bottoms. Covers fit bottom of container during drying. Premium aluminum never needs tare adjustment for rusting. Both models are sold in packages of 12. Add "-1" to model number to order single containers.	Aluminum		dia.xH, in (mm)
	SC-400	SC-400	2.0x0.9 (50.8x22.9)
	SC-402	SC-402	2.5x1.8 (63.5x45.7)
	SC-404	SC-404	3.0x1.0 (76.2x25.4)
	SC-406	SC-406	3.5x2.0 (88.9x50.8)
	Tinned		
	SC-498	SC-498	1.9x1.3 (48.3x33.0)
	SC-500	SC-500	2.25x1.4 (55x35)
	SC-502	SC-502	2.4x1.6 (61.0x40.6)
	SC-504	SC-504	2.9x1.9 (73.7x48.3)
	SC-506	SC-506	3.0x2.2 (76.2x55.9)
	SC-508	SC-508	3.8x2.8 (96.5x71.1)
Plastic Graduated Cylinders are quality polymethylpentene (PMP). PMP is highly transparent, rigid, resists impact, and handles temperatures of 200°C (180°C continuous). Not recommended for use with chlorinated solvents or strong oxidizing agents. Cylinders have pour spout, stable base, and molded-in graduations. Models with "P" suffix are sold in case quantities.	GW-40	GW-40	IDxH, in (mm) 0.47x5.5 (11.9x140)
	GW-40P, 10/CASE	GW-40P, 10/CASE	—
	GW-41	GW-41	0.7x6.7 (17.8x170)
	GW-41P, 5/CASE	GW-41P, 5/CASE	—
	GW-42	GW-42	0.92x7.9 (23.4x200)
	GW-42P, 5/CASE	GW-42P, 5/CASE	—
	GW-43	GW-43	1.1x12.4 (28x315)
	GW-43P, 5/CASE	GW-43P, 5/CASE	—
	GW-44	GW-44	1.5x12.4 (38.1x315)
	GW-45	GW-45	2x14.2 (50.8x360.7)
	GW-46	GW-46	2.4x17.3 (61x439.4)
	GW-47	GW-47	3.1x21.1 (78.7x536)



GW-40 through GW-47



SA-1 & SA-2



SA-5



SA-16 Top View Showing Baffles



SA-16



SA-14



SA-20



SA-25

HYDROMETER TEST COMPONENTS

ASTM D422, D7928; AASHTO T 88

Tests for complete particle size distribution in soils require sedimentation methods to determine silt and clay fractions. Soil specimens are mixed in a solution of water and sodium hexametaphosphate. Hydrometers are used to measure suspended solids in sedimentation cylinders over time periods of up to 24 hours.

Hydrometer Test Components	
Description	Model
ASTM 151H Soil Hydrometer is graduated to read specific gravity, with a range of 0.995–1.038 in 0.001 divisions at 68°F (20°C). Total Length: 11in (280mm). Supplied with a certificate of conformity. Add "T" suffix for hydrometer with NIST Certificate.	SA-1
ASTM 152H Soil Hydrometer measures in grams per liter (g/L) of suspension and has a range of -5–60g/L, in 1g/L divisions at 68°F (20°C). Total Length: 11in (280mm). Supplied with a certificate of conformity. Add "T" suffix for hydrometer with NIST Certificate.	SA-2
1000mL Sedimentation Cylinder (hydrometer jar), is required for each sample. Cylinders are heavy-wall clear glass with a stable base and scribed at 1,000mL mark. An optional No.12 Neoprene Stopper is convenient for use during agitation. Product Dimensions: 2.5x18in (64x457mm), dia.xH.	SA-5 GWA-512
Stirring Apparatus thoroughly mixes soil samples for hydrometer analysis using a special mixing blade and Dispersion Cup with internal baffles. The 1/3hp motor has selectable 13,000/16,000/18,000rpm speeds as well as a manual pulse switch. Rugged die-cast aluminum housing and durable spindle of the commercial-grade mixer are built to last under repeated use. The Stirring Apparatus Set includes the stainless steel Dispersion Cup with four sets of baffles specified in the test method. Additional Dispersion Cups are available separately to improve sample preparation efficiency. Product Dimensions: 6.5x6.75x20.5in (165x171x521mm), WxDxH.	SA-14 SA-14F SA-16 SAA-2
Sodium Hexametaphosphate is available in dry powder form as a dispersing aid when mixing soil sample solutions. Use is required in the test method and prevents clay platelets from sticking together in the sedimentation solution.	SA-20 SA-20C
Constant Temperature Bath is an option when conducting the Hydrometer Test and maintains temperature at a uniform 68°F (20°C) ±0.5°C with gentle, thorough circulation. Built-in brackets hold eight SA-5 Sedimentation Cylinders. Bath has stainless steel interior parts; exterior is enameled steel. An over-temperature safety cutoff is provided. Product Dimensions: 50x12x18in (1,245x356x965mm), LxWxD; Internal Dimensions: 38x8x15.5in (1,270x305x457mm), WxDxH.	SA-25 SA-25F



SG-250



SG-1000

SOIL SPECIFIC GRAVITY

ASTM D854; AASHTO T 100

Specific gravity is a ratio of material density compared to the density of water. For soils, it allows the calculation of soil density, void ratio, saturation, and other properties, and is used often in geotechnical engineering applications.



MA-270

MA-246

NEW



SGA-118

360°



SA-14

Soil Specific Gravity Pycnometers and Equipment

Description	Model
<p>Volumetric Flasks are a popular choice for use as soil specific gravity pycnometers. Each borosilicate glass flask contains indicated capacity at 20°C when filled to mark. Supplied with plastic snap cap.</p> <p>Volumetric Flask, 250mL Volumetric Flask, 500mL Volumetric Flask, 1,000mL</p>	<p>SG-250 SG-500 SG-1000</p>
<p>Stoppered Iodine Flasks can be used as soil specific gravity pycnometers when calibrated according to the test methods. The non-graduated glass flasks contain calibrated fluid volume when the included ground glass stopper is in place.</p> <p>Stoppered Iodine Flask, 250mL Stoppered Iodine Flask, 500mL Stoppered Iodine Flask, 1,000mL</p>	<p>SG-56 SG-57 SG-58</p>
<p>Flask Stoppers are neoprene and fit pycnometers for deairing operations. The stoppers feature single holes with barbed fittings for connection to vacuum tubing.</p> <p>No.1 Rubber Stopper for SG-250 Flask No.2 Rubber Stopper for SG-500 Flask No.4 Rubber Stopper for SG-1000 and Iodine Flasks</p>	<p>GWA-501 GWA-502 GWA-504</p>
<p>Thermometer models recommended for soil specific gravity tests have required 0.1°C readability and accuracy of ±0.5°C or better. Models are digital with NIST traceable standardization. Long stems allow use in volumetric flask pycnometers. See full listings elsewhere for complete details.</p> <p>Traceable® Long-Stem Ultra Thermometer Platinum RTD Thermometer Platinum RTD Data Logging Thermometer Traceable® Ultra Robo Thermometer</p>	<p>MA-116 MA-270 MA-246 MA-348</p>
<p>Pycnometer Filling Apparatus consists of a 500mL capacity wash bottle with an extended flexible spout. The added tubing permits introduction of deaired water into pycnometers without disturbing the soil and water slurry.</p>	<p>SGA-117</p>
<p>Insulated Cooler for SG Pycnometer, 30 qt maintains the thermal equilibrium of pycnometers and samples during calibration and testing phases of soil specific gravity testing. Constructed of rugged plastic with molded-in side handles and swing-up carrying handle. Product Dimensions: 13.2x16.8x18.4in (335x42x467mm), outside WxDxH.</p>	<p>SGA-118</p>
<p>Soil Dispersion Mixer is optional for thorough and convenient mixing of soil slurries for specific gravity testing. Designed for mixing soil hydrometer samples, this mixer can also be used with a non-baffled dispersion cup to prepare specific gravity samples. Powerful 1/3hp unit with selectable 13,000/16,000/18,000rpm mixing speeds includes a baffled dispersion cup. Product Dimensions: 6.5x6.75x20.5in (165x171x521mm), WxDxH.</p> <p>Stirring Apparatus Set, 115V, 60Hz Stirring Apparatus Set, 230V, 50/60Hz Replacement Blade for SA-14</p>	<p>SA-14 SA-14F SAA-2</p>

productspotlight

See separate catalog sections for a complete selection of laboratory drying ovens, precision balances, and ASTM/ISO test sieves.





MA-1807



MA-838



MA-23



MA-24



MA-27A



MA-170



SS-28



MA-205

Recommended Accessories for Soil Specific Gravity

Description	Model
<p>Hot Plates provide controlled heating of soil slurries when deairing by boiling. They can also be used together with vacuum sources for added efficiency. Choose from high-quality Cimarec™ hot plate or economical single-burner electric range.</p> <p style="text-align: right;">Thermo Scientific™ Cimarec+™ Hot Plate Single-Burner Electric Range</p>	<p>MA-1807 MA-838</p>
<p>Vacuum Pumps deair soil slurries when used alone or in combination with hot plates. Recommended models are efficient and have capacity for simultaneous deairing of multiple samples.</p> <p style="text-align: right;">Oilless Vacuum Pump, Heavy-Duty, 115V,60Hz Oilless Vacuum Pump, Economy, 115V,60Hz Two-Stage High Vacuum Pump, 115V,60Hz</p>	<p>MA-23 MA-24 MA-27A</p>
<p>Digital Residual Pressure Manometer monitors vacuum pressure to ensure consistent operation at correct vacuum levels. Model with "C" suffix includes certificate of calibration.</p> <p style="text-align: right;">Digital Residual Pressure Manometer, 115V,60Hz Digital Residual Pressure Manometer, NIST Certified, 115V,60Hz</p>	<p>MA-170 MA-170C</p>
<p>Mechanical Agitators automatically provide continuous agitation during vacuum deairing. Economical Vibra-Pad accepts flasks up to 5.25in (133mm) in diameter. Full-featured and adjustable Gilson Rice Shaker can be adapted for any type pycnometer up to 10.75in (273mm).</p> <p style="text-align: right;">Vibra-Pad Rice Shaker</p>	<p>SS-28 SGA-5R</p>
<p>Desiccators with heavy glass construction allow controlled cooldown of oven-dried specific gravity samples after testing and recovery with no moisture gain. Desiccant cartridges and desiccator plates are purchased separately.</p>	<p>MA-205</p>



BR-12



BRA-31, BRA-33, BRA-40, BRA-41, & BRA-42



BRA-32



MA-334



HM-428

CALIFORNIA BEARING RATIO (CBR) FIELD EQUIPMENT

ASTM D4429 ; COE MIL-STD-621A; CRD-C654-95

The California Bearing Ratio (CBR) field test yields in-situ strength of soils and some base course materials. The field procedure uses a loading jack to force a piston into the soil, noting the piston load and depth of penetration. The jack is loaded against dead weights or a heavy piece of equipment such as a loaded dump truck. Gilson CBR equipment can be ordered as complete sets or separately as individual components.

California Bearing Ratio (CBR) Field Equipment	
Description	Model
<p>California Bearing Ratio Field Sets include all the components required to perform Field CBR tests using a two-speed jack with a manual crank. The jack has a 10,000lbf (44.5kN) capacity with 3.5in (89mm) total travel. Other components include 2,000lbf and 5,000lbf Load Rings with dial gauges, a Swivel Base for the jack, a Penetration Piston with Connector and Extension Sets, two 10lb and two 20lb Surcharge weights, a 10lb, 10in diameter Surcharge Plate, Support Bridge, and Dial Indicator with magnetic holder. .</p> <p style="text-align: right;">California Bearing Ratio Field Set, Two-Speed Jack</p>	BR-12
<p>Two-Speed Field CBR Jack has 10,000lbf (45kN) capacity with 3.5in (89mm) lift. Supplied with a swivel base and manual crank handle.</p>	BR-2
<p>Penetration Piston is 7.5x1.954in (191x49.6mm) Lxdia. and meets requirements for ASTM or COE methods. The Piston Extension Set and Connector Set are required for proper set up and use of the Field Jack, Load Ring, and Piston assembly.</p> <p style="text-align: right;">CBR Penetration Piston, 1/2in Threaded Male Connector Field Piston Extension Set Field Connector Set</p>	BR-31 BR-32 BR-33
<p>Field Surcharge Plate with circular opening and Surcharge Masses with slotted openings simulate loads from base course or pavement which will overlie the test material. Slotted openings allow addition or removal of masses with penetration piston in place. Additional Surcharge Masses may be needed to simulate large pavement loads.</p> <p style="text-align: right;">10lb Field Surcharge Plate, 10in dia. 10lb Field Surcharge Mass, 8.5in dia. 20lb Field Surcharge Mass, 8.5in dia.</p>	BR-40 BR-41 BR-42
<p>Penetration Dial Gauges are available with inch or metric analog dial faces. The 8ft (2.4m) Dial Support Bridge and Magnetic Gauge Holder position the Penetration Dial Gauges for measuring penetration strain.</p> <p style="text-align: right;">Dial Support Bridge Penetration Dial Gauge, 1x0.001in Penetration Dial Gauge with Calibration Certificate, 1x0.001in Penetration Dial Gauge, 25x0.01mm Magnetic Gauge Holder</p>	BR-45 MA-334 MA-334C MA-346 HMA-338
<p>Load Rings are machined from high strength aluminum alloy plate and designed for compression measurement. Loads are measured to $\pm 0.5\%$ on the included mechanical dial indicator (0.0001in resolution). Measurements are plotted on a calibration chart prior to shipment. Ring dimensions are 6.25in high x 1.0in thick. Mounting holes are 1/2inx20tpi.</p> <p style="text-align: right;">Load Ring, 2,000lbf (9kN) Load Ring, 5,000lbf (22kN) Load Ring, 6,000lbf (26kN) Load Ring, 10,000lbf (44.5kN)</p>	HM-425 HM-427 HM-428 HM-430



BRA-45



VIDEO ONLINE



HM-500



HM-500 Closeup



HMA-15



HM-504A



HM-502

Penetrometers

Description	Model	Test Method
<p>Pocket Penetrometer, is a lightweight, direct-reading, handheld soil penetrometer. It provides approximate unconfined compressive strength information instantly for classification of fine-grained cohesive soils on-site or in the lab. Use is required by OSHA Publication 29, CFR 1926, Subpart P for trenching and excavation inspection. This simple hand-operated device has a 0.25in (6.4mm) dia. loading piston that is pushed into the soil to a depth of 0.25in.</p> <p>The permanent, laser-etched scale on the stainless steel piston reads approximate unconfined compressive strength in equivalent values of tons per square foot (tsf) or kilograms per square centimeter (kg/cm²). An indicator sleeve retains the maximum reading after piston is released. The calibrated loading spring is plated for rust resistance. Knurled stainless steel barrel provides a sure grip in wet and muddy conditions. A protective cloth sleeve is included. Complete penetrometer weighs only 6.8oz (193g). Optional 1in (25.4mm) Adapter Foot Attachment has a loading area of 0.785in² (0.32cm²), sixteen times greater than the standard piston, for enhanced accuracy when testing soft soils. Product Dimensions: 0.75x6.6in (19x168mm), dia.xL.</p>	<p>Pocket Penetrometer Adapter Foot Attachment</p>	<p>OSHA 29, CFR 1926</p>
<p>Pocket Shear Vane Set (Torvane) rapidly measures approximate shear strength of cohesive soils in the field or lab. Set includes all-metal driver, three vanes of different shear strength ranges, and a carrying case with carabiner clip. In use, the blades of the vane are pressed into the soil and the knob is turned slowly until failure.</p> <p>Maximum reading is retained by the indicator needle. Values using the standard vaned foot are read directly on the dial from 0 to 1kg/cm² in 0.05kg/cm² divisions (1 kg/cm² is approximately equal to 1tsf). Readings can be interpolated to 0.01kg/cm² and are multiplied by 0.2 and 2.5 when using the large (sensitive) and small (high-capacity) vanes. Total range is 0–2.5kg/cm². Extensive laboratory testing has indicated close correlation with undrained shear strengths. The tester can be used on any flat 2in (51mm) diameter surface. Product Dimensions: 3.5x2.5x1in (89x64x25mm), WxDxH.</p>	<p>HM-504A</p>	<p>ASTM D8121</p>
<p>Pocket Geotester dial penetrometer set is ideal for on-site measurement of soil strength. It gives estimated unconfined compressive strength directly in tsf or kg/cm² when used with the standard 0.25in dia. plunger. In addition, readings with four other plungers of 10, 15, 20, and 25mm dia. give strengths over a wide range of cohesive soil types.</p> <p>The plunger is pressed into the soil to the calibration notch. The maximum value is retained on the dial until released by a push button. Inner dial scale is 0–6.0 tsf or kg/cm² with 0.1 divisions. Outer scale gives total force over 0–11kg range in 0.1kg divisions and this reading is used with charts provided to estimate bearing capacities depending on plunger used and soil type.</p> <p>Geotester has large 2.5in (64mm) dial and sturdy noncorrosive construction. Dial is user-calibrated using register plates provided and any reliable scale of 10–15lb capacity. Penetrometer is complete with stainless steel plungers in carrying case with instructions, data tables, and register plates. Product Dimensions: 5.75x2.75x1in (146x70x25mm), WxDxH.</p>	<p>HM-502</p>	<p>-</p>



GILSON MONTHLY BLOG

Learn from the experts. Subscribe to our monthly blog at globalgilson.com





DYNAMIC CONE PENETROMETERS

ASTM D6951

Dynamic Cone Penetrometers (DCP) provide quick field determinations of soil shear strengths at depths up to 6ft (1.8m), with extensions. This accurate and portable field equipment measures soil properties that can be related to CBR or Resilient Modulus laboratory values. Original design by United States Army Corps of Engineers meets ASTM requirements. The DCP bridges the gap between laboratory pavement design and construction quality assurance.

Penetration resistance from the sliding hammer is measured in blows per millimeter. Cone diameter of the point is larger than the rod to ensure driving energy is not lost to skin friction on the rods. The driven points are available as multi-use Hardened Steel or single-use Disposable Cones. The Disposable Cones are abandoned in place and often used when points would be difficult to extract. Both cones have a maximum diameter of 0.790in (20.1mm) tapering at a 60° angle to a point. Rods assemble easily with quick-connect pin fittings and can be driven to a depth of about 28.25in (717.55mm). Extension rods with threaded connections can be purchased separately for testing to greater depths.

SF-20 Dual-Mass Dynamic Cone Penetrometer is effective in soils with CBR values from 0.5 to 100. Penetration of higher-strength soils is assisted using the exclusive Dual-Mass Hammer Assembly. This 8kg (17.6lb) Hammer assembly is constructed of stainless steel. For better test values in weaker soils with CBR values of ten or less, the hammer quickly converts to a 4.6kg (10.1lb) unit. The kit includes a crush resistant Pelican™ case with transport wheels, the Dual-Mass Hammer assembly, 30in (762mm) Drive Rod and 25 Disposable Cones with an adapter. Also included are a vertical scale, hardened point, T-handled hex wrench, 3-in-1 oil, and Loctite. The user's manual contains software with an Excel™ template for use as a DCP data reduction aide. Additional disposable cones, cone adapters, and hardened points are available separately. **Product Dimensions:** 17x7x45in (432x178x1,143mm), WxDxH.

SF-10 Dynamic Cone Penetrometer measures shear strength in soils with CBR values from 10 to 100. This kit is ideal for occasional use in areas where very weak soils are not common. The single-mass 8kg (17.6lb) structural steel hammer is standard. 2in depth rings are marked on the 37.75in (958.85mm) Drive Rod. Also included is one SFA-22 Hardened Point, manual and CD, and 3-in-1 oil. The manual provides look-up tables to correlate blow counts with CBR and unit weight values. The SF-10 is not supplied with a field carrying case. Disposable Cones, Adapters, and additional Hardened Points are sold separately. **Product Dimensions:** 5x6x42in (127x152x1,067mm), WxDxH.

Dynamic Cone Penetrometers (DCP)

Dual-Mass Dynamic Cone Penetrometer	SF-20
Dynamic Cone Penetrometer	SF-10

Accessories

Disposable Cones, pkg. 25	SFA-20
Disposable Cone Adapter	SFA-21
Hardened Steel Cone	SFA-22
Lower Drive Rod, 12in (305mm)	SFA-24
Extension Rod, 24in (610mm)	SFA-25



ORDER ONLINE

Browse & order directly from globalgilson.com on your phone, tablet, or computer.



HM-559A



HM-930

Soil Classification

Description	Model
<p>Static Cone Penetrometer Designed for evaluating soil consistency, compaction, and bearing capacity of foundations and pavement subgrades, the Static Cone Penetrometer yields accurate results, especially from fine-grained, soft soils. Gravel and rocks in the soil can cause misleading readings. Operation involves pressing the Penetrometer into the soil 6in (152mm), taking a reading, pulling back until the gauge reads zero pressure, advancing another 6in (152mm), and taking another reading. Continue in this manner until the entire depth is evaluated.</p> <p>The Penetrometer is constructed of two rods. The inner rod is connected to the cone tip and is independent of the outer rod. Friction of soil along the shaft of the outer rod does not affect the inner rod's function. The load on the cone is transferred via the inner rod to the hydraulic load cell in the head assembly. The pressure gauge reads the cone stress directly. Outer rod is high strength chrome alloy tubing. Inner rod is grade 316 stainless steel. Shaft assembly is designed for a maximum of 250lbf axial force. The Penetrometer includes the 0–70kgf/cm² gauge, T-handle, 1.5cm² Cone, and 2ft Starter Rod. HMA-271A 2ft Extension Rods can be added as necessary to achieve greater depth capability. Maximum area of the 60° cone is 1.5cm². Halve the readings when the 3cm² cone is used. Product Dimensions: 24x32in (610x813mm), WxH with Starter Rod.</p>	<p>Static Cone Penetrometer HM-559A 2ft Extension Rod HMA-271A 2ft Starter Rod HMA-276A 3cm² Cone HMA-272 1.5cm² Cone HMA-277</p>
<p>Soil Density Volumeter utilizes a calibrated cylinder to make rapid measurements of density of cohesive soils. With the stem of the piston completely retracted, a 30cm³ capacity cylinder with cutting edge is pushed into the soil. After squaring off the bottom of the core, soil volume in the Volumeter is read to 0.05cm³ via a scale on the piston stem and a fine-reading vernier scale on the top face of the cylinder. The sample is then extracted for weighing by screwing in the piston. Density is easily computed. The Volumeter is all stainless steel. Product Dimensions: 2x3.75in (51x95mm), dia.xL.</p>	<p>HM-930</p>
<p>Soil Classification Kit provides a full range of gauges, charts, and instruments for field evaluation and classification of various soil characteristics. The convenient carrying case contains tools for visual classification, particle size estimation, and for estimating shear strength, density, and bearing capacity.</p> <p>Kit includes: HM-500 Pocket Penetrometer HMA-15 Adapter Foot for HM-500 HM-504A Pocket Shear Vane Set HM-930 Soil Density Volumeter HM-513 Sand Gauge HM-519 Munsell Soil Color Book 3in (76mm) dia. All Stainless Steel Sieves, 1 each: No.4, No.10, No.40, No.100, No.200. Sieve Pan and Cover Sturdy Plastic Carrying Case</p> <p>Complete descriptions for individual components can be found under their respective model numbers. Product Dimensions: 16x8.4x8in (406x213x203mm), WxDxH.</p>	<p>HM-97</p>



HM-97

contactus.....


Browse and order directly on globalgilson.com

- Enjoy these features and more:
- Easy Reorder
 - Order History
 - Order Status
 - Saved Carts







HM-519

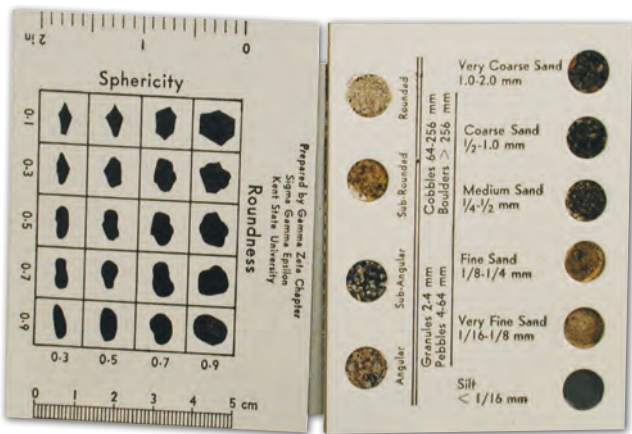


HM-510

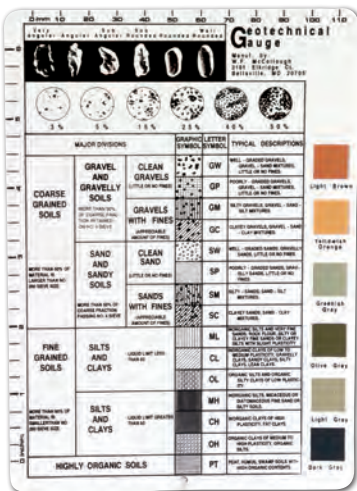

HM-512 Front

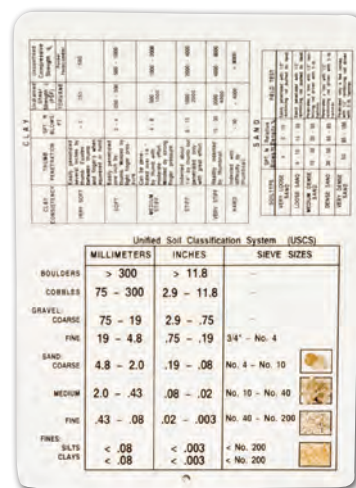

HM-512 Back

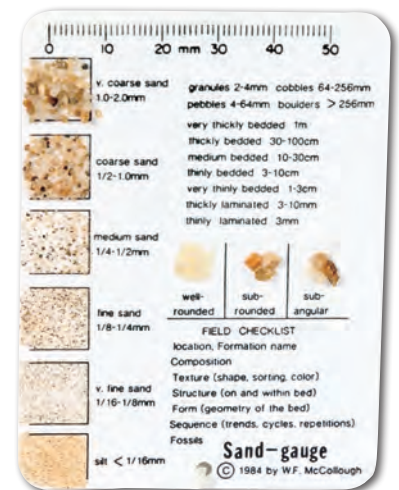

HM-513

Geotechnical Classification Charts

Description	Model
<p>Munsell Soil Color Book was developed with the U.S. Soil Conservation Service for classifying soil color, but may also be used for rocks, archeological specimens, and other natural products. Munsell Charts are a standard tool for geologists, civil engineers, and soil scientists. The tabbed charts include 10R, 7.5R, 5R, 2.5YR, 5YR, 7.5YR, 10YR, 2.5Y, 5Y, and 10Y-5GY color ranges. Charts for tropical and semitropical soils and for Australia and SE Asia are now included. A two page Gley Chart for submerged soils covers weak chromas and neutrals of blue and green hues. A white page is used to describe carbonate, silica, gypsum, soluble salt participates, and more. Openings between chips allow easy visual comparison with soil samples. Illustrations of soil grain structures, charts for estimating proportions of motles and coarse fragments, color name diagrams, and instructions are furnished. Color chips are mounted on neutral gray, 7.25x4.25in (184x108mm) water resistant pages in an 8x6in (203x152mm) loose-leaf binder.</p>	HM-519
<p>Grain Size Chart is widely used by field geologists for describing samples. It is handy, economical, and pocket-sized with recessed die-cut sample cavities filled with precision sieved sedimentary particles permanently mounted to the chart, classed according to the Wentworth grading system.</p>	HM-510
<p>Geotechnical Gauge is a water-resistant 5x8in (127x203mm) plastic card on a lanyard and has a wealth of information for classification of soils. Six color chips, four patches of sized grains, and four tables assist in classifying:</p> <ul style="list-style-type: none"> • Soils by particle size using the Unified Soils Classification System. • Coarse and fine grained soils into fifteen descriptive categories from gravels and sands to silts and clays. • Sand density from very loose to very dense. • Clay consistency from very soft to hard. <p>Categories are defined by appearance, handling properties, or ranges of field and laboratory test results. Edges of the card have separate 0-6in and 0-110mm scales.</p>	HM-512
<p>Sand Gauge has nine granule patches which are firmly attached to the handy 3.5x2.5in (89x64mm) water-resistant plastic card to assist in defining roundness and size of particles from 2mm very coarse sand to 1/16mm silt. A checklist is included to assist in making field notes and defining bed thickness. Flip side of chart has tables of geologic age and carbonate classification information. Model HM-513 has a 0-50mm scale on one edge and an attached lanyard.</p>	HM-513





HM-66



HM-100



VIDEO ONLINE



HM-104



HM-98

BALLOON DENSITY APPARATUS
ASTM D2167

The Balloon Density Apparatus determines in-place density of soil when testing compacted earth fills. The unit is a water-filled, calibrated vessel fitted with a hand-operated pump to pressurize the chamber. A thin, flexible membrane on the bottom displaces under pressure to fill a void. Using the base plate as a template, a hole is dug in the surface and the excavated soil is retained as a specimen. To determine the volume of the hole, the Balloon Density is mounted on the plate, the membrane (balloon) is pumped into the hole and fluid displacement from the vessel is noted. In-place density is computed easily by dividing weight of the retained soil by the measured volume of the hole. A portion of the retained specimen is used to determine moisture content. This method is not suitable for very soft, easily deformed soils or in a hole which will not maintain constant volume. Water volume is read from the double-graduated scale on the high-strength clear plastic cylinder. Graduations are .00025ft³ or 7cm³.

Selection of Balloon Density model is determined by top-size of soil particles. 1/20ft³ HM-66 model is used for soils with 0.5in (12.7mm) maximum particle size and 1/13ft³ HM-67 model is for soils with particle size up to 1in (25mm). Each unit includes double-graduated cylinder, base plate, pressure/vacuum pump assembly with quick-coupler, 12 balloons, and an integral gauge for controlling pressure during calibration and testing. Extra Balloons are available in packs of 12. MA-26X Aqua-Check for moisture determinations and HMA-8 In-Place Density Accessory Kit are recommended accessories. **Product Dimensions:** 9x9x7in (229x229x178mm), WxDxH.

Balloon Density Apparatus

Balloon Density Apparatus, 1/20ft ³	HM-66
Balloon Density Apparatus, 1/13ft ³	HM-67

Accessories

Balloons, pkg. 12	HMA-5
-------------------	-------

SAND CONE DENSITY APPARATUS 6.5IN

ASTM D1556; AASHTO T 191

The sand cone density test is a proven method to measure in-place density of soils with maximum particle sizes up to 2in (51mm) using test hole volumes of approximately 0.1ft³ (2.8L).

HM-100 Sand Cone Density Apparatus is a 1gal (3.8L) threaded plastic jar with detachable cone fitting. The metal cone is flanged to 6.5in (165mm), with a cylindrical valve of 0.5in (12.7mm) dia. orifice. Valve has stops to prevent rotating past completely open or closed positions.

HM-104 Density Plate is 12x12in (305x305mm) aluminum alloy with 0.5in (12.7mm) high edge walls to contain soil sample that is dug using 6.5in (165mm) center hole of plate as a guide. After test hole is prepared, flange of cone fits plate opening for filling hole with special Density Sand.

HM-106 Density Sand is clean, dry, uniform, uncemented, durable, and free-flowing. Few particles pass No.200 (75µm) or are retained on No.10 (2mm) sieves. Bulk density varies less than 1%. 50lb (22.7kg) packing bag is heavy and reinforced. MA-26X Aqua-Check for moisture determinations and HMA-8 In-Place Density Accessory Kit are recommended accessories.

Sand Cone Density Apparatus 6.5in

Sand Cone Density Apparatus	HM-100
Accessories	
Replacement Plastic Jar	HM-102
Density Plate	HM-104
Density Sand	HM-106

SAND CONE DENSITY APPARATUS 12IN

Large 12in (305mm) diameter sand cone apparatus is used for density determinations in gravels and coarse soils where a larger hole is necessary for accurate results. The unit has two identical cones with a valve in the center. A metal cylinder attached to the top cone has a clear plastic end for viewing sand flow and handles for carrying. A circular density plate is included.

Sand Cone Density Apparatus 12in

Sand Cone Density

HM-98



HMA-8

IN-PLACE DENSITY ACCESSORY KIT

In-Place Density Accessory Kit has all items necessary for field tests with either the Balloon Density or Sand Cone Density apparatus. Kit includes poly sample bags (pkg. 100), sample bag ties (pkg. 100), MA-102 25°-125°F Pocket Dial Thermometer, TSA-170 Brush, HMA-302 1in Steel Chisel, HMA-304 Stainless Steel Spoon, and HMA-300 Rubber Mallet. See individual listings elsewhere for full descriptions.

In-Place Density Kit


In-Place Density Kit

HMA-8



GAS PRESSURE MOISTURE TESTER


The gas-pressure method for moisture determination has long been in use and is widely accepted for accurate field testing of soils, aggregates, coal, abrasives, and other materials. These devices are essentially pressure vessels and depend on the formation of gas when the calcium carbide reacts with moisture in the sample. A precision gauge in the sealed chamber measures pressure for relative readings and results are easily correlated to laboratory results for enhanced accuracy.

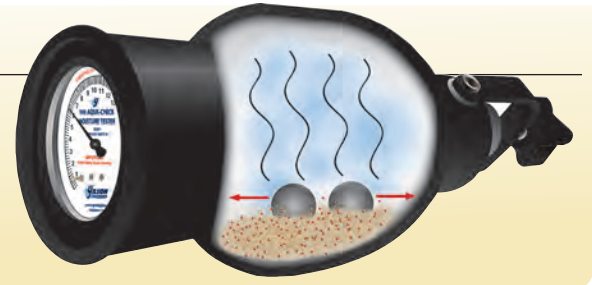

VIDEO ONLINE



MA-26X



MAA-45



MA-26X additional views



GILSON AQUA-CHECK MOISTURE TESTER

ASTM D4944; AASHTO T 217; Florida FM 5-507

Gilson Aqua-Check is made in the USA and an affordable choice for rapid, accurate, and reliable moisture tests on sand, aggregates, ores, coal, soils, and other materials with particle size up to 20mm (0.8in). Samples can be quickly tested on-site, eliminating risk of moisture loss during transport. Portable units are easy to use and meet ASTM, AASHTO, and Florida DOT requirements. The Gilson Aqua-Check was evaluated by the Florida DOT and verified to meet FM 5-507 DOT requirements.

A pre-weighed 20g sample is placed in the test chamber, along with a measured quantity of Calcium Carbide Reagent. When the chamber is sealed and agitated for 1–3 minutes, free moisture in the test sample reacts with the reagent to produce acetylene gas. The integral pressure gauge registers 0–20% moisture by weight in 0.2% graduations. Moisture range can be doubled by halving the pre-weighed sample weight.

MA-26X Aqua-Check has a rugged, cast aluminum body with a tough, wear-resistant coating and includes a 0–20x0.2% pressure gauge with certificate of calibration. Also included; electronic digital balance, two 1.25in (32mm) dia. steel pulverizing balls, reagent measuring scoop, brush, and instructions in a heavy-duty, waterproof plastic case. Approximate pressure chamber dimensions: 14x5.5in (356x140mm), Lxdia. Recalibration of existing Aqua-Check gauges is available as MAA-53. Calcium Carbide Reagent is available separately in 10lb (4.5kg) cans as MAA-44. The pressure gauge and all accessories are compatible with both Aqua-Check and Speedy-brand Moisture Testers.

MAA-45 Aqua-Check, 0–20% Replacement Pressure Gauge includes a certificate of calibration and is also compatible with Speedy-brand MA-21A and MA-25 Moisture Testers. Due to shipping restrictions, additional reagent is sold in 10lb (4.5kg) cans only. Reagent from these larger cans can be used to replenish smaller containers, MAA-43 or SC-116, for field use. **Product Dimensions:** 20x17x9in (508x432x229mm), WxDxH.

Gilson Aqua-Check Moisture Tester

Gilson Aqua-Check Moisture Tester, without Reagent	MA-26X
Accessories	
Calcium Carbide Reagent, 10lb Can	MAA-44
Empty 1lb Metal Can for Reagent	MAA-43
Aqua-Check 0–20% Pressure Gauge	MAA-45
Recalibration of MAA-45 Pressure Gauge	MAA-53
Electronic Balance, 220x0.1g	OB-205
1.25in (32mm) Steel Balls, pkg. 2	MAA-47
Sample Cup	MAA-52
Long-Handle Reagent Scoop	MAA-48
Large, Coarse Clean-Out Brush	MAA-51
Small, Fine-Bristle Brush	MAA-50
Heavy-Duty Waterproof Plastic Case	MAA-46
Round Plastic Sample Jar	SC-116

technote

Gilson Company, Inc. offers repair and calibration services for the Aqua-Check and Speedy Moisture Testers. Please call 800.444.1508 for pricing or to schedule repairs.



MA-25C

SPEEDY 2000 MOISTURE TESTERS

ASTM D4944; AASHTO T 217; Florida FM 5-507

The Speedy is widely accepted for rapid, accurate, and reliable moisture tests on all kinds of materials—sand, aggregates, ores, coal, soils, ceramics, abrasives, and other powders. Units are portable, easy to use, and do not require a power supply. Samples can be tested on-site, eliminating risk of moisture loss during transport.

Selection of four available models is based on particle size, percent moisture range and gauge accuracy desired. Standard Models MA-20A and MA-21A are used for sand, grains, clays, and fine powders. Large MA-25 and MA-25C handle soils, aggregates, coal, and ores. Model MA-25 meets ASTM and AASHTO requirements for soil moisture measurements. Moisture range may be doubled by using 1/2 specimen weight and multiplying gauge reading by two.

All units have tough, die-cast polished aluminum body (pressure chamber) with integral dial. Place weighed sample in the tester with measured quantity of calcium carbide reagent and seal with cap. Upon agitation, free moisture in test sample reacts with calcium carbonate to form acetylene gas. Pressure gauge reads directly in percent moisture by weight within 1–3 minutes.

Each Speedy 2000 Kit includes an electronic digital balance, reagent measuring scoop, brush, cleaning cloth, and instructions in a heavy-duty, waterproof plastic case. MA-25 and MA-25C include two steel balls to pulverize samples. Due to shipping restrictions, calcium carbide reagent is sold separately in 10lb (4.5kg) cans. Material from these larger cans can be used to replenish smaller MAA-43 or SC-116 containers for field use.

MA-20A and MA-21A Product Dimensions: 12x4in (305x102mm), Lxdia.

MA-25 and MA-25C Product Dimensions: 14x5.5in (356x140mm), Lxdia.

Speedy 2000 Moisture Testers

Model	Description	Max. Particle Size	Moisture Range	Specimen Weight
MA-20A	Standard Speedy	10mm	0–10 x 0.1%	12g
MA-21A	Standard Speedy	10mm	0–20 x 0.2%	6g
MA-25	Large Speedy	20mm	0–20 x 0.2%	20g
MA-25C	Large Speedy	20mm	0–50 x 0.5%	8g

Accessories

Calcium Carbide Reagent ¹ , 10lb Can	MAA-44
Empty 1lb Metal Can for Reagent	MAA-43
Round Sample Jar	SC-116
Aqua-Check 0–20% Pressure Gauge	MAA-45
Electronic Balance, 220x0.1g	OB-205
1.25in (32mm) Steel Balls, pkg. 2	MAA-47
Sample Cup	MAA-52
Long-Handle Reagent Scoop	MAA-48
Large, Coarse Clean-Out Brush	MAA-51
Small, Fine-Bristle Brush	MAA-50
Heavy-Duty Waterproof Plastic Case	MAA-46

¹Due to shipping restrictions, calcium carbide reagent is sold in 10lb (4.5kg) cans. Material from these larger cans can be used to replenish smaller containers for field use.



MA-78



MA-71

KELWAY SOIL ACIDITY/ MOISTURE METER AND pHD ACIDITY METER

Kelway Soil pH meters provide a simple, cost-effective method of obtaining accurate soil pH values. Both units are handheld, and measure electrical potential between two dissimilar plates to determine pH measurements, which are much easier to interpret than litmus paper, and do not require buffer solutions, temperature corrections, or use of fragile glass electrodes. The rugged, cone shaped end of the pH meter is inserted 2in (51mm) into moist soil and within 2–3 minutes the pH reading is displayed on the top dial. Units do not require batteries or external power source, and include a carrying case with belt loop, pH Guide Chart, and two Conditioning Film Sheets for cleaning the electrode plates.

MA-71 Kelway Soil pHD Acidity Meter measures soil pH in the 3.0–8.0 range with ± 0.2 pH accuracy. **Product Dimensions:** 2.9x7.3in (74x185mm), dia.xL.

MA-78 Kelway Soil Acidity and Moisture Meter measures soil pH in the 3.5–8.0 range with 0.2 pH accuracy on its upper scale, and moisture (0–100% relative saturation) is displayed on the lower scale when button is pressed. **Product Dimensions:** 1.5x6.5in (38x165mm), dia.xL.

Conditioning Film sheets clean and condition Kelway meter electrode plates prior to use. Film Sheets measure 3x4in (76x102mm) and can be used up to 20 times. Replacement MAA-116 Conditioning Film sheets are available in a package of 12.

Kelway Soil Acidity/Moisture Meter

Kelway pHD Acidity Meter	MA-71
Kelway Soil Acidity/Moisture Meter	MA-78

Accessories

Conditioning Film, pkg. 12	MAA-116
----------------------------	---------



HM-128



HMA-635

DOUBLE-RING INFILTRMETER

ASTM D3385

The Double-Ring Infiltrometer is used for field measurement of infiltration rate of water or other liquid into fine-grained surface soils for geotechnical and environmental studies. Infiltration rates give important data for studies of liquid waste disposal, leaching, drainage, irrigation requirements, canal or reservoir leakage, etc. This proven method produces reliable field test results.

Two galvanized steel rings, 12 and 24in (305 and 610mm) in diameter and 20in (508mm) high, are driven into the soil in a concentric arrangement using the special driving cap provided. The rings are filled with water and the level is maintained by constant-head Mariotte reservoir cylinders. Velocity of liquid passing to the soil from the inner ring is equivalent to the infiltration rate. Water between the two rings promotes one-dimensional vertical flow beneath the inner ring. The Double-Ring Infiltrometer meets ASTM D3385 requirements.

Both rings are constructed with a double-thick, reinforced top edge and beveled bottom edge for easy driving in stiff soils. The hard-alloy aluminum driving cap is 0.5in (12.7mm) thick and fitted with centering pins. The galvanized steel construction stands up to harsh field conditions. A sealed adjusting tube is used to raise or lower the head inside the Infiltrometer ring. A bleed valve is located next to the adjusting tube seal.

The graduated plastic Mariotte Cylinders have 3,000mL and 10,000mL volume capacity and are equipped with support stands, flexible tubing, and rubber splash guards. These cylinders provide a constant head of water for the test. Also available individually as an additional or replacement item.

Gilson's optional HMA-635 Infiltrometer Field Set provides essential tools for setting up and running the test. The set includes a small sledge hammer, rubber mallet, water bucket, carpenter's level, dial thermometer, pH paper, 2x4in (51x102mm) wooden driving block, and shovel.

Double-Ring Infiltrometer	
Double-Ring Infiltrometer	HM-128
Accessories	
Infiltrometer Field Set	HMA-635
Mariotte Tube, 3,000mL	HMA-632
Mariotte Tube, 10,000mL	HMA-633



ORDER ONLINE

Browse & order directly from globalgilson.com on your phone, tablet, or computer.



ONE STOP

globalgilson.com is your one stop resource for materials testing equipment and expert knowledge.



HM-940



HM-942



HM-944



HMA-670



HMA-671



HMA-672



HMA-673

SOIL RESISTIVITY APPARATUS

ASTM G57, G187; AASHTO T 288

This Soil Resistivity equipment utilizes the Wenner 4-pin method developed by the National Bureau of Standards. The test determines the average resistivity of soil at a depth equal to the spacing between electrodes (soil pins). The kit tests soil resistance in the field to a depth of 20ft (6.1m) and can also test laboratory samples prepared in Soil Boxes.

HM-940 Soil Resistivity Kit features the Soil Resistivity Reel with a four-wire harness, allowing a maximum pin spacing of 20ft (6.1m). The wire harness is equipped with spring-loaded clamps for connection to the soil pins. Four color-coded 48in (1.2m) test leads connect the reel terminals to the resistivity meter, which is sold separately. Four heavy-duty 18x3/8in (457x9.5mm) stainless steel Soil Pins with T-handles are also included, along with a Large Soil Box for laboratory testing. The 8.75x1.5x1.25in (222x38x32mm) plexiglass soil box has removable brass potential pins and stainless steel current plates and includes four 24in (610mm) lead wires. The kit is shipped in a sturdy foam-lined plastic case. HM-942 or HM-944 Soil Resistance Meters are purchased separately. **Product Dimensions:** 25x20x9in (635x508x229mm), WxDxH.

HM-942 Soil Resistance Meter displays soil resistance values directly on the analog dial when used with the HM-940 kit; no calculations are necessary. The wide-range, high-sensitivity meter has a large dial for easy readability and 8 ranges from 0.1 Ohms to 1.1 Mega-Ohms. Powered by conventional C-cell alkaline batteries. Rugged, weatherproof plastic case is IP67 rated. HM-940 Soil Resistivity Kit is purchased separately. **Product Dimensions:** 12x10x5in (305x254x127mm), WxDxH.

HM-944 Digital Soil Resistance Meter displays resistance readings instantly with no need to select ranges. The included ProCP Soil Resistivity software stores test

values directly to the user's Bluetooth-enabled Android™ tablet or smartphone. Logged results are automatically date/time stamped with positioning data when integrated with GPS feature on the handheld device. The HM-944 has a total range from 0.01 Ohms to 10 Mega-Ohms. Powered by conventional D-cell replaceable alkaline batteries. Rugged, weatherproof plastic case is IP67 rated. HM-940 Soil Resistivity Kit is purchased separately. **Product Dimensions:** 12x10.5x5.8in (305x267x147mm), WxDxH.

Other accessories include HMA-662 Small Soil Box with inside dimensions of 4.4x1.2x1in (112x31x25mm). The Small Soil Box is plexiglass with removable brass potential pins and stainless-steel current plates. HMA-664 Long Soil Pins are constructed of stainless steel with T-handles and measure 30x5/16in (762x8mm), Lxdia.

Soil Resistivity Apparatus

Soil Resistivity Kit	HM-940
Soil Resistance Meter	HM-942
Digital Soil Resistance Meter	HM-944

Accessories

Soil Resistivity Reel with Four-Wire Harness ¹	HMA-670
Heavy-Duty Soil Pin ¹	HMA-671
Long Soil Pin, 30in	HMA-664
Large Soil Box for Laboratory Testing ¹	HMA-672
Small Soil Box for Laboratory Testing	HMA-662
Test Leads for Soil Box, set of four ¹	HMA-673

¹Included with HM-940 Soil Resistivity Kit



MA-257



MA-260 shown with MAA-192, MAA-194, and MAA-196



MA-267

PEN PH METERS ASTM D4972; AASHTO T 289

Pen pH meters from Ohaus provide accurate, straightforward operation at an affordable price. Units show pH measurements in the 0–14pH range on the large, easy-to-read LCD display. The pocket-size pH meters are constructed with a durable ABS housing, a protective cap to safeguard the sensor, and automatic shutdown feature that preserves battery life. Pen meters endure prolonged use in rugged environments and feature IP67 waterproof design to prevent water damage when dropped in liquid. A wrist strap is included. The meters operate for approximately 200 hours on four included AG13 button-cell batteries. Working Environment for both units is 50°–104°F (10°–40°C) and 85%RH, non-condensing. **Product Dimensions:** 1.8x1.5x7.3in (46x38x185mm), WxDxH.

Economy Pen pH Meter has single line LCD display, range of 0–14x0.1pH, and accuracy of ±0.1pH. The built-in electrode is factory calibrated with no need for use of Buffer Solution and the meter is not equipped with temperature measurement or compensation functions.

Standard Pen pH Meter has dual line display for all pH and temperature values. The pH range is 0–14x0.01pH with ±0.05pH accuracy. The built-in electrode features three-point calibration using 4.01, 7.00, and 10.01 buffers. This meter has temperature compensation with range of 0°–99.0°C (32.0°–210.2°F).

Pen pH Meters	
Economy Pen pH Meter	MA-257
Standard Pen pH Meter	MA-258
Accessories	
pH Electrode Storage Solution	MAA-190
Buffer Solution, pH 4.01, 250mL	MAA-192
Buffer Solution, pH 7.00, 250mL	MAA-194
Buffer Solution, pH 10.01, 250mL	MAA-196

PORTABLE PH METER ASTM D4972; AASHTO T 289

Versatile Ohaus Portable pH Meter is rugged, reliable, and easy to use in the lab or field. With an IP54-rated protective ABS plastic casing shielding the meter from water and dust damage, the compact and ergonomic design is adaptable for a wide array of environments. Automatic and manual temperature compensation ensures accurate readings while a data library stores up to thirty measurements for future reference. Large, easy-to-read LCD display.

The auto buffer recognition stores calibration data and helps avoid errors during the calibration process. A maintenance-free 3-in-1 non-refillable plastic gel pH electrode with integrated temperature probe is included. Measurement range of the meter as equipped with supplied probe is 0–13x0.01pH. Accuracy is ±0.01pH. Temperature measurement is 0°–80°C (32°–212°F)x0.1°. The meter also reads -1,999–1,999x1mv. MA-260 includes the pH electrode, a meter stand, wrist strap, pH buffer packets (4.01, 7.00 and 10.01pH) and carrying bag. Working Environment 41°–104°F (5°–40°C), 80%RH, non-condensing. Operates approximately 500 hours on four included AAA batteries. **Product Dimensions:** 3.5x6x1.4in (89x152x36mm), WxDxH.

Portable pH Meter	
Portable pH Meter	MA-260
Accessories	
Buffer Solution, pH 4.01, 250mL	MAA-192
Buffer Solution, pH 7.00, 250mL	MAA-194
Buffer Solution, pH 10.01, 250mL	MAA-196
Replacement 3-in-1 pH Gel Electrode	MAA-198

PORTABLE TURBIDITY METER USEPA 180.1

The amount of suspended particles in water is quickly determined with the Portable Turbidity Meter Kit. This easy-to-use handheld instrument accurately measures turbidity by intensity of reflected light. Values are proportional to the quantity of suspended particles in the sample. The MA-267 meets EPA specifications for testing drinking water and is useful for measuring clarity of aqueous solutions in general.

Range is 0–100NTU (Nephelometric Turbidity Units) and 0–2,000AU (Attenuated Units). Accuracy is ±0.05NTU from 0 to 2.5 NTU, ±2% from 2.5 to 100 NTU. Resolution is 0.01–1.0 NTU, dependent upon range. This model also performs ratiometric measurements with a range of 0–1,000NTU. Additional units of measure are ASBC (American Society of Brewing Chemists), FNU (Formazin Nephelometric Units), or EBC (European Brewery Convention) units. Other features include IP67 waterproof construction, tungsten light source, large six-line backlit LCD display, 500-point data logging, and auto shutoff. Meter carries the CE mark. SmartLink 3 software can be purchased separately for data transfer to PC.

MA-267 Portable Turbidity Meter includes meter, 0, 1, and 10NTU Calibrating Standards, sample bottle, six sample tubes, USB cable with wall outlet adapter, and waterproof carrying case. Power is provided by a built-in 3.7V Lithium ion battery, rechargeable via included USB cable or 115V AC wall adapter. A 12VDC Car Charger is optional. **Product Dimensions:** 3.5x2.5x7.5in (89x64x191mm), WxDxH.

Portable Turbidity Meter	
Portable Turbidity Meter	MA-267
Accessories	
Calibration Standard, 0NTU	MAA-240
Calibration Standard, 1NTU	MAA-241
Calibration Standard, 10NTU	MAA-242
Calibration Standard, 100NTU	MAA-243
SmartLink 3 Software	MAA-247
Car Charger, 12V	MAA-248



SP-254



SP-258



SP-261



SP-274



SP-284



SPA-256



SP-138

Soil Samplers

Description	Carbon Steel	Stainless Steel
<p>Standard Augers are best for a wide range of soil types. Open bit design allows larger particles to pass through for recovery. Supplied with quick-connect fittings. SPA-256 Quick-Connect Pins are purchased separately. Inquire for augers with threaded connectors.</p> <p>3in (76mm) 4in (102mm)</p>	<p>SP-254 SP-256</p>	<p>SP-258 SP-259</p>
<p>Clay Augers have an open bit design and openings machined in sides that make sample viewing and recovery easier in cohesive soils. Length is 18in (457mm). Supplied with quick-connect fittings. SPA-256 Quick-Connect Pins are purchased separately. Inquire for augers with threaded connectors.</p> <p>3in (76mm) 4in (102mm)</p>	<p>SP-261 SP-262</p>	<p>SP-264 SP-266</p>
<p>Sand Augers have partially closed bodies and closed bits that aid sample retention in loose, granular soils. Length is 18in (457mm). Supplied with quick-connect fittings. SPA-256 Quick-Connect Pins are purchased separately. Inquire for augers with threaded connectors.</p> <p>3in (76mm) 4in (102mm)</p>	<p>SP-268 SP-269</p>	<p>SP-271 SP-272</p>
<p>Mud (Dutch) Augers have a unique, open design that is ideal for cutting in mucky, boggy, root-bound soils. Sample recovery and cleanup are easier. Available in 3in (76mm) diameter only. Length is 12in (305mm). Supplied with quick-connect fittings. SPA-256 Quick-Connect Pins are purchased separately. Inquire for augers with threaded connectors.</p>	<p>SP-274</p>	<p>SP-278</p>
<p>Handles & Extensions 16in (406mm) T-Handles are fitted with comfort-grip padding for ease of use. Extensions are high-strength 1in tubing, permanently marked with 6in (152mm) increments. Supplied with quick-connect fittings. SPA-256 Quick-Connect Pins are purchased separately. Inquire for handles and extensions with threaded connectors.</p> <p>2ft (.61m) 3ft (.914m) 4ft (1.22m) 5ft (1.52m) T-Handle</p>	<p>SP-284 SP-285 SP-286 SP-287 SP-288</p>	<p>SP-289 SP-290 SP-291 SP-292 SP-293</p>
<p>Adapters allow our Quick-Connect Augers to be used on older extensions with 5/8in-11 NC threaded connections. A locking pin is included.</p>	<p>SPA-255</p>	<p>—</p>
<p>Quick-Connect Pin 0.25x1.25in pin has spring retention clip. qty. 1</p>	<p>SPA-256</p>	<p>SPA-257</p>
<p>One-Piece Soil Samplers T-Handle samplers take 0.75in (19mm) diameter cores in tubes with replaceable hardened tips. Welded high-quality plated steel construction. SP-140 has a footstep to assist insertion in the soil.</p> <p>One-Piece Soil Sampler, 19in (483mm) Long, 15in (381mm) Core Sample One-Piece Soil Sampler, 36in (914mm) Long, 9in (229mm) Core Sample</p>	<p>— —</p>	<p>SP-138 SP-140</p>

technote

Systems using 5/8-11NC threaded connectors and stainless steel systems for environmental sampling applications are available.

helpfulhint

Soil Samplers are a fast, accurate way to profile soil layers and obtain samples for classification and testing. Gilson Augers and Extensions use precision quick-connect fittings of high-strength steel. One-piece pins are used to secure the components. This system is faster, more robust, and easier to use than conventional threaded systems. Heat-treated super alloy bits can be rebuilt when worn. Call for a quote.



Check Our Resources

Our Resource Center is an online Document Library, Gilson's collection of product manuals, instructions, and Safety Data Sheets (SDS), as well as 360° product photos and listings for ordering replacement parts online. Contact Gilson if more information is needed for previous models or discontinued products.

360°



Learn all about Gilson equipment!

Make sure to know what resources are available to you and your machines.

➤ GO TO [GLOBALGILSON.COM/CUSTOMER-RESOURCE-CENTER](https://www.globalgilson.com/customer-resource-center)



How to select the oven that best meets your requirements:

Step 1: Decide on gravity or forced convection air flow.

Step 2: Select desired maximum temperature.

Step 3: Determine appropriate dimensions and capacity.

helpfulhint

Having trouble deciding? Call a Gilson representative to discuss your application.

Oven Selection Guide

Model	Temperature,		Chamber Dimensions,		Product Dimensions,		Capacity, ft ³ (L)	Electrical, ¹	
	Max. °F (°C)	Uniformity °C	WxDxH, in (cm)	WxDxH, in (cm)	WxDxH, in (cm)	Volts		Amps	
Gravity Convection									
LT-10R	210 (99)	±0.8° at 75°C	12x10x10	(30x25x25)	14x12x17	(36x30x43)	0.7 (20)	115	2.6
LT-20R	210 (99)	±0.8° at 75°C	13x13x13	(33x33x33)	15x15x21	(38x38x53)	1.3 (36)	115	2.6
LT-30R	210 (99)	±1° at 75°C	18x12x16	(46x30x41)	20x14x25	(51x36x64)	2.0 (57)	115	5.2
LT-40R	210 (99)	±1° at 75°C	18x14x21	(46x36x53)	20x16x31	(51x41x79)	3.0 (85)	115	5.2
BO-10R	450 (232)	±3° at 150°C	12x10x10	(30x25x25)	14x12x17	(36x30x43)	0.7 (20)	115	5.2
BO-20R	450 (232)	±3° at 150°C	13x13x13	(33x33x33)	15x15x21	(38x38x53)	1.3 (37)	115	6.3
BO-30R	450 (232)	±3° at 150°C	18x12x16	(46x30x40)	20x14x25	(51x36x64)	2.0 (57)	115	10.5
BO-40	450 (232)	±3° at 150°C	18x14x22	(46x36x56)	20x16x30	(51x41x76)	3.0 (85)	115	12.5
PO-23 ²	550 (288)	Not-Rated	33x22x7.5	(84x56x19)	41.5x27x61	(105x69x155)	12.6 (357)	—	—
Forced Convection									
OT-2	105 (41)	Not-Rated	35.8x22.5x64	(91x57x163)	36x29.8x78	(91x76x198)	30.0 (850)	115	20
LT-110	225 (107)	±0.8° at 75°C	12x10x9	(30x25x23)	14x12x21	(36x30x53)	0.6 (17)	115	3.7
LT-120	225 (107)	±0.8° at 75°C	13x13x11	(33x33x28)	15x15x25	(38x38x64)	1.1 (32)	115	3.7
LT-130	225 (107)	±1° at 75°C	18x12x14	(46x30x36)	20x14x29	(51x36x74)	1.8 (52)	115	4.8
LT-140	225 (107)	±1° at 75°C	18x14x20	(46x36x51)	20x16x35	(51x41x89)	2.9 (81)	115	6.8
BO-250	300 (150)	±2.5° at 100°C	26x24x20	(66x61x51)	33x36x24	(84x91x61)	7.0 (198)	115	9.2
BO-250ER	300 (150)	±2° at 100°C	26x24x20	(66x61x51)	33x36x24	(84x91x61)	7.0 (198)	115	9.2
BO-60 ⁵	400 (204)	±2° at 177°C	50x30x54	(127x76x137) ³	70x46x80	(178x117x203)	46.9 (1,328)	230/460 ⁴	43/22
BO-62 ⁵	400 (204)	±2° at 177°C	56x30x60	(142x76x152) ³	76x46x86	(193x117x218)	58.3 (1,651)	230/460 ⁴	65/33
BO-64 ⁵	400 (204)	±2° at 177°C	68x30x66	(173x76x168) ³	88x46x92	(224x117x234)	77.9 (2,206)	230/460 ⁴	87/43
BO-323 ⁶	400 (204)	±2° at 177°C	36x21x36	(91x53x91)	40x28x47	(102x71x120)	15.8 (447)	230/460	19/10
BO-333 ⁶	400 (204)	±2° at 177°C	36x36x36	(91x91x91)	40x43x47	(102x109x120)	27.0 (764)	230/460	29/14
BO-343 ⁶	400 (204)	±2° at 177°C	36x48x36	(91x122x91)	40x55x47	(102x140x120)	36.0 (1,019)	230/460	29/14
DOL-24A	400 (204)	±3° at 150°C	18x18x12	(46x46x30)	24x26x26	(61x66x66)	2.3 (65)	115/240	11.6/5.8
DOL-69A	400 (204)	±3° at 150°C	30x18x22	(76x46x56)	36x26x36	(91x66x91)	6.9 (195)	115/240	21.6/10.8
DOL-120A	400 (204)	±3° at 150°C	30x20x35	(76x51x89)	36x28x51.5	(91x71x131)	12.1 (342)	240	16.6
DOL-180A	400 (204)	±3° at 150°C	37x24x35	(94x61x89)	43x32x51	(109x81x130)	18.0 (510)	240	16.7
DOL-270A	400 (204)	±3° at 150°C	37x37x35	(94x94x89)	43x45x51	(109x114x130)	27.7 (784)	240	21.7
BO-110	450 (232)	±3° at 150°C	12x10x9	(30x25x23)	14x12x21	(36x30x53)	0.6 (17)	115	6.6
BO-120	450 (232)	±3° at 150°C	13x13x11	(33x33x28)	15x15x25	(38x38x64)	1.1 (31)	115	8.8
BO-130	450 (232)	±3° at 150°C	18x12x14	(46x30x36)	20x14x29	(51x36x74)	1.8 (51)	115	12.5
BO-140	450 (232)	±3° at 150°C	18x14x20	(46x36x51)	20x16x35	(51x41x89)	2.9 (82)	115	12.5
BO-350	450 (232)	±2.5° at 100°C	26x24x20	(66x61x51)	33x36x24	(84x91x61)	7.0 (198)	115	16
BO-350ER	450 (232)	±2° at 100°C	26x24x20	(66x61x51)	33x36x24	(84x91x61)	7.0 (198)	115	16
BO-355	450 (232)	±3° at 100°C	26x24x30	(66x61x76)	33x36x34	(84x91x86)	10.6 (300)	115	16
BO-355ER	450 (232)	±2° at 100°C	26x24x30	(66x61x76)	33x36x34	(84x91x86)	10.6 (300)	115	16
SH-142	500 (260)	±3.0° at 150°C	30.7x24.7x31.0	(78.9x62.8x78.7)	39x34x48	(99.1x86.4x122)	14 (413)	230	12
SH-282	500 (260)	±3.5° at 150°C	30.8x25x61	(78.2x63.5x154.9)	39.1x35x78.3	(99.3x88.9x198.9)	27.6 (781)	230	20
DOC-38	500 (260)	±1° at 100°C	19x18x19	(48x46x48)	31x27x38	(79x69x97)	3.8 (108)	115/240	16.3/10.5
DOC-67	500 (260)	±1° at 100°C	24x20x24	(61x51x61)	36x29x43	(91x74x109)	6.7 (190)	240	12.4
DOC-120	500 (260)	±1° at 100°C	24x24x36	(61x61x91)	36x33x55	(91x84x140)	12.0 (340)	240	24.2
DOC-180	500 (260)	±1° at 100°C	36x24x36	(91x61x91)	47x33x55	(119x84x140)	18.0 (510)	240	24.2
BO-61 ⁵	550 (287)	±3° at 260°C	50x30x54	(127x76x137) ³	70x46x80	(178x117x203)	46.9 (1,328)	230/460 ⁴	65/33
BO-63 ⁵	550 (287)	±3° at 260°C	56x30x60	(142x76x152) ³	76x46x86	(193x117x218)	58.3 (1,651)	230/460 ⁴	87/43
BO-65 ⁵	550 (287)	±3° at 260°C	68x30x66	(173x76x168) ³	88x46x92	(224x117x234)	77.9 (2,206)	230/460 ⁴	109/55
BO-550	550 (287)	±3.5° at 100°C	26x23x20	(66x58x51)	33x36x24	(84x91x61)	6.6 (186)	230	12.5
BO-550ER	550 (287)	±2.5° at 100°C	26x23x20	(66x58x51)	33x36x24	(84x91x61)	6.6 (186)	230	12.5
SH-100	583 (306)	±2.25° at 150°C	12.1x13.7x14.5	(30.7x34.8x36.8)	22.7x23.5x31.5	(57.7x59.7x80.0)	1.39 (39.4)	115	12
SH-100F	583 (306)	±1.75° at 150°C	12.1x13.7x14.5	(30.7x34.8x36.8)	22.7x23.5x31.5	(57.7x59.7x80.0)	1.39 (39.4)	230	8
SH-300	583 (306)	±1.75° at 150°C	16.5x19.5x16.2	(41.9x49.5x41.1)	26.9x28.6x34.0	(68.3x72.6x86.4)	3.0 (85)	115	14
SH-300F	583 (306)	±2.5° at 150°C	16.5x19.5x16.2	(41.9x49.5x41.1)	26.9x28.6x34.0	(68.3x72.6x86.4)	3.0 (85)	230	10
SH-500	583 (306)	±1.75° at 150°C	21.0x19.4x20.7	(53.3x49.3x52.6)	31.4x28.1x38.8	(79.8x71.4x98.6)	4.9 (138)	115	14
SH-500F	583 (306)	±1.5° at 150°C	21.0x19.4x20.7	(53.3x49.3x52.6)	31.4x28.1x38.8	(79.8x71.4x98.6)	4.9 (138)	230	10

¹ Other voltages and standard accessories available. ² PO-23 Gas Oven has four chambers of indicated size. ³ Base dimensions shown, see listing in this section for dimensions as supplied. ⁴ Gas models available ⁵ Model number with specific suffix must be chosen: "EB", "EC", "GB", or "GC" ⁶ Model number with specific suffix must be chosen: "A", "B", or "C"

NEW



LT-10R

NEW



LT-130

QUINCY LOW-TEMP LAB OVENS

- Gravity or forced-air convection models
- Maximum temperatures of 210°F (99°C) for gravity convection models or 225°F (107°C) for forced-air convection models
- PID digital proportional temperature controller with ±1°C or 2°F accuracy
- LED display with lock setting function
- Temperature-tracking function stores temperature deviation from set point
- Insulated double-wall construction
- Corrosion-resistant aluminized steel chamber
- Energy-efficient, Incoloy-sheathed elements for quick heat-up
- Steel cabinets with scratch-resistant finish
- Ovens are supplied with one fixed and two adjustable shelves
- Models operate on 115V, 60Hz and are supplied with cords and plugs
- Add “F” to the model number for 230V, 50Hz operation shipped with cords and plugs

Quincy Low-Temp Lab Ovens									
Type	Model	Max. Temp., °F (°C)	Uniformity	Chamber Capacity, ft ³ (L)	Chamber Dimensions, WxDxH, in (cm)	Product Dimensions, WxDxH, in (cm)	Electrical, Volts/Amps	Shelf	
Gravity Convection	LT-10R	210 (99)	±0.8° at 75°C	0.7 (20)	12x10x10 (30x25x25)	14x12x17 (36x30x43)	115/3.8	BOA-30	
	LT-20R	210 (99)	±0.8° at 75°C	1.3 (36)	13x13x13 (33x33x33)	15x15x21 (38x38x53)	115/3.8	BOA-31	
	LT-30R	210 (99)	±1° at 75°C	2.0 (57)	18x12x16 (46x30x41)	20x14x25 (51x36x64)	115/5.2	BOA-32	
	LT-40R	210 (99)	±1° at 75°C	3.0 (85)	18x14x21 (46x36x53)	20x16x31 (51x41x79)	115/5.2	BOA-33	
Forced Air Convection	LT-110	225 (107)	±0.8° at 75°C	0.6 (17)	12x10x9 (30x25x23)	14x12x21 (36x30x53)	115/2.9	BOA-30	
	LT-120	225 (107)	±0.8° at 75°C	1.1 (32)	13x13x11 (33x33x28)	15x15x25 (38x38x64)	115/2.9	BOA-31	
	LT-130	225 (107)	±1° at 75°C	1.8 (52)	18x12x14 (46x30x36)	20x14x29 (51x36x74)	115/6.9	BOA-32	
	LT-140	225 (107)	±1° at 75°C	2.9 (81)	18x14x20 (46x36x51)	20x16x35 (51x41x89)	115/6.8	BOA-33	

CONNECT WITH US!
 Follow us on Facebook, Twitter, YouTube, Instagram, and LinkedIn.

GLOBALGILSON.COM
 SALES • SERVICE • SUPPORT



VIDEO ONLINE



BO-350



BO-355ER

QUINCY BENCH OVENS

- ▶ Forced-air convection
- ▶ Hydraulic thermostat control and high/low heat switch
- ▶ “ER” series has PID microprocessor controller with $\pm 1^{\circ}\text{C}$ or 2°F accuracy
- ▶ Full-width gasketed double doors
- ▶ Corrosion-resistant aluminized steel chamber
- ▶ Add “S” to model number to order long-lasting stainless steel interior
- ▶ Two heavy-duty 80lb (36kg) capacity shelves included
- ▶ Ovens hold up to 11 shelves, adjustable on 1.5in centers; BO-355 holds 17
- ▶ Electrical components are UL listed, CSA approved
- ▶ 6ft (1.8M) grounded cord with plug included
- ▶ Single phase, 50/60Hz operation
- ▶ Add “F” to model number for 230V operation for BO-250, BO-350, and BO-355

productspotlight

POPULAR ACCESSORIES FOR QUINCY BENCH OVENS

Heavy-Duty 80lb (36kg) Oven Shelf	BOA-1
Floor Cabinet With Two Sliding Shelves	BOA-2
Floor Stand With One Fixed Shelf	BOA-3
Exhaust Adapter For 3in (76mm) Pipe	BOA-4
12 Hour Timer	BOA-5 ¹
Seven-Day Programmable Timer	BOA-75 ²

¹Also fits Lab Ovens, except BO-10R and BO-110

²Factory install on ER Series Bench Ovens

Quincy Bench Ovens

Model	Max. Temp., °F (°C)	Uniformity	Chamber Capacity, ft ³ (L)	Chamber Dimensions, WxDxH, in (cm)	Product Dimensions, WxDxH, in (cm)	Electrical, Volts/Amps
BO-250	300 (150)	$\pm 2.5^{\circ}$ at 100°C	7.0 (198)	26x24x20 (66x61x51)	33x36x24 (84x91x61)	115/9.2
BO-250ER	300 (150)	$\pm 2^{\circ}$ at 100°C	7.0 (198)	26x24x20 (66x61x51)	33x36x24 (84x91x61)	115/9.2
BO-350	450 (232)	$\pm 2.5^{\circ}$ at 100°C	7.0 (198)	26x24x20 (66x61x51)	33x36x24 (84x91x61)	115/16
BO-350ER	450 (232)	$\pm 2^{\circ}$ at 100°C	7.0 (198)	26x24x20 (66x61x51)	33x36x24 (84x91x61)	115/16
BO-355	450 (232)	$\pm 3^{\circ}$ at 100°C	10.6 (300)	26x24x30 (66x61x76)	33x36x34 (84x91x86)	115/16
BO-355ER	450 (232)	$\pm 2^{\circ}$ at 100°C	10.6 (300)	26x24x30 (66x61x76)	33x36x34 (84x91x86)	115/16
BO-550	550 (287)	$\pm 3.5^{\circ}$ at 100°C	6.6 (186)	26x23x20 (66x58x51)	33x36x24 (84x91x61)	230/12.5
BO-550ER	550 (287)	$\pm 2.5^{\circ}$ at 100°C	6.6 (186)	26x23x20 (66x58x51)	33x36x24 (84x91x61)	230/12.5



BO-10R



BO-40



BO-140

QUINCY LAB OVENS

- Gravity or forced-air convection models
- BO-10R and BO-110 have bimetallic thermostats; others have hydraulic thermostats
- Maximum temperatures of 450°F (232°C)
- Illuminated On/Off rocker switch and a heat/cycle pilot light
- Gravity models include BOA-7 Spirit-Filled Thermometer; forced air models have BOA-6 Dual-Range In-Door Thermometer
- Corrosion-resistant aluminized steel chamber
- Factory installed BOA-5 12-Hour Timer
- Energy-efficient, Incoloy-sheathed elements for quick heat-up
- Steel cabinets with scratch-resistant finish
- Ovens are supplied with one fixed and two adjustable shelves
- Standard models operate on 115V,60Hz and are supplied with cords and plugs
- Add “F” to the model number for 230V,50Hz model. Shipped with cord and plug

contactus.....

Contact our technical support staff to find the right equipment for your material testing needs.

 **800.444.1508**

Quincy Lab Ovens

Type	Model	Max. Temp., °F (°C)	Uniformity	Chamber Capacity, ft ³ (L)	Chamber Dimensions, WxDxH, in (cm)	Product Dimensions, WxDxH, in (cm)	Electrical, Volts/Amps	Shelf
Gravity Convection	BO-10R	450 (232)	±3° at 150°C	0.7 (20)	12x10x10 (30x25x25)	14x12x17 (36x30x43)	115/5.2	BOA-30
	BO-20R	450 (232)	±3° at 150°C	1.3 (36)	13x13x13 (33x33x33)	15x15x21 (38x38x53)	115/7	BOA-31
	BO-30R	450 (232)	±3° at 150°C	2.0 (57)	18x12x16 (46x30x41)	20x14x25 (51x36x64)	115/10.5	BOA-32
	BO-40	450 (232)	±3° at 150°C	3.0 (85)	18x14x22 (46x36x56)	20x16x31 (51x41x79)	115/12.5	BOA-33
Forced Air Convection	BO-110	450 (232)	±3° at 150°C	0.6 (17)	12x10x9 (30x25x23)	14x12x21 (36x30x53)	115/6.6	BOA-30
	BO-120	450 (232)	±3° at 150°C	1.1 (32)	13x13x11 (33x33x28)	15x15x25 (38x38x64)	115/8.8	BOA-31
	BO-130	450 (232)	±3° at 150°C	1.8 (52)	18x12x14 (46x30x36)	20x14x29 (51x36x74)	115/12.5	BOA-32
	BO-140	450 (232)	±3° at 150°C	2.9 (81)	18x14x20 (46x36x51)	20x16x35 (51x41x89)	115/12.5	BOA-33



DOL-69A



DOL-120A



DOC-120

DESPATCH ELECTRIC BENCH OVENS

Standard

- Forced-air convection
- Digital single-setpoint microprocessor controller
- Stainless steel chamber
- Rocker switches for power and heat
- Maximum temperature of 400°F (204°C)
- Uniformity of 3°C at 150°
- Ovens with chamber capacity 6.9ft³ (195L) and above have two doors
- DOL-24A includes two 50lb (22kg) capacity shelves; all other models include two heavy-duty shelves with 200lb (90kg) capacity
- Optional DOBA-2 Countdown Timer shuts down oven at end of cycle
- Shelves adjust on 2in (51mm) centers
- Five-year manufacturer's warranty
- DOL-24A, DOL-69A, and DOC-38 are available in 115V or 240V models, others operate on 240V; all will operate on 50 or 60Hz power supplies
- DOL-24A, DOC-38, DOC-67 supplied with cord and plug; all others must be hardwired into electrical supply

Deluxe

- Forced-air convection
- Despatch Protocol 3™ digital self-diagnostic controller with calibrating capabilities
- Stainless steel chamber
- Programmable for up to 255 ramp and soak segments
- Maximum temperature of 500°F (260°C)
- Uniformity of ±1°C at 100°C
- Two standard-duty shelves with 50lb (22kg) capacity; inquire for heavy-duty shelves
- Shelves adjust on 2in (51mm) centers
- Five-year manufacturer's warranty
- DOC-38 is available in 115V or 240V models, others operate on 240V; all will operate on 50 or 60Hz power supplies
- DOC-38, DOC-67 supplied with cord and plug; all others must be hardwired into electrical supply

Despatch Electric Bench Ovens

Type	Model	Max Temp, °F (°C)	Uniformity	Chamber Capacity, Ft ³ (L)	Chamber Dimensions, WxDxH, in (cm)	Overall Dimensions, WxDxH, in (cm)	Electrical, Volts/Amps	Shelf	Base Stand
Standard	DOL-24A	400 (204)	±3° at 150°C	2.3 (65)	18x18x12 (46x46x30)	24x26x26 (61x66x66)	115/11.6 or 240/5.8 ¹	DOLA-20	—
	DOL-69A	400 (204)	±3° at 150°C	6.9 (195)	30x18x22 (76x46x56)	36x26x36 (91x66x91)	115/21.6 or 240/10.8 ^{1,2}	DOLA-30A	DOLA-82
	DOL-120A	400 (204)	±3° at 150°C	12.1 (342)	30x20x35 (76x51x89)	36x28x51 (91x71x130)	240/16.6 ²	DOLA-40A	DOLA-85
	DOL-180A	400 (204)	±3° at 150°C	18.0 (510)	37x24x35 (94x61x89)	43x32x51 (109x81x130)	240/16.7 ²	DOBA-40A	DOLA-83
	DOL-270A	400 (204)	±3° at 150°C	27.7 (784)	37x37x35 (94x94x89)	43x45x51 (109x114x130)	240/21.7 ²	DOBA-50A	DOLA-84
Deluxe	DOC-38	500 (260)	±1° at 100°C	3.8 (108)	19x18x19 (48x46x48)	31x27x38 (79x69x97)	115/16.3 or 240/10.5 ¹	DOCA-20	DOCA-70
	DOC-67	500 (260)	±1° at 100°C	6.7 (190)	24x20x24 (61x51x61)	36x29x43 (91x74x109)	240/12.4	DOCA-30	DOCA-71
	DOC-120	500 (260)	±1° at 100°C	12.0 (340)	24x24x36 (61x61x91)	36x33x55 (91x84x140)	240/24.2	DOCA-40	DOCA-72
	DOC-180	500 (260)	±1° at 100°C	18.0 (510)	36x24x36 (91x61x91)	47x33x55 (119x84x140)	240/24.2 ²	DOCA-50	DOCA-73

¹ Specify desired voltage. ² Oven is not supplied with cord and plug and must be hard-wired into electrical supply.



SH-100



SH-282 shown with four optional SHA-38 Shelves

SHEL LAB® OVENS

- Forced-air convection
- PID temperature controller with digital display
- Digital countdown timer built-in
- Fast heat up and recovery with excellent uniformity
- UL/CSA/CE approved ovens meet ASTM E145 and DIN 12880 standards
- Stainless steel chambers and shelves
- Stainless steel shelves adjust on 0.5in (13mm) centers
- Two standard shelves with 50lb (23kg) capacity are included with SH-100, SH-300, and SH-500 Ovens
- Three heavy-duty shelves with 75lb (34kg) capacity are included with SH-142 Ovens
- Six heavy-duty shelves with 75lb (34kg) capacity are included with SH-282 Ovens.
- 1.75in (44mm) instrumentation port and 3in (76mm) exhaust port included
- Heavy-gauge triple-wall insulated steel construction, powder coat finish
- Models operate on 115 or 230 Volt single-phase, 50 or 60 Hertz electrical supplies

SHEL LAB® Ovens

Model	Max. Temp., °F (°C)	Uniformity C°	Chamber Capacity, ft³ (L)	Chamber Dimensions, WxDxH, in (cm)	Product Dimensions, WxDxH, in (cm)	Electrical, Volts/Amps	Standard Shelf	Heavy-Duty Shelf	Stand w/ Casters
SH-100	583 (306)	±2.25 at 150	1.39 (39.4)	12.1x13.7x14.5 (30.7x34.8x36.8)	22.7x23.5x31.5 (57.7x59.7x80.0)	115/12	SHA-21	SHA-31	—
SH-100F		±1.75 at 150				230/8			
SH-300	583 (306)	±1.8 at 150	3.0 (85)	16.5x19.5x16.2 (41.9x49.5x41.2)	26.9x28.6x34.0 (68.3x72.6x86.4)	115/14	SHA-23	SHA-33	SHA-43
SH-300F		±2.5 at 150				230/10			
SH-500	583 (306)	±1.8 at 150	4.9 (138)	21.0x19.4x20.7 (53.3x49.3x52.6)	31.4x28.1x38.8 (79.8x71.4x98.6)	115/14	SHA-25	SHA-35	SHA-45
SH-500F		±1.5 at 150				230/10			
SH-142	500 (260)	±3.0 at 150	14 (413)	30.7x24.7x31.0 (77.9x62.7x78.7)	39x34.0x48.0 (99.1x86.4x122.0)	230/12	—	SHA-38	SHA-47
SH-282	500 (260)	±3.5 at 150	27.6 (781)	30.8x25x61 (78.2x63.5x154.9)	39.1x35x78.3 (99.3x88.9x198.9)	230/20	—	SHA-38	SHA-47





BO-60EB



PO-23

LARGE SHELF OVENS

- ▶ Forced-air convection with horizontal air flow
- ▶ High-volume ovens in electric or gas models with chamber volumes 46.9–78ft³ (1,328–2,206L)
- ▶ Digital controller with $\pm 0.3\%$ accuracy; uniformity is $\pm 2^\circ\text{C}$ ($\pm 4^\circ\text{F}$) for 400°F models and $\pm 3^\circ\text{C}$ ($\pm 6^\circ\text{F}$) for 550°F models
- ▶ Type 304 stainless steel interior
- ▶ Adjustable air intake and exhaust dampers; explosion-venting latches
- ▶ Holds eight to ten 100lb (46kg) capacity wire shelves on 6in centers, two are included
- ▶ Available BOA-46 Shutdown Timer turns oven off at preset time. Specify 1, 5, 10, or 30 hour range
- ▶ Available BOA-48 Operation Timer sounds alarm at preset time. Specify 1, 5, 10, or 30 hour range
- ▶ Add “EB” suffix to model number for 230V, 60Hz, 3-phase and “EC” for 460V, 60Hz, 3-phase for electric ovens; inquire for 50Hz models
- ▶ For gas ovens, add “GB” suffix to model number for 230V, 60Hz, 3-phase and GC for 460V, 60Hz, 3-phase

Large Shelf Ovens

Model	Max. Temp. °F (°C)	Uniformity	Chamber Capacity, ft ³ (L)	Chamber Dimensions, WxDxH, in (cm)	Product Dimensions ¹ , WxDxH, in (cm)	Shelf
BO-60	400 (204)	$\pm 2^\circ$ at 177°C	46.9 (1,328)	50x30x54 (127x76x137)	70x46x80 (178x117x203)	BOA-70
BO-62	400 (204)	$\pm 2^\circ$ at 177°C	58.3 (1,651)	56x30x60 (142x76x152)	76x46x86 (193x117x218)	BOA-71
BO-64	400 (204)	$\pm 2^\circ$ at 177°C	77.9 (2,206)	68x30x66 (173x76x168)	88x46x92 (224x117x234)	BOA-72
BO-61	550 (287)	$\pm 3^\circ$ at 260°C	46.9 (1,328)	50x30x54 (127x76x137)	70x46x80 (178x117x203)	BOA-70
BO-63	550 (287)	$\pm 3^\circ$ at 260°C	58.3 (1,651)	56x30x60 (142x76x152)	76x46x86 (193x117x218)	BOA-71
BO-65	550 (287)	$\pm 3^\circ$ at 260°C	77.9 (2,206)	68x30x66 (173x76x168)	88x46x92 (224x117x234)	BOA-72

Accessories

Shutdown Timer

BOA-46

Operation Timer

BOA-48

¹Add 10in width to allow for blower and control panel on right side. For gas models, add additional 15in to left side for burner.

PEERLESS GAS OVEN

- ▶ Gravity Convection
- ▶ Supplied for use with natural gas. Liquid propane (LP) model available at request
- ▶ Included Low Temperature System device for accurate control in the 150°–550°F (65°–288°C) range
- ▶ Four chambers for total capacity of 12.6ft³ (357L)
- ▶ Steel decks with aluminized interior
- ▶ Heavy steel construction; steel doors with enameled exterior
- ▶ 5in (127mm) direct vent connection or vents under canopy hood
- ▶ POA-10 Flue Diverter sold separately
- ▶ Maximum temperature of 550°F (288°C)
- ▶ **Product Dimensions:** 41.5x27x61in (105.4x68.6x155cm), WxDxH.

Peerless Gas Oven

Peerless Gas Oven

PO-23

Accessories

Flue Diverter

POA-10



VIDEO TUTORIALS

Visit globalgilson.com to watch DIY videos for maintenance, repair, and calibration.



BO-333



OT-2

LARGE CAPACITY BENCH OVENS

- Forced-air convection with ±4°C uniformity
- Type 304 stainless steel interior, aluminized steel exterior
- High sample capacity and efficient operation at affordable prices
- Maximum temperature is 400°F (204°C)
- Watlow digital temperature controller
- UL-listed control panel has digital temperature controller, blower motor control buttons, On/Off heat switch, and LED pilot lights
- Accommodates ten 50lb (23kg) capacity shelves, adjustable on 3in centers; two shelves included
- Rapid drying of large sample loads
- Available BOA-46 Shutdown Timer with “hold” feature turns off oven at a preset time. Specify 1, 5, 10, or 30 hour range.
- Available BOA-48 Operation Timer sounds alarm at preset time. Specify 1, 5, 10, or 30 hour range.
- Heaters shut off if blower fails
- Adjustable air intake and exhaust dampers
- Heavy-duty doors with explosion-venting latches
- Incoloy-sheathed tubular heating elements with built-in baffle
- Choose from a variety of electrical configurations

Large Capacity Bench Ovens

Model ¹	Chamber Capacity, ft ³ (L)	Chamber Dimensions, WxDxH, in (cm)	Product Dimensions ² , WxDxH, in (cm)	Stand Kit	Shelf
BO-323	15.8 (447)	36x21x36 (91x53x91)	49x28x57 (124x71x145)	BOA-40	BOA-50
BO-333	27 (764)	36x36x36 (91x91x91)	49x43x57 (124x109x145)	BOA-41	BOA-51
BO-343	36 (1,019)	36x48x36 (91x122x91)	49x55x57 (124x140x145)	BOA-42	BOA-52

Accessories

Shutdown Timer	BOA-46
Operation Timer	BOA-48

¹Add letter suffix to model number to specify electrical characteristics desired: “A” suffix, 230V, 60Hz, 1ph; “B” suffix, 230V, 60Hz, 3ph; “C” suffix, 460V, 60Hz, 3ph. Other electrical characteristics quoted on request. ²Dimensions include 10in (25cm) for blower motor on top of case and 9in (23cm) control panel on right side.

AIR DRYING OVEN

ASTM D197, D421, D558, D559, D698, D2013, D3302, E605; AASHTO R 58, R 74, T 99, T 180

- Forced-air convection
- Low-temperature operation and high-volume air flow
- Maximum temperature is 105°F (41°C)
- 1–4 air changes per minute
- Rapid drying without high-heat damage
- For large bulk samples of soils, aggregates, fire-proofing, and other materials
- Six included shelves adjust on 2in centers
- 30ft³ (850L) chamber space
- Double full-height doors
- Air is drawn over the 2,000 Watt heating element for even horizontal distribution
- Two 24hr timers control heater and fan
- Solid-state temperature controller with digital display
- **Chamber Dimensions:** 35.6x22.5x64in (90.4x57x163cm), WxDxH
- **Product Dimensions:** 36x29.8x78in (91x76x198cm), WxDxH.

Air Drying Oven

Air Drying Oven, 115V, 60Hz	OT-2
230V, 50Hz	OT-2F



8 OVENS / MUFFLE FURNACES



MF-2A



MF-4A

LABORATORY MUFFLE FURNACES

- Cost-effective muffle furnaces for high-temperature applications
- Programmable controllers feature precise programming and digital display
- Chamber capacities from 242 to 5,841in³ (4.0 to 95.7L)
- MF-2A models have 2,350°F (1,288°C) maximum temperature; other models have a 2,000°F (1,093°C) maximum temperature.
- Chambers enclosed with minimum 2.5in (64mm) refractory firebrick
- Heavy-gauge painted steel case
- Heating elements are easily accessible for maintenance
- Counter-weighted drop-down doors provide convenient surface for loading/unloading of larger capacity muffle furnaces MF-4 and MF-6
- Furnaces are supplied with power cord and plug
- Optional MFA-120 Vent Master 120 available for MF-4 and MF-6 series

Laboratory Muffle Furnaces

Model	Max. Temp., °F (°C)	Controller	Chamber Capacity, in ³ (L)	Chamber Dimensions, WxDxH, in (cm)	Product Dimensions, WxDxH, in (cm)	Electrical, Volts/Amps/Watts
MF-2A	2,350 (1,287)	Automatic Digital	242 (4.0)	6x6x6.3 (15.2x15.2x16.0)	11x15x18 (28x38x46)	115/12/1,440
MF-2AF	2,350 (1,287)	Automatic Digital	242 (4.0)	6x6x6.3 (15.2x15.2x16.0)	11x15x18 (28x38x46)	240/6/1,440
MF-4A	2,000 (1,093)	Automatic Digital	673 (11.0)	8.5x9x8.8 (21.6x22.9x22.4)	14x18x20.5 (36x46x52)	115/14/1,692
MF-4AF	2,000 (1,093)	Automatic Digital	673 (11.0)	8.5x9x8.8 (21.6x22.9x22.4)	14x18x20.5 (36x46x52)	240/7/1,692
MF-6A	2,000 (1,093)	Automatic Digital	1,537 (25.2)	13x13.5x8.8 (33.0x34.3x22.4)	18.25x22.5x20.5 (46x57x52)	240/13/3,120
MF-8A	2,000 (1,093)	Automatic Digital	5,841 (95.7)	21x21x13.3 (53.3x53.3x33.8)	37.5x30x23 (95x76x58)	240/30/7,200

Accessories

Vent Master 120 for MF-4 and MF-6 Series, 115V, 60Hz

MFA-120

also available.....

See listings for Porcelain Crucibles, and Crucible Tongs in the Pans, Tools and Glassware section.



GILSON NEWSLETTER

Sign up for the Gilson newsletter at globalgilson.com and never miss a thing!





MF-7910



MF-8020



MF-6010

MUFFLE FURNACES

- Laboratory furnaces by Thermolyne for high-temperature applications
- Rugged construction and quality components for long service life
- Select from three controller types (digital, single set-point, or programmable)
 - Digital control display shows current temperature and setpoint; over-temperature protection not included
 - Single setpoint control has single ramp to setpoint and a dwell; over-temperature protection included
 - Programmable control stores one program of eight segments; over-temperature protection included
- Multiple elements embedded in sides, top, and bottom of chambers
- MF-1310 and MF-1315 have ceramic fiber insulation for faster heat-up
- Safety interlock switches cut power when door is opened
- Most models include cord and plug, MF-6020 must be hard-wired to power
- All models operate on 50 or 60Hz power supplies



SHIP WEIGHT INDEX

The estimated ship weight for every product is easy to find in the Ship Weight Index!

Muffle Furnaces

Model	Max. Temp., °F (°C)	Controller	Chamber Capacity, in ³ (L)	Chamber Dimensions, WxDxH, in (cm)	Product Dimensions, WxDxH, in (cm)	Electrical, Volts, Hertz, Amps, Watts
MF-1310	2,012 (1,100)	Digital	79 (1.3)	4x5x3.8 (10.2x12.7x9.7)	9x13x14 (23x33x36)	240 50/60 4.4 1,060
MF-1315	2,012 (1,100)	Digital	79 (1.3)	4x5x3.8 (10.2x12.7x9.7)	9x13x14 (23x33x36)	115 50/60 8.9 1,060
MF-7910	2,192 (1,200)	Digital	120 (2)	5x6x4 (12.7x15.2x10.2)	11.3x15.5x18.5 (29x39x47)	240 50/60 4.2 1,000
MF-7915	2,192 (1,200)	Digital	120 (2)	5x6x4 (12.7x15.2x10.2)	11.3x15.5x18.5 (29x39x47)	115 50/60 8.3 1,000
MF-8010	2,192 (1,200)	Digital	350 (5.8)	7x10x5 (17.8x25.4x12.7)	13.3x19.5x19 (34x50x48)	240 50/60 7.5 1,800
MF-8015	2,192 (1,200)	Digital	350 (5.8)	7x10x5 (17.8x25.4x12.7)	13.3x19.5x19 (34x50x48)	115 50/60 15 1,800
MF-8020	2,192 (1,200)	Single Set	350 (5.8)	7x10x5 (17.8x25.4x12.7)	13.3x19.5x19 (34x50x48)	240 50/60 7.5 1,800
MF-8025	2,192 (1,200)	Single Set	350 (5.8)	7x10x5 (17.8x25.4x12.7)	13.3x19.5x19 (34x50x48)	115 50/60 15 1,800
MF-6010	2,192 (1,200)	Digital	864 (14.2)	12.8x10x6.8 (32.5x25.4x17.3)	19.1x20.1x21 (49x51x53)	240 50/60 12.9 3,095
MF-6020	2,192 (1,200)	Programmable	864 (14.2)	12.8x10x6.8 (32.5x25.4x17.3)	19.1x20.1x21 (49x51x53)	240 50/60 18.3 4,400



Explore 360° Photos

Using your computer, tablet, or mobile phone, you can explore our collection of high resolution, 360° product images conveniently and on-demand. These 360° images allow you to rotate, zoom in, and compare equipment features and details so you know exactly what you are getting before you order.



See more details
from every angle!



Check back often for **NEW** additions to our
360° product image library.


► GO TO GLOBALGILSON.COM/360-PRODUCT-VIEWS TO VIEW



9 SCALES & BALANCES / SELECTION GUIDE

Scales & Balances Selection Guide							Scales & Balances Selection Guide						
Capacity, g / lb	Readability, g / lb	Data Port	Weigh-Below	Brand	Model	Page	Capacity, g / lb	Readability, g / lb	Data Port	Weigh-Below	Brand	Model	Page
Electronic							Electronic						
120	0.001/—	•	—	A&D	AD-123	287	16,000/35	0.01/0.0002	•	OPT	Adam	CP-92	288
120	0.01/—	OPT	—	A&D	AD-122	287	16,000/35	0.01/0.0005	•	OPT	Adam	CP-62	284
120	0.001/—	•	•	Adam	CP-300	289	16,000/35	0.01/0.0005	•	OPT	Adam	CP-62C	284
150	0.005/—	•	•	Adam	CP-301	289	16,000/35	0.1/0.0002	•	OPT	Adam	CP-25	285
210	0.01/—	OPT	—	A&D	AD-202	287	16,000/35	0.5/0.001	•	OPT	Adam	CP-24	285
220	0.001/—	•	•	Ohaus	OBD-223	288	16,000/35	0.5/0.001	—	—	Adam	CP-403	282
220	0.001/—	•	—	Adam	CP-40	288	21,000/46	0.1/0.0005	•	OPT	A&D	AD-20KA	281
300	0.01/—	OPT	•	Adam	CP-303	289	22,000/48	0.01/0.0002	—	OPT	Adam	CP-93	288
310	0.001/—	•	—	A&D	AD-302	287	22,000/48	0.1/0.0005	•	OPT	Adam	CP-63	284
310	0.001/—	•	—	A&D	AD-303	287	22,000/48	0.1/0.0005	•	•	Adam	CP-63C	284
410	0.01/—	OPT	—	A&D	AD-402	287	24,000/52	0.1/0.0005	•	•	Ohaus	OBX-524	281
420	0.001/—	•	—	Adam	CP-41	288	25,000/50	1.0/0.003	•	—	Ohaus	OB-752	282
600	0.01/—	•	•	Adam	CP-306H	289	25,000/50	1.0/0.003	•	—	Ohaus	OB-762	282
600	0.02/—	•	•	Adam	CP-306	289	30,000/60	2.0/0.005	•	—	A&D	AD-60PA	285
610	0.01/—	OPT	—	A&D	AD-602	287	31,000/68	0.1/0.0005	•	OPT	A&D	AD-30KA	281
620	0.001/—	•	—	Adam	CP-42	288	31,000/68	1.0/0.005	•	OPT	A&D	AD-32KDA ¹	284
820	0.01/—	•	•	Ohaus	OBD-822	288	31,000/68	0.1/0.0005	•	OPT	A&D	AD-30KD	281
820	0.001/—	•	OPT	Adam	CP-43	288	32,000/70	0.1/0.0005	•	OPT	Adam	CP-64	284
1,000	0.01/—	•	•	Adam	CP-310	289	32,000/70	0.1/0.0005	•	•	Adam	CP-64C	284
1,500	0.01/—	OPT	OPT	A&D	AD-154	287	32,000/70	1.0/0.002	•	—	Adam	CP-405	282
1,500	0.05/—	•	•	Adam	CP-315	289	32,000/70	0.1/0.0002	•	•	Ohaus	OB-135H	283
1,520	0.01/—	•	•	Ohaus	OBD-152	288	32,000/70	0.2/0.0005	•	OPT	Adam	CP-27	285
1,600	0.01/—	•	•	Ohaus	OBP-162	289	35,000/75	0.5/0.001	•	•	Ohaus	OB-135	283
2,100	0.01/—	OPT	OPT	A&D	AD-214	287	32,000/70	1.00/0.002	•	OPT	Adam	CP-26	285
2,200	0.01/—	•	•	Ohaus	OBP-222	289	35,000/75	0.1/0.0005	•	•	Ohaus	OBX-535	281
2,200	0.01/—	•	•	Ohaus	OBP-221	289	35,000/75	10.0/0.02	•	—	Adam	CP-35	286
2,600	0.01/—	•	—	Adam	CP-45	288	35,000/75	10.0/0.02	•	—	Adam	CP-46	286
3,000	0.01/—	•	•	Ohaus	OB-132H	283	41,000/90	0.5/0.002	•	OPT	A&D	AD-40KA	281
3,000	0.05/—	•	•	Ohaus	OB-132	283	48,000/100	0.5/0.001	•	OPT	Adam	CP-29	285
3,000	0.1/—	•	•	Adam	CP-330	289	48,000/100	2.0/0.005	•	OPT	Adam	CP-28	285
3,100	0.1/—	OPT	OPT	A&D	AD-314	287	50,000/100	10/0.02	—	•	Adam	CP-52	291
3,200	0.1/—	•	•	Ohaus	OBP-322	289	50,000/100	2.0/0.005	•	—	Ohaus	OB-754	282
3,600	0.1/—	•	—	Adam	CP-47	288	50,000/100	2.0/0.005	•	—	Ohaus	OB-764	282
4,000	0.1/—	•	OPT	Adam	CP-20	285	60,000/130	2.0/0.005	•	—	Adam	CP-407	282
4,100	0.01/—	OPT	OPT	A&D	AD-414	287	60,000/150	5.0/0.01	•	—	A&D	AD-150PA	285
4,200	0.01/—	•	•	Ohaus	OBD-421	288	61,000/134	1.0/0.005	•	OPT	A&D	AD-60KA	281
4,200	0.01/—	•	•	Ohaus	OBP-422	289	61,000/134	1.0/0.005	•	OPT	A&D	AD-60KD	281
4,200	0.01/—	•	•	Ohaus	OBD-422	288	61,000/134	0.1/0.0005	•	OPT	A&D	AD-61KD	281
4,200	0.1/—	•	•	Ohaus	OBP-421	289	61,000/134	1.0/0.005	•	OPT	A&D	AD-61KA	281
4,600	0.01/—	•	—	Adam	CP-48	288	75,000/165	0.02/0.05	•	—	Ohaus	OB-165	287
6,000/15	0.02/0.00005	•	•	Ohaus	OB-133H	283	75,000/165	20.0/0.05	•	—	Adam	CP-75	286
6,000/15	0.1/0.0002	•	•	Ohaus	OB-133	283	75,000/165	20.0/0.05	•	—	Adam	CP-76	286
6,000/13	2.0/0.005	•	—	Adam	CP-6	286	101,000/222	1.0/0.005	•	OPT	A&D	AD-101KA	281
6,000/13	2.0/0.005	•	—	Adam	CP-7	286	101,000/222	1.0/0.005	•	OPT	A&D	AD-101KD	281
6,100	0.01/—	OPT	OPT	A&D	AD-614	287	101,000/222	10.0/0.05	•	•	A&D	AD-102KDA ¹	284
6,200/13	0.01/—	•	•	Adam	CP-50	288	120,000/260	5.0/0.01	•	—	Adam	CP-409	282
8,000/16	0.5/0.0001	•	OPT	Adam	CP-23	285	125,000/250	5.0/0.01	•	—	Ohaus	OB-756	282
8,000/16	0.1/0.0002	•	OPT	Adam	CP-22	285	125,000/250	5.0/0.01	•	—	Ohaus	OB-766	282
8,000/16	0.2/0.0005	•	OPT	Adam	CP-21	285	150,000/300	10.0/0.02	•	—	A&D	AD-300PA	285
8,000/16	0.1/0.0002	•	—	Adam	CP-401	282	150,000/300	20/0.05	—	•	Adam	CP-54	291
8,000/16	0.1/—	•	•	Ohaus	OBD-821	288	150,000/330	50.0/0.1	•	—	Adam	CP-150A	286
8,200/18	0.01/—	•	OPT	Adam	CP-51	288	150,000/330	50.0/0.1	•	—	Adam	CP-151	286
12,000/26	0.1/0.0002	•	OPT	Adam	CP-91	288	200,000/440	50.0/0.1	•	—	Adam	CP-200	286
12,000/26	0.1/0.0005	•	OPT	Adam	CP-61	284	200,000/440	50.0/0.1	•	—	Adam	CP-201	286
12,000/26	0.1/0.0005	•	OPT	Adam	CP-61C	284	250,000/500	10.0/0.03	•	—	Ohaus	OB-770	282
12,000/26	0.1/0.0005	•	OPT	A&D	AD-12KA	281	250,000/500	10.0/0.03	•	—	Ohaus	OB-758	282
12,000/26	0.1/0.0005	•	•	Ohaus	OBX-512	281	300,000/600	50.0/0.1	—	•	Adam	CP-56	291
12,500/25	0.5/0.001	•	—	Ohaus	OB-750	282	500,000/1000	20.0/0.05	—	—	Ohaus	OB-772C	282
15,000/30	0.2/0.0005	•	•	Ohaus	OB-134	283							
15,000/30	0.1/0.0002	•	•	Ohaus	OB-134H	283							
15,000/33	5.0/0.01	•	—	Adam	CP-15	286							
15,000/33	5.0/0.01	•	—	Adam	CP-16	286							

¹Dual-Range Balance. OPT = Optional

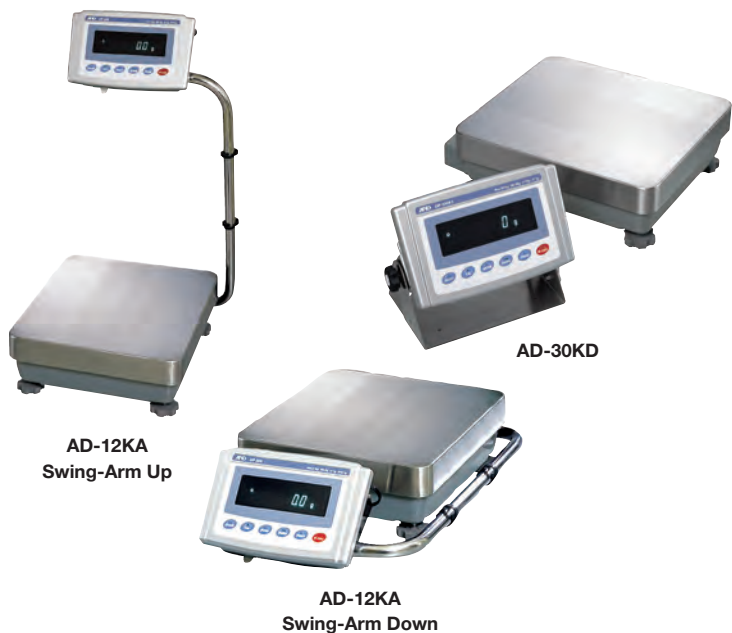

A&D GP INDUSTRIAL HIGH-CAPACITY BALANCES

- High-capacity balances with laboratory precision
- g, kg, and lb selectable weighing units (12 units total)
- Models with “KA” suffix feature 25.7in (653mm) swing-arm to position display at any angle
- Models with “KD” suffix feature detached display with 9.8ft (2.98m) cable
- Easily readable vacuum fluorescent digital display
- NEMA4/IP65 rated, all metal body
- 15.1x13.5in (384x343mm) stainless steel platform
- Automatic Self-Calibration when ambient temperature changes
- One-touch automatic internal calibration
- Built-in Windows communication software
- USB and RS-232 interface
- Models up to 41,000g capacity have weigh-below capability with ADA-4A Weigh-Below Hook
- Models over 61,000g capacity can accommodate the ADA-6A Weigh-Below Hook
- Five-year warranty
- **Product Dimensions:** 13.5x15.1x24.5in (343x384x622mm), WxDxH.

OBX-512 with OBA-709

OHAUS EXPLORER® PRECISION HIGH-CAPACITY BALANCES

- Touchless sensors for hands-free operation of zero, tare, and calibration functions
- Parts counting, percent weighing, differential weighing, density determination, statistics, and more
- g, kg and lb selectable weighing units (16 units total)
- Full-color 5.7in (145mm) VGA graphic touchscreen display
- Detachable display with 5ft (1.5m) cable
- OBA-709 Display Column Kit is available as an accessory
- Cast metal base and IP54 rated enclosure for protection against spills, debris, and humidity
- 12.2x14.8in (310x376mm) stainless steel platform
- Ohaus SmarText™ 2.0 software with AutoCal™ for fast internal calibration
- USB and RS-232 interface
- Weigh-below hook included
- Operate on 100/120V or 220/240V, 50/60Hz electrical supplies or rechargeable battery kit, sold separately
- Two-year warranty
- **Product Dimensions:** 14.9x17.4x4.7in (378x442x119mm), WxDxH.

A&D GP Industrial High-Capacity Balances

Model	Capacity x Readability, g (lb)	Repeatability, g
AD-12KA	12,000x0.1 (26x0.0005)	0.1
AD-20KA	21,000x0.1 (46x0.0005)	0.1
AD-30KA	31,000x0.1 (68x0.0005)	0.1
AD-40KA	41,000x0.5 (90x0.002)	0.5
AD-60KA	61,000x1.0 (134x0.005)	0.7
AD-61KA	61,000x0.1 (134x0.005)	0.2
AD-101KA	101,000x1.0 (222x0.005)	1.0
AD-30KD	31,000x0.1 (68x0.0005)	0.1
AD-60KD	61,000x1.0 (134x0.005)	0.7
AD-61KD	61,000x0.1 (134x0.0005)	0.2
AD-101KD	101,000x1.0 (222x0.005)	1.0

Ohaus Explorer® Precision High-Capacity Balances

Model	Capacity x Readability, g (lb)	Repeatability, g
OBX-512	12,000x0.1 (26x0.0005)	0.1
OBX-524	24,000x0.1 (52x0.0005)	0.1
OBX-535	35,000x0.1 (77x0.0005)	0.1

Accessories

Display Column Kit, 18in high	OBA-709
Rechargeable Battery Kit	OBA-42
Impact Printer	OBA-44

Accessories

Weigh-Below Hook for 41,000g capacity and below	ADA-4A
Weigh-Below Hook for 61,000g capacity and above	ADA-6A



CP-401



OB-750



OB-772C

ADAM GBK BENCH SCALES

- Affordable, portable, high-capacity
- Simple, user-friendly operation
- kg, g, lb, oz and lb:oz selectable weighing units
- Large, backlit LCD with capacity tracker
- Tough, splash-proof ABS housing
- 11.8x15.7in (300x399mm) stainless steel platform
- RS-232 interface
- Overload protection
- Rechargeable battery pack for portable use
- Two-year warranty
- **Product Dimensions:** 11.8x20.5x26.8in (300x521x681mm), WxDxH

Adam GBK Bench Scales

Model	Capacity x Readability, kg (lb)	Repeatability, g
CP-401	8x0.1 (16x0.0002)	0.2
CP-403	16x0.5 (35x0.001)	1.0
CP-405	32x1 (70x0.002)	2.0
CP-407	60x2 (130x0.005)	4.0
CP-409	120x5 (260x0.01)	10.0

Accessories

RS-232 to PC cable	CPA-41
RS-232 to USB Interface Cable	CPA-43
Adam Data Collection Software	CPA-45

OHAUS DEFENDER® 5000 BENCH SCALES

- Fast display of weight within two seconds
- kg, g, lb, oz, lb:oz, metric tons, and short ton selectable weighing units
- Large LCD display with backlight viewable even in direct sunlight
- Powder-coated steel construction with ABS indicator housing and aluminum load cell
- Removable stainless steel weighing platform
- RS-232 interface with RS485, USB device, Ethernet, and Wi-Fi/Bluetooth connectivity available
- Included SD card storage of up to 50,000 items and 1,000 user profiles
- Optional lithium battery for cordless operation
- Add "C" suffix to model number for Column-Mounted display model (inquire for dimensions)
- One-year warranty

Ohaus Defender® 5000 Bench Scales

Model	Capacity x Readability kg (lb)	Repeatability, kg	Platform Size, in (mm)	Product Dimensions, WxDxH, in (mm)
OB-750	12.5x0.0005 (25x0.001)	0.001	12x12 (305x305)	12x23.1x4.6 (305x587x117)
OB-752	25x0.001 (50x0.002)	0.002	12x12 (305x305)	12x23.1x4.6 (305x588x117)
OB-754	50x0.002 (100x0.005)	0.004	18x18 (457x457)	18x28.9x4.6 (457x734x117)
OB-756	125x0.005 (250x0.01)	0.01	18x18 (457x457)	18x28.9x4.6 (457x734x117)
OB-758	250x0.01 (500x0.02)	0.02	24x24 (610x610)	24x34.6x5.1 (610x879x130)
OB-762	25x0.001 (50x0.002)	0.002	14x12 (356x305)	12x25.1x4.6 (305x638x117)
OB-764	50x0.002 (100x0.005)	0.004	14x12 (356x305)	12x25.1x4.6 (305x638x117)
OB-766	125x0.005 (250x0.01)	0.01	24x18 (610x457)	18x34.9x4.6 (457x887x117)
OB-770	250x0.01 (500x0.02)	0.02	24x18 (610x457)	18x34.9x5.1 (457x887x130)
OB-772C	500x0.02 (1,000x0.2)	0.04	31x23.6 (787x600)	31.5x37.9x47.4 (800x963x1,204)

Accessories

Rechargeable Battery Kit for Defender 5000 Scales	OBA-51
Impact Printer	OBA-44



OB-132



OB-134

OHAUS RANGER® 7000 COMPACT BENCH SCALES

- Standard and high-resolution models, built for demanding industrial applications
- Exclusive Sieving Analysis mode
- g, kg, lb, and oz selectable weighing units
- Weigh-below density, percent weighing, differential weighing, filling, and more
- 4.3in (109mm) TFT graphical LCD display
- Base and indicator housing are cast metal
- Stainless steel platform (size varies, see below)
- Models with “H” suffix have higher resolution and exclusive Auto-Cal function
- Operation is powered by exclusive Ohaus SmarText™ 2.0 software
- USB and RS-232 interfaces
- Weigh-below hook included
- Column-mounted display, rechargeable battery, and printer accessories
- One-year warranty

Ohaus Ranger® 7000 Compact Bench Scales				
Model	Capacity x Readability, g (lb)	Repeatability, g	Platform Size, in (mm)	Product Dimensions, WxDxH in (mm)
OB-132	3,000x0.05 (6x0.0001)	0.1	11x11 (279x279)	11x16.5x4.5 (279x419x114)
OB-133	6,000x0.1 (15x0.0002)	0.2	11x11 (279x279)	11x16.5x4.5 (279x419x114)
OB-134	15,000x0.2 (30x0.0005)	0.4	14.8x12.2 (376x310)	14.9x18.4x5 (378x467x127)
OB-135	35,000x0.5 (25x0.001)	1.0	14.8x12.2 (376x310)	14.9x18.4x5 (378x467x127)
OB-132H	3,000x0.01 (6x0.00002)	0.02	8.3x8.3 (211x211)	11x16.5x4.5 (279x419x114)
OB-133H	6,000x0.02 (15x0.00005)	0.04	8.3x8.3 (211x211)	11x16.5x4.5 (279x419x114)
OB-134H	15,000x0.1 (30x0.0002)	0.2	14.8x12.2 (376x310)	14.9x18.4x5 (378x467x127)
OB-135H	35,000x0.1 (75x0.0002)	0.2	14.8x12.2 (376x310)	14.9x18.4x5 (378x467x127)

Accessories

Rechargeable Battery Kit	OBA-42
Impact Printer	OBA-44
Column Kit for Display	OBA-46

technote

Ranger 7000 Sieving Analysis Mode

Ohaus Ranger 7000 Compact Bench Scales now feature an exclusive new operating mode for Sieve Analysis. This application quickly calculates distributions for particle size analysis, enhancing lab efficiency and minimizing recording errors.

After a set of sieves is set up in the Ranger 7000's library, operation in the Sieve Analysis Mode quickly weighs the contents of each sieve fraction and computes percent retained and passed, along with any weight lost during the process. The end result is displayed on the Ranger's bright QVGA display and can be sent to the OBA-44 printer for ticket printing or to a PC for integration into a data management system. The Ranger 7000 also computes Fineness Modulus and provides cumulative percent retained for each fraction size.

Fully customizable print templates include information like company name, address, phone number, website and contact email, as well as GMP/GLP data for date, time, user ID, project ID, Scale ID, and a unique Sample ID. The Ranger 7000 supports full capture of scale settings and data via the included USB port and can support a range of printers and bar code scanners.

```

Sample Tag#: 12345
DATA
Start Weight: 1271.9 g
Size      Measured Weight
25mm      169.9 g
12.5mm    715.9 g
6.3mm     246.9 g
Pan       138.2 g
-----
Weight Lost: 1.0 g
End Weight: 1270.9 g
ANALYSIS
Size      Retained      Passed
25mm     13.37%         86.63%
12.5mm   56.33%         30.30%
6.3mm    19.43%         10.87%
Pan      10.87%         0.00%
Size      Acc % retained
25mm     13.37%
12.5mm   69.70%
6.3mm    89.13%
Pan      ---
Fineness Modulus: 1.72
    
```

Sample print-out from OBA-44



CP-61



CP-61C



AD-32KDA

ADAM ECLIPSE® HIGH-CAPACITY BALANCES

- High-capacity, affordable precision
- g, kg, lb, oz weighing units (16 units total)
- Sealed, illuminated touch keypad has durable, smooth surface for easy wipe-down
- Vivid, backlit LCD display is easily visible in any lighting conditions
- Weigh-Below capability with CPA-15 Weigh-Below Hook
- Overload protection and capacity tracker
- External calibration for verification and adjustment with calibration masses
- RS-232 and USB interfaces
- Models with column-mounted or low-profile attached displays
- Large, 304 stainless steel platform, 15.7x11.8in (399x300mm)
- Rugged metal frame with level indicator and adjustable feet
- 18VDC AC adapter included. CE and CUL marked
- Add "C" suffix to model number for units with Column-Mounted Display
- **Product Dimensions:** 15.8x18.1x4in (401x460x102mm), WxDxH
- **Product Dimensions (column-mounted):** 15.8x19.7x23.6in (401x500x599mm), (WxDxH).

Adam Eclipse® High-Capacity Balances

Model	Capacity x Readability g (lb)	Repeatability, g
CP-61	12,000x0.1 (26x0.0005)	0.2
CP-62	16,000x0.1 (35x0.0005)	0.2
CP-63	22,000x0.1 (48x0.0005)	0.2
CP-64	32,000x0.1 (70x0.0005)	0.2

Accessories

Weigh-Below Hook

CPA-15

A&D GP SMART-RANGE INDUSTRIAL BALANCES

- Dual weighing ranges
- Standard range: high-capacity with normal readability
- Precision range: limited capacity with enhanced precision and readability
- g, kg, and lb selectable weighing units (12 units total)
- 25.7in swing arm positions display at any angle
- Easily readable vacuum fluorescent digital display
- NEMA4/IP65 washdown rated, all metal body
- 13.5x15.1in (343x384mm) stainless steel platform
- One-touch Automatic Internal Calibration
- Built-in Windows communication software
- Affordable alternative for multiple weighing applications
- RS-232 interface
- ADA-4A and ADA-6A Weigh-Below Hooks are available as accessories
- Five-year warranty
- **Product Dimensions:** 14x24.2x5.1in (356x615x130mm), WxDxH.

A&D GP Smart-Range Industrial Balances

Model	Standard Capacity and Readability, g (lb)	Precision Capacity and Readability, g (lb)	Repeatability, g Standard/Precision
AD-32KDA	31,000x1.0 (68x0.005)	6,100x0.1 (13x0.0005)	0.5/0.1
AD-102KDA	101,000x10 (222x0.05)	61,000x1.0 (134x0.005)	5.0/1.0

Accessories

Weigh-Below Hook for 41,000g Capacity and Below

ADA-4A

Weigh-Below Hook for 61,000g Capacity and Above

ADA-6A



AD-150PA



CP-20

A&D FG-K BENCH/PLATFORM SCALES

- Cost-effective, portable scale for lab or field use
- kg, lb, and oz selectable weighing units
- Platform-mounted LCD display, inquire for column-mounted models
- IP65 rated, all metal body and rock-solid frame construction
- 12x15in (305x381mm) stainless steel platform
- RS-232 communication with ADA-30A Serial Interface
- ADA-33A Carrying Handle is available as an accessory
- Powered by included AC adapter or four C batteries (not included)
- Two-year warranty
- **Product Dimensions:** 15x18.3x4.6in (381x465x117mm), WxDxH.

A&D FG-K Bench/Platform Scales		
Model	Capacity x Readability, kg (lb)	Repeatability, g
AD-60PA	30x0.002 (60x0.005)	5.0
AD-150PA	60x0.005 (150x0.01)	10.0
AD-300PA	150x0.01 (300x0.02)	20.0

Accessories

RS-232 Serial Interface	ADA-30A
Wall Mount Kit	ADA-32A
Carrying Handle	ADA-33A
17ft Extension Cable	ADA-34A

VIDEO TUTORIALS

Visit globalgilson.com to watch DIY videos for maintenance, repair, and calibration.

ADAM CRUISER BENCH SCALES

- Large capacities, choice of resolutions
- g, kg, lb, oz, and lb:oz selectable weighing units
- Preset Tare Function
- Large, backlit LCD with 0.6in (15mm) digits
- Tough, splash-proof ABS housing
- Sealed keypad
- 8.3x11.8in (211x300mm) stainless steel platform
- RS-232 interface
- Overload protection
- Adjustable feet and level indicator
- Weigh-below capable if purchased with factory-installed CPA-33 Weigh-Below Hook
- Powered by included AC adapter or internal 90-hour rechargeable battery
- **Product Dimensions:** 12.4x14x4.5 (315x356x114), WxDxH.

Adam Cruiser Bench Scales		
Model	Capacity x Readability, g (lb)	Repeatability, g
CP-20	4,000x0.1 (8x0.0002)	0.2
CP-21	8,000x0.2 (16x0.0005)	0.4
CP-22	8,000x0.1 (16x0.0002)	0.2
CP-23	8,000x0.05 (16x0.0001)	0.1
CP-24	16,000x0.5 (35x0.001)	1.0
CP-25	16,000x0.1 (35x0.0002)	0.2
CP-26	32,000x1.0 (70x0.002)	2.0
CP-27	32,000x0.2 (70x0.0005)	0.4
CP-28	48,000x2.0 (100x0.005)	4.0
CP-29	48,000x0.5 (100x0.001)	1.0

Accessories

Adam Cruiser Scale Case	CPA-11
Weigh-Below Hook	CPA-33



CP-46



CP-75 shown with HM-30 (Not Included)

ADAM CPW PLUS BENCH SCALES

- Portable, high-capacity with extra readability
- Simple, four-button operation for fast, affordable weighing operations
- kg, lb, oz, and lb:oz selectable weighing units
- Corded remote display with large, easy-to-read LCD display and backlight
- Wall mount bracket
- Tough, splash-proof housing
- 11.8x11.8in (300x300mm) low profile stainless steel platform
- RS-232 interface
- Powered by included AC adapter or six AA batteries (not included)
- Hold function allows continuous display weight readings
- One-year warranty
- **Product Dimensions:** 11.8x11.8x2in (300x300x51mm), WxDxH.

Adam CPW Plus Bench Scales		
Model	Capacity x Readability, kg (lb)	Repeatability, g
CP-7	6x0.002 (13x0.005)	2.0
CP-16	15x0.005 (33x0.01)	5.0
CP-46	35x0.01 (75x0.02)	10.0
CP-76	75x0.02 (165x0.05)	20.0
CP-151	150x0.05 (330x0.1)	50.0
CP-201	200x0.05 (440x0.1)	50.0

COMPACT FIELD SCALES

- Portable, affordable solution for field weighing of roil, concrete, and asphalt specimens
- kg, lb, oz, and lb:oz selectable weighing units
- Large, easy-to-read LCD display
- Wall mount bracket for display
- Large, 11.8x11.8in (300x300mm) stainless steel weighing platform
- RS-232 interface
- Aluminum carrying case with fitted foam interior
- Compliant with ASTM C29, C138 and AASHTO T 19 and T 121 for field unit weights and yield tests
- Hold function allows continuous display of weight readings
- Powered by included AC adapter or six AA batteries (not included)
- One-year warranty
- **Outside Case Dimensions:** 18.63x14.25x6in (473.2x361.95x152.4mm), WxDxH.
- **Product Dimensions:** 11.8x11.8x2in (300x300x51mm), WxDxH

Compact Field Scales		
Model	Capacity x Readability, kg (lb)	Repeatability, g
CP-6	6x0.002 (13x0.005)	2.0
CP-15	15x0.005 (33x0.01)	5.0
CP-35	35x0.01 (75x0.02)	10.0
CP-75	75x0.02 (165x0.05)	20.0
CP-150A	150x0.05 (330x0.1)	50.0
CP-200	200x0.05 (440x0.1)	50.0



OB-165

OHAUS DIGITAL FIELD TEST SCALE

- Portable, precision field weighing for concrete, asphalt, aggregate, and soil samples
- 165lb (75kg) capacity with 20g readability
- Three-second stabilization time
- Selectable weighing units of lb, oz, lb:oz, kg, and g
- Easy-to-read LCD display with backlight
- Selectable auto shutoff
- Large 11x12.4x1.8in (279.4x315x45.72mm) painted diamond plate steel platform
- RS-232 interface
- Aluminum carrying case with fitted foam interior for all components
- Meets ASTM C29, ASTM C138, AASHTO T 19, and AASHTO T 121 for field weights and yield test
- Flexible coiled cable (extendable up to 9ft.)
- Operates on included AC adapter or 70-hour internal rechargeable battery
- One-year warranty
- **Base Dimensions:** 11x12.4x1.77in (280x315x45mm), WxDxH.
- **Outside Case Dimensions:** 15x13.5x7in (381x343x178mm), WxDxH.

Ohaus Digital Field Test Scale		
Model	Capacity x Readability, kg (lb)	Repeatability, g
OB-165	75x0.02 (165x0.05)	2.0



AD-214



A&D NEWTON COMPACT BALANCES

- Affordable precision and portability
- Ten selectable weighting units
- LCD display with backlight and fast, one-second response time
- USB and RS-232 Interface accessories
- Models with 1,500g capacity or more are weigh-below capable if purchased with applicable Weigh-Below Hook
- Built-in specific gravity functions
- Operates with included AC adapter or four AA batteries (not included)
- ADA-35 Carrying Case for easy portability (excludes AD-123 and AD-303 models)
- ADA-36 Draft Shield included with AD-123 and AD-303
- Five-year warranty
- **Product Dimensions:** 7.5x8.3x3.3in (191x211x84mm), WxDxH.

A&D Newton Compact Balances			
Model	Capacity x Readability, g	Repeatability, g	Platform Size, in (mm)
AD-123	120x0.001	0.003	4.3 (110) dia.
AD-303	310x0.001	0.003	4.3 (110) dia.
AD-122	120x0.01	0.01	4.3 (110) dia.
AD-202	210x0.01	0.01	4.3 (110) dia.
AD-302	310x0.01	0.01	4.3 (110) dia.
AD-402	410x0.01	0.01	4.3 (110) dia.
AD-602	610x0.01	0.01	4.3 (110) dia.
AD-154	1,500x0.1	0.1	5.5x5 (127x140)
AD-214	2,100x0.1	0.1	5.5x5 (127x140)
AD-314	3,100x0.1	0.1	5.5x5 (127x140)
AD-414	4,100x0.1	0.1	5.5x5 (127x140)
AD-614	6,100x0.1	0.1	5.5x5 (127x140)

Accessories


Weigh-Below Hook for AD-154, and AD-214	ADA-20
Weigh-Below Hook for AD-314, AD-414, and AD-614	ADA-22
Carrying Case	ADA-35
USB Interface	ADA-202
RS-232C Interface	ADA-203
Draft Shield for Newton Compact Balances	
AC Adapter	ADA-36 ADA-201



OBD-223



OBD-822

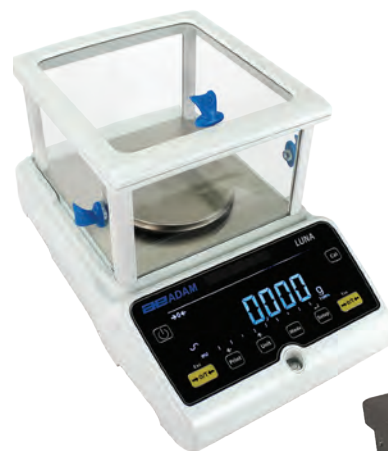

CP-41



CP-91

OHAUS ADVENTURER PRECISION BALANCES

- High-resolution balances for laboratory, industrial, and educational applications
- g, kg, and lb selectable weighing units (16 units total)
- Adventurer series is designed for stability, accuracy, and fast response time
- 4.3in (109mm) full color LCD touchscreen makes application control easy, even with laboratory gloves on
- Dual USB ports
- Weigh-below hook, protective cover, integral security bracket, and stability indicator are included
- OBD-223 model features a draftshield with wide-entry, glass panel doors
- Sealed front panel, molded spill ring, large stainless steel platforms, and leveling feet for quick setup
- Operates on included AC adapter or 70-hour internal rechargeable battery
- Inquire for models conforming to National Type Evaluation Program (NTEP) Standards and units with internal calibration
- Two-year warranty
- **Product Dimensions:** 9.1x13.9x3.9in (231x353x99mm), WxDxH. OBD-223 with draftshield has 9.5in (241mm) height

Ohaus Adventurer Precision Balances

Model	Capacity x Readability, g	Repeatability, g	Platform size, in (mm)
OBD-223	220x0.001	0.001	5.1 (130) dia
OBD-822	820x0.01	0.01	6.9x7.7 (175x196)
OBD-152	1,520x0.01	0.01	6.9x7.7 (175x196)
OBD-421	4,200x0.01	0.01	6.9x7.7 (175x196)
OBD-422	4,200x0.1	0.1	6.9x7.7 (175x196)
OBD-821	8,200x0.1	0.1	6.9x7.7 (175x196)

ADAM PRECISION BALANCES

- Multilingual display capability
- CP-40 to CP-43 models: 13 selectable weighing units
- CP-45 to CP-48 models: 16 selectable weighing units
- CP-50 and CP-51 models: 14 selectable weighing units
- CP-91 to CP-93 models: 10 selectable weighing units
- Large display for clear visibility
- Stainless steel weighing platform
- USB and RS-232 interfaces (CP-50: RS-232 only)
- External calibration for verification and adjustment with weights
- Level indicator and adjustable feet ensures correct setup
- Three-year warranty
- **Product Dimensions:**
 CP-40 to CP-43: 8.8x14.7x8.6in (224x373x218mm), WxDxH.
 CP-45 to CP-51: 8.8x14.7x3.7in (224x373x94mm), WxDxH.
 CP-91 to CP-93: 8.7x12.2x6.6in (221x310x168mm), WxDxH.

Adam Precision Balances

Model	Capacity x Readability, g	Repeatability, g	Platform Size, in (mm)
CP-40	220x0.001	0.002	4.7 (119) dia.
CP-41	420x0.001	0.002	4.7 (119) dia.
CP-42	620x0.001	0.002	4.7 (119) dia.
CP-43	820x0.001	0.002	4.7 (119) dia.
CP-45	2,600x0.01	0.02	7.3 (185) dia.
CP-47	3,600x0.01	0.02	7.3 (185) dia.
CP-48	4,600x0.01	0.02	7.3 (185) dia.
CP-50	6,200x0.01	0.02	7.3x7.3 (185x185)
CP-51	8,200x0.01	0.02	7.3x7.3 (185x185)
CP-91	12,000x0.1	0.2	15.7x11.8 (399x300)
CP-92	16,000x0.1	0.2	15.7x11.8 (399x300)
CP-93	22,000x0.1	0.2	15.7x11.8 (399x300)

Accessories

Weigh-Below Hook
Adam Data Collection Software

CPA-15
CPA-45



OBP-162



CP-310

OHAUS PIONEER PRECISION BALANCES

- Economical high-resolution balances for laboratory, industrial, and educational applications
- Selectable weighing units include g, kg, oz, and lb (18 units total)
- Pioneer series is designed for accuracy, durability, economy, and simple operation
- Backlit Liquid Crystal Display (LCD) has second line of text for guidance
- RS-232 and USB interfaces
- Durable construction with cast-metal lower housing, metal sub-pan, and stainless steel weighing pan
- Integrated weigh-below hook, protective cover, integral security bracket, and stability indicator are included
- Leveling feet for fast set up
- Large, 7.09in (180mm) platform diameter
- Models operate on 100-240V, 50/60Hz power supply with the included AC Adapter
- Add "B" suffix to model number for units with internal calibration (calibrates and adjusts with the touch of a button)
- Two-year warranty
- **Product Dimensions:** 8.2x12.6x3.9in (208x320x99mm), WxDxH.

Ohaus Pioneer Precision Balances

Model	Capacity x Readability, g	Repeatability, g
OBP-162	1,600x0.01	0.01
OBP-222	2,200x0.01	0.01
OBP-322	3,200x0.01	0.01
OBP-422	4,200x0.01	0.01
OBP-221	2,200x0.1	0.1
OBP-421	4,200x0.1	0.1

ADAM HIGHLAND PORTABLE PRECISION BALANCES

- Rugged, lightweight, and portable
- g and lb selectable weighing units (15 units total)
- LCD display with backlight
- 4.7in (119mm) diameter stainless steel platform
- HandiCal™ internal calibration with built-in mass
- ShockProtect™ overload protection
- USB and RS-232 interfaces
- Weigh-below hook included
- Internal rechargeable battery with AC adapter
- Removable draft shield standard on all models
- Two-year warranty
- **Product Dimensions:** 6.7x9.6x3.1in (170x244x79mm), WxDxH.

Adam Highland Portable Precision Balances

Model	Capacity x Readability, g	Repeatability, g
CP-300	120x0.001	0.002
CP-301	150x0.005	0.05
CP-303	300x0.01	0.01
CP-306	600x0.02	0.02
CP-306H	600x0.01	0.01
CP-310	1,000x0.01	0.01
CP-315	1,500x0.05	0.05
CP-330	3,000x0.1	0.1





Calibration Weights



Calibration Sets



NIST Weights

CALIBRATION WEIGHTS FOR BALANCES

Sophisticated testing and frequent auditing of laboratory equipment has made it increasingly necessary for laboratories to calibrate their own balances. Calibration Weights check span and linearity and calibrate electronic balances. The commonly used Span Calibration method uses one-point calibration with a single mass approximately equal to the capacity of the balance. Some balances use the Linearity Calibration method which allows the user to select multiple mass settings, normally defined as zero, center (half span), and full span of the balances capacity. This method minimizes deviation throughout the balance's weighing range.

Gilson offers Calibration Weights in ASTM Classes 1 and 4, NIST Class F, and Ultra Class. Ultra Class weights boast weight tolerances 40–50% tighter than ASTM Class 1 and equal to or exceeding OIML Class E2. Ultra Class and ASTM Class 1 weights are highly polished stainless steel. ASTM Class 4 weights are satin-finished stainless steel. Recessed grip handles are part of the 10kg and 20kg weights for easier handling and stacking. Individual weights from 10 to 4,000g include a glove and protective, foam-lined plastic case. Cases for 10kg and 20kg weights are high-impact plastic, reinforced with metal edges.

Precision Weights Sets are available in Ultra Class, ASTM Class 1, and ASTM Class 4 with ranges of 1mg–100g and 1–100g. Weights are supplied in 5-2-2-1 series as ASTM E617 specifies.

NIST Class F Calibration Weights are available for higher capacity balances and scales. Fabricated of cast iron with integral grip handles.

Traceable or NVLAP Certificates are available for all weights and sets. Traceable Certificates document traceability to NIST and compliance with ASTM or OIML specifications. They include nominal value and correction, date of calibration, accuracy class, customer name, and purchase order number. NVLAP Weight Calibration Certificates should be requested by users who must provide certification to ISO, FDA, ANSI, or other requirements. Report format and contents comply with NVLAP requirements. Order weights or sets with these certifications, by adding "T" for Traceable certificate or "W" for NVLAP Certificate to the catalog number.

helpfulhint

- Ultra Class:** For analytical and sensitive balances and applications that demand superior accuracy.
- ASTM Class 1:** For analytical balances and applications requiring first-order accuracy.
- ASTM Class 4:** For most balances less sensitive than 0.01g and applications having average accuracy requirements.
- NIST Class F:** For higher capacity, less sensitive balances and scales.

Calibration Weights for Balances

Individual Weights				
Weight	Ultra Class	ASTM Class 1	ASTM Class 4	NIST Class F
10g	OBA-201	OBA-301	OBA-401	—
20g	OBA-202	OBA-302	OBA-402	—
30g	OBA-203	OBA-303	OBA-403	—
50g	OBA-204	OBA-304	OBA-404	—
100g	OBA-205	OBA-305	OBA-405	—
200g	OBA-206	OBA-306	OBA-406	—
300g	OBA-207	OBA-307	OBA-407	—
400g	OBA-208	OBA-308	OBA-408	—
500g	OBA-209	OBA-309	OBA-409	—
1,000g	OBA-210	OBA-310	OBA-410	—
2,000g	OBA-211	OBA-311	OBA-411	—
3,000g	OBA-212	OBA-312	OBA-412	—
4,000g	OBA-213	OBA-313	OBA-413	—
10kg	OBA-214	OBA-314	OBA-414	OBA-282
20kg	OBA-215	OBA-315	OBA-415	OBA-284
25kg	—	—	—	OBA-286
50kg	—	—	—	OBA-288
100kg	—	—	—	OBA-289
250kg	—	—	—	OBA-291
25lb	—	—	—	OBA-278
50lb	—	—	—	OBA-280
Sets				
1mg–100g	OBA-216	OBA-316	OBA-416	—
1g–100g	OBA-217	OBA-317	OBA-417	—

Accessories

Plastic Case for ASTM and Ultra 10kg Weights
Plastic Case for ASTM and Ultra 20kg Weights

OBA-10
OBA-20



CP-52



CS-10W



CS-10S

ADAM SHS CRANE SCALES

- Ideal for rapid weight determinations of large, difficult-to-position items
- lb and kg selectable weighing units
- Cast metal frame and 360° rotary safety hook
- Overload rated to 150% of total capacity with full-range taring
- Included remote control promotes safety when selecting units, hold functions, and zeroing
- Large, red LED display with easily readable 0.6in (15mm) digits
- Rechargeable lithium batteries last up to 20 hours; or use AA batteries
- 100–240V, 50/60Hz AC Adapter
- One-year warranty
- **Product Dimensions:** 5.8x2.6x12.6in (147x66x320mm), WxDxH

Adam SHS Crane Scales		
Model	Capacity x Readability, lb (kg)	Repeatability, lb (kg)
CP-52	100x0.02 (50x0.01)	0.02 (0.01)
CP-54	300x0.05 (150x0.02)	0.05 (0.02)
CP-56	600x0.1 (300x0.05)	0.1 (0.05)

PULP DENSITY/SPECIFIC GRAVITY SCALES

- Direct readings of specific gravity, percent solids, and weight in kilograms
- Simple, direct determination of pulp densities and specific gravities of pulps, liquids, and dry solids
- Calculation errors are eliminated
- Wide range for specific gravities from 1.2 to 7.8 using one of twelve included interchangeable analog dial faces
- Sturdy painted steel scales have a 10in (254mm) circular dial with acrylic lens
- A 1,000mL stainless steel or plastic container with overflow holes are available separately or included with the Marcy™ Specific Gravity Scale
- CS-10W Scale is sold without a container
- CS-10 Scale is supplied with the clear plastic container with slotted overflow holes
- CS-10S Scale is supplied with the stainless steel container with round overflow holes
- **Product Dimensions:** 17.5x12x3in (445x305x76mm), WxDxH.

Pulp Density/Specific Gravity Scales

Marcy™ Pulp Density/Specific Gravity Scale, without Container	CS-10W
Marcy™ Pulp Density/Specific Gravity Scale, with Clear Container	CS-10
Marcy™ Pulp Density/Specific Gravity Scale, with Stainless Steel Container	CS-10S

Accessories

1,000mL Plastic Container	CSA-25
1,000mL Stainless Steel Container	CSA-26
Set of 12 Dial Faces for CS-10W, CS-10, or CS-10S	CSA-30



SSA-802 with OBA-10783A and TSA-170



OBA-10783A



OBA-1101



OBA-171



OBA-170



TSA-168



TSA-170



TSA-179



TSA-173



TSA-172



TSA-174



TSA-171

WEIGHING AND HANDLING SCOOPS

Select from a range of sizes and capacities of scoops with pouring spouts for weighing and handling of samples. Types of construction include stainless steel (SS), aluminum (AL), polypropylene (PP). For larger samples, see TSA-162, TSA-163 and HMA-68, described elsewhere.

Weighing/Handling Scoops			
Model	Description	Size, LxWxH, in	Approx. Tare, g
OBA-10783A	SS Flat Bottom	11.9x7.38x1.7	190
OBA-1101	PP Footed	12x6x2.8	125
OBA-171 ¹	AL Flat Bottom with Tab	3x2.3x0.8	9
OBA-170 ¹	AL Flat Bottom with Tab	2x1.5x0.4	4

¹Includes counterweight.

Brushes

Description	Model
Small Fine Sieve Cleaning Brush has soft bristles tapered for use with No. 50 and finer mesh sieves. Mounted in round 0.75in (19mm) ferrule. Overall length is 5in (127mm) with wood handle.	TSA-168
Fine Sieve Cleaning Brush is ideal for cleaning No.16 and finer sieves. Soft bristles, nicked steel ferrule, lacquered wood handle, 1.25x5.75in (32x146mm), dia.xL.	TSA-170
Nylon Sieve Cleaning Brush is a hardwood block brush with nylon bristles, optimal for cleaning No. 120 and finer mesh sieves. 1.875x0.875in (48x22mm), dia.xThick with 3.75in (95mm) straight wood handle. Overall brush length is 5.88in (149mm).	TSA-179
Wire Loop Brush is a 1.25in (32mm) wide fan-type brush with 1.625in (41mm) long metal bristles and a wire loop handle. The 4.75in (121mm) long brush is designed for use on No. 16 and coarser wire cloth.	TSA-173
Coarse Sieve Cleaning Brush has an 8.5in (216mm) curved plastic handle with a 1.5x1.75in (38x44mm) area of slanted brass wire bristles—perfect for No.30 and coarser wire cloth in round sieves.	TSA-172
Coarse Screen Tray Brush is recommended for No.30 and coarser wire cloth in screen trays. The 13in (330mm) curved wooden handle has 5.5x0.75in (140x19mm) of fine (0.005) brass wire bristles, which slant toward the tip for cleaning corners of screen trays. Also useful for cleaning sample molds.	TSA-171
Table Brush has a 9x3in (229x76mm) area of horsehair bristles. This 14in (356mm) long brush comes with a plastic or wood handle, depending on availability. A general purpose brush suitable for clean up of lab equipment.	TSA-174
Scrub Brushes are available in 20in (508mm) long-handled, or 8in (203mm) short-handled versions and stand up to heavy everyday use in the field. Both feature durable, solid plastic handles and sturdy, acid-resistant synthetic fibers.	
Short Scrub Brush, 8in (203mm)	TSA-232
Long Scrub Brush, 20in (508mm)	TSA-233



TSA-233





LC-33



LC-37 shown with LCA-57



VIDEO ONLINE

BICO JAW CRUSHERS

Sturdy Bico Crushers are designed for size reduction of hard rocks, ores, and minerals. Capacity is exceptional with minimum power consumption. Time proven designs are effective and have long service life, all parts are accessible for cleaning and maintenance.

Electric motor starting switch is included, but must be installed on-site. Single phase motors can be configured for 110V or 220V operation. Three phase motors can be set to operate on 220V or 440V. Please specify voltage, phase, and frequency at time of order.

LC-33 and LC-34 Chipmunk Jaw Crushers have reversible jaw plates to extend life. Stationary jaw lifts easily from frame for cleaning interior parts and both jaws are easily replaced when worn. Construction is wear-resistant alloy steel with sealed bronze bearings and alloy steel shafts. Semi-enclosed motor with mounting blocks drives four V-belt drive. Sample Pan, Feed Hopper, and Guards for belts and flywheel are included. Both the LC-33 and LC-34 Crushers have 3x6in (76x152mm) jaw size with 3x2.25in (76x57mm) opening. A hand-wheel on the side adjusts wedge blocks to set jaw discharge to 1/16–3/8in (1.6–9.5mm) particle size.

LC-35 and LC-36 Chipmunk Jaw Crushers have 4x9in (102x229mm) jaw size with 4x2.375in (102x60mm) opening and adjust for 1/16–5/8in (1.6–15.9mm) final particle size.

LC-37 Badger Jaw Crusher has the high crushing capacity needed for labs and pilot plants. This heavy-duty unit has a jaw size of 5x7in (127x178mm) and a unique vertical/horizontal jaw action to aggressively and efficiently reduce 4x6in (102x152mm) topsize rock to 1/8–3/4in (3–19mm) at a rate of 1,300lb/hour (590kg/hour). Guards for belts, a flywheel, and a feed hopper are included. Dust Collector Base with Pan is available as LCA-57.

LCA-91 Dust Enclosure Bench can accommodate either LC-33, LC-34, LC-35, or LC-36 Jaw Crusher. The 50x36x35in (1,270x914x889mm), WxDxH painted sheet metal enclosure has a lighted interior

and a hinged cover with view panel. The removable-grate work surface is made up of 0.75in (19mm) bars. A high-capacity blower with 500–700FPM (152–213m/min) air velocity moves dust to a collector drawer with replaceable filter cartridge. An exhaust silencer controls noise. Pulverizer plates may be changed without moving the machine. Shipped fully assembled and requires no installation or special duct work. Operates on 220V, 60Hz. Specify 440V, 60Hz operation by adding a “V” suffix. **Product Dimensions:** 57x37x60in (1,448x940x1,524mm), WxDxH.

Bico Jaw Crushers

Model	Description	Max Feed Size, in	Capacity, ¹ lb (kg)/hour	Motor HP	Electrical Supply	Dimensions, WxDxH, in (cm)
LC-33	Chipmunk Jaw Crusher	2.2x3	400 (182)	2	110V, 50/60Hz, 1ph	25x19x30 (64x48x76)
LC-33A	Chipmunk Jaw Crusher	2.2x3	400 (182)	2	220V, 50/60Hz, 1ph	25x19x30 (64x48x76)
LC-34	Chipmunk Jaw Crusher	2.2x3	400 (182)	2	220V, 50/60Hz, 3ph	25x19x30 (64x48x76)
LC-34A	Chipmunk Jaw Crusher	2.2x3	400 (182)	2	440V, 50/60Hz, 3ph	25x19x30 (64x48x76)
LC-35	Chipmunk Jaw Crusher	2.4x4	800 (363)	3	110V, 50/60Hz, 1ph	28x19x32 (71x48x81)
LC-35A	Chipmunk Jaw Crusher	2.4x4	800 (363)	3	220V, 50/60Hz, 1ph	28x19x32 (71x48x81)
LC-36	Chipmunk Jaw Crusher	2.4x4	800 (363)	3	220V, 50/60Hz, 3ph	28x19x32 (71x48x81)
LC-36A	Chipmunk Jaw Crusher	2.4x4	800 (363)	3	440V, 50/60Hz, 3ph	28x19x32 (71x48x81)
LC-37	Badger Jaw Crusher	4x6	1,300 (590)	5	220V, 50/60Hz, 3ph	32x24x20 (81x61x51)
LC-37A	Badger Jaw Crusher	4x6	1,300 (590)	5	440V, 50/60Hz, 3ph	32x24x20 (81x61x51)

¹Capacity is for reduction of 7 Mohs hardness quartz to 1/4in for crusher.


Accessories

Dust Collector Base for LC-37	LCA-57
Dust Enclosure Bench, 220V, 60Hz, 3ph	LCA-91
Dust Enclosure Bench, 440V, 60Hz, 3ph	LCA-91V
Replacement Filter for LCA-91	LCA-92






LC-27

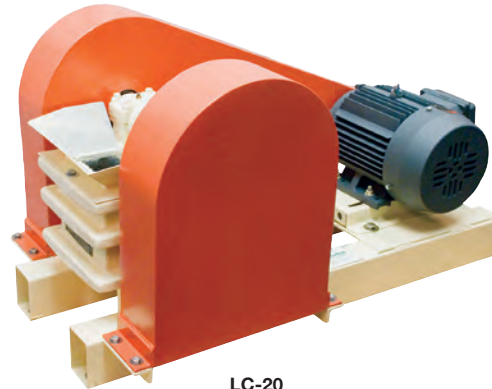

LC-20

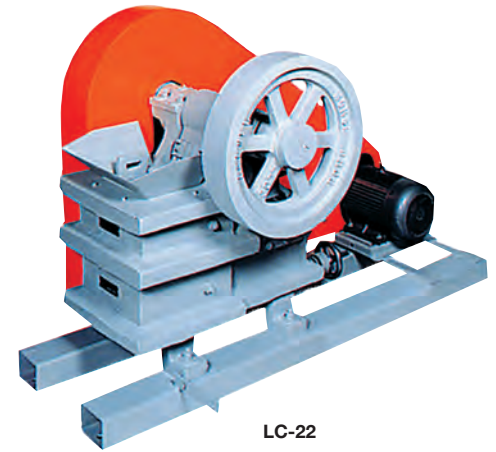

LC-22

LABORATORY JAW CRUSHERS

Laboratory Jaw Crushers are designed for economic size reduction of typical aggregates and common minerals with an output scaled for laboratory testing. Adjustable jaw openings allow close control of output size. High operating rpm promotes efficient size reduction with lower dust generation compared to other crushers and pulverizers. Crushers are mounted on sturdy welded-steel base frames with CSA-rated electric motors and are fully equipped with pulleys, feed hoppers, and safety guards. Replacement Jaw Plate sets are available.

LC-27 2.25x3in Laboratory Jaw Crusher reduces 2in (51mm) aggregate, ore, and rock materials to a product with 80% passing a No.14 (1.4mm) sieve. Jaw opening easily adjusts down to 1mm minimum to closely control output size. Maximum throughput is approximately 50lb (22kg) per hour at 525rpm. Rate of operation is regulated by the variable speed controller. Jaw plates are high-impact, wear-resistant AR450 steel. 1hp electric motor. Electrical cord and plug are included for operation on 115V, 50/60Hz electrical supply. LC-27F operates on 220V, 50/60Hz with a slight reduction in speed.

LC-28 3x4in Laboratory Jaw Crusher reduces 3in feed aggregate and rock material to product with 50% passing a 0.25in (6.4mm) sieve. Jaw opening quickly adjusts from 0.375 to 1.5in (9.5 to 38mm) Operation of the overhead eccentric is regulated by the variable speed controller up to 375rpm and quickly crushes material for final testing or to prepare for secondary crushing. Throughput is up to 500lb (227kg) per hour for most materials. High-manganese steel jaw plates can be rotated when worn for extended service life. 3hp electric motor is 220V and operates on either 50 or 60Hz electrical supplies.

Laboratory Jaw Crushers					
Model	Feed Opening, in (mm)	Electrical, Volts, Hertz	Capacity, lb (kg)/hr	Dimensions, WxDxH, in (mm)	Replacement Jaw Sets
LC-27	2.25x3 (57x76)	115, 50/60	25 (11)	13x22x20 (330x559x508)	LCA-192
LC-27F	2.25x3 (57x76)	220, 50/60	25 (11)	13x22x20 (330x559x508)	LCA-192
LC-28	3x4 (76x102)	220, 50/60	220 (100)	19x32x31 (483x813x787)	LCA-193


MORSE JAW CRUSHERS

Heavy-duty Morse Jaw Crushers are built for high throughput and larger feed size. These high horsepower units have heavy cast frames and flywheels. Guards for belts and flywheels are included. Eccentric overhead action and corrugated jaw plates work together to force-feed material and avoid back-flow or "pop out" of particles. Particle size capable to minus 1/4in (6.4mm) is set via handwheel adjustment of a single toggle. Jaw plates are reversible for extended life. Crushing rates vary with hardness and size of feed.


Jaw and cheek plates are heat treated, abrasion-resistant steel alloy. Heavy-duty bronze bearing inserts may be replaced easily in the field. Cast iron alloy frame, motor guard, and feed hopper are mounted on a tubular steel frame.

Select from models with 4x6in (102x152mm), 5x6in (127x152mm), or 8x8in (203x203mm), WxD jaw openings, all equipped with TEFC, three phase motor. Voltage and Hertz of supply must be specified with order.

Morse Jaw Crushers				
Model	Jaw Size DxW, in (mm)	Motor	Capacity, lb (kg)/hour	Dimensions, WxDxH, in (cm)
LC-20	4x6 (102x152)	3hp, 3ph 230/460V, 60Hz	400-1,200 (182-545)	42x24x24 (107x61x61)
LC-20F	4x6 (102x152)	3hp, 3ph 220/380/440V, 50Hz	400-1,200 (182-545)	42x24x24 (107x61x61)
LC-22	5x6 (127x152)	5hp, 3ph 230/460V, 60Hz	1,000-2,500 (454-1,134)	54x30x38 (137x76x97)
LC-22F	5x6 (127x152)	5hp, 3ph 220/380/440V, 50Hz	1,000-2,500 (454-1,134)	54x30x38 (137x76x97)
LC-24	8x8 (203x203)	10hp, 3ph 230/460V, 60Hz	1,500-4,000 (682-1,818)	73x39x38 (185x99x97)
LC-24F	8x8 (203x203)	10hp, 3ph 220/380/440V, 50Hz	1,500-4,000 (682-1,818)	73x39x38 (185x99x97)

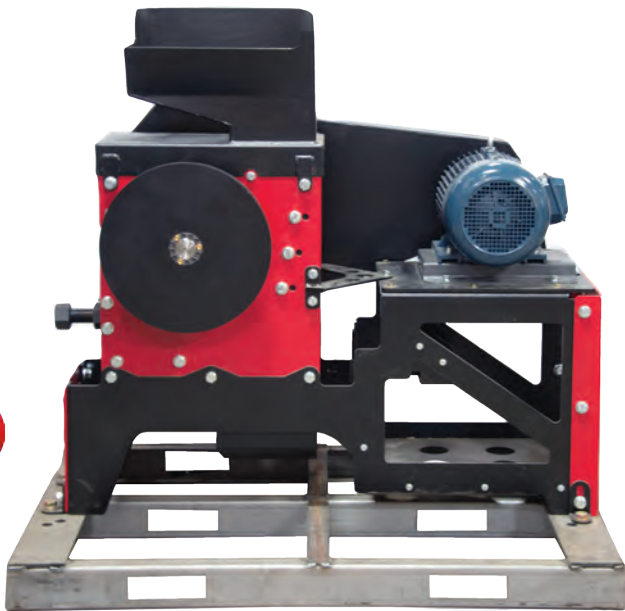

LC-44

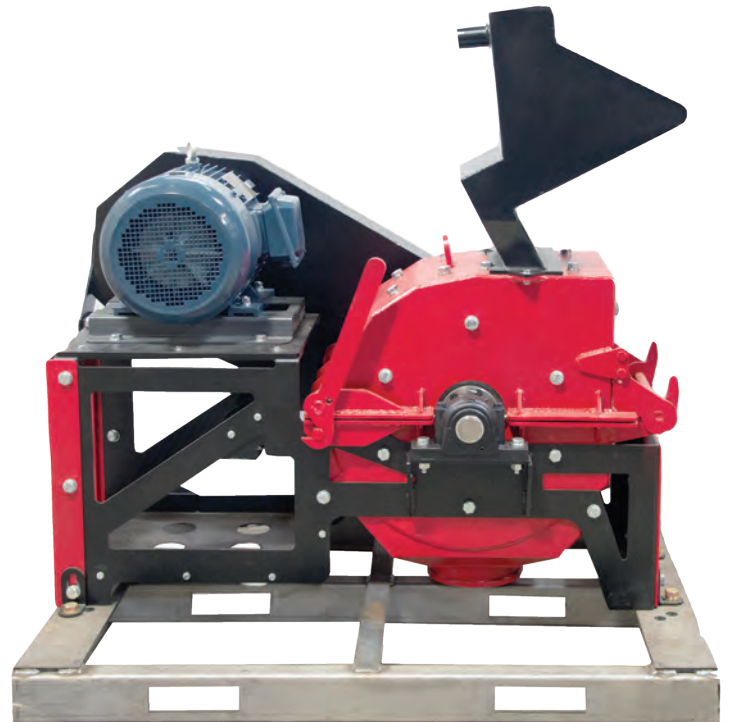

LC-47

PORTABLE CRUSHERS

Rugged and versatile crushers excel at processing bulk aggregate, minerals, and ore materials for high-volume lab testing, pilot-plant, and even small production operations. Outfitted with your choice of gasoline, diesel, or electric power, their tough construction allows easy adaptation from the most remote placements to permanent installations. Both crusher models feature robust design and use heavy welded-steel plate and high-quality materials throughout for uninterrupted reliability in the harshest environments. Top of the line bearings, pillow blocks, and other components mean less downtime and higher production. Crushers are pre-mounted on sturdy welded-steel frames. Inquire for available mounting options on single or dual-axle trailers for truly mobile operation.

Jaw Crusher and Hammermill models can be used independently, but also work efficiently together as primary and secondary crushers for reduction of bulk materials from 8in (203mm) to finer than No.35 (0.5mm) sizes. Each crusher arrives fully assembled and ready for immediate use. Models with electric motors are supplied ready for wiring to a number of common three-phase voltage configurations from 208 to 460V.

LC-44 Jaw Crusher has a maximum feed size of 8in (203mm) and final output size can be regulated from 0.25 to 3in (6 to 76mm) through clearance adjustment of the jaw plates. Throughput is approximately 1–2 tons (900–1,800kg) per hour. Jaw sizes are 10x6in (254x152mm), WxD and are made from 0.75in (19mm) manganese alloy. Available power options are 20hp gasoline or 18hp diesel engines, or a 10hp electric motor. The main shaft is 2.4in (61mm) at the cam shaft and 2in (51mm) at the drive shaft. **Product Dimensions:** 56x32x48in (1,422x813x1,219mm), WxDxH.

LC-47 Hammermill Crusher has a maximum feed size of 2in (51mm) and final output sizes as fine as No.80 (0.2mm) controlled by standard screen inserts of No.35 (0.5mm) or No.20 (1.0mm) openings. Production is higher and hammer life is enhanced by feeding 1in (25mm) material. Approximately 1–2 tons (900–1,800kg) of throughput per hour. The ten 1.5in (38mm) wide hammers are made from wear-resistant high-chrome steel for long service life. One standard screen is included, specify at time of order. Custom Screens are also available with any opening size, inquire for available sizes. Screens are laser-cut from long-lasting 0.25in (6mm) material. Proprietary nonslip disc system allows complete change-out of the hammers in less than ten minutes. Power is supplied by 30hp gasoline or 24hp diesel engines, or a 15hp electric motor. The drive shaft is 2in (51mm) diameter. **Product Dimensions:** 56x33x53in (1,422x838x1,346mm), WxDxH.

Portable Crushers

Jaw Crusher, 20hp Gasoline Engine	LC-44G
Jaw Crusher, 18hp Diesel Engine	LC-44D
Jaw Crusher, 10hp Electric Motor	LC-44E
Hammermill Crusher, 30hp Gasoline Engine	LC-47G
Hammermill Crusher, 24hp Diesel Engine	LC-47D
Hammermill Crusher, 15hp Electric Motor	LC-47E

Accessories

Cast Manganese/Chrome Steel Jaw Plates for LC-44	LCA-415
0.125in (3.18mm) Screen for LC-47	LCA-416
No.10 (2.0mm) Screen for LC-47	LCA-417
No.20 (1.0mm) Screen for LC-47	LCA-418
0.75mm Screen for LC-47	LCA-419
No.35 (0.5mm) Screen for LC-47	LCA-422




MONTHLY BLOG

Stay informed and learn from the experts. Subscribe to our monthly blog at globalgilson.com.



LC-53

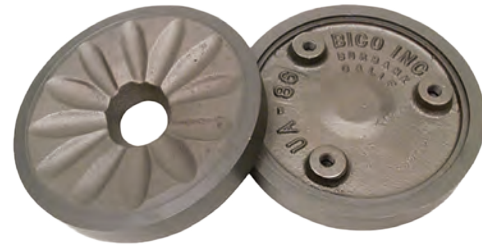

LCA-9



VIDEO ONLINE



LC-53 Alternate View



LC-53 shown with LCA-91

BICO PULVERIZER

The Bico Pulverizer features efficient operation for minimum power consumption and long service life. This time proven design is compact and effective for processing hard rock, ores, and minerals. The grinding chamber is easily accessible for cleaning, maintenance, and complete sample recovery.

The LC-53 Pulverizer grinds 1/4in (6.4mm) feed material to approximately 75µm (No.200 sieve size) in a single pass, depending on material. Throughput is about 60lb (27kg) per hour. A threaded knob with locking lever adjusts the gap between the 8in (203mm) diameter grinding plates to control particle size output. Stationary and revolving grinding plates are easily replaced. Grinding Plate Sets are available in a variety of materials and hardnesses to suit individual applications. One LCA-6 Iron Alloy Grinding Plate Set is included. LCA-5 Semi-Steel set is recommended for most applications and has up to three times the wear resistance of LCA-6. Semi-steel is a compound of iron carbide in a Martensite matrix, with a Rockwell C-Scale hardness of 55–62. Other heavy-duty or special-use plate sets are available for specialized applications. Contact a Gilson Product Specialist for advice on selecting the best grinding plate options for your application.

Power from the 2hp motor rotates the shaft at 900–1,000rpm through a double V-belt drive. Three phase 50 or 60Hz motors can be set to operate on 220V or 440V. A motor starting switch is included and must be installed separately.

Inquire for additional voltages. Totally enclosed motor has thermal overload protection. Safety guards and catch pan are included. Lubrication to shaft bearings is supplied by manually adjusted grease cups. **Product Dimensions:** 37x22x23 (940x559x584mm), WxDxH.

The LCA-91 Dust Enclosure Bench has a lighted interior, removable bottom grate, and a hinged cover with a viewing panel. High capacity blower moves dust to a collection drawer with a replaceable filter cartridge and exhaust silencer. **Product Dimensions:** 67x37x67.5in (1,702x940x1,715mm), WxDxH.

Bico Pulverizer	
Bico Pulverizer, 220/240V, 50/60Hz, 3ph	LC-53
Accessories	
Semi-Steel Grinding Plate Set	LCA-5
Iron Alloy Grinding Plate Set	LCA-6
Hardened Iron Alloy Grinding Plate Set	LCA-9
Chrome Steel Grinding Plate Set	LCA-10
Ceramic Grinding Plate Set	LCA-11
Dust Enclosure Bench, 220V, 60Hz	LCA-91
Replacement Filter for LCA-91	LCA-92



LC-115



LCA-242

VIBRATING CUP PULVERIZER

The Vibrating Cup Pulverizer, also known as a puck mill or shatterbox, efficiently uses pressure, impact, and friction to grind rock, ore, minerals, soil, and other materials to analytical size. It has many useful applications in the laboratory and small-scale pilot plants. An 8in (203mm) diameter bowl containing grinding rings and a puck is driven by a rotating eccentric and swings contents on a horizontal plane at a precise speed and distance for maximum grinding efficiency. The grinding bowl is locked down and held securely in place by a cam lever system and a protective cover encloses the grinding chamber for safe and quiet operation. Wet or dry samples of 0.5in (12.7mm) maximum feed size are rapidly reduced to a final particle size of 150–38µm (No.100–No.400 U.S. Standard sieve size), depending on material.

The included chrome-steel alloy Grinding Set has a sample volume of 250mL and consists of an 8in (203mm) bowl with cover, two rings, and a puck. For more efficient processing, additional Grinding Sets can be ordered as LCA-240. LCA-242 Tungsten Carbide Grinding Set with 100mL capacity is also available. Contact a Gilson Product Specialist for expert advice on applications for this unit. The heavy-duty 1hp motor includes a starting switch and drives the eccentric at a speed of 900rpm (750rpm at 50Hz). The control panel is set at the proper angle and height for best visibility and ease of operation. A 0–100 minute digital timer resets itself automatically after each test for maximum repeatability. An emergency stop button is provided. Sturdy painted-steel insulated cabinet reduces noise. The motor operates on 208/220/400V, 50/60Hz and 3 phase power supplies. Single phase available as well. **Product Dimensions:** 24x24x43in (610x610x1,092mm), WxDxH.

Vibrating Cup Pulverizer

Vibrating Cup Pulverizer, 208/220/400V, 50/60Hz, 3ph LC-115

Accessories

Chrome Steel 250mL Grinding Set LCA-240
 Tungsten Carbide 100mL Grinding Set LCA-242



SSA-39

BALL-PAN HARDNESS TEST

ASTM D3802

The ball-pan hardness test method determines degradation resistance of granulated activated carbons. SSA-39 set consists of a special 8in (203mm) diameter brass ball-pan and two sets of 0.5in (12.7mm) and 0.375in (9.5mm) steel balls. The ball-pan has a special 8mm thick hardened brass bottom plate dished out at 1.092mm inner radius to give a 3.2mm thickness at its center. The bottom plate is mounted in a standard full-height sieve frame with extended rim for stacking.

A sample is placed in the ball-pan with the steel balls and run for 30 minutes in a Model SS-30 Ro-Tap® Sieve Shaker. The ball-pan is stacked with five regular 8in sieves, sieve pan, and cover. “Hardness” of the activated carbon sample is determined by degradation resistance as measured by sieving the ground sample. The Ro-Tap®, sieves, sieve pan, and cover are listed separately.

Ball-Pan Hardness Test

Ball-Pan Hardness Set	SSA-39
Accessories	
Ball-Pan	SSA-41
0.5in Steel Balls, set of 15	SSA-43
0.375in Steel Balls, set of 15	SSA-44

GILSON NEWSLETTER



Sign up for the Gilson newsletter at globalgilson.com and never miss a thing!



MOBILE FRIENDLY


globalgilson.com is mobile friendly so you can view on any device.



LC-7



LC-8

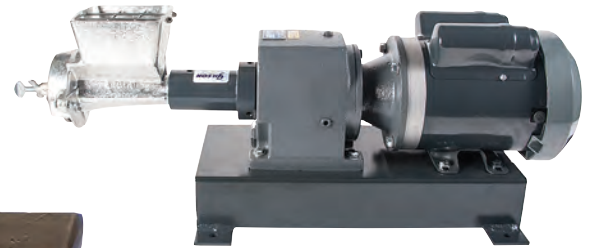

LC-82



LC-80

MINI-PULVERIZER & MINI-CRUSHER

LC-7 Mini-Pulverizer reduces up to 20g of 1/8in (3.2mm) material to minus No.140 (106µm). Unit is supplied with 1.625in (41mm) diameter high-density alumina ceramic grinding plates. A switch reverses direction of plate rotation for extended plate life of up to 3,000 samples. For extra-hard materials, the LCA-56 Tungsten Carbide Plate Set is available as an accessory. Grinding plates are adjustable to produce sample sizes from No.40 to No.140 (425 to 106µm). Nearly all product is recoverable by brushing.

The Mini-Pulverizer has cam-action closure with sealed bearings and is driven by a 1/3hp capacitor-start motor mounted on rubber feet. **Product Dimensions:** 10x15x10in (254x381x254mm), WxDxH.

LC-8 Mini-Crusher has 2x2in (51x51mm) feed opening for crushing 1in (25.4mm) and smaller feed material to 1/16in (1.6mm) and finer at about 1/4lb (114g) per minute. The unit comes standard with hardened steel alloy jaws and cheek plates. For special applications, order LCA-46 Ceramic Plate Set (85% alumina) to avoid metal contamination or LCA-47 Tungsten Carbide Plate Set (in 6% cobalt binder) for extra tough jobs. Sets are interchangeable and adjust feed opening to produce product from 1/4in (6.4mm) to below 1/16in (1.6mm) in size.

Construction of the LC-8 features a case-hardened alloy steel eccentric shaft with heavy-duty sealed bearings. The crusher is belt driven by a 1/4hp motor with overload and On/Off switches, all mounted on a steel base with rubber feet for freestanding operation. Samples are collected in a stainless steel tray. **Product Dimensions:** 10x19x11in (254x483x279mm), WxDxH.

Mini-Pulverizer & Mini-Crusher

Mini-Pulverizer, 115V, 60Hz	LC-7
230V, 50Hz	LC-7F
Mini-Crusher, 115V, 60Hz	LC-8
230V, 50Hz	LC-8F

Accessories

Replacement Alumina Plate Set for LC-7	LCA-55
Tungsten Carbide Plate Set for LC-7	LCA-56
Replacement Alloy Steel Plate Set for LC-8	LCA-45
Ceramic Plate Set for LC-8	LCA-46
Tungsten Carbide Plate Set for LC-8	LCA-47

LABORATORY DISC MILLS

Hand-Cranked or Motorized Laboratory Disc Mills provide effective performance for limited dry or wet grinding to moderate fineness. Mills are useful for coal, chemicals, ores, pharmaceuticals, nuts, grains, and other friable materials. Both mills process materials between a set of iron alloy fixed and rotating 4in (102mm) diameter grinding discs for reduction. Feed hoppers have 50in³ (0.8L) volume and final fineness is easily set by thumb screw adjustment of grinding disc clearance. No.80–No.100 (180–150µm) is typical fineness limit. Mills disassemble quickly without tools for cleaning.

Disc mills are supplied with tooth-type feed augers for dry materials and a set of fine-grinding discs. For wet or oily materials, optional Wet-Feed Auger sets are available and include a worm-type feeder and fine-grinding discs. LCA-171 Coarse Grinding Disc Set is purchased separately to fit either mill and allows higher throughput of coarse product. Feeders and Grinding Discs quickly interchange and extras are useful for different sample types and to avoid contamination.

LC-80 Hand-Crank Disc Mill has painted, cast iron body that mounts by screw clamp on a bench top up to 1.5in (38.1mm) thick. Throughput varies with material type, but 10lb (4.5kg) per hour is typical. Overall height is 14in (356mm). Includes LCA-175 Dry-Feed Auger and Grinding Disc Set.

LC-82 Motorized Disc Mill has a 89rpm 1/3hp motor mounted to a welded steel base. Body is plated cast iron. Capacity varies with type of material, but 40lb (18kg) per hour is typical. The LC-82 meets ASTM C409 requirements for preparation of Hardgrove Grindability specimens. The oil-filled gear box features the replaceable LCA-179 Safety Coupling to prevent overload damage. An 8ft (2.4m) grounded cord with in-line switch is provided. Includes LCA-176 Dry Feeder and Grinding Disc Set. LCA-178 is a complete Grinding Head with body, dry tooth-feed auger, and fine-grinding discs. **Product Dimensions:** 25x8x12in (635x203x305mm), WxDxH.

Laboratory Disc Mills

Hand-Crank Disc Mill	LC-80
Motorized Disc Mill, 115V, 60Hz	LC-82
220V, 60Hz	LC-82S
220V, 50Hz	LC-82F

Accessories

Fine Grinding Disc Set	LCA-170
Coarse Grinding Disc Set	LCA-171
Wet-Feed Auger and Grinding Disc Set for LC-80	LCA-172
Wet-Feed Auger and Grinding Disc Set for LC-82	LCA-173
Dry-Feed Auger and Grinding Disc Set for LC-80	LCA-175
Dry-Feed Auger and Grinding Disc Set for LC-82	LCA-176
Complete Grinding Head for LC-82	LCA-178
Safety Coupling for LC-82	LCA-179




LC-88



LCA-73 through LCA-76



LCA-34 through LCA-37

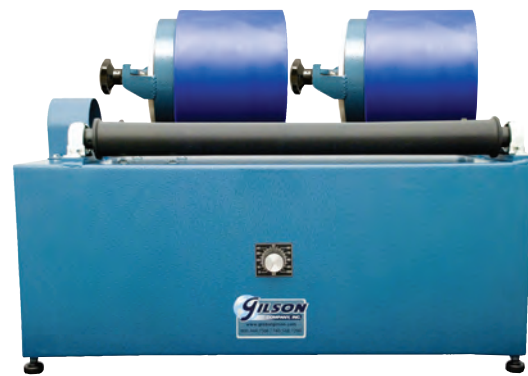

LC-91 shown with LCA-63

JAR MILLS

Jar Mills are used for wet or dry grinding or mixing and blending a wide variety of materials like ores, chemicals, paints, ceramics, glass, etc. Different size jars are available for different grinding conditions. Bench or floor model Jar Mills from Gilson have capacities from one to six jars.

Totally enclosed DC motors drive special 2in (51mm) diameter neoprene-covered rollers at speeds from 20 to 300rpm. Roller spacing adjusts easily to accommodate jars from 2 to 15in (51 to 381mm) diameter and are configured to keep jars centered during operation. Welded steel frames, roller chain drives and sealed ball bearings assure long service life. Mills operate on 115V, 50/60Hz electrical supply. Add "F" to model number for 230V, 50Hz models. Grinding Jars and Media are ordered separately.

Grinding Jars are ceramic-based Roalox™ or premium High Alumina material. High-strength Roalox™ has four times the wear life of ordinary porcelain and reduces levels of silica contamination. Ultra-high fired High Alumina jars have higher service life, negligible silica contamination, and polyurethane coated body to minimize breakage. Both have wide mouths for fast loading/cleaning and neoprene gasketed lids with positive-locking bar and hand wheel. Jar capacities range from 0.1 to 6.6gal (0.3 to 25.0L) and diameters from 3.4 to 14.63in (86 to 372mm). Specimen capacity is approximately 25% of total jar volume and grinding media should take up approximately 50% of total volume.

Grinding media is cylindrical, with equal length and diameter for maximum surface area. Ultra-high fired Burundum alumina with 3.42 specific gravity is ideal for most milling and has low contamination. Burundum is supplied in 10lb (5kg) packages. Premium high-density 5.55 specific gravity Zirconia mills faster than Burundum, with less wear of grinding jars and media. Zirconia is sold in 5lb (2kg) packages.

BENCHTOP LABMILL

Compact Benchtop Labmill rotates milling jars smoothly and quietly, adjusting easily for four sizes of jars from 0.5 to 10L (16 to 338oz). Sample volumes from 75mL to 4L can be handled with unattended ease. Estimated specimen capacity is approximately 25% of total jar volume. Volume for grinding media required is approximately 50% of jar volume. The special HDPE (High Density Polyethylene) jars are disposable to avoid cross-contamination and feature baffled interiors for efficient wet or dry grinding action. Each milling jar is held in a supporting metal sleeve for rigidity.


The unit also holds other grinding jars, from 3 to 7in (76 to 178mm) diameter and up to 11in (279mm) width. A speed control switch gives 10–260rpm roller speed from the direct-drive 60 Watt DC motor. For 230V, 50/60Hz electrical supplies, order TR-502 Transformer separately. Disposable Grinding Jars and Supporting Metal Sleeves are ordered separately. **Product Dimensions:** 18x14x2.5in (457x356x64mm), WxDxH.


Benchtop Labmill	
Benchtop Labmill, 115V, 50/60Hz	LC-88
Accessories	
Disposable HDPE Jars, 0.5L, pkg. 12	LCA-73
Disposable HDPE Jars, 1L, pkg. 6	LCA-74
Disposable HDPE Jars, 4L, pkg. 6	LCA-75
Disposable HDPE Jars, 10L, pkg. 4	LCA-76
Stainless Steel Sleeve for 0.5L Jar	LCA-34
Stainless Steel Sleeve for 1L Jar	LCA-35
Anodized Aluminum Sleeve for 4L Jar	LCA-36
Anodized Aluminum Sleeve for 10L Jar	LCA-37
500 Watt Step-Up/Step-Down Transformer	TR-502

Jar Mills				
Model	Tiers	Maximum Jars	Motor, hp	Dimensions, WxDxH, in (mm)
LC-91	1	2	1/4	30x13x16 (762x330x406)
LC-92	2	2	1/4	20x12x34 (508x305x864)
LC-95	3	6	3/4	40x12x50 (1,016x305x1,270)

Accessories

Roalox™ Porcelain Grinding Jar, 0.3L	LCA-50
Roalox™ Porcelain Grinding Jar, 1.0L	LCA-51
Roalox™ Porcelain Grinding Jar, 1.8L	LCA-52
Roalox™ Porcelain Grinding Jar, 5.6L	LCA-53
Roalox™ Grinding Jar, 8.3L	LCA-80
Roalox™ Grinding Jar, 12.4L	LCA-81
Roalox™ Grinding Jar, 17.6L	LCA-82
Roalox™ Grinding Jar, 25.0L	LCA-83
High Alumina Grinding Jar, 1.0L	LCA-60
High Alumina Grinding Jar, 5.6L	LCA-61
High Alumina Grinding Jar, 12.4L	LCA-63
Burundum Media, 13x13mm, 10lb pkg.	LCA-65
Burundum Media, 21x21mm, 10lb pkg.	LCA-66
Burundum Media, 32x32mm, 10lb pkg.	LCA-68
Zirconia Media, 10x10mm, 5lb pkg.	LCA-70
Zirconia Media, 13x13mm, 5lb pkg.	LCA-72

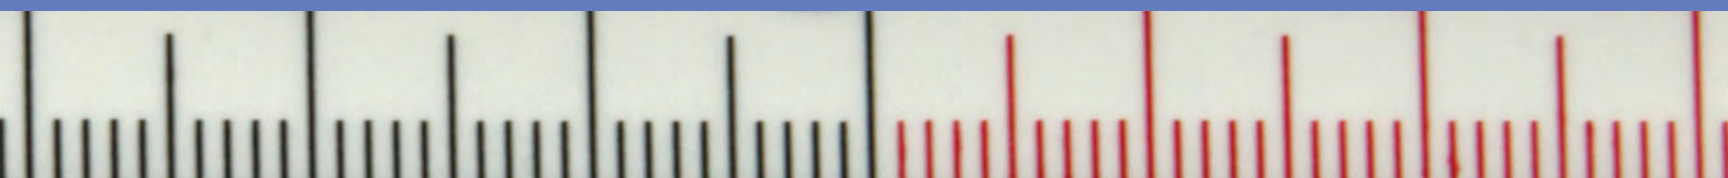

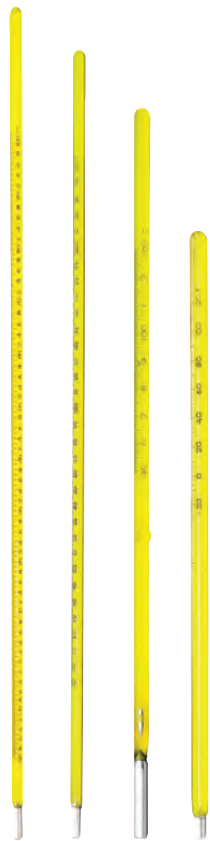

ASTM Thermometers

ASTM MERCURY THERMOMETERS ASTM E1, E77

ASTM thermometers have strict manufacturing tolerances. Accuracy is assured by inspection and testing of samples from each production run. Each thermometer is supplied with a statement of compliance to E1 and E77 requirements. ASTM Thermometers are yellow-backed glass with permanent graduations, mercury filled, and individually packed in cardboard tubes. MA-450 Sets include one each of ASTM 62 to 70 (°C or °F) in a velvet-lined protective case. Inquire for other ASTM Thermometers.

To order ASTM thermometers with NIST traceable Certificate of Calibration at five points, add "T" suffix to the model number.

Always store liquid-in-glass thermometers vertically to prevent mercury column separation, see MA-305 Thermometer Storage Rack.

helpfulhint

State or local ordinances may prevent sales or shipment of instruments containing mercury into your area. Please check for restrictions before ordering or consult our customer service professionals.


ASTM Mercury Thermometers							
Type	Model	ASTM Number	Range	Division	Length, in (mm)	Immersion, in (mm)	
General Use	MA-420F	1F	0°-302°F	2.0°	12.7 (323)	3 (76)	
	MA-420C	1C	-20°-150°C	1.0°	12.7 (323)	3 (76)	
	MA-421F	2F	20°-580°F	2.0°	15.4 (391)	3 (76)	
	MA-421C	2C	-5°-300°C	1.0°	15.4 (391)	3 (76)	
	MA-422F	3F	20°-760°F	2.0°	16.3 (414)	3 (76)	
	MA-422C	3C	-5°-400°C	1.0°	16.3 (414)	3 (76)	
Cloud & Pour	MA-424F	5F	-36°-120°F	2.0°	9.0 (229)	4.3 (109)	
	MA-424C	5C	-38°-50°C	1.0°	9.0 (229)		
Distillation	MA-426F	7F	30°-580°F	2.0°	15.1 (384)	Total	
	MA-426C	7C	-2°-300°C	1.0°	15.1 (384)	Total	
	MA-427F	8F	30°-760°F	2.0°	15.1 (384)	Total	
	MA-427C	8C	-2°-400°C	1.0°	15.1 (384)	Total	
Precision Use	MA-430F	62F	-36°-35°F	0.2°	14.9 (378)	Total	
	MA-430C	62C	-38°-2°C	0.1°	14.9 (378)	Total	
	MA-431F	63F	18°-89°F	0.2°	14.9 (378)	Total	
	MA-431C	63C	-8°-32°C	0.1°	14.9 (378)	Total	
	MA-432F	64F	77°-131°F	0.2°	14.9 (378)	Total	
	MA-432C	64C	25°-55°C	0.1°	14.9 (378)	Total	
	MA-433F	65F	122°-176°F	0.2°	14.9 (378)	Total	
	MA-433C	65C	50°-80°C	0.1°	14.9 (378)	Total	
	MA-434F	66F	167°-221°F	0.2°	14.9 (378)	Total	
	MA-434C	66C	75°-105°C	0.1°	14.9 (378)	Total	
	MA-435F	67F	203°-311°F	0.5°	14.9 (378)	Total	
	MA-435C	67C	95°-155°C	0.2°	14.9 (378)	Total	
	MA-436F	68F	293°-401°F	0.5°	14.9 (378)	Total	
	MA-436C	68C	145°-205°C	0.2°	14.9 (378)	Total	
	MA-437F	69F	383°-581°F	1.0°	14.9 (378)	Total	
	MA-437C	69C	195°-305°C	0.5°	14.9 (378)	Total	
	MA-438F	70F	563°-761°F	1.0°	14.9 (378)	Total	
	MA-438C	70C	295°-405°C	0.5°	14.9 (378)	Total	
	Precision Use Sets	MA-450F	°F Set	-36°-761°F	Varies	14.9 (378)	Total
		MA-450C	°C Set	-38°-405°C	Varies	14.9 (378)	Total
Pensky-Martens & Tag Closed High	MA-210F	9F	20°-230°F	1.0°	11.8 (300)	2.3 (58)	
	MA-210C	9C	-5°-110°C	0.5°	11.8 (300)	2.3 (58)	
Tag Closed Low	MA-428F	57F	4°-122°F	1.0°	11.8 (300)	2.3 (58)	
	MA-428C	57C	-20°-50°C	0.5°	11.8 (300)	2.3 (58)	
Pensky-Martens High	MA-211F	10F	200°-700°F	5.0°	11.8 (300)	2.3 (58)	
	MA-211C	10C	90°-370°C	2.0°	11.8 (300)	2.3 (58)	
Open Flash	MA-212F	11F	20°-760°F	5.0°	12.1 (307)	1 (25)	
	MA-212C	11C	-6°-400°C	2.0°	12.2 (310)	1 (25)	
Gravity	MA-429F	12F	-5°-215°F	0.5°	16.5 (419)	Total	
	MA-429C	12C	-20°-102°C	0.2°	16.5 (419)	Total	
Loss on Heat	MA-223C	13C	155°-170°C	0.5°	7.0 (178)	Total	
Bituminous Softening Point	MA-225F	15F	30°-180°F	0.5°	15.6 (396)	Total	
	MA-225C	15C	-2°-80°C	0.2°	15.6 (396)	Total	
	MA-226F	16F	85°-392°F	1.0°	15.6 (396)	Total	
	MA-226C	16C	30°-200°C	0.5°	15.6 (396)	Total	
	MA-227F	113F	30°-350°F	1.0°	15.9 (404)	Total	
	MA-227C	113C	-1°-175°C	0.5°	15.9 (404)	Total	
Saybolt Viscosity	MA-213F	17F	66°-80°F	0.2°	10.8 (274)	Total	
	MA-213C	17C	19°-27°C	0.1°	10.8 (274)	Total	
	MA-214F	18F	94°-108°F	0.2°	10.8 (274)	Total	
	MA-214C	18C	34°-42°C	0.1°	10.8 (274)	Total	
	MA-215F	19F	120°-134°F	0.2°	10.8 (274)	Total	
	MA-215C	19C	49°-57°C	0.1°	10.8 (274)	Total	
	MA-216F	20F	134°-148°F	0.2°	10.8 (274)	Total	
	MA-216C	20C	57°-65°C	0.1°	10.8 (274)	Total	
	MA-217F	21F	174°-188°F	0.2°	10.8 (274)	Total	
	MA-217C	21C	79°-87°C	0.1°	10.8 (274)	Total	
	MA-218F	22F	204°-218°F	0.2°	10.8 (274)	Total	
	MA-218C	22C	95°-103°C	0.1°	10.8 (274)	Total	
	MA-452F	77F	245°-265°F	0.5°	10.8 (274)	Total	
	MA-454F	78F	295°-315°F	0.5°	10.8 (274)	Total	
	MA-453F	108F	270°-290°F	0.5°	10.8 (274)	Total	
	MA-455F	109F	320°-340°F	0.5°	10.8 (274)	Total	
	MA-456F	79F	345°-365°F	0.5°	10.8 (274)	Total	
	MA-457F	80F	395°-415°F	0.5°	10.8 (274)	Total	
MA-458F	81F	445°-465°F	0.5°	10.8 (274)	Total		
Kinematic Viscosity	MA-219F	47F	137.5°-142.5°F	0.1°	12.0 (305)	Total	
	MA-219C	47C	58.6°-61.4°C	0.05°	12.0 (305)	Total	
	MA-220F	110F	272.5°-277.5°F	0.1°	12.0 (305)	Total	
	MA-220C	110C	133.6°-136.4°C	0.05°	12.0 (305)	Total	
Solvents Distillation	MA-460C	37C	-2°-52°C	0.2°	15.6 (396)	3.9 (99)	
	MA-462C	39C	48°-102°C	0.2°	15.6 (396)	3.9 (99)	
	MA-464C	41C	98°-152°C	0.2°	15.6 (396)	3.9 (99)	
	MA-467C	103C	148°-202°C	0.2°	15.6 (396)	3.9 (99)	
	MA-469C	105C	198°-252°C	0.2°	15.6 (396)	3.9 (99)	
	MA-471C	107C	248°-302°C	0.2°	15.6 (396)	3.9 (99)	

ASTM NON-MERCURY THERMOMETERS

ASTM E1, E77, E2251

These ASTM Non-Mercury Thermometers meet standard test method requirements for use in their referenced applications. The liquid-in-glass thermometers have the same performance characteristics as ASTM Mercury Thermometers, but use safe dark blue liquid instead of mercury. The proprietary formula is biodegradable, nontoxic, and nonhazardous. The dark blue color is easily read against the white-backed stem.

For individual thermometers with five-point certification by an ISO/IEC accredited laboratory, add a "T" suffix to the model number when ordering. Full sets of Certified Precision Use Thermometers are available as MA-751CT for S62C to S67C ASTM numbers, or MA-751FT for S62F to S67F. To prevent fluid column separation, always store liquid-in-glass thermometers vertically, using our MA-305 Thermometer Storage Rack.

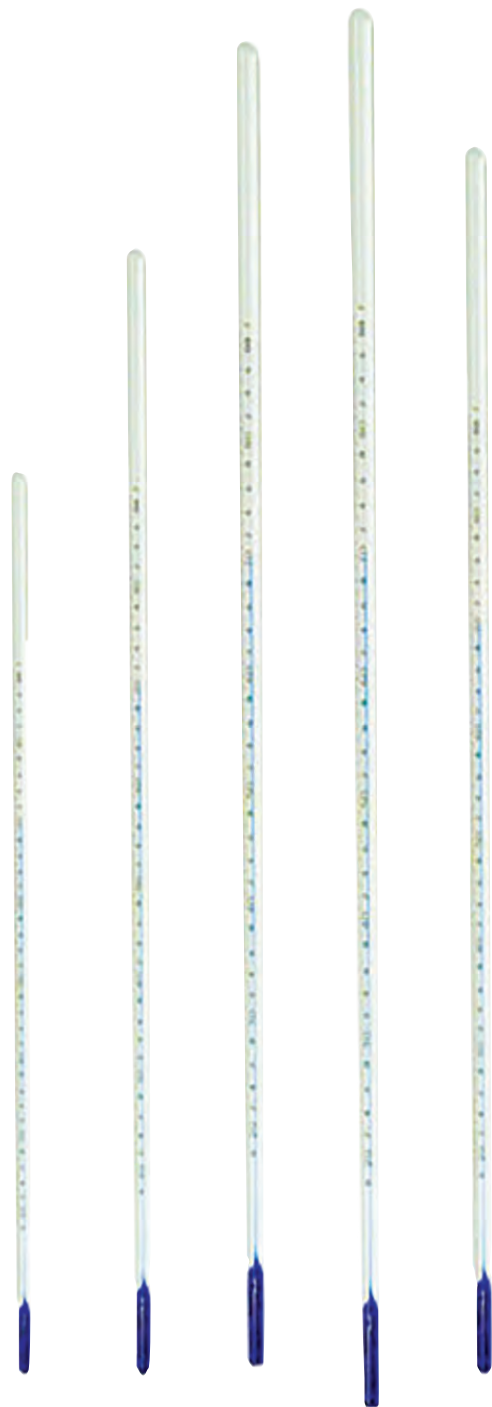

ASTM Non-Mercury Thermometers

ASTM Non-Mercury Thermometers

Type	Model	ASTM Number	Range	Division	Length, in (mm)	Immersion, in (mm)
Bomb Calorimeter	MA-521C	S116C	18.9°–25.1°C	0.01°	24.0 (610)	Total
	MA-522C	S117C	23.9°–30.1°C	0.01°	24.0 (610)	Total
	MA-538C	S56C	19°–35°C	0.02°	23.6 (599)	Total
	MA-538F	S56F	66°–95°F	0.05°	23.6 (599)	Total
Cloud and Pour	MA-524C	S5C	-38°–50°C	1.0°	4.25 (108)	4.3 (109)
	MA-524F	S5F	-36°–120°F	2.0°	4.25 (108)	4.3 (109)
	MA-545C	S6C	-80°–20°C	1.0°	9.0 (229)	3.0 (76)
	MA-545F	S6F	-112°–70°F	2.0°	9.0 (229)	3.0 (76)
Gravity	MA-529C	S12C	-20°–102°C	0.2°	16.7 (424)	Total
	MA-529F	S12F	-5°–215°F	0.5°	16.7 (424)	Total
Kinematic Viscosity	MA-536C	S120C	38.5°–41.5°C	0.05°	12.0 (305)	Total
Low Softening Point	MA-525C	S15C	-2°–80°C	0.2°	15.7 (399)	Total
	MA-525F	S15F	30°–180°F	0.2°	15.7 (399)	Total
Precision Use	MA-530C	S62C	-38°–2°C	0.1°	15.7 (399)	Total
	MA-530F	S62F	-36°–35°F	0.2°	15.7 (399)	Total
	MA-531C	S63C	-8°–32°C	0.1°	15.7 (399)	Total
	MA-531F	S63F	18°–89°F	0.2°	15.7 (399)	Total
	MA-532C	S64C	25°–55°C	0.1°	15.7 (399)	Total
	MA-532F	S64F	77°–131°F	0.2°	15.7 (399)	Total
	MA-533C	S65C	50°–80°C	0.1°	15.7 (399)	Total
	MA-533F	S65F	122°–176°F	0.2°	15.7 (399)	Total
	MA-534C	S66C	75°–105°C	0.1°	15.7 (399)	Total
	MA-534F	S66F	167°–221°F	0.2°	15.7 (399)	Total
	MA-535C	S67C	95°–155°C	0.2°	15.7 (399)	Total
	MA-535F	S67F	203°–311°F	0.5°	15.7 (399)	Total
Precision Use Sets	MA-751CT		-38°–155°C	Varies	15.7 (399)	Total
	MA-751FT		-36°–311°F	Varies	15.7 (399)	Total
Saybolt Viscosity	MA-514C	S18C	34°–42°C	0.1°	11.0 (279)	Total
	MA-514F	S18F	94°–108°F	0.2°	11.0 (279)	Total
	MA-518C	S22C	95°–103°C	0.1°	11.0 (279)	Total
	MA-518F	S22F	204°–218°F	0.2°	11.0 (279)	Total
Tank	MA-540C	S58C	-34°–49°C	0.5°	12.0 (305)	Total
	MA-540F	S58F	-30°–120°F	1.0°	12.0 (305)	Total
	MA-542C	S59C	-18°–82°C	0.5°	12.0 (305)	Total
	MA-542F	S59F	0°–180°F	1.0°	12.0 (305)	Total
	MA-543C	S130C	-7°–105°C	0.5°	12.0 (305)	Total
	MA-543F	S130F	20°–220°F	1.0°	12.0 (305)	Total

contactus

Contact our technical support staff to find the right equipment for your application.




800.444.1508

ASTM EQUIVALENT NON-MERCURY THERMOMETERS

ASTM E1, E77

These liquid-in-glass thermometers have physical and performance characteristics matching those of ASTM thermometers for their referenced applications, but have not yet been reviewed and accepted by ASTM for these purposes. They use a safe dark blue or red indicating liquid that is biodegradable, nontoxic, and nonhazardous. The dark blue or red color is easily read against the white-backed stem. Add a "T" suffix to the model number to specify thermometers with five-point certification by an ISO/IEC accredited laboratory. Always store liquid-in-glass thermometers vertically to prevent fluid column separation using our MA-305 Thermometer Storage Rack.

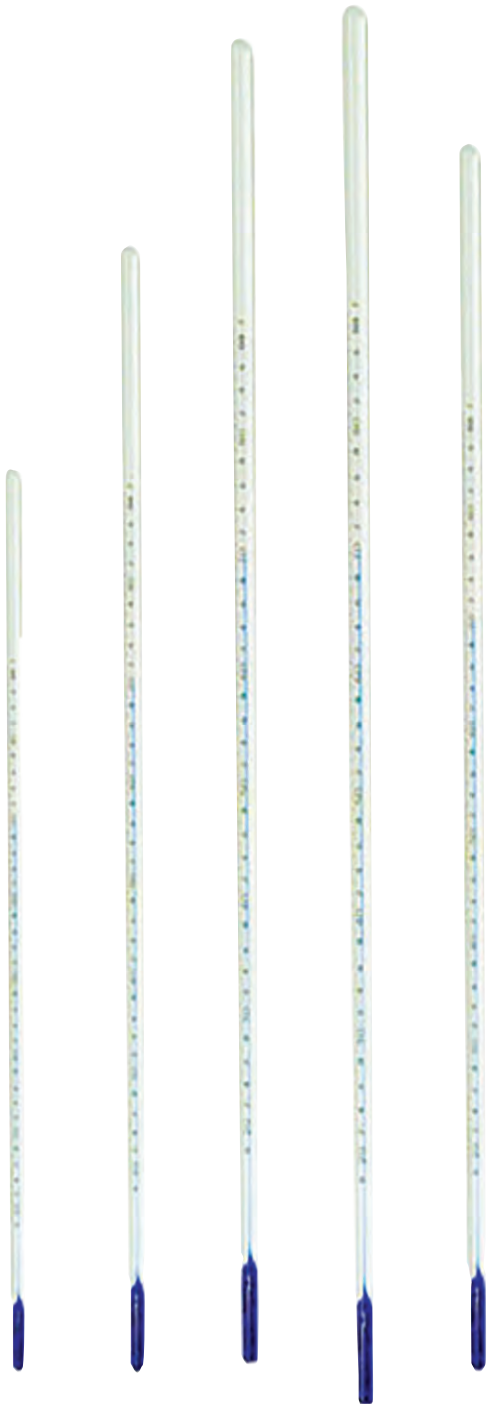

ASTM Equivalent Non-Mercury Thermometers

ASTM Equivalent Non-Mercury Thermometers						
Type	Model	ASTM Number	Range	Division	Length, in (mm)	Immersion, in (mm)
Bituminous Softening Point	MA-526C	S16C	30°–200°C	0.5°	15.7 (399)	Total
	MA-526F	S16F	85°–392°F	1.0°	15.7 (399)	Total
	MA-527C	S113C	-1°–175°C	0.5°	16.0 (406)	Total
	MA-527F	S113F	30°–350°F	1.0°	16.0 (406)	Total
General Use	MA-520C	S1C	-20°–150°C	1.0°	12.9 (328)	3 (76)
	MA-520F	S1F	0°–302°F	2.0°	12.9 (328)	3 (76)
Kinematic Viscosity	MA-519C	S47C	58.6°–61.4°C	0.05°	12.6 (320)	Total
	MA-519F	S47F	137.5°–142.5°F	0.1°	12.6 (320)	Total
	MA-557C	S110C	133.6°–136.4°C	0.05°	12.6 (320)	Total
	MA-557F	S110F	272.5°–277.5°F	0.1°	12.6 (320)	Total
Loss on Heat	MA-523C	S13C	155°–170°C	0.5°	6.9 (175)	Total
Pensky-Martens & Tag Closed High	MA-510F	S9F	20°–230°F	1.0°	11.6 (295)	2.3 (58)
	MA-510C	S9C	-5°–110°C	0.5°	11.6 (295)	2.3 (58)
Saybolt Viscosity	MA-513C	S17C	19°–27°C	0.1°	11.0 (279)	Total
	MA-513F	S17F	66°–80°F	0.2°	11.0 (279)	Total
	MA-515C	S19C	49°–57°C	0.1°	11.0 (279)	Total
	MA-515F	S19F	120°–134°F	0.2°	11.0 (279)	Total
	MA-516C	S20C	57°–65°C	0.1°	11.0 (279)	Total
	MA-516F	S20F	134°–148°F	0.2°	11.0 (279)	Total
	MA-517C	S21C	79°–87°C	0.1°	11.0 (279)	Total
	MA-517F	S21F	174°–188°F	0.2°	11.0 (279)	Total
	MA-552F	S77F	245°–265°F	0.5°	11.4 (290)	Total
	MA-553F	S108F	270°–290°F	0.5°	11.4 (290)	Total
	MA-554F	S78F	295°–315°F	0.5°	11.4 (290)	Total
	MA-555F	S109F	320°–340°F	0.5°	11.4 (290)	Total
	MA-556F	S79F	345°–365°F	0.5°	11.4 (290)	Total
Solvents Distillation	MA-567C	S103C	148°–202°C	0.2°	16.0 (406)	3.9 (99)
	MA-560C	S37C	-2°–52°C	0.2°	15.7 (399)	3.9 (99)
	MA-562C	S39C	48°–102°C	0.2°	15.7 (399)	3.9 (99)
	MA-564C	S41C	98°–152°C	0.2°	16.0 (406)	Total
Tag Closed Low	MA-528C	S57C	-20°–50°C	0.5°	11.4 (290)	2.3 (58)
	MA-528F	S57F	-4°–122°F	1.0°	11.4 (290)	2.3 (58)

technote.....

To prevent fluid column separation, always store liquid-in-glass thermometers vertically using our MA-305 Thermometer Storage Rack.



ORDER ONLINE

Browse & order directly from globalgilson.com on your phone, tablet, or computer.



MA-655, MA-155



MA-110



MA-161



MA-159



MA-149



MA-780

Non-Mercury Thermometers

Description	Model	Range	Division	Length, in (mm)	
General Purpose Total Immersion Thermometers are liquid-in-glass and SAMA (Scientific Apparatus Makers Association) approved. Each thermometer is filled with an environmentally safe, nonhazardous blue spirit liquid. Single fixed scale is accurate to ± 1 division below 105°C (221°F), ± 1.5 divisions above 105°C (221°F), and ± 2 divisions above 200°C (392°F). Thermometers are serial numbered and shipped with an accuracy statement. These thermometers should be stored vertically in our MA-305 Thermometer Storage Rack to prevent fluid column separation.	MA-655	-20°-110°C	1.0°	12 (305)	
	MA-645	0°-230°F	2.0°	12 (305)	
	MA-646	0°-300°F	2.0°	12 (305)	
	MA-657	-10°-260°C	1.0°	12 (305)	
	MA-656	-20°-150°C	1.0°	12 (305)	
	MA-648	-30°-120°F	2.0°	12 (305)	
	MA-650	-35°-50°C	1.0°	12 (305)	
General Purpose Partial Immersion Thermometers are liquid-in-glass, SAMA (Scientific Apparatus Makers Association) approved and designed for 76mm (3in) immersion. Indicating fluid is an environmentally safe, nonhazardous blue spirit liquid. Single scale graduations are accurate to ± 1 division below 105°C (221°F), ± 1.5 divisions above 105°C (221°F), and ± 2 divisions above 200°C (392°F). Thermometers are serial numbered and shipped with an accuracy statement. These thermometers should be stored vertically in our MA-305 Thermometer Storage Rack to prevent fluid column separation.	MA-145	0°-230°F	2.0°	12 (305)	
	MA-146	0°-300°F	2.0°	12 (305)	
	MA-157	-10°-260°C	1.0°	16 (406)	
	MA-155	-20°-110°C	1.0°	12 (305)	
	MA-156	-20°-150°C	2.0°	12 (305)	
	MA-147	20°-500°F	1.0°	16 (406)	
	MA-649	-30°-120°F	2.0°	12 (305)	
	MA-650P	-35°-50°C	1.0°	12 (305)	
	Pocket Copper-Plated Thermometer is red spirit filled. Pointed copper bulb prevents abrasion and breakage. Reversible aluminum storage case serves as a handle.	MA-110	0°-120°F	1.0°	6.0 (152)
Max/Min Registering Thermometer shows maximum and minimum temperatures in °F and °C since last reset, as well as current temperature. Reset button and protective plastic case for the spirit filled U-shaped capillary instrument are included. Product Dimensions: 3x9.5x1in (76x241x25mm), WxDxH.		MA-161	-40°-120°F (-40°-50°C)	2.0° (1.0°)	8.0 (203)
	Hybrid Max/Min Thermometer is a unique mercury-free model with spirit-in-glass units showing current temperatures and a built-in digital display to indicate maximum and minimum temperatures since last reset. Displays in both °F or °C. Product Dimensions: 10x4x1.5in (254x102x38mm), WxDxH.	MA-159	-40°- 120°F (-40°- 50°C)	2.0° (1.0°) (0.10 for digital)	8.0 (203)
Non-Mercury Concrete Reference Thermometer meets ASTM C1064 and E77 requirements to verify temperature measuring devices for cement and concrete testing. Blue liquid spirit-filled glass thermometer is calibrated for 3in (76mm) immersion and includes documented certification at seven points with NIST traceability.		MA-149	-1°-51°C	0.2°	15.7 (399)
	Armored Non-Mercury Thermometers are red spirit filled glass for general laboratory use and accurate to NIST tolerances. Sturdy nickel-plated brass cases with built-in suspension rings protect against accidental breakage and have slotted front for ease of reading. 76mm immersion depth. Etched black divisions against white background. To order glass thermometer refill only, add "R" suffix to model number.	MA-780	-35°-50°C	1°	12 (305)
		MA-781	-20°-150°C	1°	12 (305)
		MA-783	-10°-200°C	1°	12 (305)
		MA-784	-10°-260°C	1°	16 (406)
		MA-785	-30°-120°F	1°	12 (305)
		MA-786	0°-230°F	2°	12 (305)
MA-787		30°-300°F	2°	12 (305)	



ASTM DIGITAL ALTERNATIVE THERMOMETERS

ASTM E1, E77, E2877

These popular thermometers are mercury-free options for construction materials testing. Regulations or outright bans restrict the sale and shipments of scientific instruments containing mercury. Most ASTM, AASHTO, and ISO standard test methods now indicate the performance required from a “thermometric device,” rather than specifying a certain type of mercury thermometer.



MA-270



MA-246



MA-322A



MA-324

Thermometers

Description	Model	Range	Resolution	Accuracy
Platinum RTD Thermometer is highly accurate, has a wide range, and is a safe and acceptable alternative to mercury thermometers in many standard test methods. Large LCD display is easy to read and features max/min and hold functions. Other functions include a count-down timer, high-range alarm, and one-touch display of temperature change. Fast, one-second °F/°C switchable data update with low battery indicator. Supplied with a 5.9in (150mm) stainless-steel probe with 43in (1.1m) cable and NIST traceable certificate. IP67 waterproof rating. Includes a hard carry case, stainless steel probe holder, and four AAA batteries. Product Dimensions: 2.04x0.86x6.3in (52x22x-160mm), WxDxH.	MA-270	-58°–752°F (-50°–400°C)	0.1°	±0.1% + 0.2°C below 200°C ±0.15% + 0.5°C above 200°C
Platinum RTD Data Logging Thermometers are highly accurate and feature a rolling memory to collect over 525,000 temperature observations at user-defined intervals from one minute to 24 hours. Recorded data transfers directly to a PC or Mac using a USB flash drive (not included) with no need for additional software. Visual and audible Smart-Alarm™ indicators signal continuously until acknowledged. Up to ten alarm events are time-stamped and stored in memory. Also features max/min, difference, and average temperature functions. Models are available equipped with one or two 316 stainless steel factory-calibrated probes with 10ft (3m) leads. Replacement probes must be factory-installed and calibrated. Case is high-impact, chemical-resistant ABS plastic. Each CE marked thermometer features NIST traceable calibration and unique ID from an A2LA lab. Includes two AAA batteries, AC adaptor, built-in stand, and wall-mount accessories. Product Dimensions: 2.75x0.75x4.25in (70x19x108mm), WxDxH.	MA-246 MA-247	-130°–221°F (-90°–105°C)	0.1°	±0.2°C
Basic Type K or J Thermometers are pocket-sized and accept standard Type K or J thermocouples. Max/min memory, hold, auto power-off, and relative temperature function are standard features. Four-digit LCD display switches between °C and °F. Includes a 9V battery and beaded wire probe (two probes for MA-322A). Dual channel MA-322A reads and displays results from two probes simultaneously. Add “T” to model number for NIST traceable certificate of calibration. MAA-203 Rubber Boot Accessory provides protection for rugged use. Product Dimensions: 2.25x1.25x5.25in (57x32x133mm), WxDxH.	MA-321A MA-321AT MA-322A MA-322AT MAA-203			±0.5% of reading +0.7°C
Four-Channel Data Logging Thermometer has a wide range and displays data from four probes simultaneously on a multi-line backlit LCD screen. Accepts a variety of standard Type J, K, E, or T thermocouples, purchased separately. Features include selectable °C or °F units, automatic shutoff, high/low alarms, auto ranging, max/min, and hold functions. 99 memories store up to 16,000 data points for downloading to PC with included USB cable and free downloadable software. Includes foam-lined case, two beaded-wire probes, and four AA batteries. An optional water-resistant plastic pouch MAA-228 is also available. Add “C” to the model number for a unit with NIST Traceable Certification. Product Dimensions: 2.5x1.25x7.25in (64x32x184mm), WxDxH.	MA-324 MA-324C MAA-228	-328°–2,501°F (-200°–1,372°C)	0.1°–200°F and 1° above 200°F	0.1% of reading +0.7°C (1.40°F)

NEW



MA-327



MA-238



MA-323



MAA-286, MAA-287, & MAA-288



HMA-320



HMA-321

Thermometers			
Description	Model	Range	Resolution
<p>Waterproof RTD Thermometer with replaceable platinum resistance temperature probe is highly accurate and stable throughout its temperature range. Accuracy is rate at $\pm 0.1\% \text{rdg} + 0.8^\circ\text{F}$ ($\pm 0.1\% \text{rdg} = 0.4^\circ\text{C}$). Temperatures are displayed on the large backlit LCD in selectable $^\circ\text{F}$ or $^\circ\text{C}$ units. The sturdy, fully waterproof IP67 housing protects the thermometer in wet environments. Other features include min/max/avg functions, relative temperature (Δ), data hold, auto off, touch-tone buttons, and a battery status indicator. Three AAA batteries and operating instructions are also included. A model with NIST traceable certification is available. Product Dimensions: 2.5x6x1.25in (64x152x32mm), WxDxH.</p> <p style="text-align: right;">Waterproof RTD Thermometer Waterproof RTD Thermometer with NIST Traceable Certification</p>	<p>MA-327 MA-327C</p>	<p>-148$^\circ$-572$^\circ\text{F}$ (-100$^\circ$-300$^\circ\text{C}$)</p>	<p>0.1$^\circ$ F/C</p>
<p>Traceable[®] Workhorse[™] Thermometer has adjustable calibration to a specific temperature or sensor. The sharp LCD display is easy to read in variable light conditions. Compatible with all Type K probes and features a hold key. Meter temperature accuracy is 1$^\circ\text{C}$ from 0$^\circ$ to 500$^\circ\text{C}$. An individually serial numbered NIST traceable certificate is provided. Includes a Type K sensor with probe and cable. A bench stand, 9V battery, and carrying case are also supplied. Probe cable is 30in (762mm). Product Dimensions: 2.75x1.25x5.5in (70x32x140mm), WxDxH.</p>	<p>MA-238</p>	<p>-58$^\circ$-2,372$^\circ\text{F}$ (-50$^\circ$-1,300$^\circ\text{C}$)</p>	<p>0.1$^\circ$ from -50$^\circ$ to 200$^\circ\text{F}$ then 1$^\circ$</p>
<p>Four-Channel Thermometer displays data from four probes simultaneously on a backlit LCD screen in $^\circ\text{C}$ or $^\circ\text{F}$, using standard Type K thermocouples. Features include automatic shutoff, auto ranging, max/min, and hold functions. Accuracy is $\pm 0.5\%$ of reading +1$^\circ\text{C}$ or 2$^\circ\text{F}$, full-scale. Includes foam-lined case, two beaded-wire probes, and 9V battery. An AC adapter is optional. A plastic, water-resistant pouch and benchtop mounting tripod are also available. Add "C" to the model number for models with NIST Traceable Certification. Product Dimensions: 2.5x1.25x7.25in (64x32x184mm), WxDxH.</p> <p style="text-align: right;">Four-Channel Thermometer Four-Channel Thermometer with NIST Certificate AC Adapter, 115V, 60Hz Water-Resistant Instrument Pouch Benchtop Tripod</p>	<p>MA-323 MA-323C MAA-227 MAA-228 MAA-229</p>	<p>-328$^\circ$-2,498$^\circ\text{F}$ (-200$^\circ$-1,370$^\circ\text{C}$)</p>	<p>0.1$^\circ$ < 200$^\circ\text{F}$ 1.0$^\circ$ > 200$^\circ\text{F}$</p>
<p>Thermocouple Probes and Accessories have standard two-blade connector. Separate connectors and bulk rolls of Type K thermocouple wire allow users to fabricate probes as needed. Simply install a connector and solder or crimp the ends of the two wires together to form an inexpensive, disposable probe.</p> <p>Short General Purpose Probe, 0.0625x4in (1.6x101.6mm) Long General Purpose Probe, 0.125x6in (3.2x152.4mm) High-Temperature Probe, 2,200$^\circ\text{F}$ (1,200$^\circ\text{C}$), 0.3125x3.25in (7.9x83mm) Type K Wire Probe, 3ft (914mm) Type K Male Connector Type K Wire, 100ft (30m) Type T Wire, 100ft (30m) Type K Wire Extension with Female Connectors, 10ft (3m)</p>	<p>MAA-286 MAA-287 MAA-288 HMA-320 HMA-323 HMA-324 HMA-20 HMA-321</p>	<p>— — — — — — — —</p>	<p>— — — — — — — —</p>





MA-102



MA-117



MA-118



VIDEO ONLINE

MA-123



MA-127



VIDEO ONLINE

Thermometers

Description	Model	Range	Division	Stem Length, in (mm)
Pocket Dial Thermometers feature type 304 stainless steel dial case and pointed 0.15in diameter stem. Dial face is 1in (25.4mm) diameter and adjustment nut allows for easy recalibration. Accurate to 1% of range. Includes plastic carrying case with clip.	MA-100	-40°-160°F	2°	5 (127)
	MA-101	0°-250°F	2°	5 (127)
	MA-102	25°-125°F	1°	5 (127)
	MA-103	50°-550°F	5°	5 (127)
	MA-104	0°-150°C	2°	5 (127)
	MA-105	10°-285°C	5°	5 (127)
Pocket Digital Thermometers both have LCD display and switches for On/Off, wide-range operation and °F/°C selection. Sturdy pocket case with clips and long-life, 1.5V batteries are included. Economical MA-117 has 4.75x0.15in (121x3.8mm) stainless steel stem and one second response time. Premium MA-118 model is waterproof and features backlit display, auto-off, max/min memory, and hold functions. 5.0x0.12in (127x3mm) stainless steel probe has 0.06in (1.5mm) step-down tip for very fast response time. The MA-118 can be recalibrated.	MA-117	-40°-500°F (-40°-260°C)	0.1°	4.75 (121)
	MA-118	-40°-500°F (-40°-260°C)	0.1°	5 (127)
Dual Range, Large Dial Thermometers , have type 304 stainless steel dial cases and 8.0x0.15in (203x3.8mm), Lxdia. stems. Dual scale 1.75in (44.45mm) diameter dial faces are clearly marked with °F and °C graduations and have polycarbonate lenses. MA-121 and MA-123P have 2in (50.8mm) dials. MA-123 has a 2in sturdy glass lens and can be used in higher temperature environments. All are accurate to ±1% of range and include an adjustable mounting clip. An adjustment nut allows calibration to known temperature. Models with polycarbonate dial faces are not intended for use in oven chambers.	MA-120	0°-220°F (-18°-105°C)	2°	8 (203)
	MA-121	25°-125°F (0°-50°C)	1°	8 (203)
	MA-122	50°-300°F (10°-150°C)	2°	8 (203)
	MA-123	0°-550°F (0°-285°C)	5°	8 (203)
	MA-123P	50°-510°F (10°-265°C)	5°	8 (203)
Single Range, Large Dial Thermometers have type 304 stainless steel dial cases and 8.0x0.15in (203x3.8mm), Lxdia. stems. 1.75in (44.45mm) diameter dial faces are marked with either °F or °C graduations. Accurate to ±1% of range. Adjustment nut allows calibration to known temperature. Polycarbonate dial faces are not intended for use in oven chambers.	MA-120F	0°-220°F	2°	8 (203)
	MA-121F	25°-125°F	1°	8 (203)
	MA-124	-5°-50°C	0.5°	8 (203)
Dual Range, Dial Surface Thermometers measure surface temperatures on contact with any horizontal surface. Two integral magnets also allow mounting on non-horizontal ferrous surfaces. Dials are 2in (50.8mm) diameter and marked with both °F and °C graduations. Accuracy is ±2% of scale.	MA-125	0°-150°F (-15°-65°C)	2°	—
	MA-126	0°-250°F	5°	—
	MA-127	(-15°-120°C) 0°-500°F (-15°-250°C)	1° 10° 5°	—

NEW



MA-357



MA-341



VIDEO ONLINE



MA-115



MA-343



MA-347

Thermometers

Description	Model	Range	Resolution	Accuracy
<p>Waterproof IP67 Rated, Digital Dial Thermometer has a sealed metal housing with IP67 rating and 5in (127mm) thermocouple probe for general purpose use in wet environments. Large, bright 0.375in (9.5mm) LCD digits in 1.75in diameter display are easy to read. Features include selectable F°/C° units, max/min, hold, and low battery indicator. Powered by a 357 silver oxide battery and supplied with a NIST traceable certificate.</p>	MA-357	-4°-185°F (-20°-85°C)	0.1°	±2°F ±1°C
<p>Traceable Jumbo Display Digital Dial Thermometers provide continuous display for over a year. Switchable between °F/°C. MA-342 Ultra™ accuracy is ±0.3°C at tested points. Extra large LCD display is easy to read. Stainless steel probe is resistant to most laboratory chemicals. Plastic and stainless steel construction make it safer than mercury thermometers. An individually serial numbered NIST traceable certificate is included. Stem: 5.25x0.14in (133x3.6mm), Lxdia. Top Diameter: 2.125in (54mm). Overall Length: 6.5in (165.1mm). Supplied with silver oxide battery.</p>	MA-341 MA-342	-58°-302°F (-50°-150°C)	0.1° from -20° to 200°C, 1° otherwise	±1.0°C ±0.3°C
<p>Traceable Long-Stem Thermometers feature stainless steel probes for easy measurements in flasks, beakers, and other recessed areas. Rugged ABS Plastic and stainless steel construction. MA-115 and MA-116 models have 8in (203mm) probes but differ in accuracy. MA-119 has a longer 11.4in (290mm) stem. Bright 0.25in (6.4mm) digital display switches between °C/°F ranges. Includes protective probe sleeve, NIST traceable certificate, and battery.</p>	MA-115 MA-116 MA-119	-58°-302°F (-50°-150°C) -58° -572°F (-50°-300°C)	0.1° from -20° to 200°C, 1° otherwise	±1°C ±0.2°C ±1°C
<p>Traceable Pocket Thermometer has flat profile design. Stainless steel and plastic construction makes it safe for all lab tests. Probe guard extends overall length to 10.75in (273.1mm). MA-344 Ultra™ model accuracy is ±0.4°C at tested points. Recall max/min readings at the touch of a key. HOLD key freezes display; another switches from °F/°C. Large, bright LCD display is easy to read. Operates continuously for 1.5 years on a replaceable silver oxide battery. Includes an individually serial numbered NIST traceable certificate and a protective case. Overall Length: 7in (178mm). Stem: 3.5x0.14in (89x3.6mm), Lxdia.</p>	MA-343 MA-344	-58°-572°F (-50°-300°C)	0.1° from -20° to 200°C, 1° otherwise	±1.5°C ±0.4°C
<p>Traceable Robo™ Thermometer has rotating digital display for easy viewing. Switchable between °F/°C. MA-348 Ultra™ accuracy is ±0.4°C. Stainless steel probe is resistant to most laboratory chemicals. Rugged plastic and stainless steel construction makes it safer than mercury-in-glass thermometers. An individually serial numbered NIST traceable certificate is included. Large, bright 0.25in (6.4mm) high LCD display is easy to read. Overall Length: 9.25in (235mm). Stem: 8x0.14in (203x3.6mm), Lxdia. Battery is included.</p>	MA-347 MA-348	-58°-536°F (-50°-280°C)	0.1° from -20° to 200°C, 1° otherwise	±1°C ±0.4°C



PRODUCT VIDEOS, DIY VIDEOS, AND 360° VIEWS

Look for the icons at the left throughout our catalog to see more in-depth details on select products.



360° Product Photos. See more details from all angles with hi-res 360° images at globalgilson.com



MA-248



MA-182

NEW



MA-351

NEW



MA-355



MA-270

NEW



MA-326

Thermometers			
Description	Model	Range	Resolution
<p>Waterproof Thermometer is shockproof and monitors temperature inside chambers, water baths, and other lab and field environments. Max/min readings can be recalled for any time period. Accuracy is $\pm 1^\circ\text{C}$ between $-20^\circ\text{--}100^\circ\text{C}$ for MA-248. Tough 1.75in (44mm) dia. ABS plastic case and 4.75in (120.7mm) long stainless steel probe with 10ft (3m) cable can be installed anywhere with included suction cups, Velcro®, or magnetic mounts. °F/°C switchable. An individually serial numbered NIST traceable certificate is provided.</p>	MA-248	-58° – 572°F (-50° – 300°C)	0.1° from -19.9° to 199.9°C, then 1°
<p>Max/Min Memory Thermometer displays inside and outside temperature simultaneously in large 1.25in (32mm) LCD digits and has memory for maximum and minimum limits of both until cleared. Accuracy is $\pm 2\%$ of reading. The unit comes with an 10ft (3m) sensor cable for outside measurements. The case has a built-in stand and a wall-mount bracket is also provided. One AAA battery is included. Product Dimensions: 5x1.5x3.5in (127x38x39mm), WxDxH.</p>	MA-182	-58° – 158°F (-50° – 70°C)	0.1°F
<p>Traceable® Flip-Stick™ Thermometer has flip-to-open design. Stainless steel probe can be positioned at any angle. When folded, protected probe permits carrying by the wrist strap or in a pocket. Large LCD display. Ultra™ model accuracy is $\pm 0.3^\circ\text{C}$ at tested points. Features include °F/°C switch, max/min memory, and a HOLD switch. An individually serial numbered NIST traceable certificate is included. Accuracy for MA-351 is $\pm 1^\circ\text{C}$ and $\pm 0.3^\circ\text{C}$ for MA-352. Length: extended 11in (279mm), folded 6in (152mm). Stem Product Dimensions: 4.5x0.14in (114x3.6mm), Lxdia.</p>	MA-351 MA-352	-58° – 572°F (-50° – 300°C)	0.1° from -20° to 200°C, then 1°
<p>Thermocouple/Infrared Thermometer measures both internal and infrared surface temperatures. Features include F° or C° selectable, hold, max/min, auto-off, and a built-in, convenient belt clip. Folding 4in (102mm) thermocouple probe has a large temperature range with one second response time and $\pm 2^\circ\text{F}$ accuracy. Noncontact infrared has a one second response time, $\pm 2^\circ\text{F}$ accuracy and 0.95 emissivity. A lithium battery and nylon storage case are included. Product Dimensions: 5.2x1.6x1in (132x41x25mm), LxWxH.</p>	MA-355	Infrared: -27° – 428°F (-33° – 220°C) Thermocouple Probe -67° – 630°F (-55° – 330°C)	0.1°C
<p>Platinum RTD Thermometer is accurate, reliable, and meets requirements for ASTM D2726, D6927, D2041 and other standard test methods as an alternative to mercury thermometers. This highly accurate unit has accuracy to $\pm 0.1\%$ + 0.2°C below 200°C and $\pm 0.15\%$ + 0.5°C above 200°C. IP67 waterproof rating. Fast, one-second °F/°C switchable data update with low battery indicator. Includes hard carry case, stainless steel probe holder, NIST Traceable® certificate and probe with stainless steel 5.9in (150mm) stem, and 43in (1.1m) cable. Powered by four AAA batteries (included). Product Dimensions: 2.04x0.86x6.3in (52x22x160mm), LxWxH.</p>	MA-270	-58° – 752°F (-50° – 400°C)	0.01°C
<p>Large Display Thermometer with 1.5in (38mm) high digits is ideal for monitoring current °F or °C temperatures in curing tanks, water baths, and other containers. The extra long 19in (483mm) high-accuracy thermistor probe on a 59in (1.5m) cable quickly attaches to tank walls with the included clamping bracket. Wall-mounting hardware is also included for the display unit. The assembled thermometer is rated IP67 waterproof. Accuracy is 0.1 $\pm 1.6^\circ\text{F}$ (0.1 $\pm 1^\circ\text{C}$). Four AAA batteries are included and power the thermometer for about one year of continuous use. A model with NIST traceable certification is available. Product Dimensions: Display unit 4.75x1.23x3.4in (121x31x86mm), WxDxH.</p>	MA-326 MA-326C	14° – 230°F (-10° – 400°C)	0.1°F/°C



MA-140 & MA-150



MA-111



MA-162



MA-158



MA-305



MAA-90

Mercury-In-Glass Thermometers

Description	Model	Range	Division	Length, in (mm)
General Purpose Lab Thermometers have single scale to SAMA (Scientific Apparatus Makers Association) standards and engraved stem. Calibrated for total immersion, mercury filled.	MA-140	-30°–120°F	1°	12 (305)
	MA-150	-35°–50°C	1°	12 (305)
	MA-141	0°–230°F	2°	12 (305)
	MA-151	-20°–110°C	1°	12 (305)
	MA-142	0°–300°F	2°	12 (305)
	MA-152	-20°–150°C	1°	12 (305)
	MA-143	20°–500°F	2°	16 (406)
	MA-153	-10°–250°C	1°	16 (406)
	MA-144	20°–750°F	5°	16 (406)
	MA-154	-10°–400°C	2°	16 (406)
Armored Mercury-Filled Thermometers feature rugged nickel-plated brass cases to reduce accidental breakage and clean up of hazardous material. Thermometers for general laboratory use meet NIST requirements and tolerances. Cases have slotted front for ease of reading and built-in suspension rings. Etched black divisions against yellow background. 76mm immersion depth. To order glass thermometer refill only, add "R" suffix to model number.	MA-680	-30°–120°F	1°	12 (305)
	MA-681	-35°–50°C	1°	12 (305)
	MA-682	0°–220°F	2°	12 (305)
	MA-683	-20°–105°C	1°	12 (305)
	MA-684	0°–300°F	2°	12 (305)
	MA-685	-20°–150°C	1°	12 (305)
	MA-686	-2°–150°C	1°	14 (356)
	MA-687	-2°–205°C	1°	14 (356)
	MA-688	-2°–260°C	1°	14 (356)
	MA-689	20°–400°F	2°	16 (406)
Teflon[®]-tipped Pocket Thermometer is mercury filled. Teflon [®] wrapped bulb resists abrasion and breakage. Sturdy aluminum case has a loop for lanyard.	MA-111	100°–450°F	5°	6 (152)
Max/Min Registering Thermometer shows maximum and minimum temperatures since last reset, as well as current temperature in °F and °C. Reset button and protective plastic case for the mercury-filled U-shaped thermometer are included. Product Dimensions: 9x3.25in (229x83mm), WxD.	MA-162	-60°–120°F -50°–50°C	2° 1°	8 (203)
Concrete Reference Thermometer checks calibration of other devices used for temperature determinations in cement and concrete. Meets ASTM C1064 and E77. Mercury-filled with black engraved numbers against yellow background. Calibrated for 3in (76mm) immersion and includes a certificate with NIST traceability. Purchase the MA-149 for a non-mercury alternative.	MA-158	30°–124°F	0.2°	18 (457)
Thermometer Storage Rack holds up to 25 thermometers in correct vertical position to prevent fluid column separation and reduce risk of breakage. Construction is 0.25in (6.35mm) thick polyethylene with sturdy base and large carrying handles. Retaining holes are 0.3125in (7.9mm) in dia. and base plate has 0.125in (3.2mm) drain holes. Product Dimensions: 6x9x9.5in (152x229x241mm), WxDxH.	MA-305	—	—	—
Thermometer Well provides temperature stability when reading or calibrating laboratory ovens. The solid aluminum block with machined internal well protects 1/4in (6.4mm) dia. glass thermometers, transfers heat efficiently, and maintains constant temperature when oven doors are opened. The large, square cross-section is stable on most oven shelves. Product Dimensions: 2x2x3.75in (51x51x95mm), WxDxH.	MAA-90	—	—	—

helpful hint.....

State or local ordinances may prevent sales or shipment of instruments containing mercury into your area. Please check for restrictions before ordering or consult our customer service professionals.



NEW



MA-777 & MA-779



MA-777 shown with smartphone

NEW



MA-773



MA-769

FLIR® INFRARED THERMAL IMAGING CAMERAS

FLIR® Thermal Cameras instantly detect and display temperature gradients with visible details on color LCD displays. In paving operations, the cameras measure temperatures and highlight thermal gradients. Structural applications include locating and documenting voids, delaminations, and moisture in concrete or masonry walls, bridge decks, and floor slabs. FLIR® Cameras are light and compact, with focus-free lenses and simple operation. Models are built tough for rugged jobsite conditions and rated to withstand shock values to 25g.

FLIR® Infrared Thermal Imaging Cameras

Description	Model	Temperature Range, F° (C°)	Accuracy	Thermal Sensitivity, C°	IR Sensor Resolution, (Pixels)	Field of View
<p>FLIR® ONE Pro Thermal Camera combines the power and performance of a FLIR thermal camera with the convenience of your smartphone. Separate versions of the ONE Pro attach to iPhones with Lightning connections or to Android models with USB-C ports. Performance features rival other FLIR models with extensive temperature range, infrared, visual, and MSX images, a full range of color palettes, and video, photo, or time-lapse capture modes. Sharp image clarity is augmented by VividIR™ for enhanced rendering of details. JPEG images and MPEG-4 video are stored in the memory of the phone. There are six temperature regions and three temperature spot meters on the display. A separate rechargeable Li-ion battery powers the unit for about one hour of operation. Product Dimensions: 2.7x0.6x1.3in (69x15x33mm), WxDxH.</p> <p>FLIR® ONE Pro Thermal Camera for iOS Smartphone FLIR® ONE Pro Thermal Camera for Android Smartphone</p>	MA-777 MA-779	-4°–752° (-20°–400°)	±3°C or ±5% of Reading	<0.07°	160x120 (19,200)	55°X43°
<p>FLIR® Compact Thermal Camera</p> <p>These pocket-sized devices combine a full-featured thermal camera, 5-megapixel visual inspection camera, and LED flashlight. FLIR C5 and entry-level C3-X models are affordable inspection tools for construction and maintenance applications. Wi-Fi and Bluetooth connectivity allows direct data transfer, storage, and backup to the cloud using the built-in FLIR Ignite™ application, or upload to a PC via the USB-C connector. Thermal, MSX®, and visual images are available on all your devices for instant email transfer or professional report generation. The new C5 features enhanced image resolution, video streaming, zoom functions, one-touch level/span adjustment, and a higher temperature range. The large, 3.5in (89mm) LCD touchscreen displays feature auto-orientation and wide field of view. Internal memory stores 5,000 JPEG images. A lanyard and USB-C cable for charging and data transfer between PC, iOS, and Android devices. Product Dimensions: 5.4x0.94x3.3in (137x24x84mm), WxDxH.</p> <p>FLIR® C5 Compact Thermal Camera FLIR® C3-X Compact Thermal Camera</p>	MA-773 MA-772	MA-773 -4°–752° (-20°–400°)	MA-773 0°–100°C: ±3°C, 100°–300°C: ±3%	MA-773 <0.07°	MA-773 160x120 (19,200)	MA-773 54°X42°
		MA-772 -4°–572° (-20°–300°)	MA-772 0°–100°C: ±3°C, 100°–300°C: ±3%	MA-772 <0.07°	MA-772 128x60 (7,680)	MA-772 54°X42°
<p>FLIR® Spot Thermal Camera</p> <p>This affordable imaging IR thermometer bridges the gap between ordinary infrared thermometers and FLIR Infrared Thermal Cameras. The MA-769 lets you visualize heat patterns instead of relying on spot temperatures. Up to 50,000 images are saved to an included 4GB Micro SD card or to a PC over a USB connection. Memory can be expanded up to 32GB with user-supplied micro-SD card. The measurement field is framed by dual-laser pointers and has a 24:1 spot ratio for accurate measurements at a safe distance. The 2.4in (61mm) display has selectable color palettes, MSX® imaging, and adjustable auto power-off. A lanyard, USB cable, and international AC charger are included. Analysis Software is not included. MAA-14 Protective Vinyl Case and a convenient Belt Holster are available as options. Product Dimensions: 2.5x3.2x8.3in (64x81x211mm), WxDxH.</p>	MA-769	-13°–572° (-25°–300°)	varies ±1.5°–3°C	<0.10°	80x60 (4,800)	51°x66°





MA-774



MA-775



MA-776



MA-778

FLIR® Infrared Thermal Imaging Cameras

Description	Model	Temperature Range, F° (C°)	Accuracy	Thermal Sensitivity, C°	IR Sensor Resolution, (Pixels)	Field of View
E4 Thermal Imaging Camera is economical and features infrared, visual, and MSX image modes on 3in (76mm) color display. Sensor operates only in center-spot measurement mode. Comes with FLIR® Tools software and a sturdy plastic case. Product Dimensions: 3.1x1x4.9in (79x25x124mm), WxDxH.	MA-774	-4°-482° (-20°-250°)	±2°C OR 2%	<0.15°	80x60 (4,800)	45°x34°
E5-XT Thermal Imaging Camera measurement modes include center-spot or area box. Automatic hot/cold detection marks maximum and minimum temperatures within the 3in (76mm) color display. Image modes are infrared, visual, and MSX. A plastic carrying case and FLIR® Tools software with Wi-Fi connectivity are included. Product Dimensions: 3.7x5.5x9.6in (94x140x244mm), WxDxH.	MA-775	-4°-752° (-20°-400°)	±2°C or 2%	<0.10°	160x120 (19,200)	45°x34°
E6-XT Thermal Imaging Camera with higher infrared resolution and thermal sensitivity rating of less than 0.06°C. Measurement modes include center-spot or area box. Automatic hot/cold detection marks maximum and minimum temperatures within the display area. Image modes are infrared, visual, MSX, and picture-in-picture on the 3in (76mm) color display. FLIR® Tools analytical software with Wi-Fi connectivity and a plastic case are included. Product Dimensions: 3.7x5.5x9.6in (94x140x244mm), WxDxH.	MA-776	-4°-1,022° (-20°-550°)	±2°C or 2%	<0.06°	240x180 (43,200)	45°x34°
E8-XT Thermal Imaging Camera features full, sharp 76,800 Infrared pixel infrared resolution with thermal sensitivity rating of less than 0.05°C. Measurement modes include center-spot or area box. Automatic hot/cold detection marks maximum and minimum temperatures within the display area. Image modes are infrared, visual, MSX, and picture-in-picture on the 3in (76mm) color display. A plastic case and FLIR® Tools software with Wi-Fi connectivity are included. Product Dimensions: 3.7x5.5x9.6in (94x140x244mm), WxDxH.	MA-778	-4°-1,022° (-20°-550°)	±2°C or 2%	<0.05°	320x240 (76,800)	45°x34°



MOBILE FRIENDLY

globalgilson.com is mobile friendly for any device.



GLOBALGILSON.COM

SALES • SERVICE • SUPPORT



Ship Weight Index. Find estimated ship weight for every product in the Ship Weight Index.



MA-372



MA-373



MA-107



MA-384

Infrared Thermometers

Description	Model	Range	Resolution	Accuracy	D:S Ratio
<p>Infrared Thermometer has selectable °F/°C temperature units, eight point circular laser pointing and maximum temperature capture shown on the LCD display. Emissivity is fixed at 0.95 and D:S ratio is 12:1. Product Dimensions: 8x3x1.5in (203x76x38mm), WxDxH.</p> <p style="text-align: right;">Infrared Thermometer Soft Carry Case</p>	MA-372 MAA-10B	-76°– 932°F (-60°– 500°C)	0.1°F or °C	±2% or 2°C	12:1
<p>Infrared/Thermocouple Thermometer features port for Type K Thermocouple Probes (purchased separately). Also includes high and low alarms, selectable °F/°C, and eight point circular laser aiming. Emissivity is adjustable from 0.10 to 1.00, with default setting of 0.95. Selectable modes for IR or probe functions include max/min, difference (max/min), and lock for continuous scanning. Product Dimensions: 8x3x1.5in (203x76x38mm), WxDxH.</p> <p style="text-align: right;">Infrared/Thermocouple Thermometer Infrared/Thermocouple Thermometer with Certificate of Calibration Soft Carry Case</p>	MA-373 MA-373C MAA-10B	-76°–1,157°F (-60°– 625°C)	0.1°F or °C	±2% or 2°C	16:1
<p>Infrared/Thermocouple Traceable[®] Thermometer displays accurate surface temperatures in less than a second. Temperatures from a connected Type K thermocouple can also be shown simultaneously on the dual display. Dual lasers target the surface. Switchable between °F and °C. Max/min, average and differential temperatures, high/low temperature alarms, and adjustable emissivity are all included features. A 48in (1,219mm) beaded Type K thermocouple probe is included. The CE Marked unit includes a Traceable[®] Certificate and batteries. Product Dimensions: 7x4x2in (178x102x51mm), WxDxH.</p>	MA-107	Infrared: -76° – 1,022°F (-60° – 550°C) Thermocouple Probe: -83° – 2,552°F (-64° – 1,400°C)	0.1°F or °C	±2% of 2°C,	12:1
<p>Dual-Laser Infrared Thermometer has a wide temperature range with 0.1° resolution and high Distance to Spot (D:S) ratio at 30:1. Dual-laser aiming system allows precise spotting for increased accuracy. Emissivity is adjustable from 0.10 to 1.00. Measuring modes include max/min, difference (max/min), lock for continuous scanning, and high and low temperature alarms. Built-in LED flashlight and magnetic base for extended versatility. Two AAA batteries provide up to 180 hours of continuous operation. Product Dimensions: 7x3x1.5in (178x76x38mm), WxDxH.</p>	MA-384	-76°– 1,832°F (-60°– 1,000°C)	0.1°F or °C	±2% or 2°C	30:1



MA-81



MA-324



MA-245



MA-317



MA-246

Temperature Humidity Recorders & Data Loggers

Description	Model	Range	Division	Accuracy
<p>Temperature Chart Recorders save data on 8in (203mm) circular paper charts and feature selectable 24 hour or seven day operation. No power source or batteries required. Wall-mounted or portable models can be equipped with air or liquid sensors. Air sensors have a bendable 14-3/8in (365mm) cable. Liquid sensors are supplied with 5ft (1.5m) cable. Heavy aluminum cases have gasket seals. Includes 100 seven day charts and a felt-tip pen. Extra pens and 24 hour charts are ordered separately. Recorders for other ranges (°F or °C) and/or electric and battery operated drives are quoted on request. Inquire for models with NIST traceable calibration. Temperature sensors contain mercury and may be restricted for sale in some areas. Check local regulations before ordering. Product Dimensions: 10.5x5x14.5in (267x127x368mm), WxDxH.</p> <p>Wall-Mounted Recorder with Air Sensor MA-80 Wall-Mounted Recorder with Liquid Sensor MA-80B Portable Recorder with Air Sensor MA-81 Portable Recorder with Liquid Sensor MA-81B Seven Day Charts, pkg. 100 MAA-60 24 Hour Charts, pkg. 100 MAA-61 Felt-Tip Pens, pkg. 5 MAA-62</p>		0°–150°F	3°	±1%
<p>Four-Channel Data Logging Thermometer displays data from four probes simultaneously on a multi-line backlit LCD screen in °C or °F, using standard Type J, K, E, and T thermocouples. Features include automatic shutoff, high/low alarms, auto ranging, max/min, and hold functions. Accuracy is ±0.1% of reading +0.7°C or 1.4°F, full-scale. 99 memories store up to 16,000 data points for downloading to PC with USB cable and downloadable software. Includes foam-lined case, two beaded-wire probes, USB computer power cable, free software download, and four AA batteries. A plastic, water-resistant pouch is also available. Add "C" to the model number for models with NIST Traceable Certification. Product Dimensions: 2.5x1.25x7.25in (64x32x184mm), WxDxH.</p> <p>Four-Channel Data Logging Thermometer MA-324 Micro USB Cable MAA-224 Water-Resistant Instrument Pouch MAA-228</p>		-328°–2,501°F (-200°–1,372°C)	0.1°– 200°F and 1° above 200°F	0.1% of reading +0.7°C or 1.4°F
<p>Data Logging Thermometer captures 5.9 million date, time, and temperature readings on a 256MB SD memory card. Data is quickly uploaded to any Windows™ PC via the included USB flash drive with built-in SD card reader port. Features include max/min memory and user-adjustable high/low alarms. Four-line display shows probe and ambient temperatures, relative humidity, and time of day. Range is -22°–158°F (-30°–70°C) with 0.1° resolution. Accuracy is ±0.6°C from 0° to 50°C and ±1.2°C otherwise. Stainless steel probe is 0.16x1in (4x25mm), ODxL. A 256MB SD card, USB card reader, bench stand, wall mount, batteries, AC adaptor, and certificate are included. Product Dimensions: 3.5x1.25x4.25in (88.9x32x108mm), WxDxH.</p>	MA-245	-22°–158°F (-30°–70°C)	0.1°	±0.6°C from 0° to 50°C
<p>Kestrel® 5200 Professional Environmental Meters are handheld, portable units with built-in evaporation rate calculators for monitoring the conditions allowing plastic shrinkage cracking in fresh concrete. Meeting ACI 308R guidelines for documentation of concrete placement and curing conditions, the meters offers a complete suite of environmental measurements and calculations including air temperature, wind speed, relative humidity, barometric pressure, evaporation rate, dew point, heat stress, and wind chill. The high-resolution display and dual color backlight provide visibility in any lighting conditions. Up to 2,900 data points can be uploaded and stored to a PC with the MAA-166 USB Transfer Cable. Waterproof to IP67 and drop-tested to MIL-STD-810G. The MAA-317B LiNK model enables Wi-Fi connectivity to a smartphone or tablet for remote monitoring. The LiNK enabled model can communicate directly to a Windows or Mac computer via Wi-Fi when used with the MA-167 Kestrel LiNK® Dongle, purchased separately. A waterproof carrying pouch, wrist lanyard, and AA Lithium battery are included with both models. Optional Mini Tripod allows hand-free operation and the Wind Vane mount keeps the unit oriented into the wind for continuous measurement of key weather parameters. Product Dimensions: 4.8x1.9x1.1in (122x48x28mm), WxDxH.</p> <p>Kestrel® 5200 Professional Environmental Meter MA-317 Kestrel® 5200 Professional with LiNK Environmental Meter MA-317B Mini Tripod MAA-162 Portable Wind Vane Mount MAA-163 USB Transfer Cable MAA-166 Kestrel® LiNK Dongle MAA-167</p>		Temperature -20°–158°F (-29°–70°C) Humidity 0–90%RH @ 25°C Non-Condensing Wind Speed 1.3–89.5mph (0.6–40m/s) Pressure 20.67–32.48 inHg	0.1° 0.1% RH 0.1mph (0.1m/s) 0.1inHg	0.9°F 0.5°C ±2%RH 3% of reading ±0.044 inHg @ 77°F (25°C)
<p>Platinum RTD Data Logging Thermometer is highly accurate and allows direct transfer of recorded data (CSV files) to PC or Mac using a USB flash drive (not included) — no need for additional software. Temperature range is -130°–221°F (-90°–105°C) with 0.01° resolution and accuracy of ±0.2°C across the entire range. Rolling data logging memory captures temperatures at user-defined intervals from one minute to 24 hours with capacity for a year of recorded data using one minute intervals. Smart-Alarm™ visual and audible indicators signal continuously until acknowledged. Up to ten alarm events are stored and time-stamped in memory. Also features max/min, difference, and average functions. This two-channel unit is available supplied with one or two 316 stainless steel factory-calibrated Probes, for connection to high-impact, chemical-resistant ABS plastic case with 10ft (3m) leads. Replacement probes must be factory-installed and calibrated. Each CE marked thermometer features NIST Traceable calibration from an A2LA lab and has a unique ID for identification. Includes AAA batteries, AC adaptor, built-in stand, and wall-mount accessories. Product Dimensions: 2.75x0.75x4.25in (70x19x108mm), WxDxH.</p> <p>Platinum RTD Data Logging Thermometer, with 1 Probe MA-246 Platinum RTD Data Logging Thermometer, with 2 Probes MA-247</p>		-130°–221°F (-90°–105°C)	0.1°	±0.2°C



MA-491



MA-492



MA-493



MA-494



MA-495



MA-496

USB TEMPERATURE DATA LOGGERS

°C/°F selectable, these accurate and reliable USB Data Loggers allow temperature values to be monitored and recorded over a period of time. Included software enables quick configuration and data transfer to a PC. Data can then be exported to other applications for detailed analysis.

USB Temperature Data Loggers				
Description	Model	Range, °F (°C)	Resolution °F (°C)	Accuracy, °F (°C)
<p>Thermocouple Data Logger with Graphic Screen measures and stores more than 250,000 temperature readings from Type K, J, or T thermocouples. It is supplied with a Type K thermocouple. A high contrast dot-matrix LCD graphic display has three buttons to navigate through the on-screen menu. This menu provides access to real-time trend analysis, data summaries, and the ability to start, stop, and restart the data logger independently of the host PC. The max/min reading can be reset on-screen; introducing an event marker into the data which can later be viewed in the graphing software and data file. Logging intervals selectable from two seconds to one hour. The data logger is supplied with two lithium batteries, with typical life of up to one year. Product Dimensions: 4x1.9x1.2in (102x48.3x30.5mm), LxWxH.</p>	MA-491	32°– 392° (0°– 200°)	0.2° (0.1°)	±2.7° (±1.5°) Logger Only
<p>Thermocouple Temperature Data Logger with Display measures and stores over 32,000 temperature readings from Type K, J, or T thermocouples. Thermocouples are attached via a standard connector on the base of the unit. The user can cycle between several different temperature variables on the LCD display using the push button. The logger can be started immediately, delayed, or with push-start button. Logging intervals selectable from one second to twelve hours. The data logger is supplied with a long-life lithium battery, with typical life of up to one year. Product Dimensions: 5.31x0.94x0.82in (135x24x21mm), LxWxH.</p>	MA-492	32°– 392° (0°– 200°)	1.0° (0.5°)	±2° (±1°) Logger Only
<p>Temperature and Humidity Data Logger with Display stores up to 16,379 readings each of relative humidity and temperature readings. Relative humidity, temperature, and dew point data can be graphed, printed, and exported to other applications. At the touch of a button, the user can cycle between current temperature and humidity and max/min stored values. Logging intervals selectable from ten seconds to twelve hours. The data logger is supplied with a long-life lithium battery, with typical life of up to one year. Product Dimensions: 5x1x0.9in (127x25x23mm), LxWxH.</p>	MA-493	Temperature: -31°– 176° (-35°– 80°) Relative Humidity: 0–100% Non-Condensing	Temp: 1° (0.5°) RH: 0.5%	Temp: ±1.04° (±0.55°) RH: ±2.25%
<p>Temperature Data Logger stores up to 16,382 readings. Operational status is indicated by flashing red, green, and orange LEDs. The data logger is protected against moisture to IP67 standard when the protective cap is fitted. Selectable parameters include logging rate from ten seconds to twelve hours, temperature units, high & low alarms, and start time. The data logger is supplied with a long-life lithium battery, with typical life of up to one year. Product Dimensions: 3.9x1x0.9in (99x25x23mm), LxWxH.</p>	MA-494	-31°– 176° (-35°– 80°)	1.0° (0.5°)	±1° (±0.05°)
<p>Thermocouple Temperature Data Logger measures and records over 32,000 temperature readings from Type K, J, or T thermocouples. A standard Type K thermocouple is included. Thermocouples are attached via a standard connector on the base of the unit. Start times are programmed and recorded temperatures displayed through connection to the USB port of a Windows-based PC. Selectable logging intervals from one second to twelve hours. The data logger is supplied with a long-life lithium battery, with typical life of up to one year. Product Dimensions: 4.6x1.1x1.1in (117x28x28mm), LxWxH.</p>	MA-495	32°– 392° (0°– 200°)	1.0° (0.5°)	±2° (±1°) Logger Only
<p>Submersible Temperature Data Logger measures and stores up to 32,510 temperature readings. The logger is housed in a 316 grade stainless steel case for years of protection from corrosion, impact, and moisture. Selectable logging intervals from one second to twelve hours. Moisture protection is rated at IP-67 standards. A slot for a retrieval lanyard is provided. A long-life, high-capacity lithium battery is included for logging for up to three years. Product Dimensions: 4.3x0.7in (110x18mm), Lxdia.</p>	MA-496	-40°– 257° (-40°– 125°)	0.2° (0.1°)	±0.4° (±0.2°)



MA-189



MA-349



MA-30

Timers & Stopwatches

Description	Model	Power Supply	Range
<p>Digital Thermometer/Timer is a 99 minute countdown timer that also displays temperature in 32°–392°F (0°–200°C) range and is switchable between °F and °C. Temperature cable with probe fits into closed oven door. 4ft cord is resistant to 482°F (250°C). Alarm sounds when time or temperature limit is reached. Time and temperature functions can be used separately or simultaneously. The display swivels for easy reading and magnets permit mounting on sides of ovens. Accuracy is ±2°C. Probe and two AAA batteries included. Product Dimensions: 3x1x5in (76x25 x127mm), WxDxH.</p>	MA-189	Two AAA Batteries (Included)	24hrx1sec
<p>Traceable® Timer/Temperature Alarm with Probe features both time and temperature alarms. Range is 32°– 392°F (0°– 200°C), accuracy is ±2°C and resolution is 1°. Meets ISO/IEC standards. The large 1.5x2in (38x51mm) LCD display folds to allow viewing angle adjustment. Time remaining, probe temperature, and temperature alarm setting are shown simultaneously. Magnets on the back of the unit permit vertical mounting. The temperature and time alarms have unique alarm tones. Temperature alarm is set in 1° increments. A continuous five minute alarm sounds when the temperature passes the set point. The 24 hour timer is set in one minute increments. When time expires, a one minute alarm sounds, the display flashes, and the timer counts up from zero. For repetitive tasks, the timer memory function recalls the previous set time. The removable 8.5in (216mm) stainless steel probe has a high-temperature, silicon-coated 42in (1,067mm) cable suitable for oven use. The timer base is made from chemical-resistant ABS plastic. Unit comes with an individually numbered Traceable® certificate and AAA battery. CE marked. Product Dimensions: 2.75x3x3.5in (70x76x89mm), WxDxH.</p>	MA-349	One AAA Battery (Included)	32°– 392°F (0°–200°C)
<p>Large Display Digital Stopwatch has click-stop controls with positive tactile feedback and a large LCD display. Unit has split interval, clock, and calendar functions. Housed in a rugged ABS plastic case. A vinyl case is included. Product Dimensions: 2.5x0.75x3.75in (63.5x19.05x95.25mm), WxDxH.</p>	MA-30	One AA Battery (Included)	30minx0.01sec 24hrx1sec



GILSON MONTHLY BLOG

Learn from the experts. Subscribe to our monthly blog at globalgilson.com



PRODUCT VIDEOS, DIY VIDEOS, AND 360° VIEWS

Look for the icons at the left throughout our catalog to see more in-depth details on select products.



TSA-169R



TSA-1167



TSA-190



MA-193



MA-38

Timers & Stopwatches

Description	Model	Power Supply	Range
<p>Digital Lab Timer controls up to 1hp single-phase motors or 20 amp loads. Bright 0.5in (12.7mm) LED display shows remaining time, stops machine at zero, then resets to programmed time for next use. Test times are set with tactile panel buttons. When stopped and restarted, countdown resumes from time remaining when paused. Electronics are mounted in a stainless steel case. The timer has a three-wire receptacle for timed devices. TSA-169RF has two 6ft (3m) three-wire cords without plugs for hard-wiring to mains and machine. Product Dimensions: 4.5x5x5.5in (114x127x140mm), WxDxH.</p>	TSA-169R TSA-169RF	115V, 60Hz 230V, 50Hz	Four Modes: 9,999 sec 9,999 min 99:59 min:sec 99:59 hr:min
<p>Gralab Timer is an electromechanical timer that plugs into wall outlet and controlled device plugs into timer. Option for continuous-run without removing timer from circuit. Rugged plastic case with gray and white finish. 6.5in (165mm) dial has black markings and hands. Smaller red numerals allow alternate use as a stop-clock. Controls up to 1/3hp motor or 1,200 Watt resistive load. Product Dimensions: 7.5x2.5x7.5in (191x64x191mm), WxDxH.</p>	TSA-1167 TSA-1167F	120V, 60Hz 230V, 50Hz	60minx1sec
<p>Spring-Wound Timers are simple to operate and have 30 or 60 minute ranges in one minute increments. Just plug the timed device into the back of the timer and turn the dial to the desired interval. When the dial returns to zero, power is cut off and the device stops. The black plastic case features an easy to set indicator dial and satin chrome face with black numerals. These timers are fully grounded for single-phase rated to control up to 10 amps at 125 VAC. Product Dimensions: 3x2.75x3.3in (76x70x84mm), WxDxH.</p>	TSA-190 TSA-191	115V, 60Hz, 10 amp	30minx1min 60minx1min
<p>Dual Timer has 0.6in LCD displays for two independent timers, with both audio and flashing green/red visual alarms. Two memory settings for repetitive times. Large buttons and simple programming make it easy to use. NIST traceable certificate for ±0.01% accuracy. Supplied with magnetic back, stand/spring-clip, lanyard opening, and two AAA alkaline batteries. Product Dimensions: 3.5x0.6x3in (89x15x76mm), WxDxH.</p>	MA-193	Two AAA Batteries (Included)	Two Timers 99hr:99min x1sec
<p>Four-Channel Traceable Alarm Timer has a large, 0.75in (19mm) display for viewing from across the lab. Accuracy is 0.01%. The extra-loud, high-decibel alarm sounds for one minute or until silenced. At zero, the timer starts counting up, showing time elapsed since alarm. All four channels may be used simultaneously and separately to count-down or count-up. For repetitive tests, the memory returns the display to the previously programmed countdown time at the touch of a key. Finger-size keys make it easy to set times and change channels. An individually serial-numbered certificate traceable to NIST is provided from an A2LA accredited laboratory. Magnetic back and flip-open stand allows the timer to be placed on any surface. Product Dimensions: 2.75x2.5x0.5in (70x64x13mm), WxDxH.</p>	MA-38	Two-year, silver-oxide battery (Included)	99hr, 59min, 59secx1sec

contactus

Contact our technical support staff to find the right equipment for your application.



800.444.1508







TSA-163



SPA-100



SC-1, SC-3, SC-4, & SC-5



SC-45



SC-51, SC-50, SC-55, & SC-56



SC-73, SC-74, SC-77, & SC-78



SC-80, SC-81, SC-82, SC-83, & SC-84



SC-149, SC-150, SC-151, & SC-152

Metal Sample Pans & Containers

Description	Type	Model	External Dimensions, WxDxH, in	Capacity, qt
Steel Pans are welded and painted for a durable, long life. Cross-stacking Handling Pans have chute end and swing-down handle to permit oven access. Sample Pans have end flanges for lifting and nest for storage. SPA-120 is also available in aluminum as SPA-122.	Steel Handling Pans	TSA-162	15x30x4	39.0
		TSA-163	12x20.5x4	17.0
	Steel Sample Pans	SPA-105	29x12x9	48.0
		SPA-104	22x13x11	49.0
		SPA-400	25x9x8	31.0
		SPA-101	20x7x6	14.0
		SPA-100	26x9x6	24.0
		SPA-120	29x13.75x6.75	36.0
Galvanized Iron Pans have wire-bound rolled top edges and two drop handles. Often used for drying or mixing. Pans SC-2, SC-4, and SC-5 have tapered sides for nesting. Others have straight sides. Safe for use in oven temperatures up to 350°F (177°C).	Galvanized Pans	SC-1	18x18x1.5	8.0
		SC-2	18x18x3	17.0
		SC-3	24x24x4	40.0
		SC-4	24x24x3	30.0
		SC-5	10x20x3	10.0
Stainless Steel Pans and Bowls have top quality seamless construction with rounded corners. Rectangular pans have straight sides. SC-45 through SC-47 have handles, others have oversize flanges for handling. Round pans have tapered sides. The SC-77 is sized to contain 8in (203mm) sieves. SC-80 through SC-84 are round sided bowls.	SS Rectangular Pans	SC-45	17.2x14.5x2.5	8.3
		SC-46	15.3x13x2.5	6.5
		SC-47	15.3x11.2x2.3	4.3
		SC-50	20.7x12.7x2.5	8.3
		SC-51	20.7x12.7x4	14.0
		SC-55	10.4x12.7x2.5	4.0
		SC-56	10.4x12.7x4	6.7
		SC-57	10.4x12.7x6	9.6
		SC-60	6.9x12.7x2.5	2.6
		SC-61	6.9x12.7x6	5.9
		SC-65	6.4x10.4x2.5	1.8
		SC-70	6.9x6.3x2.5	1.2
		SS Round Pans	SC-73	10x1.9
	SC-74		14.2x1.9	1.3
	SC-77		11x3.5	5.0
	SC-78		13.5 x5	7.5
	SS Round Bowls	SC-80	7.7x2.7	1.5
		SC-81	9x3.2	3.0
		SC-82	11.3x3.6	5.0
		SC-83	13.3x4.4	8.0
SC-84		17.5x5.2	16.0	
Aluminum Pans are popular seamless, heavy-gauge aluminum pans for an economical and lightweight option for handling samples. Models SC-149 through SC-151 have end handles. Large SC-149 is extra heavy-duty.		Aluminum Pans	SC-149	26x18x3.5
	SC-150		18x12x2.5	7.7
	SC-151		15.5x11x2.5	4.5
	SC-163		13.5x10x2.5	4.0
	SC-152		8x8x2	2.0
	SPA-301		7.5x3.7x2.3	1.1
			dia.xH	
	Aluminum Round Pan	SC-165	8x1.5	1.3



SC-250 & SC-251



SC-252



SC-259



SC-400 through SC-406



SC-498 through SC-508



SC-115 & SC-118



MFA-70



SC-270 & SC-272



HM-450

Sample Pans & Containers				
Description	Type	Model	External Dimensions, WxDxH, in	Capacity
Glass Ovenware is made of heavy-duty, 0.375in (9.5mm) thick, ovenproof clear glass and is microwavable. Dimensions include handles.	Rectangular Dish	SC-250	10.9x15.8x2.3	3qt
	Rectangular Dish	SC-251	8.5x13.7x2.3	2qt
	Square Dish	SC-252	8.5x0.5x2.5	1.5qt
	Deep Dish	SC-253	5.5x11.3x3	1.5qt
	Round Bowl	SC-258	8.5x4.3	2.5qt
	Round Bowl	SC-259	7.3x3.5	1.5qt
Metal Round Sample Containers have tight-fitting lids to prevent moisture loss in samples. All have straight sides and flat bottoms. Covers fit bottom of container during drying. Premium aluminum never needs tare adjustment for rusting. Sold in packages of twelve. Add "-1" to model number to order single containers.	Aluminum, Round Pkg. 12	SC-400	dia.xH 2x0.9	1.5oz
		SC-402	2.5x1.8	4oz
		SC-404	3x1	5oz
		SC-406	3.5x2	11oz
	Tinned, Round Pkg. 12	SC-498	1.9x1.3	2oz
		SC-500	2.2x1.6	3oz
		SC-502	2.4x1.6	4oz
		SC-504	2.9x1.9	6oz
		SC-506	3x2.2	8oz
		SC-508	3.8x2.8	16oz
Plastic Round Sample Jars are lightweight and enclosed to protect from moisture, dust, etc. Intermediate Polypropylene wide-mouth jars with leak-proof screw-top lids. Sold in case lots only.	Plastic, Round 12/case	SC-115	dia.xH 4.61x4	32oz
	12/case	SC-116	3.4x4.1	16oz
	12/case	SC-117	2.5x3.5	8oz
	24/case	SC-118	2x2.8	4oz
	24/case	SC-119	1.6x2.8	2oz
	Porcelain Crucibles are used with Muffle Furnaces for loss-on-ignition (LOI) testing of cement, fly ash, and soil materials. They are temperature rated to 1,832°F (1,000°C). They have a high-form design and are glazed inside and out, except for outside bottom and rim. Available in three sizes.	Porcelain, Glazed	MFA-65	dia.xH 30x25mm
Porcelain, Glazed		MFA-70	45x36mm	30mL
Porcelain, Glazed		MFA-80	43x59mm	50mL
Sample Cans are round, tinned-metal cans ideal for storing or transporting soil, aggregates, or other samples. Epoxy lacquered interiors and tight fitting friction-type lids provided.	Tinned-Metal, Round 6/Case	SC-272	dia.xH 6.6x7.5	4qt
	12/Case	SC-270	4.3x4.9	1qt
	1 each	MAA-43	3.3x4.0	1pt
Sample Buckets are ideal for bulk field samples. Thick-wall, high-density polyethylene containers have sturdy bail handles for easy transport. Tight-fitting lids prevent moisture loss and spillage.	Plastic Square	HM-450	9.5x9.5x13	16qt



GW-11



GW-74



VIDEO ONLINE



GW-22, GW-23, & GW-24



GW-28



MA-45, MA-48, & MA-50



SG-250



MA-42, MA-41, & MA-40



SG-56



GW-40 through GW-47

Laboratory Flasks, Beakers, & Graduated Cylinders

Description	Capacity, mL	Other Features	Models		Pkg. Qty.	
			Unit	Pkg.		
Erlenmeyer Flasks are narrow-mouth and meet ASTM E1404 Type 1 requirements. They have a heavy-duty rim and permanent white volume graduations for approximate measuring/mixing. Large matte spot for easy writing and erasing. Not for vacuum or pressure use.	125	25	GW-10	GW-10P	12	
	250	25	GW-11	GW-11P	12	
	500	50	GW-12	GW-12P	6	
	1,000	50	GW-13	GW-13P	6	
	2,000	100	GW-14	GW-14P	4	
	4,000	500	GW-15	—	1	
	6,000	500	GW-16	—	1	
Filter Flasks with side tubulation for 0.375in ID tubing. Heavy-duty 2,000/4,000mL sizes have thick wall for maximum strength.	1,000	No. 8	GW-74	—	1	
	2,000	No. 9	GW-75	—	1	
	4,000	No. 12	GW-76	—	1	
Graduated Cylinders are durable borosilicate glass with etched single scale for precision liquid measurements. Large pouring lip and oversize, stable base. 10mL size has enlarged funnel top.	10	0.2	GW-20	GW-20P	4	
	25	0.5	GW-21	GW-21P	4	
	50	1.0	GW-22	GW-22P	4	
	100	1.0	GW-23	GW-23P	4	
	250	2.0	GW-24	GW-24P	2	
	500	5.0	GW-25	—	1	
	1,000	10.0	GW-26	—	1	
	2,000	20.0	GW-27	—	1	
	Beakers are low-form Griffin borosilicate glass beakers that meet ASTM E960 Type 1 requirements and have reinforced rims, uniform wall thickness, and spouts for pouring. Approximate volume graduations guide measuring/mixing operations with $\pm 5\%$ accuracy. The range of graduation marks is less than total capacity of the beaker. Large matte area for marking.	50	5	GW-30	GW-30P	12
100		10	GW-31	GW-31P	12	
200		25	GW-28	GW-28P	12	
300		50	GW-29	GW-29P	12	
400		25	GW-33	GW-33P	6	
600		50	GW-34	GW-34P	6	
800		50	GW-38	GW-38P	6	
1,000		50	GW-35	GW-35P	6	
Volumetric Flasks are borosilicate glass and calibrated to contain indicated quantity at 20°C. Supplied with plastic snap cap. Meets ASTM E288, E694; useful for specific gravity tests such as ASTM D854.		100	—	SG-100	—	1
		250	—	SG-250	—	1
	500	—	SG-500	—	1	
	1,000	—	SG-1000	—	1	
Stainless Steel Beakers are heavy-duty, seamless and corrosion resistant with rolled top rims. MA-40 through MA-42 have sturdy handles and oz/cc graduations. Larger MA-45 through MA-50 are straight-sided Bain Marie style with no handle or graduations. Useful for handling and collecting corrosive solvents, extracts, or bitumen samples without fear of breakage.	500	3.5x4.5 (89x114)	MA-40	—	1	
	1,000	4.5x5 (114x127)	MA-41	—	1	
	2,000	5.5x6.5 (140x165)	MA-42	—	1	
	1,893	4.9x6.8 (124x173)	MA-45	—	1	
	5,678	7.3x8.6 (185x218)	MA-48	—	1	
	11,356	9x10.9 (229x277)	MA-50	—	1	
Plastic Graduated Cylinders are quality polymethylpentene (PMP). PMP is highly transparent, rigid, resists impact, and handles temperatures of 200°C (180°C continuous). Not recommended for use with chlorinated solvents or strong oxidizing agents. Cylinders have pour spout, stable base, and molded-in graduations. Models with "P" suffix are sold in case quantities.	10	0.2	GW-40	GW-40P	10	
	25	0.5	GW-41	GW-41P	5	
	50	1.0	GW-42	GW-42P	5	
	100	1.0	GW-43	GW-43P	5	
	250	2.0	GW-44	—	1	
	500	5.0	GW-45	—	1	
	1,000	10.0	GW-46	—	1	
	2,000	20.0	GW-47	—	1	
Stoppered Iodine Flasks can be used as soil specific gravity pycnometers when calibrated according to the test methods. The non-graduated glass flasks contain calibrated fluid volume when the included ground glass stopper is in place.	250	—	SG-56	—	1	
	500	—	SG-57	—	1	
	1,000	—	SG-58	—	1	
Neoprene Stoppers fit various sizes of Erlenmeyer Filter Flasks and some Graduated Cylinders.	—	Size No.	GWA-508	—	1	
	—	8	GWA-585	—	1	
	—	9	GWA-509	—	1	
	—	12	GWA-512	—	1	



TSA-168 TSA-170 TSA-179 TSA-173



TSA-172



TSA-171



TSA-174

TSA-176



WT-6



TSA-232



TSA-233



TSA-177 & TSA-178



TSA-182 & TSA-183



TSA-184, TSA-186, & TSA-188



TSA-198



TSA-205, TSA-207, & TSA-208

Brushes

Description	Model
Small Fine Sieve Cleaning Brush has soft bristles tapered for use with No.50 and finer mesh sieves. Mounted in round 0.75in (19mm) ferrule. Overall length is 5in (127mm) with wood handle.	TSA-168
Fine Sieve Cleaning Brush is ideal for cleaning No.16 and finer sieves. Soft bristles, nicked steel ferrule, lacquered wood handle, 1.25x5.75in (32x146mm), dia.xL.	TSA-170
Nylon Sieve Cleaning Brush is a hardwood block brush with nylon bristles, optimal for cleaning No. 120 and finer mesh sieves. 1.875x0.875in (48x22mm), dia.xThick with 3.75in (95mm) straight wood handle. Overall brush length is 5.88in (149mm).	TSA-179
Wire Loop Brush is a 1.25in (32mm) wide fan-type brush with 1.625in (41mm) long metal bristles and a wire loop handle. The 4.75in (121mm) long brush is designed for use on No.16 and coarser wire cloth.	TSA-173
Coarse Sieve Cleaning Brush has an 8.5in (216mm) curved plastic handle with a 1.5x1.75in (38x44mm) area of slanted brass wire bristles—perfect for No.30 and coarser wire cloth in round sieves.	TSA-172
Coarse Screen Tray Brush is recommended for No.30 and coarser wire cloth in screen trays. The 13in (330mm) curved wooden handle has 5.5x0.75in (140x19mm) of fine (0.005) brass wire bristles, which slant toward the tip for cleaning corners of screen trays. Also useful for cleaning sample molds.	TSA-171
Table Brush has a 9x3in (229x76mm) area of horsehair bristles. This 14in (356mm) long brush comes with a plastic or wood handle, depending on availability. A general purpose brush suitable for clean up of lab equipment.	TSA-174
Wire Scratch Brush has flat wire bristles that are grouped in 5x10 rows. Sturdy wood block handle is 7.75x 2.625in (197x67mm), LxW. The TSA-176, with 2in bristles, may be used on soil-cement specimens to meet ASTM D559, D560, AASHTO T 135, and T 136. The TSA-176A is the same brush with 1.25in (32mm) bristles.	TSA-176 TSA-176A
Scrub Brushes are available in 20in (508mm) long-handled, or 8in (203mm) short-handled versions and stand up to heavy everyday use in the field. Both feature durable, solid plastic handles and sturdy, acid-resistant synthetic fibers.	Short Scrub Brush, 8in (203mm) Long Scrub Brush, 20in (508mm)
Camel Hair Brush Set for small 3in (76mm) dia., No. 50 and finer sieve mesh includes two flat-tip and two round-tip brushes.	WT-6

Scoops

Type	Model	Capacity, oz (L)	Bottom Type	Bowl LxW, in	Overall Length, in (mm)
Plastic	TSA-177	32 (0.95)	Flat	6.5x 5.0	11.5 (292)
	TSA-178	82 (2.4)	Flat	9.0x 6.0	14.5 (368)
Aluminum	TSA-182	35 (1.03)	Flat	8.8x4.75	13.5 (343)
	TSA-183	4 (0.11)	Flat	4.8x2.25	6.25 (159)
	TSA-193	2 (0.05)	Round	4.5x2.0	7.8 (198)
	TSA-184	5 (0.15)	Round	4.8x2.5	7.3 (185)
	TSA-185	12 (0.36)	Round	5.8x3.3	8.8 (224)
	TSA-186	24 (0.71)	Round	7.0x3.8	10.5 (267)
	TSA-187	85 (2.37)	Round	11.8x6.3	16.0 (406)
	TSA-188	38 (1.12)	Round	8.8x4.6	12.3 (312)
	TSA-189	58 (1.71)	Round	10.0x5.3	14.3 (363)
Stainless Steel	TSA-198	4 (0.11)	Round	3.0x5.0	9.0 (229)
	TSA-205	12 (0.36)	Flat	5.5x3.0	9.0 (229)
	TSA-206	24 (0.71)	Flat	7.0x4.5	12.0 (305)
	TSA-207	45 (1.33)	Flat	8.0x5.5	13.5 (343)
	TSA-208	63 (1.86)	Flat	10x7.0	15.0 (381)





MA-275

MA-278



HMA-302



HMA-340



HMA-300



HMA-304



HMA-307



MA-203



MA-207, MA-208, & MA-209



MA-187




MA-194



MA-195



WT-4R

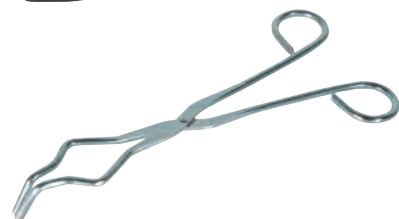

MA-196



MA-198

Laboratory Tools

Description	Model										
<p>Evaporating Dishes, Porcelain, MA-275 and MA-276 are glazed inside and out; MA-277 and MA-278 are glazed inside and around rim, bottom is not glazed.</p> <table border="1"> <thead> <tr> <th>Diameter x Height, in (mm)</th> <th>mL</th> </tr> </thead> <tbody> <tr> <td>3.23x1.26 (82x32)</td> <td>80</td> </tr> <tr> <td>3.35x1.5 (98x38)</td> <td>120</td> </tr> <tr> <td>4.1x1.6 (104x40)</td> <td>150</td> </tr> <tr> <td>4.7x1.7 (120x42)</td> <td>250</td> </tr> </tbody> </table>	Diameter x Height, in (mm)	mL	3.23x1.26 (82x32)	80	3.35x1.5 (98x38)	120	4.1x1.6 (104x40)	150	4.7x1.7 (120x42)	250	<p>MA-275 MA-276 MA-277 MA-278</p>
Diameter x Height, in (mm)	mL										
3.23x1.26 (82x32)	80										
3.35x1.5 (98x38)	120										
4.1x1.6 (104x40)	150										
4.7x1.7 (120x42)	250										
Chisel , hardened steel with 1in (25.4mm) wide blade; 8in (203mm) long.	HMA-302										
Estwing Rock Hammer is top quality for digging, splitting, and prying. One-piece forged solid steel. Handle has nylon-vinyl grips. 13in (330mm) in length.	HMA-340										
Rubber Mallet , hard rubber, 2.25in (57mm) face, wooden handle, 12in (305mm) overall length.	HMA-300										
Spoon , for mixing, digging of soils, etc., one piece stainless steel. Approximate length: 11.5in (292mm).	HMA-304										
Trowel , 6x3in (152x76mm), LxW flat steel blade with 4.5in long wood handle.	HMA-306										
ASTM Straight Edge Trowel , 5.5x3in (140x76mm), LxW flat blade with 4.25in long wood handle. Has straight edges to meet ASTM C109, AASHTO T 106.	HMA-307										
<p>Desiccators, Scheibler, complete with cover. Clear heavy glass, ground rim, and cover with knob. Desiccator Plates and Desiccant Cartridges are purchased separately.</p> <table border="1"> <tbody> <tr> <td>6in (152mm) ID</td> <td>MA-203</td> </tr> <tr> <td>8in (203mm) ID</td> <td>MA-204</td> </tr> <tr> <td>10in (254mm) ID</td> <td>MA-205</td> </tr> </tbody> </table>	6in (152mm) ID	MA-203	8in (203mm) ID	MA-204	10in (254mm) ID	MA-205					
6in (152mm) ID	MA-203										
8in (203mm) ID	MA-204										
10in (254mm) ID	MA-205										
<p>Desiccator Plates support specimens in Desiccators. Chemical resistant and withstands temperatures up to 300°F (149°C).</p> <table border="1"> <tbody> <tr> <td>140mm (for 6in)</td> <td>MA-207</td> </tr> <tr> <td>190mm (for 8in)</td> <td>MA-208</td> </tr> <tr> <td>230mm (for 10in)</td> <td>MA-209</td> </tr> </tbody> </table>	140mm (for 6in)	MA-207	190mm (for 8in)	MA-208	230mm (for 10in)	MA-209					
140mm (for 6in)	MA-207										
190mm (for 8in)	MA-208										
230mm (for 10in)	MA-209										
<p>Desiccant Cartridges in durable perforated bags fit desiccators. Nutrasorb indicating silica gel beads are blue when dry, pink when moist, and cartridges regenerate repeatedly when dried in a 300°F (149°C) oven.</p> <table border="1"> <tbody> <tr> <td>114mm (for 6in and 8in)</td> <td>MA-187</td> </tr> <tr> <td>197mm (for 10in)</td> <td>MA-188</td> </tr> </tbody> </table>	114mm (for 6in and 8in)	MA-187	197mm (for 10in)	MA-188							
114mm (for 6in and 8in)	MA-187										
197mm (for 10in)	MA-188										
Sink Aspirator with Coupling , Chapman style. Low cost vacuum using 10–50psi water source. Has 3/8in NPT water inlet or fits threaded faucet with included coupling. Nickel-plated, 6in long, with ball valve to prevent water backflow.	MA-194										
<p>Tongs, nickel-plated steel with riveted joints. MA-195 is 10in (254mm) long and has 5in (127mm) long plastisol jaws to fit 50–2,000mL beakers. MA-196 is 8in (203mm) long.</p> <table border="1"> <tbody> <tr> <td>Beaker Tongs</td> <td>MA-195</td> </tr> <tr> <td>Crucible Tongs</td> <td>MA-196</td> </tr> </tbody> </table>	Beaker Tongs	MA-195	Crucible Tongs	MA-196							
Beaker Tongs	MA-195										
Crucible Tongs	MA-196										
Clear Vinyl Tubing , 1/16in wall thickness.											
	<table border="1"> <tbody> <tr> <td>3/8in ID, per foot</td> <td>WT-4</td> </tr> <tr> <td>100ft pack</td> <td>WT-4R</td> </tr> <tr> <td>1/4in ID, per foot</td> <td>WT-8</td> </tr> <tr> <td>100ft pack</td> <td>WT-8R</td> </tr> </tbody> </table>	3/8in ID, per foot	WT-4	100ft pack	WT-4R	1/4in ID, per foot	WT-8	100ft pack	WT-8R		
3/8in ID, per foot	WT-4										
100ft pack	WT-4R										
1/4in ID, per foot	WT-8										
100ft pack	WT-8R										
Adjustable Hose Clamp , with adjustment screw to permit accurate flow regulation in flexible tubing. Nickel-plated brass with pivoting lower jaw.	MA-198										



HMA-25 & HMA-24



HM-109



HM-111



HMA-10, HMA-11, HMA-11A, & HMA-12



HMA-13



SC-90



SPA-23



SPA-24



SPA-22



SP-92



TR-1002

Laboratory Tools

Description	Model												
Wash Bottles , polyethylene, squeeze dispensing; flow can be increased by cutting tip.	Wash Bottle, 250mL Wash Bottle, 500mL												
Mortar & Pestles , heavy porcelain 5in dia. mortar bowl has 320mL capacity, glazed except for sample contact area (small porcelain pestle included). Use HM-111 Rubber Tip Pestle to break up agglomerates of soils, etc.	Mortar and Pestle Rubber Tip Pestle												
Spatulas with mirror-finished stainless steel blades riveted to hardwood handles. HMA-11A meets ASTM C1252 and AASHTO T 304.													
	<table border="1"> <thead> <tr> <th>LxW of Blade, in (mm)</th> <th>Overall Size, in (mm)</th> </tr> </thead> <tbody> <tr> <td>4x0.75 (102x19)</td> <td>7.8 (198)</td> </tr> <tr> <td>6x0.5 (152x13)</td> <td>11.5 (292)</td> </tr> <tr> <td>6x1 (152x25)</td> <td>10.5 (267)</td> </tr> <tr> <td>3.9x0.9 (99x22.9)</td> <td>8.25 (210)</td> </tr> <tr> <td>10x1.5 (254x38)</td> <td>14.3 (363)</td> </tr> </tbody> </table>	LxW of Blade, in (mm)	Overall Size, in (mm)	4x0.75 (102x19)	7.8 (198)	6x0.5 (152x13)	11.5 (292)	6x1 (152x25)	10.5 (267)	3.9x0.9 (99x22.9)	8.25 (210)	10x1.5 (254x38)	14.3 (363)
LxW of Blade, in (mm)	Overall Size, in (mm)												
4x0.75 (102x19)	7.8 (198)												
6x0.5 (152x13)	11.5 (292)												
6x1 (152x25)	10.5 (267)												
3.9x0.9 (99x22.9)	8.25 (210)												
10x1.5 (254x38)	14.3 (363)												
Lab Spoon & Spatula is handy for mixing, scraping, and handling powders. Constructed entirely of stainless steel, the overall length is 7.8in (198mm). Spatula blade is 1.8x0.4in (46x10mm).													
Sample ID Tags of soft embossable aluminum are 3x0.8in (76x20mm), LxW and can be permanently marked by either pencil or ballpoint to attach to bags, containers, etc. via wire ties provided. Weatherproof and ovenproof. Package of 500.													
Bucket Liner Sample Bags optimize efficiency of sample collection, transport, and handling. Insert as a liner into an appropriate-size bucket or other container and the top stays wide open for easy one-person collection of bulk soil, aggregate, or asphalt samples. The bucket is easily carried around to the collection points and once filled, the bag opening is secured for transport using Double-Loop Wire Ties and the Wire Tie Twister, both purchased separately. Bags are 20x24in (508x610mm), WxH and can be used with Gilson HM-450, HM-452, MA-950, and SSA-20 sample containers and many other standard buckets with 3-6 gal (11-22L) capacity. Fabric and thread of the sturdy cotton cloth bags is temperature-rated to 400°F (204°C).	Bucket Liner Sample Bags, qty. 10 Bucket Liner Sample Bags, qty. 100 Bucket Liner Sample Bags, qty. 1,000 Double-Loop Wire Ties, 8in (200mm), qty. 50 Wire Tie Twister with Plastic Handle												
Sample Bags are heavy-duty and available with or without poly liners. Bags are quality high count drill textile with drawcords and are suitable for use with soil, sand, aggregates, ores, and similar materials. Use lined bags for fine or wet materials. Capacity for 10x8in bags is approximately 50lbs (23kg) and for 17x32in bags approximately 75lbs (34kg). Packages of 10.	Sample Bags, 10x18in (254x457mm) Sample Bags, 17x32in (432x813mm) Lined Sample Bags, 10x18in (254x457mm) Lined Sample Bags, 17x32in (432x813mm)												
Step-Up/Step-Down Transformers convert electrical voltages up from 110-120V to 220-240V, or down from 220-240V to 110-120V. Included adaptor allows input connection to common grounded power supplies in North America, Europe, and many other parts of the world. Universal output accepts North American, UK, European, and other plugs. Transformers have an On/Off switch, two spare fuses, and are CE marked. Do not exceed maximum rated wattage. Product Dimensions: TR-502: 6x5x4in (152x127x102mm), WxDxH. TR-1002: 8.5x7.5x5.5in (216x191x140mm), WxDxH. TR-3002: 7.2x9.8x6in (183x249x152mm), WxDxH.	Step-Up/Step-Down Transformer, 500 Watts Step-Up/Step-Down Transformer, 1,000 Watts Step-Up/Step-Down Transformer, 3,000 Watts												





MA-1807



MA-1827 (Flask not included)



MA-839



MA-812



MA-290

Hot Plates/Driers

Description	Model	Maximum Temperature, °F (C°)	Dimensions, WxDxH, in (mm)	
Cimarec+™ Stirring Hot Plates feature digital displays with settings adjustable in 1-degree increments. Microprocessor-controlled feedback maintains accurate, consistent temperatures. Hot-surface alert system warns of high temperatures regardless of On/Off status. Ceramic heating plate is easy to clean and resistant to most chemicals. Low-profile aluminum housing prevents fluid spills into electronics. Large wire-wound mica heating element assures fast, even heat up. Model with magnetic stirrer uses ceramic drive magnet and stepless control for quiet, reliable operation. Patented Stir-Trac Technology provides exceptional slow-speed stirring 50–1,500rpm and immediate braking. A 2x0.375in (51x10mm) Teflon-coated stir bar is included with MA-1827. Models operate on 100–120V, 50/60Hz. Thermo Scientific Cimarec + Hot Plate Magnetic Stirring Hot Plate	MA-1807	1,004° (540°)	14.2x8.2x4.1 (361x208x104)	
	MA-1827	1,004° (540°)	14.2x8.2x4.1 (361x208x104)	
Electric Ranges with heavy-duty burner plates are ideal for laboratory heating/drying applications where precise temperature control is not required. High quality commercial grade cast iron elements are built for long service life and stand up to daily use. Single-burner MA-838 is rated at 1,300 Watts and 11 amp operation for quick warm-up and heat retention. Double-burner MA-839 has one 1,300 Watt and one 500 Watt burner for lower temperature warming and drying. MA-839 has total 15 amp draw. Adjustable thermostatic heat controls have On and Ready indicator lights. Brushed stainless steel case and nonslip rubber feet allow safe operation and low maintenance. 120V, 60Hz. Electric Range, Single-Burner Electric Range, Double-Burner	MA-838	—	11x12.25x3.25 (279x311x83)	
	MA-839	—	19.75x12.25x3.25 (502x311x83)	
Propane Hot Plates are ideal for remote operation. Cast metal construction is rugged enough for reliable use in the most demanding field conditions. Single and Double Burner Heavy-Duty models weigh 21.5 and 53lb (9.8 and 24kg) respectively and have 35,000 BTU rating for each burner. Economy models have 15,000 BTU burners and weigh 9.5 and 18lb (4.3 and 8.1kg) each. All operate on standard propane cylinders connected to the 3/8in (9.5mm) male flare fitting. Each Hot Plate requires a Low-Pressure (11in Water Column) Regulator, purchased separately MAA-181 POL or MAA-182 Type 1 tank connectors. Includes 5ft (1.5m) length of U.L. listed LPG hose with a 3/8in (9.5mm) female flare swivel. Single Burner Economy Propane Hot Plate Double Burner Economy Propane Hot Plate Single Burner Heavy-Duty Propane Hot Plate Double Burner Heavy-Duty Propane Hot Plate Low Pressure Regulator with POL Connector Low Pressure Regulator with Type 1 Connector	MA-812	—	10.5x11.5x5.75 (267x292x146)	
	MA-814	—	20.5x11.5x5.75 (521x292x146)	
	MA-816	—	13x13x7.5 (330x330x191)	
	MA-818	—	27x13x7.5 (686x330x191)	
	MAA-181	—	—	—
	MAA-182	—	—	—
Heat Gun Driers are industrial-duty and ideal for use on soil and aggregate samples. Versatile design allows handheld or benchtop operation on a nonslip, removable base. Heating elements are reinforced mica-insulated ceramic and the housing is sturdy cast aluminum. The 1.19in (30mm) diameter heat nozzle rotates and locks over 90°. Maximum air volume is 23cfm (651L/min) at 3,000ft/min (914m/min) velocity. An adjustable air intake shutter controls air temperature. Models operate on 120V, 60Hz power supply and are UL listed and CSA approved. Add, "F" suffix for models that operate on 220–240V, 50Hz. Standard Dryer, 600 Watts High-Temperature Dryer, 1,440 Watts	MA-290	300° (149°)	10x5.25x9.5 (254x133x241)	
	MA-291	500° (260°)	10x5.25x9.5 (254x133x241)	



SE-20



MA-74



SE-26



SE-42



SE-28



SE-24



SE-33




SE-30

Safety Equipment	
Description	Model
Lightweight Hearing Protector earmuff features three-position contoured headband for use with helmets and shields and is made from nonconductive materials. Cushion-seal earpieces adjust easily for comfortable fit. Includes an auxiliary headband strap for multi-position wear. Noise Reduction Rating (NRR) is 25dB.	SE-20
Compressible Hearing Protectors are reusable, form-fitting foam ear plugs. Bright orange plugs have a smooth, soil-resistant skin and tapered shape for easy insertion. Once inserted, the plugs expand slightly for a snug, comfortable fit. Flared ends enable effortless removal. Noise Reduction Rating (NRR) 33dB. Sold in packs of twenty-five pairs.	MA-74
Safety Goggles have a soft, clear vinyl frame that fits snugly and comfortably. Perforated side-shields permit air flow but still protect from splashes, flying chips, and particles. Premium clear polycarbonate lenses are scratch-resistant with anti-fog coating. Can be worn over prescription glasses; adjustable elastic headband provided.	SE-26
Face Shield with full coverage protects from sparks, particles, short duration heat exposure, etc. The headgear has ratchet type adjustment, floating suspension and pivots up when not in use. The 70mil thick 9x15.5in (229x394mm) impact and heat resistant polycarbonate window is held securely in place by locking cams. Meets ANSI Z87.1.	SE-42
Safety Glasses have clear, impact-resistant polycarbonate lenses with full coverage side-shields for maximum protection. Wrap around ear pieces for secure fit.	SE-28
Disposable Dust Masks provide relief from nontoxic nuisance dusts. Lightweight, contoured design has a comfortable fit, adjustable elastic headband and an adjustable metal nosepiece. They are not NIOSH approved. Packed in boxes of fifty.	SE-24
Heat Resistant Gloves are made from long-lasting, genuine suede leather and protect hands from thermal heat up to 200°C (392°F). A cut and puncture-resistant layer provides protection from sharp edges and abrasions. The palm areas are reinforced with an extra layer of leather for additional durability. Soft, 100% cotton fleece lining adds extra insulation and comfort. 100% Kevlar® stitching provides improved flexibility, longevity, and is flame resistant. Ideal for hot mix asphalt testing. One-size-fits-all.	SE-33
Nitrile Rubber Gloves are durable and outperform other rubber types for petroleum and chlorinated solvents. They are ideal for use with oils, acids, caustics, and alcohol compounds. Sturdy embossed-grip gloves are 12.5in (318mm) long, 17mil thick, flock lined, and resistant to cuts and snags. Available individually or by the dozen in M, L, or XL sizes.	SE-30M SE-30MD SE-30L SE-30LD SE-30X SE-30XD



ONE STOP


globalgilson.com is your one stop resource for materials testing equipment, supplies, & expert knowledge and tips.

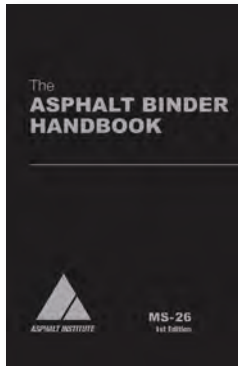

BK-50




BK-43

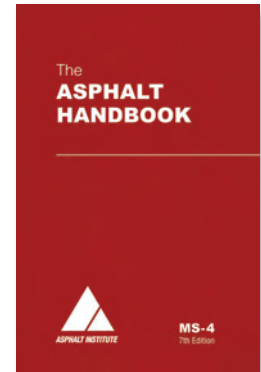


BK-44



BK-45

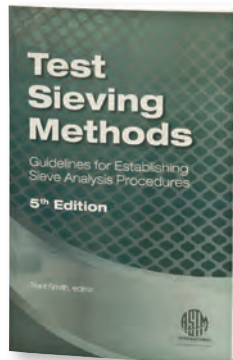

BK-447R

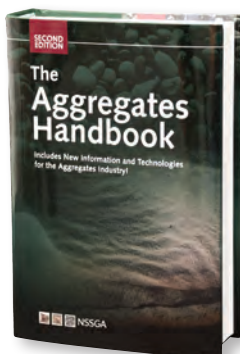

BK-36

Reference Library

Description	Model
<p>ASPHALT BINDER HANDBOOK A comprehensive manual devoted entirely to information about asphalt binders and bitumen. It is a compilation of information contained in numerous other Asphalt Institute publications, including SP-1, MS-4, MS-5, MS-19, and MS-25 manuals. It also includes previously unpublished information on topics like the Multiple-Stress Creep Recovery (MSCR) test, testing variability and resolution, and the generation of mastercurves. Fully illustrated. 1st edition. 223 pages. Product Dimensions: 6x9in (152x229mm), WxH.</p>	BK-50
<p>ASPHALT MIX DESIGN METHODS A practical guide to asphalt mix design by Marshall and Hveem methods. Fully illustrated paperback. 7th edition. 112 pages. Product Dimensions: 6x9in (152x229mm), WxH.</p>	BK-43
<p>THE ASPHALT HANDBOOK A primary reference guide for contractors, engineers, consultants, specifiers, and user agencies. Chapters include Superpave asphalt binder and mix design, stone matrix asphalt, open-graded friction courses, quality control and acceptance, pavement management, and rehabilitation of concrete pavements with hot-mix asphalt (HMA). Fully illustrated and leather bound. 7th edition. 832 pages. Product Dimensions: 6x9in (152x229mm), WxH.</p>	BK-44
<p>CONSTRUCTION OF QUALITY ASPHALT PAVEMENTS Prepared by the Asphalt Institute for the U.S. Federal Highway Administration to define asphalt pavement quality control procedures. Chapters include Inspection and the Inspector, Materials, Mix Design, Plant Operations, Placing Operations, and Compaction. Useful for engineers, inspectors, and technicians. Paperback with appendices. 3rd edition. 209 pages. Product Dimensions: 8.5x11in (216x279mm), WxH.</p>	BK-45
<p>ASTM MANUAL ON TEST SIEVING METHODS New, 5th edition ASTM publication supplements current ASTM sieving standards. Subject matter covers sieve types, sampling methods, sieving procedures, calculation, and graphing. Appendices include reference tables and charts. 5th edition. 66 pages. Product Dimensions: 6x9in (152x229mm), WxH.</p>	BK-447R
<p>THE AGGREGATES HANDBOOK This compilation of articles creates a comprehensive reference for anyone dealing with aggregates. Discusses basic properties, aggregate as a component of Portland cement and asphalt concrete, sampling and testing principles, and more. Features expanded coverage of many industry topics. 2nd edition. Product Dimensions: 8.5x11in (216x279mm), WxH.</p>	BK-36

ORDER ONLINE

Browse & order directly from globalgilson.com on your phone, tablet, or computer.

This index is designed to help you find products based on your ASTM, AASHTO or other testing requirements. The pages with products related to the specific Test ID are listed. For assistance, contact a Gilson Technical Service representative at 800-444-1508.

ASTM (AMERICAN SOCIETY FOR TESTING AND MATERIALS) INDEX

B215	58, 59, 60	C490	164	D979	56, 95	D5321	228
C20	80, 100, 102	C496	133, 134, 139	D1140	12, 13, 74	D5329	129
C29	150, 151, 286, 287	C511	170, 171, 172	D1168	129	D5581	86, 87, 88, 89, 90, 91, 241, 243
C31	150, 158, 160, 161, 170	C535	68	D1188	80, 100, 102	D5856	219
C39	132, 133, 134, 135, 136, 137, 138, 139, 140, 141	C579	162, 163	D1321	129	D5873	178, 179
C40	77	C593	166	D1403	129	D6084	128
C42	114, 196	C597	184	D1514	167	D6087	185, 186
C70	81	C617	144, 145, 162, 163	D1556	194, 259	D6243	228
C78	132, 133, 134, 136, 139, 160	C642	80, 100	D1557	238, 239, 240, 241	D6307	104, 106
C87	162, 163, 166	C702	52, 53, 54, 55, 58, 59, 62	D1558	238, 239, 240, 241, 243	D6390	109
C87M	163	C778	52, 55, 62, 194	D1632	222, 245	D6432	185, 186, 187
C88	70	C803	177	D1633	222, 223, 235, 245	D6449	166
C91	162, 163, 165	C805	178	D1831	129	D6521	118
C91M	163	C830	80, 84, 100, 103	D1856	107	D6648	119
C109	130, 132, 133, 134, 136, 139, 162, 163, 166, 168, 194, 195, 324	C837	77	D1883	200, 202, 203, 204, 235, 238, 241	D6925	91, 92, 93, 94, 241
C109M	139, 162, 163	C860	166	D2013	55, 59, 61, 275	D6926	90, 91, 241, 243
C110	166	C876	182, 183	D2041	80, 83, 84, 99, 100, 101, 102, 103, 310	D6927	86, 87, 88, 89, 310
C115	20, 167	C918	173	D2166	205, 220, 221, 235	D6928	69
C117	12, 13, 74	C939	166	D2167	259	D6931	86, 87
C127	80, 81, 100, 102	C942	162, 163	D2168	239	D6951	256
C128	81, 82, 84, 98, 103	C1012	162	D2170	126, 127	D7175	124
C131	68	C1019	135, 168, 169	D2171	126, 127	D7181	205, 206, 207, 209, 211, 216, 235
C138	150, 151, 161, 286, 287	C1064	305, 311	D2172	84, 103, 107, 108, 109	D7229	92, 93, 94
C140	139, 169	C1074	173	D2419	72, 73	D7234	188
C141	162, 163, 165	C1090	158	D2434	218	D7313	87
C141M	163	C1202	183, 189	D2435	230, 231, 232, 234, 235	D7405	124
C143	152, 153, 154	C1231	142, 169	D2726	80, 100, 310	D7428	69
C143M	152, 153, 154	C1252	75, 250, 325	D2850	205, 206, 207, 209, 211, 212, 216, 235	D7496	126
C151	164	C1260	164	D2872	117	D7522	188
C157	164	C1314	139	D2884	129	D7928	251
C173	149, 240	C1542	141	D3080	224, 225, 226, 227, 235	D8044	86, 87, 89
C185	166, 240	C1583	188	D3302	275	D8121	255
C187	165	C1609	134	D3319	79	E1	302, 303, 304, 306
C188	81	C1610	157	D3385	262	E4	136, 137
C190	194	C1611	156	D3744	71, 72	E11	2-15, 19, 20, 37, 38, 40, 42, 46, 47, 50, 109, 167
C191	165	C1621	156	D3802	298	E77	302, 303, 304, 305, 306, 311
C192	158, 160, 161, 170, 171, 172, 194	C1712	155	D4013	64	E145	273
C204	20, 167	C1760	189	D4253	244	E161	9, 11, 37, 38
C227	130, 164, 195	C1891	20, 167	D4254	244	E276	55
C230	166	C5873	178	D4318	248, 249	E288	322
C231	146, 147, 148, 240	D5	129	D4373	246	E303	79
C266	165	D36	125	D4402	120, 121, 122, 123	E323	46, 47
C287	144	D70	81, 101	D4429	254	E389	55
C293	132, 133, 134, 136, 139	D88	126	D4541	188	E605	275
C305	130, 195	D92	127	D4546	230, 231, 232, 234, 235	E617	290
C307	144	D113	128	D4644	71, 247	E694	322
C308	165	D197	275	D4647	246	E877	55
C311	162, 163	D204	82, 98	D4695	113	E960	322
C348	166	D217	129	D4748	185, 186	E1404	322
C359	165	D346	55, 59	D4749	46, 47	E2251	303
C403	160, 165, 168	D421	275	D4767	205, 206, 207, 209, 211, 212, 216, 235	E2427	3, 19, 21
C409	299	D422	251	D4791	76	E2877	306
C414	165	D427	249	D4829	234	F1869	192
C430	20, 167	D445	126, 127	D4867	82, 84, 86, 87, 98, 103	F2170	190
C451	165	D446	126	D4943	249	F2659	190, 191, 192
C469	133, 135, 140	D558	238, 239, 240, 241, 275	D4944	78, 260, 261	G57	263
C470	158	D559	16, 238, 239, 240, 241, 275, 323	D4972	264	G187	263
C472	162, 163	D560	16, 238, 239, 240, 241, 323	D5084	207, 209, 211, 212, 213, 215, 216		
		D698	238, 239, 240, 241, 275				
		D854	81, 82, 98, 252, 322				
		D937	129				

AASHTO (AMERICAN ASSOCIATION OF STATE HIGHWAY AND TRANSPORTATION OFFICIALS)

M 92	15	T 72	126	T 164	84, 103, 107, 108, 109	T 278	79
M 152M	166	T 84	81, 82, 98	T 166	80, 100, 102	T 279	79
M 201	170, 171, 172	T 85	80, 81, 100, 102	T 176	72, 73	T 283	86, 87, 89, 99, 101
M 205	158	T 88	251	T 177	132, 133, 134, 139	T 288	263
M 205M	158	T 89	248	T 180	238, 239, 240, 241, 275	T 289	264
PP 89	141	T 90	248, 249	T 185	165	T 296	205, 206, 207, 209, 211, 216, 235
R 28	118	T 96	68	T 186	165	T 297	205, 206, 207, 209, 211, 216, 235
R 37-04	185, 186	T 97	132, 133, 134, 139, 160	T 191	194, 259	T 300	128
R 39	158, 160, 161, 170, 194	T 98	20, 167	T 192	20, 167	T 301	128
R 47	56, 95	T 99	238, 239, 240, 241, 275	T 193	200, 202, 203, 204, 235, 238, 241	T 304	75, 250, 325
R 58	275	T 100	81, 82, 84, 98, 103	T 196	149	T 305	109
R 59	107	T 104	70	T 196M	149	T 308	104, 106
R 64	162, 163	T 106	130, 133, 134, 139, 163, 168,	T 197	158, 168	T 312	64, 91, 92, 93, 94, 241
R 67	114, 196		194, 195, 324	T 197M	158, 165, 168	T 313	119
R 68	90, 91, 243	T 106M	139, 162, 163, 166	T 198	134, 139	T 315	124
R 70	164	T 107	164	T 201	122, 126, 127	T 316	120, 121, 122, 123
R 74	275	T 107M	164	T 202	126, 127	T 324	96, 97
R 76	52, 54, 55, 58, 59, 62	T 119	152, 153, 154	T 208	220, 221, 235	T 325	173
T 11	12, 13, 74	T 119M	152, 153, 154	T 209	80, 82, 83, 84, 98, 99, 100, 101,	T 326	75, 240
T 19	150, 151, 286, 287	T 121	150, 151, 161, 286, 287		102, 103	T 327	69
T 19M	151	T 121M	151, 161	T 210	71, 72, 73	T 330	77
T 21	77	T 126	158	T 215	218	T 336	193
T 22	132, 133, 134, 135, 136, 139, 141,	T 127	65	T 216	230, 231, 232, 234, 235	T 340	96, 97
	142, 169	T 129	165	T 217	78, 260, 261	T 344	94
T 23	158, 160, 161, 170, 171, 172	T 131	165	T 220	238, 239, 241	T 345	156
T 24	114, 196	T 133	81	T 231	144, 145, 162, 163	T 347	156
T 24M	196	T 134	238, 239, 240, 241	T 236	224, 225, 226, 227, 235	T 350	124
T 27	52, 55	T 135	16, 238, 239, 240, 241, 323	T 240	117	T 354	81
T 43	81, 101	T 136	16, 238, 239, 240, 241, 323	T 245	86, 87, 88, 89, 90, 241, 243	T 358	183
T 48	127	T 137	166, 240	T 248	52, 54, 55, 58, 59, 62	TP 108	68
T 49	129	T 152	146, 147, 148	T 256	113	TP 114	86, 87
T 51	128	T 153	20, 167	T 275	80, 100, 102	TP 118	148
T 53	125	T 154	165	T 276	173	TP 124	86, 87, 89
T 71	166	T 162	130, 195	T 277	189		

CALIFORNIA DEPARTMENT OF TRANSPORTATION TEST METHODS (CTM)

201.....	54	227.....	71
214.....	70	229.....	71, 72, 73
216.....	238, 239, 244	346.....	117
217.....	72, 73		

TEXAS DEPARTMENT OF TRANSPORTATION TEST METHODS (TXDOT)

105-E.....	249	242-F.....	96, 97
227-F.....	82, 98	845-49-40.....	69

PENNSYLVANIA TEST METHODS (PTM)

510.....	70
705.....	90

FLORIDA

5-507.....	78, 260, 261	5-565.....	112
5-515.....	200, 202, 203, 204, 235, 238, 241		

API STANDARDS

STD 19C.....	57
--------------	----

INTERNATIONAL STANDARDS ORGANIZATION (ISO)

565.....	2, 8, 9, 10, 11, 19, 38, 42, 47	3310-3.....	9, 11
1920.....	184	4624.....	188
3104.....	126	13503-2-2006.....	57
3310-1.....	2, 8, 9, 10, 19, 38, 47	17025.....	94

BRITISH STANDARDS (BS) EUROPEAN STANDARDS (EN)

812-105.....	76	13036.....	79
812-114.....	79	13302.....	120
1015-12.....	188	13791.....	178
1348.....	188	EN 1097-8.....	79
1610.....	132, 136	EN 1542.....	188
1881.....	132, 136, 152, 153, 154, 163, 182, 183	EN 12504-2.....	178
1881-202.....	178	EN 12504-4.....	184
1881-204.....	180, 181	EN 14769.....	118
1881-207.....	177	EN 302066.....	185, 186

HM-673, 673F.....	43 (19)	HMA-63.....	5 (2)	HMA-229.....	1 (0.5)	HMA-506.....	2 (1)	HMA-685D.....	25 (11)
HM-674B.....	5 (2)	HMA-64-1.....	2.5 (1)	HMA-232, 232D.....	3 (1)	HMA-514, 514S.....	19 (9)	HMA-685DF.....	25 (11)
HM-674D.....	2 (1)	HMA-68.....	10 (5)	HMA-234, 234D.....	3 (1)	HMA-516, 516S.....	33 (15)	HMA-686.....	7 (3)
HM-677.....	9 (4)	HMA-69.....	20 (9)	HMA-236, 236D.....	9 (4)	HMA-517, 517S.....	31 (14)	HMA-687.....	13 (6)
HM-678.....	16 (7)	HMA-78.....	2 (1)	HMA-240.....	55 (25)	HMA-518, 518S.....	31 (14)	HMA-687D.....	15 (7)
HM-679.....	24 (11)	HMA-79.....	2 (1)	HMA-250.....	10 (5)	HMA-519, 519S.....	45 (20)	HMA-687DF.....	15 (7)
HM-685 (All).....	1250 (567)	HMA-82.....	2 (1)	HMA-251.....	3 (1)	HMA-520.....	13 (6)	HMA-694.....	30 (14)
HM-687, 687F.....	700 (317)	HMA-84A-F.....	8 (4)	HMA-258.....	4 (2)	HMA-521.....	4 (2)	HMA-696.....	25 (11)
HM-705.....	6 (3)	HMA-85.....	6 (3)	HMA-259.....	2 (1)	HMA-522.....	2 (1)	HMA-697.....	4 (2)
HM-714A.....	1100 (499)	HMA-86.....	2 (1)	HMA-260.....	6 (3)	HMA-523.....	2 (1)	HMA-700.....	3 (1)
HM-716A.....	1100 (499)	HMA-88A-L.....	1 (0.5)	HMA-261.....	6 (3)	HMA-524.....	1 (0.5)	HMA-701.....	1 (0.5)
HM-723/F.....	40 (18)	HMA-89.....	30 (14)	HMA-262.....	6 (3)	HMA-525.....	1 (0.5)	HMA-702.....	1 (0.5)
HM-725.....	2 (1)	HMA-90A thru 90J.....	1 (0.5)	HMA-263.....	8 (4)	HMA-526.....	6 (3)	HMA-704.....	2 (1)
HM-739 thru 740.....	2 (1)	HMA-94.....	80 (36)	HMA-264.....	5 (2)	HMA-527 thru 529.....	2 (1)	HMA-714.....	6 (3)
HM-750R, 750RF.....	150 (68)	HMA-95.....	80 (36)	HMA-265.....	10 (5)	HMA-553.....	2 (1)	HMA-715.....	3 (1)
HM-806, 806F.....	113 (51)	HMA-104, 104C.....	20 (9)	HMA-266.....	4 (2)	HMA-554.....	3 (1)	HMA-716.....	6 (3)
HM-807, 807F.....	113 (51)	HMA-107R.....	1 (0.5)	HMA-271A.....	4 (2)	HMA-556.....	6 (3)	HMA-725.....	166 (75)
HM-808, 808F.....	98 (45)	HMA-108.....	2 (1)	HMA-272.....	1 (0.5)	HMA-557.....	1 (0.5)	HMA-727.....	79.5 (36)
HM-810 thru 814.....	1 (0.5)	HMA-110.....	13 (6)	HMA-276A.....	3 (1)	HMA-558.....	1 (0.5)	HMA-729.....	243 (110)
HM-815.....	1 (0.5)	HMA-110B.....	6 (3)	HMA-277.....	1 (0.5)	HMA-559.....	2 (1)	HMA-730.....	95 (43)
HM-816.....	2 (1)	HMA-110C.....	3 (1)	HMA-278.....	7 (3)	HMA-563 thru 569.....	1 (0.5)	HMA-731.....	219 (99)
HM-817.....	1 (0.5)	HMA-110M.....	6 (3)	HMA-279.....	2 (1)	HMA-573 thru 579.....	1 (0.5)	HMA-732.....	134 (61)
HM-818.....	2 (1)	HMA-111, 111M.....	6 (3)	HMA-282.....	5 (2)	HMA-581.....	55 (25)	HMA-733.....	3 (1)
HM-819.....	1 (0.5)	HMA-112.....	5 (2)	HMA-283.....	6 (2)	HMA-582.....	20 (9)	HMA-734 thru 734S.....	3 (1)
HM-831, 832.....	6 (3)	HMA-113.....	5 (2)	HMA-286.....	20 (9)	HMA-583.....	5 (2)	HMA-735, 735S.....	3 (1)
HM-833.....	10 (4)	HMA-114.....	5 (2)	HMA-287.....	15 (7)	HMA-584.....	5 (2)	HMA-736, 736S.....	4 (2)
HM-834.....	12 (5)	HMA-115.....	5 (2)	HMA-289.....	80 (36)	HMA-586A.....	5 (2)	HMA-737, 737S.....	4 (2)
HM-835.....	20 (9)	HMA-116.....	19 (9)	HMA-290.....	1 (0.5)	HMA-587A/B.....	5 (2)	HMA-739.....	6 (3)
HM-891.....	12 (5)	HMA-116C.....	5 (2)	HMA-292.....	1 (0.5)	HMA-588A/B.....	5 (2)	HMA-739B.....	6 (3)
HM-892.....	12 (5)	HMA-116M.....	8 (4)	HMA-293.....	2 (0.5)	HMA-589A/B.....	5 (2)	HMA-743.....	1 (0.5)
HM-893.....	15 (7)	HMA-117.....	21 (9)	HMA-295.....	3 (1)	HMA-591.....	7 (3)	HMA-744 thru 744S.....	1 (0.5)
HM-894.....	20 (9)	HMA-117M.....	8 (4)	HMA-296.....	5 (2)	HMA-592.....	4 (2)	HMA-745.....	1 (0.5)
HM-895.....	42 (19)	HMA-118.....	6 (3)	HMA-298.....	1 (0.5)	HMA-593.....	4 (2)	HMA-746, 746S.....	1 (0.5)
HM-914.....	6 (3)	HMA-120.....	3 (1)	HMA-299.....	15 (7)	HMA-608.....	1 (0.5)	HMA-747S.....	1 (0.5)
HM-916.....	10 (4)	HMA-121.....	1 (0.5)	HMA-300.....	2 (1)	HMA-609.....	1 (0.5)	HMA-763.....	1 (0.5)
HM-923, 923F.....	185 (84)	HMA-122.....	3 (3)	HMA-301.....	1 (0.5)	HMA-610.....	1 (0.5)	HMA-764 thru 764S.....	1 (0.5)
HM-924.....	3 (1)	HMA-123.....	5 (2)	HMA-302.....	3 (1)	HMA-611.....	1 (0.5)	HMA-765.....	1 (0.5)
HM-925.....	3 (1)	HMA-124.....	2 (1)	HMA-303.....	1 (0.5)	HMA-612.....	1 (0.5)	HMA-766S.....	1 (0.5)
HM-926.....	3 (1)	HMA-125.....	3 (1)	HMA-304 thru 308R.....	2 (1)	HMA-613.....	1 (0.5)	HMA-767S.....	1 (0.5)
HM-930.....	1 (0.5)	HMA-129.....	6 (3)	HMA-309.....	1 (0.5)	HMA-615, 616.....	30 (14)	HMA-772.....	1 (0.5)
HM-940.....	24 (11)	HMA-130.....	13 (6)	HMA-320.....	1 (1)	HMA-617.....	22 (10)	HMA-773.....	1 (0.5)
HM-942.....	7 (3)	HMA-131.....	10 (5)	HMA-321.....	1 (0.5)	HMA-618.....	3 (1)	HMA-774.....	1 (0.5)
HM-944.....	9 (4)	HMA-132, 132WR.....	15 (7)	HMA-323.....	1 (0.5)	HMA-619.....	22 (10)	HMA-775.....	1 (0.5)
HM-952.....	5 (2)	HMA-133.....	3 (1)	HMA-324.....	2 (1)	HMA-621.....	60 (27)	HMA-776.....	1 (0.5)
HM-954.....	5 (2)	HMA-134.....	1 (0.5)	HMA-338.....	1 (0.5)	HMA-622.....	14 (6)	HMA-804.....	1 (0.5)
		HMA-135.....	1 (0.5)	HMA-340.....	3 (1)	HMA-623.....	3 (1)	HMA-810.....	173 (78)
		HMA-136.....	3 (1)	HMA-347.....	1 (0.5)	HMA-624.....	4 (2)	HMA-812.....	2 (1)
		HMA-137.....	1 (0.5)	HMA-348R.....	2 (1)	HMA-626.....	18 (8)	HMA-813.....	15 (7)
		HMA-139.....	2 (1)	HMA-349.....	4 (2)	HMA-628.....	8 (4)	HMA-814.....	2 (1)
		HMA-140.....	6 (3)	HMA-355.....	2 (1)	HMA-629.....	8 (4)	HMA-815.....	8 (4)
		HMA-141.....	1 (0.5)	HMA-356.....	1 (0.5)	HMA-630.....	3 (1)	HMA-820.....	96 (44)
		HMA-143.....	2 (1)	HMA-356A,B,C.....	0.5 (0.23)	HMA-632.....	18 (8)	HMA-821.....	37 (17)
		HMA-145.....	1 (0.5)	HMA-359.....	12 (5)	HMA-633.....	27 (12)	HMA-822.....	52 (24)
		HMA-146.....	0.5 (0.23)	HMA-368.....	0.5 (0.23)	HMA-635.....	18 (8)	HMA-826.....	78 (35)
		HMA-147.....	0.5 (0.23)	HMA-385.....	1 (0.5)	HMA-660.....	0.25 (0.5)	HMA-828.....	56 (25)
		HMA-155.....	2 (1)	HMA-386.....	1 (0.5)	HMA-661.....	1 (0.5)	HMA-834D, 834E.....	7 (3)
		HMA-180, 180C.....	1 (0.5)	HMA-387.....	1 (0.5)	HMA-662.....	1 (0.5)	HMA-835.....	4 (2)
		HMA-181, 181C.....	1 (0.5)	HMA-402, 402F.....	4 (1)	HMA-664.....	1 (0.5)	HMA-836.....	7 (3)
		HMA-182.....	2 (1)	HMA-405.....	1 (0.5)	HMA-665.....	6 (3)	HMA-837.....	4 (2)
		HMA-183, 183S.....	1 (0.5)	HMA-407.....	1 (0.5)	HMA-666.....	0.25 (0.5)	HMA-838, 839.....	15 (7)
		HMA-188.....	1 (0.5)	HMA-409.....	1 (0.5)	HMA-667.....	15 (7)	HMA-840.....	10 (4)
		HMA-190.....	3 (1)	HMA-410, 411.....	8 (4)	HMA-668.....	4 (2)	HMA-841.....	4 (2)
		HMA-191.....	16 (7)	HMA-460.....	16 (7)	HMA-669.....	0.25 (0.5)	HMA-842.....	4 (2)
		HMA-203.....	2 (1)	HMA-465.....	8 (4)	HMA-670.....	4 (2)	HMA-843.....	6 (3)
		HMA-204W.....	25 (11)	HMA-466.....	8 (4)	HMA-671.....	1 (0.5)	HMA-844.....	8 (4)
		HMA-207.....	2 (1)	HMA-467.....	8 (4)	HMA-672.....	1 (0.5)	HMA-846.....	1 (0.5)
		HMA-208.....	1 (0.5)	HMA-482.....	20 (9)	HMA-673.....	1 (0.5)	HMA-848.....	1 (0.5)
		HMA-214 thru 220.....	2 (1)	HMA-490.....	1 (0.5)	HMA-674/C.....	18 (8)	HMA-850 thru 854.....	1 (0.5)
		HMA-221.....	3 (1)	HMA-491.....	4 (2)	HMA-680.....	0.25 (0.5)	HMA-855.....	1 (0.5)
		HMA-224.....	40 (18)	HMA-492.....	2 (1)	HMA-683D.....	10 (5)	HMA-856.....	1 (0.5)
		HMA-226.....	40 (18)	HMA-493.....	10 (5)	HMA-683DF.....	10 (5)	HMA-857.....	1 (0.5)
		HMA-228.....	1 (0.5)			HMA-685.....	16 (7)	HMA-860.....	1 (0.5)

HMA

	lb	(kg)
HMA-1A.....	0.5	(.23)
HMA-2.....	1	(0.5)
HMA-5.....	1	(0.5)
HMA-8.....	12	(5)
HMA-9.....	1	(0.5)
HMA-10 thru 12.....	2	(1)
HMA-13.....	1	(0.5)
HMA-15.....	1	(0.5)
HMA-20.....	2	(1)
HMA-21.....	2	(1)
HMA-24 thru 49.....	1	(0.5)
HMA-51.....	8	(4)
HMA-52.....	4	(2)
HMA-53.....	2	(1)
HMA-54.....	5	(2)
HMA-54-2.....	6.5	(3)
HMA-54-5.....	5.5	(2.5)
HMA-55V.....	1	(0.5)
HMA-56.....	6	(3)
HMA-56B.....	55	(25)
HMA-58.....	2	(1)
HMA-60.....	6	(3)
HMA-61.....	10	(5)
HMA-62.....	4	(2)



HMA-861.....	40 (18)
HMA-863.....	2 (1)
HMA-864.....	40 (18)
HMA-866.....	1 (0.5)
HMA-920.....	13 (6)
HMA-922.....	13 (6)
HMA-924.....	4 (2)
HMA-943.....	2 (1)
HMA-944.....	2 (1)
HMA-946A.....	2 (1)
HMA-947.....	2 (1)
HMA-948.....	2 (1)
HMA-949.....	2 (1)
HMA-953.....	5 (2)
HMA-954.....	7 (3)
HMA-956.....	13 (6)
HMA-957 thru 957B.....	2 (1)
HMA-958.....	2 (1)
HMA-958A.....	4 (2)
HMA-958B.....	3 (1)
HMA-959.....	3 (1)
HMA-959A.....	5 (2)
HMA-963.....	4 (2)
HMA-964.....	6 (3)
HMA-966.....	13 (6)
HMA-967 thru 967B.....	2 (1)
HMA-968.....	2 (1)
HMA-968A thru 969.....	3 (1)
HMA-969A.....	4 (2)
HMA-973.....	4 (2)
HMA-974.....	6 (3)
HMA-976.....	13 (6)
HMA-977 thru 978.....	2 (1)
HMA-978A thru 979.....	3 (1)
HMA-979A.....	4 (2)
HMA-983.....	9 (4)
HMA-984.....	10 (5)
HMA-986.....	17 (8)
HMA-987 thru 988.....	7 (3)
HMA-988A thru 989.....	8 (4)
HMA-989A.....	9 (4)
HMA-1050.....	8 (3)
HMA-1051.....	22 (10)
HMA-1052.....	6 (3)
HMA-1053.....	5 (2)
HMA-1054.....	100 (45)

LC

	lb (kg)
LC-7, 7F.....	40 (18)
LC-8, 8F.....	65 (30)
LC-20, 20F.....	600 (272)
LC-22, 22F.....	1600 (726)
LC-27.....	125 (57)
LC-28.....	250 (113)
LC-33.....	430 (195)
LC-34.....	430 (195)
LC-35.....	610 (277)
LC-36.....	610 (277)
LC-37.....	885 (401)
LC-44D/E/G.....	1050 (476)
LC-47D/E/G.....	1500 (680)
LC-53.....	390 (177)
LC-80.....	15 (7)
LC-82, 82F.....	70 (32)
LC-82S.....	70 (32)
LC-88.....	35 (16)
LC-115.....	680 (309)

LCA

	lb (kg)
LCA-5 thru 6.....	24 (11)
LCA 9.....	24 (11)
LCA-11.....	24 (11)
LCA-34.....	3 (1)
LCA-35.....	4 (2)
LCA-36.....	5 (2)
LCA-37.....	10 (5)
LCA-45.....	8 (4)
LCA-46.....	5 (2)
LCA-47.....	12 (5)
LCA-50.....	2 (1)
LCA-51.....	7 (3)
LCA-52.....	10 (5)
LCA-53.....	26 (12)
LCA-55.....	1 (0.5)
LCA-56.....	1 (0.5)
LCA-57.....	250 (113)
LCA-60.....	6 (3)
LCA-61.....	23 (10)
LCA-63.....	45 (20)
LCA-65 thru 68.....	10 (5)
LCA-70.....	5 (2)
LCA-72.....	5 (2)
LCA-73.....	2 (1)
LCA-74.....	2 (1)
LCA-75.....	6 (3)
LCA-76.....	24 (11)
LCA-80.....	24 (11)
LCA-81.....	36 (16)
LCA-82.....	47 (21)
LCA-83.....	56 (25)
LCA-91.....	850 (386)
LCA-92.....	11 (5)
LCA-170.....	1 (0.5)
LCA-171.....	1 (0.5)
LCA-172 thru 176.....	3 (1)
LCA-178.....	5 (2)
LCA-179.....	1 (0.5)
LCA-240.....	30 (13)
LCA-242.....	30 (13)
LCA-412.....	40 (18)
LCA-416.....	30 (13)
LCA-417.....	30 (13)
LCA-418.....	30 (13)
LCA-419.....	30 (13)
LCA-422.....	30 (13)

LP / LPA

	lb (kg)
LP-10, 10F.....	258 (117)
LP-16.....	2 (1)
LP-18.....	3 (1)
LP-72.....	15 (7)
LP-74.....	15 (7)
LP-82.....	5 (2)
LP-84.....	22 (10)
LP-88.....	3 (1)
LPA-20.....	5 (2)
LPA-21.....	5 (2)
LPA-24.....	1 (0.5)
LPA-26.....	2 (1)
LPA-30, 30F.....	53 (24)
LPA-70.....	8 (4)
LPA-73.....	27 (12)
LPA-75.....	36 (16)
LPA-77.....	2 (1)
LPA-79.....	2 (1)
LPA-81.....	4 (2)
LPA-83.....	4 (2)
LPA-86.....	2 (1)
LPA-87.....	4 (2)

LPA-88.....	4 (2)
LPA-89.....	4 (2)
LPA-182.....	20 (9)
LPA-708.....	2 (1)
LPA-709.....	2 (1)
LPA-710.....	2 (1)
LPA-711.....	2 (1)
LPA-713.....	1 (0.5)
LPA-715.....	2 (1)
LPA-717.....	1 (0.5)
LPA-721.....	2 (1)
LPA-816.....	3 (1)
LPA-821.....	3 (1)
LPA-827.....	3 (1)
LPA-828.....	3 (1)
LPA-829.....	3 (1)
LPA-10R.....	43 (20)
LPA-20R.....	57 (26)
LPA-30R.....	77 (35)
LPA-40R.....	92 (42)

MA

	lb (kg)
MA-10.....	15 (7)
MA-11.....	1 (0.5)
MA-12.....	2 (1)
MA-13.....	1 (0.5)
MA-20A.....	23 (10)
MA-21A.....	23 (10)
MA-22.....	90 (41)
MA-22F.....	90 (41)
MA-23, 23F.....	27 (12)
MA-24, 24F.....	18 (8)
MA-25, 25C.....	23 (10)
MA-26X.....	14 (6)
MA-27A, 27AF.....	30 (14)
MA-29, 29F.....	110 (50)
MA-30.....	1 (0.5)
MA-31.....	9 (4)
MA-32, 32F.....	15 (7)
MA-33, 33F.....	12 (6)
MA-38.....	1 (0.5)
MA-40 thru 45.....	2 (1)
MA-48.....	2 (1)
MA-50.....	3 (1)
MA-52.....	55 (25)
MA-52X.....	55 (25)
MA-54A.....	210 (95)
MA-66.....	48 (22)
MA-67.....	113 (51)
MA-68.....	125 (57)
MA-71.....	2 (1)
MA-74.....	1 (0.5)
MA-78.....	2 (1)
MA-80, 80B.....	10 (5)
MA-81, 81B.....	10 (5)
MA-100 thru 127.....	1 (0.5)
MA-140.....	1 (0.5)
MA-141.....	1 (0.5)
MA-142.....	2 (1)
MA-143.....	3 (1)
MA-144.....	3 (1)
MA-145 thru 149.....	1 (0.5)
MA-150 thru 154.....	1 (0.5)
MA-155 thru 158.....	1 (0.5)
MA-159.....	2 (1)
MA-161 thru 162.....	1 (0.5)
MA-168 thru 169.....	2 (1)
MA-170 thru 170F.....	3 (1)
MA-182.....	2 (0.1)
MA-187.....	1 (0.5)

MAA

MA-188.....	1 (0.5)
MA-189.....	1 (0.5)
MA-193 thru 198.....	1 (0.5)
MA-196.....	1 (0.5)
MA-203.....	8 (4)
MA-204.....	18 (8)
MA-205.....	23 (10)
MA-207 thru 209.....	1 (0.5)
MA-210C.....	1 (0.5)
MA-238.....	2 (1)
MA-245 thru 249.....	2 (1)
MA-257 thru 258.....	2 (1)
MA-260.....	2 (1)
MA-267.....	6 (3)
MA-275 thru 278.....	1 (0.5)
MA-290.....	6 (3)
MA-291.....	6 (3)
MA-305.....	2 (1)
MA-317, 317B.....	1 (0.5)
MA-321A thru 322AT.....	2 (1)
MA-323 thru 324C.....	2 (1)
MA-326.....	2 (1)
MA-327, 327C.....	2 (1)
MA-330 thru 373C.....	2 (1)
MA-356.....	2 (1)
MA-357.....	2 (1)
MA-384.....	2 (1)
MA-420C thru 471T.....	1 (0.5)
MA-491 thru 496.....	1 (0.5)
MA-510C.....	1 (0.5)
MA-510C/F thru 540C/F.....	1 (0.5)
MA-529C thru 541T.....	1 (0.5)
MA-542, 542T.....	1 (0.5)
MA-543 thru 692.....	1 (0.5)
MA-751CT, 751FT.....	3 (1)
MA-769.....	2 (1)
MA-772.....	2 (1)
MA-774 thru 778.....	7 (3)
MA-780.....	1 (0.5)
MA-781.....	1 (0.5)
MA-783 thru 787.....	1 (0.5)
MA-812.....	11 (5)
MA-814.....	22 (10)
MA-816.....	27 (12)
MA-818.....	50 (23)
MA-838.....	9 (4)
MA-839.....	20 (9)
MA-950.....	5 (2)
MA-1807.....	12 (5)
MA-1827, 1827F.....	11 (5)

	lb (kg)
MAA-10B.....	1 (0.5)
MAA-25.....	0.5 (0.23)
MAA-30A.....	2 (1)
MAA-32.....	10 (5)
MAA-34A.....	17 (8)
MAA-43.....	0.5 (0.23)
MAA-44.....	13 (6)
MAA-45.....	5 (2)
MAA-46.....	5 (2)
MAA-47.....	1 (0.5)
MAA-48 thru 52.....	1 (0.5)
MAA-60.....	2 (1)
MAA-61.....	2 (1)
MAA-62.....	1 (0.5)
MAA-64, 64F.....	14 (6)
MAA-75.....	1 (0.5)
MAA-81.....	1 (0.5)
MAA-90.....	2 (1)
MAA-116.....	1 (0.5)

MC

	lb (kg)
MC-60, 60F.....	850 (386)
MC-250P thru 250PR.....	780 (354)
MC-300P thru 300PR.....	975 (442)
MC-400P thru 400PR.....	1620 (735)
MC-500 (All).....	2500 (1134)
MCA-4.....	151 (70)
MCA-5.....	45 (20)
MCA-6.....	45 (20)
MCA-7.....	45 (20)
MCA-8.....	121 (55)
MCA-9.....	101 (46)
MCA-10.....	152 (69)
MCA-11.....	114 (52)
MCA-14.....	34 (15)
MCA-22.....	1 (0.5)
MCA-41.....	1 (0.5)
MCA-42.....	1 (0.5)
MCA-44, 44N.....	4 (2)
MCA-46.....	4 (2)
MCA-61 thru 64.....	0.5 (.23)

MD / MF / MFA

	lb (kg)
MD-2000/F.....	248 (112)
MF-2 thru 2AF.....	44 (20)
MF-4 thru 4AF.....	74 (34)
MF-6A.....	146 (66)
MF-8A.....	348 (158)
MF-1310.....	17 (8)
MF-1315.....	17 (8)
MF-6010.....	140 (63)
MF-6020.....	110 (50)
MF-7910.....	41 (19)
MF-7915.....	41 (19)
MF-8010 thru 8025.....	85 (39)
MFA-65.....	2 (1)
MFA-70.....	3 (1)
MFA-80.....	4 (2)

MO / MS

	lb (kg)
MO-36.....	400 (181)
MO-39.....	420 (190)
MO-40.....	750 (340)



SP

	lb	(kg)
SP-0	465	(211)
SP-1, 1C	134	(61)
SP-2	71	(32)
SP-2.5	51	(23)
SP-3	10	(5)
SP-6	278	(126)
SP-10	320	(145)
SP-12CA, 12CG	238	(108)
SP-33	15	(7)
SP-48R, 48RF	120	(54)
SP-50	50	(23)
SP-52	124	(56)
SP-55	75	(34)
SP-90	2	(1)
SP-92	3	(1)
SP-93	4	(2)
SP-96	5	(2)
SP-97	8	(4)
SP-138	2	(1)
SP-140	6	(3)
SP-171	4	(2)
SP-171X	4	(2)
SP-173	16	(7)
SP-174	28	(13)
SP-175	15	(7)
SP-177	20	(9)
SP-230	79	(36)
SP-245, 245F	575	(261)
SP-254	3	(1)
SP-256	3	(1)
SP-258	3	(1)
SP-259	3	(1)
SP-261	3	(1)
SP-262	3	(1)
SP-264	3	(1)
SP-266	3	(1)
SP-268	3	(1)
SP-269	3	(1)
SP-271	3	(1)
SP-272	3	(1)
SP-274	3	(1)
SP-278	3	(1)
SP-284	4	(2)
SP-285	4	(2)
SP-286	4	(2)
SP-287	4	(2)
SP-288	4	(2)
SP-289	4	(2)
SP-290	4	(2)
SP-291	4	(2)
SP-292	4	(2)
SP-293	4	(2)
SPA-7	195	(88)
SPA-21	14	(6)
SPA-22, 22C	5	(2)
SPA-22K	45	(20)
SPA-23	0.45	(.10)
SPA-24	0.30	(.14)
SPA-30	10	(5)
SPA-31	16	(7)
SPA-51	36	(16)
SPA-64	5	(2)
SPA-100	10	(5)
SPA-101	6	(3)
SPA-102	6	(3)
SPA-104	35	(16)
SPA-105	22	(10)
SPA-108	4	(2)
SPA-109	12	(5)
SPA-110	15	(7)

SPA-111	18	(8)
SPA-114	15	(7)
SPA-115	22	(10)
SPA-120	20	(9)
SPA-122	10	(5)
SPA-129 thru 132	2	(1)
SPA-151	2	(1)
SPA-171	3	(1)
SPA-181	4	(2)
SPA-240X	1	(0.5)
SPA-241	1	(0.5)
SPA-242	1	(0.5)
SPA-244	1	(0.5)
SPA-245X	8	(4)
SPA-255	4	(2)
SPA-256 thru 262	2	(1)
SPA-263	3	(1)
SPA-264	4	(2)
SPA-301	1	(0.5)
SPA-302	8	(4)
SPA-303	2	(1)
SPA-400	18	(8)
SPA-450	30	(14)
SPA-501	10	(5)
SPA-501X	10	(5)

SS

	lb	(kg)
SS-3	33	(15)
SS-8R, 8RF	135	(61)
SS-10	145	(66)
SS-12R, 12RF	162	(73)
SS-14 thru 14F	100	(45)
SS-15 thru 15F	60	(27)
SS-18, 18F	65	(29)
SS-20, 20F	219	(99)
SS-21, 21F	228	(103)
SS-22, 22F	245	(111)
SS-23	8	(4)
SS-25, 25F	175	(79)
SS-28, 28F	10	(5)
SS-30 thru 30S	170	(77)
SS-31 thru 31S	190	(86)
SS-33 thru 33S	242	(110)
SS-34, 34F	95	(43)
SS-36, 36F	121	(55)
SS-82, 82F	80	(36)
SSA-10	0.1	(.04)
SSA-11 thru 15	2	(1)
SSA-17	0.5	(.23)
SSA-20	5	(2)
SSA-22	5	(2)
SSA-39	8	(4)
SSA-41 thru 58	1	(0.5)
SSA-72 thru 76	1	(0.5)
SSA-77	5	(2)
SSA-320A	115	(52)
SSA-321	135	(61)
SSA-325	65	(29)
SSA-801 thru 803	10	(5)
SSA-804	8	(4)
SSA-805R	118	(54)
SSA-807	8	(4)
SSA-809	8	(4)
SSA-820	26	(12)
SSA-822	40	(18)
SSA-823	1	(0.5)

SV

	lb	(kg)
SV-125	1	(0.5)
SV-126	1	(0.5)

SV-135 thru 218	0.5	(.23)
SV-800	2	(1)
SV8-2C, 2F	2	(1)

TM

	lb	(kg)
TM-5, 5F	700	(318)
TM-6, 6F	700	(318)
TR-502	9	(4)
TR-1002	21	(9)
TR-3002	37	(17)

TS

	lb	(kg)
TS-1, 1F	405	(184)
TS-2, 2F	399	(181)
TS-3, 3F	454	(206)
TS-4, 4F	520	(236)
TSA-100 thru 115	18	(8)
TSA-116	23	(10)
TSA-117	23	(10)
TSA-124 thru 135	4	(2)
TSA-136	15	(7)
TSA-137	15	(7)
TSA-140 (All)	3	(1)
TSA-153	50	(23)
TSA-154R	30	(14)
TSA-155	26	(12)
TSA-156	45	(20)
TSA-157	15	(7)
TSA-159	26	(12)
TSA-162	15	(7)
TSA-163	10	(5)
TSA-167	63	(29)
TSA-168	1	(0.5)
TSA-169R, 169RF	5	(2)
TSA-170	1	(0.5)
TSA-171	2	(1)
TSA-172 thru 174	1	(0.5)
TSA-175 thru 178	2	(1)
TSA-179	1	(0.5)
TSA-180	290	(132)
TSA-182 thru 189	1	(0.5)
TSA-190	2	(1)
TSA-191	2	(1)
TSA-193	1	(0.5)
TSA-198	1	(0.5)
TSA-205	2	(1)
TSA-206	2	(1)
TSA-207	3	(1)
TSA-208	2	(1)
TSA-222	5	(2)
TSA-232 thru 271	2	(1)
TSA-273	3	(1)
TSA-275 thru 279	2	(1)
TSA-1167, 1167F	3	(1)

UB

	lb	(kg)
UB-1/1A	56	(25)
UB-5, 5A	120	(54)
UB-12F	17	(8)
UB-15	16	(7)
UB-18 thru 18B	111	(50)
UBA-1	7	(3)
UBA-4	11	(5)
UBA-100	7	(3)

V

	lb	(kg)
V3 (All)	1	(0.5)
V3 Covers	1	(0.5)

V3 Pans	1	(0.5)
V6 (All)	2	(1)
V6 Covers	1	(0.5)
V6 Pans	1	(0.5)
V8 (All)	2	(1)
V8 Covers	1	(0.5)
V8 Pans	2	(1)
V10 (All)	3	(1)
V10 Covers	2	(1)
V10 Pans	2	(1)
V12 (All)	4	(2)
V12 Covers	2	(1)
V12 Pans	4	(2)
V18 (All)	8	(4)
V18 Covers	4	(2)
V18 Pans	8	(4)
V200 (All)	2	(1)
V200 Covers	2	(1)
V200 Pans	2	(1)
V300 (All)	4	(2)
V300 Covers	4	(2)
V300 Pans	4	(2)

WCA / WP / WPA / WT

	lb	(kg)
WCA-540	3	(1)
WCA-541	3	(1)
WCA-542	3	(1)
WP-530	27	(12)
WP-532, 532A	27	(12)
WP-700	4	(2)
WPA-1, 1B	3	(1)
WPA-3, 3B	3	(1)
WT-1, 1A	3	(1)
WT-3	2	(1)
WT-3S	3	(1)
WT-4	2	(1)
WT-4B	1	(0.5)
WT-4R	1	(0.5)
WT-5	1	(0.5)
WT-6	1	(0.5)
WT-7	1	(0.5)
WT-8	0.2	(.09)
WT-8R	4	(2)
WT-10	4	(2)
WT-13	0.25	(.11)
WT-13S	0.25	(.11)
WT-23ESB	1	(0.5)
WT-34C, 34S	2	(1)
WT-62	1	(0.5)
WT-84C, 84S	3	(1)
WT-88C, 88S	3	(1)
WT-128C, 128S	5	(2)
WT-204	2	(1)
WT-206	2	(1)
WT-324	4	(2)
WT-326	4	(2)
WTA-1 thru 54	0.1	(.02)

A

AC-250 132, 133, 134, 135
 AC-250M 133
 AC-250MR 133
 AC-325 133, 134, 135
 AC-325M 133
 AC-325MR 133
 AC-450 133, 134, 135
 AC-450M 133
 AC-450MR 133

 ACA-120 134
 ACA-121 134
 ACA-122 134
 ACA-123 134
 ACA-130 134
 ACA-131 134
 ACA-132 134
 ACA-133 134
 ACA-140 134
 ACA-141 134
 ACA-142 134
 ACA-143 134
 ACA-160 134
 ACA-161 134
 ACA-162 134
 ACA-163 134
 ACA-200 134
 ACA-320 134
 ACA-321 134
 ACA-360 134
 ACA-362 134
 ACA-440 134
 ACA-441 134
 ACA-460 134
 ACA-540 135
 ACA-560 135
 ACA-640 135
 ACA-660 135
 ACA-730 135
 ACA-731 135
 ACA-820 135
 ACA-821 135

 AD-12KA 106, 280, 281
 AD-20KA 280, 281
 AD-30KA 280, 281
 AD-30KD 280, 281
 AD-32KDA 280, 284
 AD-40KA 280, 281
 AD-60KA 280, 281
 AD-60KD 280, 281
 AD-60PA 280, 285
 AD-61KA 280, 281
 AD-61KD 280, 281
 AD-101KA 280, 281
 AD-101KD 280, 281
 AD-102KDA 280, 284
 AD-122 280, 287
 AD-123 280, 287
 AD-150PA 280, 285
 AD-154 280, 287
 AD-202 280, 287
 AD-214 280, 287
 AD-300PA 280, 285
 AD-302 280, 287
 AD-303 280, 287
 AD-314 280, 287
 AD-402 280, 287

AD-414 280, 287
 AD-602 280, 287
 AD-614 280, 287

 ADA-4A 281, 284
 ADA-6A 281, 284
 ADA-20 287
 ADA-22 287
 ADA-30A 285
 ADA-32A 285
 ADA-33A 285
 ADA-34A 285
 ADA-35 287
 ADA-36 287
 ADA-201 287
 ADA-202 287
 ADA-203 287

 AJ-103 11, 24, 40
 AJ-103B 40
 AJ-105 11, 24, 40
 AJ-105B 40
 AJ-111 40

 AJA-4 40
 AJA-8 40
 AJA-8M 40
 AJA-111 40
 AJA-131 40
 AJA-131F 40
 AJA-133 40
 AJA-135 40
 AJA-139 40
 AJA-140 40
 AJA-210 11
 AJA-211 11
 AJA-212 11
 AJA-213 11
 AJA-214 11
 AJA-216 11
 AJA-217 11
 AJA-218 11
 AJA-220 11
 AJA-222 11
 AJA-223 11
 AJA-224 11
 AJA-226 11
 AJA-227 11
 AJA-228 11
 AJA-229 11
 AJA-230 11
 AJA-231 11
 AJA-232 11
 AJA-233 11
 AJA-234 11
 AJA-235 11
 AJA-236 11
 AJA-237 11
 AJA-238 11
 AJA-239 11
 AJA-240 11
 AJA-241 11
 AJA-242 11
 AJA-243 11
 AJA-244 11
 AJA-245 11

 AP-1B 112
 AP-14 112
 AP-16 112

AP-20 104
 AP-20L 104

 APA-11B 112
 APA-17 112
 APA-18 112
 APA-22 112
 APA-25 104, 105
 APA-31 104, 105
 APA-32 105
 APA-33 105
 APA-34 105
 APA-35 105
 APA-36 105
 APA-37 105
 APA-105 112
 APA-120 112
 APA-144 112
 APA-166 112

B

BK-36 81, 328
 BK-43 328
 BK-44 328
 BK-45 328
 BK-50 328
 BK-447R 17, 328

 BO-10R 268, 270, 271
 BO-20R 268, 271
 BO-30R 268, 271
 BO-40 268, 271
 BO-60 268, 274
 BO-60EB 274
 BO-61 268, 274
 BO-62 268, 274
 BO-63 268, 274
 BO-64 268, 274
 BO-65 268, 274
 BO-110 268, 270, 271
 BO-120 268, 271
 BO-130 268, 271
 BO-140 268, 271
 BO-250 268, 270
 BO-250ER 268, 270
 BO-323 268, 275
 BO-333 268, 275
 BO-343 268, 275
 BO-350 268, 270
 BO-350ER 268, 270
 BO-355 268, 270
 BO-355ER 268, 270
 BO-550 268, 270
 BO-550ER 268, 270

 BOA-1 270
 BOA-2 270
 BOA-3 270
 BOA-4 270
 BOA-5 270, 271
 BOA-6 271
 BOA-30 269, 271
 BOA-31 269, 271
 BOA-32 269, 271
 BOA-33 269, 271
 BOA-40 275
 BOA-41 275
 BOA-42 275
 BOA-46 274, 275
 BOA-48 274, 275

BOA-50 275
 BOA-51 275
 BOA-52 275
 BOA-70 274
 BOA-71 274
 BOA-72 274
 BOA-75 270

 BR-2 254
 BR-12 254

 BRA-30 202
 BRA-31 202, 254
 BRA-32 254
 BRA-33 254
 BRA-40 254
 BRA-41 254
 BRA-42 254
 BRA-45 254
 BRA-55 203
 BRA-57 203
 BRA-59 202, 203, 239, 241
 BRA-59B 202, 241
 BRA-59M 202, 241
 BRA-60 200, 201, 202, 203, 239, 241
 BRA-60B 241
 BRA-60C 241
 BRA-60M 202, 241
 BRA-61 202, 203
 BRA-62 202, 203
 BRA-63 203
 BRA-64 201, 203
 BRA-65 203
 BRA-67 201, 202, 203
 BRA-68 201, 203
 BRA-68F 203
 BRA-70 203
 BRA-75 202, 203
 BRA-76 202, 203
 BRA-80 203
 BRA-609B 202

 BS-5 20
 BS-10 20
 BS-20 20
 BS-40B 20
 BS-42 20
 BS-46 20, 167
 BS-50 20, 167
 BS-391 20
 BS-392 20
 BS-393 20
 BS-394 20
 BS-395 20
 BS-396 20
 BS-397 20
 BS-398 20
 BS-399 20
 BS-400 20
 BS-401 20
 BS-402 20
 BS-403 20
 BS-404 20
 BS-405 20
 BS-406 20
 BS-407 20
 BS-408 20
 BS-409 20
 BS-410 20

BS-411 20
 BS-412 20
 BS-413 20
 BS-414 20
 BS-415 20
 BS-416 20
 BS-417 20
 BS-418 20
 BS-419 20
 BS-420 20

C

CD-1 196
 CD-6 196
 CD-6F 196

 CDA-15 196, 197
 CDA-16 196, 197
 CDA-18 196, 197
 CDA-19 196, 197
 CDA-20 196
 CDA-22 196
 CDA-24 196
 CDA-26 196
 CDA-32 196
 CDA-40 196
 CDA-41 196
 CDA-43 196
 CDA-45 196
 CDA-46 196
 CDA-50 196
 CDA-51 196
 CDA-55 196
 CDA-120 196
 CDA-121 196
 CDA-122 196
 CDA-123 196
 CDA-130 196
 CDA-131 196
 CDA-132 196
 CDA-133 196
 CDA-140 196
 CDA-141 196
 CDA-142 196
 CDA-143 196
 CDA-160 196
 CDA-161 196
 CDA-162 196
 CDA-163 196
 CDA-220 196
 CDA-221 196
 CDA-222 196
 CDA-223 196
 CDA-230 196
 CDA-231 196
 CDA-232 196
 CDA-233 196
 CDA-240 196
 CDA-241 196
 CDA-242 196
 CDA-243 196
 CDA-260 196
 CDA-261 196
 CDA-262 196
 CDA-263 196

 CF-1 50
 CF-1F 50
 CFA-100 50
 CFA-101 50



CFA-102	50	CS-10W	291	CTA-96	182	GAA-40	9	GSA-210	227
CFA-112	50			CTA-97	182	GAA-41	9	GSA-210S	227
CFA-113	50	CSA-25	291			GAA-42	9	GSA-211	211, 215
CP-6	150, 280, 286	CSA-26	291	D		GAA-43	9	GSA-212	233
CP-7	280, 286	CSA-30	291	DOBA-2	272	GAA-44	9	GSA-213	227
CP-15	150, 280, 286			DOBA-40A	272	GAA-45	9	GSA-213S	227
CP-16	280, 286	CT-50	190, 191	DOBA-50A	272	GAA-46	9	GSA-214	211, 215
CP-20	280, 285	CT-50B	191			GAA-47	9	GSA-215	211, 215
CP-21	280, 285	CT-51	190, 191	DOC-38	268, 272	GAA-48	9	GSA-216	233
CP-22	280, 285	CT-51B	191	DOC-67	268, 272	GAA-49	9	GSA-217	227, 234
CP-23	280, 285	CT-130	184	DOC-120	268, 272	GAA-50	9	GSA-217S	227
CP-24	280, 285	CT-133	184	DOC-180	268, 272	GAA-51	9	GSA-219	227, 233, 234
CP-25	280, 285	CT-135	184	DOCA-20	272	GAA-52	9	GSA-219S	227
CP-26	280, 285	CT-140	188	DOCA-30	272	GAA-62	9	GSA-220	211, 215
CP-27	280, 285	CT-143	188	DOCA-40	272	GAA-63	9	GSA-222	233
CP-28	280, 285	CT-150	185	DOCA-50	272	GAA-63A	9	GSA-223	211, 215
CP-29	280, 285	CT-153	185	DOCA-70	272	GAA-64	9	GSA-226	233
CP-35	150, 280, 286	CT-154	186	DOCA-71	272	GAA-65	9	GSA-228	233
CP-40	280, 288	CT-155	185	DOCA-72	272	GAA-66	9	GSA-229	211, 215
CP-41	280, 288	CT-156	186	DOCA-73	272	GAA-67	9	GSA-230	233, 234
CP-42	280, 288	CT-160	181, 182			GAA-68	9	GSA-231	227, 233
CP-43	280, 288	CT-163	181	DOL-24A	268, 272	GAA-69	9	GSA-231S	227
CP-45	280, 288	CT-165	181	DOL-69A	268, 272	GAA-70	9	GSA-232	227, 233
CP-46	280, 286	CT-170	181, 182	DOL-120A	268, 272	GAA-71	9	GSA-232S	227
CP-47	280, 288	CT-180	187	DOL-180A	268, 272	GAA-72	9	GSA-234	211, 215
CP-48	280, 288			DOL-270A	268, 272	GAA-72A	9	GSA-237	211, 215
CP-50	280, 288	CTA-18	191	DOLA-20	272	GAA-73	9	GSA-331A	234
CP-51	280, 288	CTA-19	191	DOLA-30A	272	GAA-74	9		
CP-52	280, 291	CTA-20	191	DOLA-40A	272	GAA-74A	9	GV-60	19, 167
CP-54	280, 291	CTA-21	191	DOLA-82	272	GAA-75	9	GV-61	19, 47
CP-56	280, 291	CTA-22	191	DOLA-83	272	GAA-76	9	GV-62	19
CP-61	280, 284	CTA-24	191	DOLA-84	272	GAA-77	9	GV-63	19
CP-61C	280, 284	CTA-25	191	DOLA-85	272	GAA-77A	9	GV-64	19, 47
CP-62	280, 284	CTA-26	191			GAA-78	9	GV-65	19, 167
CP-62C	280	CTA-27	191	G		GAA-78A	9	GV-66	19, 47
CP-63	280, 284	CTA-28	191	GA-6	9, 24, 37, 38	GAA-79	9	GV-67	19, 47
CP-63C	280	CTA-29	191	GA-8	24, 38	GAA-80	9		
CP-64	280, 284	CTA-30	184	GAA-2	37	GAA-81	9	GW-10	322
CP-64C	280	CTA-32	191	GAA-3	37	GAA-82	9	GW-10P	322
CP-75	150, 280, 286	CTA-33	184	GAA-4	37	GAA-83	9	GW-11	322
CP-76	280, 286	CTA-34	191	GAA-5	38	GAA-84	9	GW-11P	322
CP-91	280, 288	CTA-35	184	GAA-10	38	GAA-88	9, 36, 37	GW-12	322
CP-92	280, 288	CTA-36	184	GAA-15	38	GP-4	65	GW-12P	322
CP-93	280, 288	CTA-37	184	GAA-16	38	GP-5	65	GW-13	322
CP-150A	150, 280, 286	CTA-38	184	GAA-18	38, 38	GP-6	65	GW-13P	322
CP-151	280, 286	CTA-39	184	GAA-19	17, 35, 38	GP-6S	65	GW-14	322
CP-200	150, 280, 286	CTA-40	188	GAA-19M	17, 38	GP-8	65	GW-14P	322
CP-201	280, 286	CTA-41	188	GAA-20	9	GP-12	65	GW-15	322
CP-300	280, 289	CTA-42	188	GAA-21	9	GP-14	65	GW-16	322
CP-301	280, 289	CTA-43	188	GAA-22	9	GP-16	65	GW-20	322
CP-303	280, 289	CTA-44	188	GAA-23	9	GP-22	65	GW-20P	322
CP-306	280, 289	CTA-45	188	GAA-24	9	GP-24	65	GW-21	322
CP-306H	280, 289	CTA-46	188	GAA-25	9	GP-25	65	GW-21P	322
CP-310	280, 289	CTA-47	188	GAA-26	9	GP-29	65	GW-22	322
CP-315	280, 289	CTA-48	188	GAA-27	9	GP-29A	65	GW-22P	322
CP-330	280, 289	CTA-49	188	GAA-28	9	GP-68A	65	GW-23	322
CP-401	280, 282	CTA-50	185, 186	GAA-29	9	GP-70A	65	GW-23P	322
CP-403	280, 282	CTA-51	185, 186	GAA-30	9	GP-80	65	GW-24	322
CP-405	280, 282	CTA-52	185, 186	GAA-31	9	GP-82	65	GW-24P	322
CP-407	280, 282	CTA-53	185, 186	GAA-32	9	GP-106	65	GW-25	322
CP-409	280, 282	CTA-54	185, 186	GAA-33	9	GP-112	65	GW-26	322
		CTA-55	188	GAA-34	9	GP-118	65	GW-27	322
CPA-11	285	CTA-56	188	GAA-35	9	GPA-11	65	GW-28	322
CPA-15	284, 288	CTA-63	186	GAA-36	9			GW-28P	322
CPA-33	285	CTA-64	186	GAA-37	9			GW-29	322
CPA-41	282	CTA-81	181	GAA-38	9	GSA-201	211, 215	GW-29P	322
CPA-43	282	CTA-82	181	GAA-39	9	GSA-202	211, 215	GW-30	322
CPA-45	282, 288	CTA-85	181			GSA-203	211, 215	GW-30P	322
		CTA-91	181			GSA-207	233	GW-31	322
CS-10	291	CTA-92	182			GSA-208	227	GW-31P	322
CS-10S	291	CTA-95	182			GSA-208S	227	GW-33	322

GW-33P.....	322	HM-43	156	HM-131D.....	140	HM-252	164	HM-356F	230
GW-34.....	322	HM-45	153, 155	HM-133	161	HM-254	164	HM-360	142
GW-34P.....	322	HM-45M.....	153	HM-133F.....	161	HM-255	164	HM-361	142
GW-35.....	322	HM-47	153, 161	HM-134	173	HM-256	164	HM-362	142
GW-35P.....	322	HM-48	151, 153, 161	HM-135	161	HM-257	164	HM-363	142
GW-38.....	322	HM-48A.....	153, 161	HM-136	173	HM-258	164	HM-364	142
GW-38P.....	322	HM-49	170	HM-137	77	HM-259	164	HM-365	142
GW-40.....	250, 322	HM-50	170	HM-137F.....	77	HM-263	143	HM-366	142
GW-40P.....	250, 322	HM-52	74	HM-140	161	HM-264	143	HM-367	142
GW-41.....	250, 322	HM-52F.....	74	HM-140F.....	161	HM-267	217	HM-368	142
GW-41P.....	250, 322	HM-53	154	HM-141	159	HM-268	164	HM-369	142
GW-42.....	250, 322	HM-54	156	HM-142	158	HM-270	164	HM-370	142
GW-42P.....	250, 322	HM-55	156	HM-143	158	HM-271	193	HM-371	166
GW-43.....	250, 322	HM-56	109	HM-144	158	HM-271F.....	193	HM-372	166
GW-43P.....	250, 322	HM-56A.....	109	HM-146	158	HM-272	166	HM-372A.....	166
GW-44.....	250, 322	HM-56B.....	109	HM-149	158	HM-272F.....	166	HM-372B.....	166
GW-45.....	250, 322	HM-57R.....	74	HM-151	158	HM-273	166	HM-373	166
GW-46.....	250, 322	HM-57RF.....	74	HM-152	158	HM-273F.....	166	HM-373B.....	166
GW-47.....	250, 322	HM-58R.....	77	HM-153	158	HM-274	166	HM-375R.....	244
GW-74.....	83, 322	HM-59	119	HM-154	158	HM-275	64	HM-378	106
GW-75.....	82, 83, 322	HM-59F.....	19	HM-156	158	HM-279	160	HM-380D.....	224, 226
GW-76.....	82, 83, 322	HM-60	197	HM-157	158	HM-280	160	HM-380DF.....	226
		HM-62	197	HM-158	158	HM-281	160	HM-380R.....	226
GWA-1.....	101	HM-63	153, 161	HM-159	158	HM-282	160	HM-380RF.....	226
GWA-2.....	101	HM-64	155	HM-160	158	HM-284	160	HM-381	225
GWA-3.....	83, 101	HM-65	155	HM-161	159	HM-286	160	HM-381F.....	225
GWA-501.....	252	HM-66	259	HM-162	141	HM-287	160	HM-382	224, 225
GWA-502.....	252	HM-67	259	HM-162M.....	141	HM-288	160	HM-382F.....	225
GWA-504.....	252	HM-68	153	HM-166	143	HM-290	168	HM-384	228
GWA-508.....	322	HM-70A.....	68	HM-169	158	HM-291	168	HM-385	228
GWA-509.....	322	HM-70AF.....	68	HM-178	159	HM-292	168	HM-396	200, 201, 206, 221, 222
GWA-512.....	251, 322	HM-73	119	HM-179	159	HM-294	162	HM-396F.....	201, 206, 221
GWA-585.....	322	HM-73F.....	119	HM-180	142	HM-294C.....	162	HM-397	200, 201, 206, 221, 222
		HM-74	118	HM-181	142	HM-294M.....	162	HM-397B.....	200, 201, 206, 221, 222
		HM-75	178, 179	HM-182	142	HM-295	168	HM-397BF.....	221
		HM-75L.....	179	HM-183	142	HM-296	162	HM-397F.....	201, 206, 221
		HM-76B.....	178, 179	HM-186	144	HM-296C.....	162	HM-398	200, 201, 206, 221, 222
		HM-78	155	HM-187	144	HM-296M.....	162	HM-398F.....	201, 206, 221
		HM-80	155	HM-188	159	HM-297	163	HM-399	201, 206, 221, 222
		HM-81	219	HM-189	144	HM-298	163, 166	HM-399F.....	201, 206, 221
		HM-82	179	HM-190	144	HM-299	162	HM-401	152
		HM-82L.....	179	HM-192	159	HM-300	165	HM-403	152
		HM-84	178, 179	HM-196	180	HM-302	165	HM-403P.....	152
		HM-84L.....	179	HM-197	180	HM-307	162	HM-410	152
		HM-89	178, 179	HM-200	145	HM-308	162	HM-410P.....	152
		HM-89L.....	179	HM-200F.....	145	HM-308C.....	162	HM-413	205, 206, 236
		HM-90	124	HM-201	145	HM-309	162	HM-413F.....	205, 206, 236
		HM-91	124	HM-201F.....	145	HM-310	165	HM-414	205, 236
		HM-97	257	HM-202	145	HM-315	244	HM-414F.....	205, 236
		HM-98	259	HM-202F.....	145	HM-315F.....	244	HM-415	236
		HM-100.....	259	HM-203	140	HM-317	244	HM-415F.....	236
		HM-102.....	259	HM-203D.....	140	HM-318	244	HM-416	236
		HM-104.....	259	HM-204	145	HM-319	244	HM-416F.....	236
		HM-106.....	194, 259	HM-204F.....	145	HM-320	129	HM-417	236
		HM-107.....	194	HM-205	145	HM-322	129	HM-417F.....	236
		HM-108.....	194	HM-205F.....	145	HM-322D.....	129	HM-418	201, 204, 205, 206, 213, 216, 220, 221, 223, 225, 226, 230, 231, 232, 236
		HM-109.....	250, 325	HM-206	145	HM-322DF.....	129	HM-418F.....	204, 205, 225, 226, 230, 231, 232, 236
		HM-111.....	250, 325	HM-206F.....	145	HM-323	160	HM-419	204, 205, 206, 207, 212, 213, 216, 220, 223, 224, 225, 226, 230, 231, 232, 236
		HM-112.....	159	HM-207	140	HM-331	160	HM-419F.....	204, 205, 225, 226, 230, 231, 232, 236
		HM-114.....	159	HM-207D.....	140	HM-335	163	HM-420	237
		HM-116.....	159	HM-210	145	HM-340	163	HM-421	237
		HM-124E.....	109	HM-220	194	HM-345	148	HM-421D.....	236
		HM-124H.....	109	HM-223	194	HM-350A.....	207, 212	HM-422	237
		HM-124P.....	109	HM-228	222, 245	HM-350M.....	207, 212, 216, 234	HM-422D.....	236
		HM-125E.....	109	HM-229	245	HM-350MF.....	207, 212, 216	HM-424	237
		HM-125H.....	109	HM-231	217	HM-353	232		
		HM-125P.....	109	HM-232	217	HM-354	230, 233		
		HM-128	262	HM-239	140	HM-354F.....	230		
		HM-130	140	HM-246	183	HM-355	230, 233		
		HM-130D.....	140	HM-250	164	HM-355F.....	230		
		HM-131	140	HM-250D.....	164	HM-356	230, 233		

H



HM-424D.....	224, 226, 236	HM-634.....	174, 175	HM-818.....	77	HMA-83F.....	233	HMA-135A.....	238, 239, 240
HM-425.....	237, 254	HM-635.....	174	HM-819.....	77	HMA-83G.....	233	HMA-136.....	165
HM-425D.....	236	HM-636.....	174, 175	HM-831.....	218	HMA-83H.....	233	HMA-139.....	163
HM-427.....	237, 254	HM-637.....	174	HM-832.....	218	HMA-83J.....	233	HMA-140.....	163
HM-428.....	237, 254	HM-638.....	174	HM-833.....	218	HMA-83L.....	233	HMA-141.....	163
HM-428D.....	236	HM-639.....	174	HM-834.....	218	HMA-84A.....	233	HMA-143.....	163
HM-430.....	237, 254	HM-640.....	175	HM-835.....	218	HMA-84B.....	233	HMA-145.....	156
HM-430D.....	236	HM-641.....	175	HM-891.....	218	HMA-84D.....	233	HMA-146.....	166
HM-438D.....	236	HM-642.....	176	HM-892.....	218	HMA-84E.....	233	HMA-147.....	166
HM-442.....	70	HM-643.....	176	HM-893.....	218	HMA-84F.....	233	HMA-155.....	194
HM-444.....	70	HM-644.....	175	HM-894.....	218	HMA-85.....	164	HMA-180.....	129
HM-447.....	70	HM-645.....	175	HM-895.....	218	HMA-86.....	164	HMA-180C.....	129
HM-450.....	321, 325	HM-645S.....	175	HM-914.....	216	HMA-88A.....	233	HMA-181.....	129
HM-452.....	70, 325	HM-646.....	175	HM-916.....	216	HMA-88B.....	233	HMA-181C.....	129
HM-457.....	96	HM-647.....	176	HM-923.....	118	HMA-88C.....	233	HMA-182.....	129
HM-457B.....	96	HM-648.....	171	HM-923F.....	118	HMA-88D.....	233	HMA-183.....	129
HM-459.....	97	HM-648F.....	171	HM-924.....	76	HMA-88E.....	233, 234	HMA-183S.....	129
HM-460.....	169	HM-649.....	80, 100	HM-925.....	76	HMA-88F.....	233	HMA-188.....	129
HM-490.....	142	HM-649F.....	102	HM-926.....	76	HMA-88G.....	233	HMA-190.....	158
HM-493.....	170	HM-651.....	80, 171	HM-930.....	257	HMA-88H.....	233	HMA-191.....	158
HM-494.....	170	HM-652.....	174	HM-940.....	263	HMA-88J.....	233	HMA-203.....	79
HM-496.....	170	HM-653.....	172	HM-942.....	263	HMA-88L.....	233	HMA-204W.....	79
HM-500.....	255, 257	HM-653F.....	172	HM-944.....	263	HMA-89.....	232	HMA-207.....	79
HM-502.....	255	HM-653V.....	172	HM-952.....	183	HMA-90A.....	233	HMA-208P.....	79
HM-504A.....	255, 257	HM-654.....	174	HM-954.....	183	HMA-90B.....	233	HMA-219.....	243
HM-510.....	258	HM-655.....	80, 171	HM-977A.....	211, 215	HMA-90C.....	233	HMA-220.....	243
HM-512.....	258	HM-660.....	174			HMA-90D.....	233	HMA-221.....	243
HM-513.....	257, 258	HM-666.....	174	HMA-1A.....	151	HMA-90E.....	233, 234	HMA-224.....	197
HM-514.....	243	HM-668D.....	192	HMA-2.....	151	HMA-90F.....	233	HMA-226.....	197
HM-516.....	243, 245	HM-669.....	174, 192	HMA-5.....	259	HMA-90G.....	233	HMA-228.....	79
HM-519.....	257, 258	HM-673.....	172	HMA-8.....	259	HMA-90H.....	233	HMA-229.....	79
HM-521.....	216	HM-673F.....	172	HMA-9.....	250, 325	HMA-90J.....	233	HMA-232.....	197
HM-524.....	217	HM-673V.....	172	HMA-10.....	248, 249, 250, 325	HMA-90L.....	233	HMA-232D.....	197
HM-524F.....	217	HM-674B.....	192	HMA-11.....	250, 325	HMA-94.....	200, 201, 206, 221, 222	HMA-234.....	197
HM-530.....	239, 241	HM-674D.....	192	HMA-11A.....	75, 250, 325	HMA-95.....	225	HMA-234D.....	197
HM-530F.....	239	HM-678.....	169	HMA-12.....	250, 325	HMA-104.....	193	HMA-236.....	197
HM-534.....	246	HM-679.....	169, 174	HMA-13.....	325	HMA-107R.....	146, 147	HMA-236D.....	197
HM-536.....	246	HM-680.....	174	HMA-15.....	255, 257	HMA-108.....	146, 147	HMA-240.....	79
HM-540.....	242	HM-685.....	93, 94	HMA-20.....	173, 307	HMA-108S.....	146, 147	HMA-250.....	79
HM-540F.....	242	HM-685F.....	93	HMA-21.....	143	HMA-110.....	238, 239, 241	HMA-251.....	79
HM-550.....	240	HM-685S.....	93	HMA-24.....	248, 250, 325	HMA-110B.....	241	HMA-258.....	79
HM-551.....	240	HM-685SF.....	93	HMA-25.....	250, 325	HMA-110C.....	241	HMA-259.....	79
HM-559A.....	257	HM-687.....	92, 94	HMA-49.....	219	HMA-110M.....	241	HMA-260.....	74
HM-560.....	243	HM-687F.....	92	HMA-51.....	109	HMA-111.....	238, 239, 241	HMA-261.....	74
HM-562.....	234	HM-705.....	178, 179	HMA-52.....	109	HMA-111M.....	241	HMA-262.....	74
HM-564.....	234	HM-714A.....	141	HMA-53.....	109	HMA-113.....	193	HMA-263.....	107
HM-565.....	234	HM-716A.....	141	HMA-54.....	108, 109	HMA-114.....	193	HMA-264.....	107
HM-567.....	234	HM-723.....	189	HMA-54-2.....	108	HMA-115.....	193	HMA-265.....	107, 108
HM-570.....	165	HM-723F.....	189	HMA-55V.....	108	HMA-116.....	238, 239, 241	HMA-266.....	107, 108
HM-571.....	165	HM-725.....	76	HMA-56.....	108	HMA-116B.....	241	HMA-271A.....	257
HM-574.....	113	HM-726.....	76	HMA-56B.....	108	HMA-116C.....	241	HMA-272.....	257
HM-580.....	238, 241	HM-739.....	224, 225, 226, 230, 231,	HMA-58.....	108	HMA-116M.....	241	HMA-276A.....	257
HM-580F.....	238		232, 236	HMA-60.....	244	HMA-117.....	239, 241	HMA-277.....	257
HM-591.....	113	HM-740.....	88, 236	HMA-61.....	109	HMA-117M.....	241	HMA-278.....	189
HM-597.....	157	HM-750R.....	107	HMA-62.....	109	HMA-120.....	239	HMA-278M.....	189
HM-602W.....	79	HM-750RF.....	107	HMA-63.....	109	HMA-121.....	239	HMA-279.....	189
HM-614.....	79	HM-806.....	107	HM-64.....	109	HMA-122.....	245	HMA-282.....	217
HM-614F.....	79	HM-806F.....	107	HMA-64-1.....	108, 109	HMA-123.....	245	HMA-283.....	189
HM-615.....	79	HM-807.....	107	HMA-68.....	56, 64	HMA-124.....	245	HMA-286.....	189
HM-615F.....	79	HM-807F.....	107	HMA-68.....	56	HMA-125.....	245	HMA-287.....	189
HM-620.....	171	HM-808.....	107	HMA-69.....	106	HMA-129.....	222	HMA-289.....	217
HM-621.....	171	HM-808F.....	107	HMA-78.....	77	HMA-129A.....	222	HMA-290.....	165
HM-623.....	171	HM-810.....	77	HMA-79.....	77	HMA-129B.....	222	HMA-292.....	165
HM-624.....	171	HM-811.....	77	HMA-81.....	227, 230	HMA-130.....	68	HMA-293.....	165
HM-625.....	171	HM-812.....	77	HMA-82.....	173	HMA-131.....	68	HMA-295.....	155
HM-626.....	171	HM-813.....	77	HMA-83A.....	233	HMA-132.....	68	HMA-296.....	165
HM-630.....	172	HM-814.....	77	HMA-83B.....	233	HMA-132WR.....	68	HMA-298.....	172
HM-633.....	172	HM-815.....	77	HMA-83C.....	233	HMA-133.....	166	HMA-299.....	189
HM-633F.....	172	HM-816.....	77	HMA-83D.....	233	HMA-134.....	166	HMA-300.....	259, 324
HM-633V.....	172	HM-817.....	77	HMA-83E.....	233	HMA-135.....	238, 239, 240	HMA-301.....	154

HMA-302	259, 324	HMA-523	211, 215	HMA-589	209, 211, 213, 215	HMA-734	227	HMA-847	183
HMA-303	154	HMA-523C	211, 215	HMA-589A	209, 211, 213, 215	HMA-734M	227	HMA-848	183
HMA-304	259, 324	HMA-524	211, 215	HMA-591	64	HMA-734MS	227	HMA-850	217
HMA-305	154	HMA-524C	211, 215	HMA-592	64	HMA-734SA	227	HMA-851	217
HMA-306	154, 163, 168, 324	HMA-524C	211, 215	HMA-593	64	HMA-735	226, 227	HMA-852	217
HMA-307	163, 168, 324	HMA-525	205, 207, 209, 212, 213, 216, 234	HMA-608	230, 231, 232, 235	HMA-735S	227	HMA-853	217
HMA-308R	107	HMA-526	211, 215	HMA-609	201, 204, 235	HMA-736	227	HMA-854	217
HMA-309	154	HMA-526C	211, 215	HMA-610	224, 225, 226, 235	HMA-736S	227	HMA-855	217
HMA-320	307	HMA-527	211, 215	HMA-611	220, 221, 235	HMA-737	227	HMA-856	217
HMA-321	307	HMA-527A	211, 215	HMA-612	222, 223, 235	HMA-737S	227	HMA-857	217
HMA-323	173, 307	HMA-527B	211, 215	HMA-613	205, 206, 235	HMA-739	225, 226	HMA-860	179
HMA-324	173, 307	HMA-527C	211, 215	HMA-615	93, 94	HMA-739B	225, 226	HMA-861	179
HMA-338	237, 254	HMA-527D	211, 215	HMA-616	93	HMA-743	227	HMA-863	179
HMA-339	237	HMA-527E	211, 215	HMA-617	93, 94	HMA-743M	227	HMA-864	178, 179
HMA-340	324	HMA-528	211, 215	HMA-618	93	HMA-743MS	227	HMA-866	178, 179
HMA-347	119	HMA-528A	211, 215	HMA-619	93	HMA-743S	227	HMA-920	69
HMA-348R	119	HMA-528B	211, 215	HMA-621	92, 93, 94	HMA-744	227	HMA-922	69
HMA-349	168	HMA-528C	211, 215	HMA-622	94	HMA-744M	227	HMA-924	69
HMA-355	124	HMA-528D	211, 215	HMA-623	94	HMA-744MS	227	HMA-943	211, 215
HMA-356	124	HMA-528E	211, 215	HMA-624	93, 94	HMA-744SA	227	HMA-944	211, 215
HMA-356A	124	HMA-529	211, 215	HMA-626	92, 93, 94	HMA-745	226, 227	HMA-946	211, 215
HMA-356B	124	HMA-529A	211, 215	HMA-628	93, 94	HMA-745S	227	HMA-946A	211, 215
HMA-356C	124	HMA-529C	211, 215	HMA-629	93	HMA-746	227	HMA-947	211, 215
HMA-359	169	HMA-529D	211, 215	HMA-630	93	HMA-746S	227	HMA-947A	211, 215
HMA-368	154, 155, 157, 166	HMA-553	211, 215	HMA-632	262	HMA-747	227	HMA-947B	211, 215
HMA-376	229	HMA-554	211, 215	HMA-633	262	HMA-747S	227	HMA-948	211, 215
HMA-378	229	HMA-556	211, 215	HMA-635	262	HMA-763	227	HMA-948A	211, 215
HMA-385	183	HMA-557	211, 215	HMA-660	174	HMA-763M	227	HMA-948B	211, 215
HMA-386	183	HMA-557A	211, 215	HMA-661	192	HMA-763MS	227	HMA-949	211, 215
HMA-387	183	HMA-557B	211, 215	HMA-662	263	HMA-763S	227	HMA-949A	211, 215
HMA-388	229	HMA-558	211, 215	HMA-664	263	HMA-764	227	HMA-953	211, 215
HMA-389	229	HMA-558A	211, 215	HMA-665	234	HMA-764M	227	HMA-954	211, 215
HMA-390	229	HMA-558B	211, 215	HMA-666	174	HMA-764MS	227	HMA-956	211, 215
HMA-401	237	HMA-559	211, 215	HMA-667	234	HMA-764SA	227	HMA-957	211, 215
HMA-402	172	HMA-559A	211, 215	HMA-668	236	HMA-765	226, 227	HMA-957A	211, 215
HMA-402F	172	HMA-563	211, 215	HMA-669	174	HMA-765S	227	HMA-957B	211, 215
HMA-403	237	HMA-564	211, 215	HMA-670	263	HMA-766	227	HMA-958	211, 215
HMA-405	236	HMA-566	211, 215	HMA-671	263	HMA-766S	227	HMA-958A	211, 215
HMA-407	236	HMA-567	211, 215	HMA-672	263	HMA-767	227	HMA-958B	211, 215
HMA-409	236	HMA-567A	211, 215	HMA-673	263	HMA-767S	227	HMA-959	211, 215
HMA-410	239	HMA-567B	211, 215	HMA-674	118	HMA-772	211, 215	HMA-959A	211, 215
HMA-411	239	HMA-568	211, 215	HMA-674C	118	HMA-773	211, 215, 234	HMA-963	211, 215
HMA-413	206	HMA-568A	211, 215	HMA-679	174	HMA-774	211, 215	HMA-964	211, 215
HMA-460	169	HMA-568B	211, 215	HMA-680	174	HMA-775	211, 215	HMA-966	211, 215
HMA-465	169	HMA-569	211, 215	HMA-683	221	HMA-776	211, 215	HMA-967	211, 215
HMA-466	169	HMA-569A	211, 215	HMA-683D	220, 221	HMA-804	174, 175, 176	HMA-967A	211, 215
HMA-467	169	HMA-573	211, 215	HMA-683DF	220, 221	HMA-810	106	HMA-967B	211, 215
HMA-482	148	HMA-574	211, 215	HMA-685	200, 201	HMA-812	106	HMA-968	211, 215
HMA-490	151	HMA-576	211, 215	HMA-685D	200, 201, 204	HMA-813	106	HMA-968A	211, 215
HMA-491	151	HMA-577	211, 215	HMA-685DF	201, 204	HMA-814	106	HMA-968B	211, 215
HMA-492	151	HMA-577A	211, 215	HMA-686	206	HMA-815	96, 97	HMA-969	211, 215
HMA-493	151	HMA-577B	211, 215	HMA-687	222	HMA-820	96	HMA-969A	211, 215
HMA-506	213	HMA-578	211, 215	HMA-687D	222, 223	HMA-821	96	HMA-973	211, 215
HMA-514	213	HMA-578A	211, 215	HMA-687DF	222, 223	HMA-822	96	HMA-974	211, 215
HMA-516	213	HMA-578B	211, 215	HMA-694	92, 94	HMA-826	97	HMA-976	211, 215
HMA-517	206, 207, 209	HMA-579	211, 215	HMA-696	92, 94	HMA-828	97	HMA-977	211, 215
HMA-517S	209	HMA-579A	211, 215	HMA-697	92	HMA-834D	234	HMA-977B	211, 215
HMA-518	209	HMA-581	238	HMA-714	118	HMA-834E	234	HMA-978	211, 215
HMA-518S	209	HMA-582	238	HMA-716	118	HMA-835D	234	HMA-978A	211, 215
HMA-519	209	HMA-583	209, 211, 213, 215	HMA-725	226, 227, 232	HMA-835E	234	HMA-978B	211, 215
HMA-519H	209	HMA-584	209, 211, 213, 215	HMA-727	226, 227, 232	HMA-836	218, 234	HMA-979	211, 215
HMA-519H1	209	HMA-586	211, 215	HMA-729	226, 227, 232	HMA-837	218	HMA-979A	211, 215
HMA-519HS	209	HMA-586A	209, 211	HMA-730	226, 227, 232	HMA-838	218	HMA-983	211, 215
HMA-519HS1	209	HMA-587	209, 211, 213, 215	HMA-731	226, 227, 232	HMA-839	218	HMA-984	211, 215
HMA-519S	209	HMA-587A	209, 211, 213, 215	HMA-732	226, 227, 232	HMA-840	218, 219	HMA-986	211, 215
HMA-519S1	209	HMA-587B	209, 211, 213, 215	HMA-733	227	HMA-841	234	HMA-987	211, 215
HMA-520	207, 212, 216	HMA-588	209, 211, 213, 215	HMA-733M	227	HMA-842	234	HMA-987A	211, 215
HMA-521	205, 206, 207, 209, 212, 213, 216, 234	HMA-588A	209, 211, 213, 215	HMA-733MS	227	HMA-843	183	HMA-987B	211, 215
HMA-521F	205, 207, 209, 212,	HMA-588B	209, 211, 213, 215	HMA-733S	227	HMA-844	183	HMA-988	211, 215
						HMA-846	183	HMA-988A	211, 215



HMA-988B..... 211, 215
 HMA-989..... 211, 215
 HMA-989A..... 211, 215
 HMA-1050..... 141
 HMA-1051..... 141
 HMA-1052..... 141
 HMA-1053..... 141
 HMA-1054..... 141
 HMA-5191..... 209

L

LC-7..... 299
 LC-7F..... 299
 LC-8..... 299
 LC-8F..... 299
 LC-20..... 295
 LC-20F..... 295
 LC-22..... 295
 LC-22F..... 295
 LC-24..... 295
 LC-24F..... 295
 LC-27..... 295
 LC-27F..... 295
 LC-28..... 295
 LC-33..... 294
 LC-33A..... 294
 LC-34..... 294
 LC-34A..... 294
 LC-35..... 294
 LC-35A..... 294
 LC-36..... 294
 LC-36A..... 294
 LC-37..... 294
 LC-37A..... 294
 LC-44..... 296
 LC-44D..... 296
 LC-44E..... 296
 LC-44G..... 296
 LC-47..... 296
 LC-47D..... 296
 LC-47E..... 296
 LC-47G..... 296
 LC-53..... 297
 LC-80..... 299
 LC-82..... 299
 LC-82F..... 299
 LC-82S..... 299
 LC-88..... 300
 LC-91..... 300
 LC-92..... 300
 LC-95..... 300
 LC-115..... 298

LCA-5..... 297
 LCA-6..... 297
 LCA-9..... 297
 LCA-10..... 297
 LCA-11..... 297
 LCA-34..... 300
 LCA-35..... 300
 LCA-36..... 300
 LCA-37..... 300
 LCA-45..... 299
 LCA-46..... 299
 LCA-47..... 299
 LCA-50..... 300
 LCA-51..... 300
 LCA-52..... 300
 LCA-53..... 300
 LCA-55..... 299

LCA-56..... 299
 LCA-57..... 294
 LCA-60..... 300
 LCA-61..... 300
 LCA-63..... 300
 LCA-65..... 300
 LCA-66..... 300
 LCA-68..... 300
 LCA-70..... 300
 LCA-72..... 300
 LCA-73..... 300
 LCA-74..... 300
 LCA-75..... 300
 LCA-76..... 300
 LCA-80..... 300
 LCA-81..... 300
 LCA-82..... 300
 LCA-83..... 300
 LCA-91..... 294, 297
 LCA-91V..... 294
 LCA-92..... 294, 297
 LCA-170..... 299
 LCA-171..... 299
 LCA-172..... 299
 LCA-173..... 299
 LCA-175..... 299
 LCA-176..... 299
 LCA-178..... 299
 LCA-179..... 299
 LCA-192..... 295
 LCA-193..... 295
 LCA-240..... 298
 LCA-242..... 298
 LCA-415..... 296
 LCA-416..... 296
 LCA-417..... 296
 LCA-418..... 296
 LCA-419..... 296
 LCA-422..... 296

LP-10..... 128
 LP-10F..... 128
 LP-16..... 125
 LP-18..... 125
 LP-72..... 120, 121
 LP-74..... 120, 121
 LP-82..... 122, 123
 LP-84..... 122, 123
 LP-88..... 123

LPA-20..... 128
 LPA-21..... 128
 LPA-24..... 128
 LPA-26..... 128
 LPA-30..... 128
 LPA-31..... 128
 LPA-70..... 120, 121
 LPA-73..... 120, 121
 LPA-75..... 120, 121
 LPA-79..... 120, 121
 LPA-81..... 122, 123
 LPA-83..... 123
 LPA-86..... 123
 LPA-87..... 123
 LPA-88..... 123
 LPA-89..... 123
 LPA-182..... 128
 LPA-708..... 120, 121
 LPA-709..... 121
 LPA-710..... 121
 LPA-711..... 121

LPA-713..... 121
 LPA-715..... 121
 LPA-717..... 121
 LPA-816..... 123
 LPA-821..... 123
 LPA-827..... 123
 LPA-828..... 123
 LPA-829..... 123
 LT-10R..... 268, 269
 LT-20R..... 268, 269
 LT-30R..... 268, 269
 LT-40R..... 268, 269
 LT-110..... 268, 269
 LT-120..... 268, 269
 LT-130..... 268, 269
 LT-140..... 268, 269

M

MA-10..... 167
 MA-11..... 167
 MA-12..... 167
 MA-13..... 167
 MA-20A..... 261
 MA-21A..... 260, 261
 MA-23..... 103, 84, 253, 84
 MA-23F..... 103, 84
 MA-24..... 103, 84, 253, 84
 MA-24F..... 103, 84
 MA-25..... 260, 261
 MA-25C..... 261
 MA-26X..... 78, 259, 260
 MA-27A..... 103, 84, 253, 84
 MA-27AF..... 103, 84
 MA-30..... 94, 166, 317
 MA-31..... 103, 84, 84
 MA-33..... 103, 84, 84
 MA-33F..... 103, 84
 MA-38..... 318
 MA-40..... 322
 MA-41..... 322
 MA-42..... 166, 322
 MA-45..... 322
 MA-48..... 166, 322
 MA-50..... 322
 MA-52..... 195
 MA-52F..... 195
 MA-52X..... 195
 MA-52XF..... 195
 MA-54A..... 195
 MA-54AF..... 195
 MA-66..... 195
 MA-67..... 195
 MA-68..... 195
 MA-71..... 261
 MA-74..... 327
 MA-78..... 261
 MA-80..... 315
 MA-80B..... 315
 MA-81..... 315
 MA-81B..... 315
 MA-100..... 308
 MA-101..... 308
 MA-102..... 259, 308
 MA-103..... 308
 MA-104..... 308
 MA-105..... 308
 MA-107..... 314
 MA-110..... 305
 MA-111..... 311

MA-115..... 309
 MA-116..... 252, 309
 MA-117..... 308
 MA-118..... 308
 MA-119..... 309
 MA-120..... 308
 MA-120F..... 308
 MA-121..... 308
 MA-121F..... 308
 MA-122..... 308
 MA-123..... 308
 MA-123P..... 308
 MA-124..... 308
 MA-125..... 308
 MA-126..... 308
 MA-127..... 308
 MA-140..... 311
 MA-141..... 311
 MA-142..... 311
 MA-143..... 311
 MA-144..... 311
 MA-145..... 305
 MA-146..... 305
 MA-147..... 305
 MA-149..... 305, 311
 MA-150..... 311
 MA-151..... 311
 MA-152..... 311
 MA-153..... 311
 MA-154..... 311
 MA-155..... 305
 MA-156..... 305
 MA-157..... 305
 MA-158..... 311
 MA-159..... 305
 MA-161..... 305
 MA-162..... 311
 MA-167..... 315
 MA-168..... 70
 MA-169..... 70
 MA-170..... 80, 82, 253
 MA-170C..... 253
 MA-170F..... 80, 82
 MA-170FC..... 80, 82
 MA-182..... 310
 MA-187..... 324
 MA-188..... 324
 MA-189..... 317
 MA-193..... 318
 MA-194..... 324
 MA-195..... 324
 MA-196..... 324
 MA-198..... 74, 83, 324
 MA-203..... 324
 MA-204..... 324
 MA-205..... 253, 324
 MA-207..... 324
 MA-208..... 324
 MA-209..... 324
 MA-210C..... 127, 302
 MA-210F..... 302
 MA-211C..... 302
 MA-211F..... 302
 MA-212C..... 127, 302
 MA-212F..... 302
 MA-213C..... 302
 MA-213F..... 302
 MA-214C..... 302
 MA-214F..... 302
 MA-215C..... 302
 MA-215F..... 302

MA-216C..... 302
 MA-216F..... 302
 MA-217C..... 302
 MA-217F..... 302
 MA-218C..... 302
 MA-218F..... 302
 MA-219C..... 302
 MA-219F..... 302
 MA-220C..... 302
 MA-220F..... 302
 MA-223C..... 302
 MA-225C..... 302
 MA-225F..... 302
 MA-226C..... 302
 MA-226F..... 302
 MA-227C..... 302
 MA-227F..... 302
 MA-238..... 307
 MA-245..... 315
 MA-246..... 70, 252, 306, 315
 MA-247..... 70, 306, 315
 MA-248..... 310
 MA-257..... 264
 MA-258..... 264
 MA-260..... 264
 MA-267..... 264
 MA-270..... 252, 306, 310
 MA-275..... 250, 324
 MA-276..... 250, 324
 MA-277..... 250, 324
 MA-278..... 248, 250, 324
 MA-290..... 326
 MA-291..... 326
 MA-305..... 302, 303, 304, 305, 311
 MA-317..... 315
 MA-317B..... 315
 MA-321A..... 306
 MA-321AT..... 306
 MA-322A..... 306
 MA-322AT..... 306
 MA-323..... 307
 MA-323C..... 307
 MA-324..... 173, 306, 315
 MA-324C..... 306
 MA-326..... 310
 MA-326C..... 310
 MA-327..... 307
 MA-327C..... 307
 MA-330..... 237
 MA-330B..... 237
 MA-333..... 230, 232, 234
 MA-334..... 203, 237, 254
 MA-334B..... 237
 MA-334C..... 203, 237, 254
 MA-341..... 309
 MA-342..... 309
 MA-343..... 309
 MA-344..... 309
 MA-346..... 203, 237, 254
 MA-347..... 309
 MA-348..... 252, 309
 MA-349..... 317
 MA-351..... 310
 MA-352..... 310
 MA-355..... 310
 MA-357..... 309
 MA-360..... 237
 MA-361..... 237
 MA-363..... 230, 231, 232, 234
 MA-364..... 237
 MA-366..... 237



MA-367.....	237	MA-517C.....	304	MA-685.....	311	MAA-142.....	195	MCA-30.....	139
MA-372.....	314	MA-517F.....	304	MA-686.....	311	MAA-143.....	195	MCA-32.....	139
MA-373.....	314	MA-518C.....	304	MA-687.....	311	MAA-144.....	195	MCA-34.....	139
MA-373C.....	314	MA-518F.....	304	MA-688.....	311	MAA-145.....	195	MCA-41.....	135, 140
MA-384.....	314	MA-519C.....	304	MA-689.....	311	MAA-146.....	195	MCA-42.....	135, 140
MA-420C.....	302	MA-519F.....	304	MA-690.....	311	MAA-147.....	195	MCA-44.....	135, 140
MA-420F.....	302	MA-520C.....	304	MA-691.....	311	MAA-148.....	195	MCA-44N.....	135, 140
MA-421C.....	164, 302	MA-520F.....	304	MA-692.....	311	MAA-149.....	195	MCA-46.....	135, 140
MA-421F.....	164, 302	MA-521C.....	304	MA-751CT.....	303	MAA-162.....	315	MCA-51.....	139
MA-422C.....	302	MA-522C.....	304	MA-751FT.....	303	MAA-163.....	315	MCA-52.....	139
MA-422F.....	302	MA-523C.....	304	MA-769.....	312	MAA-166.....	315	MCA-55.....	139
MA-424C.....	302	MA-524C.....	304	MA-772.....	312	MAA-167.....	315	MCA-61.....	136, 140
MA-424F.....	302	MA-524F.....	304	MA-773.....	312	MAA-181.....	326	MCA-62.....	136, 140
MA-426C.....	302	MA-525C.....	304	MA-774.....	313	MAA-182.....	326	MCA-63.....	136, 140
MA-426F.....	302	MA-525F.....	304	MA-775.....	313	MAA-190.....	264	MCA-64.....	136, 140
MA-427C.....	302	MA-526C.....	304	MA-776.....	313	MAA-192.....	264	MD-2000.....	69
MA-427F.....	302	MA-526F.....	304	MA-777.....	312	MAA-194.....	264	MD-2000F.....	69
MA-428C.....	302	MA-527C.....	304	MA-778.....	313	MAA-196.....	264	MD-2000V.....	69
MA-428F.....	302	MA-527F.....	304	MA-779.....	312	MAA-198.....	264		
MA-429C.....	302	MA-528C.....	304	MA-780.....	305	MAA-203.....	306	MF-2A.....	276
MA-429F.....	302	MA-528F.....	304	MA-781.....	305	MAA-224.....	173, 315	MF-2AF.....	276
MA-430C.....	302	MA-529C.....	304	MA-783.....	305	MAA-227.....	307	MF-4.....	276
MA-430F.....	302	MA-529F.....	304	MA-784.....	305	MAA-228.....	173, 306, 307, 315	MF-4A.....	276
MA-431C.....	302	MA-530C.....	304	MA-785.....	305	MAA-229.....	307	MF-4AF.....	276
MA-431F.....	302	MA-530F.....	304	MA-786.....	305	MAA-240.....	264	MF-6.....	276
MA-432C.....	302	MA-531C.....	304	MA-787.....	305	MAA-241.....	264	MF-6A.....	276
MA-432F.....	302	MA-531F.....	70, 304	MA-812.....	326	MAA-242.....	264	MF-8A.....	276
MA-433C.....	302	MA-532C.....	304	MA-814.....	326	MAA-243.....	264	MF-1310.....	277
MA-433F.....	302	MA-532F.....	304	MA-816.....	326	MAA-247.....	264	MF-1315.....	277
MA-434C.....	302	MA-533C.....	304	MA-818.....	326	MAA-248.....	264	MF-6010.....	277
MA-434F.....	302	MA-533F.....	304	MA-838.....	253, 326	MAA-260.....	195	MF-6020.....	277
MA-435C.....	302	MA-534C.....	304	MA-839.....	326	MAA-261A.....	195	MF-7910.....	277
MA-435F.....	302	MA-534F.....	304	MA-950.....	56, 81, 325	MAA-266.....	195	MF-7915.....	277
MA-436C.....	302	MA-535C.....	304	MA-1807.....	253, 326	MAA-267A.....	195	MF-8010.....	277
MA-436F.....	302	MA-535F.....	304	MA-1827.....	326	MAA-281.....	130	MF-8015.....	277
MA-437C.....	302	MA-536C.....	304	MA-3631.....	231	MAA-286.....	307	MF-8020.....	277
MA-437F.....	302	MA-538C.....	304			MAA-287.....	307	MF-8025.....	277
MA-438C.....	302	MA-538F.....	304	MAA-10B.....	314	MAA-288.....	307		
MA-438F.....	302	MA-540C.....	304	MAA-14.....	312	MAA-317B.....	315	MFA-65.....	321
MA-450.....	302	MA-540F.....	304	MAA-25.....	80			MFA-70.....	321
MA-450C.....	302	MA-542C.....	304	MAA-28.....	195	MC-250P.....	136, 137	MFA-80.....	321
MA-450F.....	302	MA-542F.....	304	MAA-28F.....	195	MC-250PR.....	137	MFA-120.....	276
MA-452F.....	302	MA-543C.....	304	MAA-30A.....	195	MC-300P.....	137		
MA-453F.....	302	MA-543F.....	304	MAA-31.....	195	MC-300PR.....	137	MH-1.....	63
MA-454F.....	302	MA-545C.....	304	MAA-32.....	195	MC-400P.....	137	MH-2.....	63
MA-455F.....	302	MA-545F.....	304	MAA-34A.....	195	MC-400PR.....	137	MH-3.....	63
MA-456F.....	302	MA-552F.....	304	MAA-43.....	78, 260, 261, 321	MC-500P.....	137	MH-4.....	63
MA-457F.....	302	MA-553F.....	304	MAA-44.....	78, 260, 261	MC-500PR.....	137	MH-4X.....	63
MA-458F.....	302	MA-554F.....	304	MAA-45.....	78, 260, 261	MC-500PRP.....	137	MH-5.....	63
MA-460C.....	302	MA-555F.....	304	MAA-46.....	78, 260, 261			MH-6.....	63
MA-462C.....	302	MA-556F.....	304	MAA-47.....	78, 260, 261	MCA-3.....	139		
MA-464C.....	302	MA-557C.....	304	MAA-48.....	78, 260, 261	MCA-4.....	139	MM-70.....	19
MA-467C.....	302	MA-557F.....	304	MAA-50.....	78, 260, 261	MCA-5.....	139	MO-36.....	117
MA-469C.....	302	MA-560C.....	304	MAA-51.....	78, 260, 261	MCA-6.....	139	MO-39.....	116
MA-471C.....	302	MA-562C.....	304	MAA-52.....	78, 260, 261	MCA-7.....	139	MO-40.....	116
MA-491.....	316	MA-564C.....	304	MAA-53.....	78, 260	MCA-8.....	139	MOA-2.....	118
MA-492.....	316	MA-567C.....	304	MAA-60.....	315	MCA-9.....	139	MOA-2C.....	118
MA-493.....	316	MA-645.....	305	MAA-61.....	315	MCA-10.....	139	MOA-3.....	117
MA-494.....	316	MA-646.....	305	MAA-62.....	315	MCA-11.....	139	MOA-5.....	117
MA-495.....	316	MA-648.....	305	MAA-64.....	195	MCA-12R.....	139	MOA-6.....	117
MA-496.....	316	MA-649.....	305	MAA-64F.....	195	MCA-13R.....	139	MOA-10.....	117
MA-510C.....	127, 304	MA-650.....	305	MAA-70.....	237	MCA-14.....	139		
MA-510F.....	304	MA-650P.....	305	MAA-72.....	237	MCA-15.....	139	MS-1.....	90, 91
MA-513C.....	304	MA-655.....	305	MAA-74.....	237	MCA-16.....	139	MS-1B.....	90
MA-513F.....	304	MA-656.....	305	MAA-75.....	140	MCA-17.....	139	MS-2.....	90, 91
MA-514C.....	304	MA-657.....	305	MAA-76.....	237	MCA-18.....	139	MS-3.....	90, 91
MA-514F.....	304	MA-680.....	311	MAA-81.....	230, 231, 232, 237	MCA-19.....	139	MS-4.....	328
MA-515C.....	304	MA-681.....	311	MAA-82.....	140	MCA-24.....	139	MS-5.....	90, 91, 328
MA-515F.....	304	MA-682.....	311	MAA-90.....	311	MCA-27.....	139	MS-6.....	90, 91
MA-516C.....	304	MA-683.....	311	MAA-116.....	261	MCA-28.....	138, 139	MS-10.....	90, 91
MA-516F.....	304	MA-684.....	311	MAA-141.....	195	MCA-29.....	136, 138, 139	MS-19.....	328



MS-25..... 328
 MS-25D..... 87
 MS-25F..... 87
 MS-26..... 86, 87, 88
 MS-27..... 91
 MS-29..... 86, 87
 MS-35..... 86, 87
 MS-36..... 86, 87
 MS-43..... 86, 87
 MS-43F..... 86, 87
 MS-45..... 86, 87
 MS-48..... 87
 MS-62..... 125
 MS-62F..... 125
 MS-64..... 125
 MS-64F..... 125
 MS-66..... 125
 MS-66F..... 125
 MS-67..... 125
 MS-67F..... 125
 MS-86..... 86, 88
 MS-86F..... 86
 MS-87..... 86
 MS-398..... 86
 MS-398F..... 86

MSA-100..... 90, 91
 MSA-100B..... 91
 MSA-100C..... 91
 MSA-100M..... 91
 MSA-101..... 90, 91
 MSA-101B..... 91
 MSA-101M..... 91
 MSA-106..... 90, 91
 MSA-106B..... 91
 MSA-106C..... 91
 MSA-106M..... 91
 MSA-111..... 90
 MSA-112..... 90
 MSA-113..... 90
 MSA-114..... 90
 MSA-120..... 91, 94, 241
 MSA-121..... 91, 94, 241
 MSA-125..... 89
 MSA-125F..... 89
 MSA-130..... 89
 MSA-130F..... 89
 MSA-130S..... 89
 MSA-130SF..... 89
 MSA-131..... 89
 MSA-131F..... 89
 MSA-134..... 86, 88
 MSA-220..... 87
 MSA-222..... 87
 MSA-860..... 86
 MSA-860D..... 86, 88

N

NM-1..... 13
 NM-2..... 13
 NM-3..... 13
 NM-4..... 13
 NM-5..... 13
 NM-A..... 15
 NM-B..... 15
 NM-C..... 15
 NM-D..... 15
 NM-E..... 15
 NM-F..... 15

O

OB-132..... 280, 283
 OB-132H..... 280, 283
 OB-133..... 280, 283
 OB-133H..... 280, 283
 OB-134..... 280, 283
 OB-134H..... 280, 283
 OB-135..... 280, 283
 OB-135H..... 280, 283
 OB-165..... 150, 280, 287
 OB-205..... 78, 192, 260, 261
 OB-750..... 280, 282
 OB-752..... 280, 282
 OB-754..... 280, 282
 OB-756..... 280, 282
 OB-758..... 280, 282
 OB-762..... 280, 282
 OB-764..... 280, 282
 OB-766..... 280, 282
 OB-770..... 280, 282
 OB-772C..... 280, 282
 OBA-10..... 290
 OBA-15R..... 27, 31
 OBA-20..... 290
 OBA-42..... 281, 283
 OBA-44..... 281, 282, 283
 OBA-46..... 283
 OBA-51..... 282
 OBA-170..... 292
 OBA-171..... 292
 OBA-201..... 290
 OBA-202..... 290
 OBA-203..... 290
 OBA-204..... 290
 OBA-205..... 290
 OBA-206..... 290
 OBA-207..... 290
 OBA-208..... 290
 OBA-209..... 290
 OBA-210..... 290
 OBA-211..... 290
 OBA-212..... 290
 OBA-213..... 290
 OBA-214..... 290
 OBA-215..... 290
 OBA-216..... 290
 OBA-217..... 290
 OBA-278..... 290
 OBA-280..... 290
 OBA-282..... 290
 OBA-284..... 290
 OBA-286..... 290
 OBA-288..... 290
 OBA-289..... 290
 OBA-291..... 290
 OBA-301..... 290
 OBA-302..... 290
 OBA-303..... 290
 OBA-304..... 290
 OBA-305..... 290
 OBA-306..... 290
 OBA-307..... 290
 OBA-308..... 290
 OBA-309..... 290
 OBA-310..... 290
 OBA-311..... 290
 OBA-312..... 290
 OBA-313..... 290
 OBA-314..... 290

OBA-315..... 290
 OBA-316..... 290
 OBA-317..... 290
 OBA-401..... 290
 OBA-402..... 290
 OBA-403..... 290
 OBA-404..... 290
 OBA-405..... 290
 OBA-406..... 290
 OBA-407..... 290
 OBA-408..... 290
 OBA-409..... 290
 OBA-410..... 290
 OBA-411..... 290
 OBA-412..... 290
 OBA-413..... 290
 OBA-414..... 290
 OBA-415..... 290
 OBA-416..... 290
 OBA-417..... 290
 OBA-709..... 281
 OBA-1101..... 292
 OBA-1701..... 292
 OBA-1711..... 292
 OBA-10783A..... 292
 OBD-152..... 280, 288
 OBD-223..... 280, 288
 OBD-421..... 280, 288
 OBD-422..... 280, 288
 OBD-821..... 280, 288
 OBD-822..... 280, 288
 OBP-162..... 280, 289
 OBP-221..... 280, 289
 OBP-222..... 280, 289
 OBP-322..... 280, 289
 OBP-421..... 280, 289
 OBP-422..... 280, 289
 OBX-512..... 80, 280, 281
 OBX-524..... 280, 281
 OBX-535..... 280, 281
 OT-2..... 268, 275
 OT-2F..... 275

P

PM-1..... 13
 PM-2..... 13
 PM-3..... 13
 PM-4..... 13
 PM-5..... 13
 PM-A..... 15
 PM-B..... 15
 PM-C..... 15
 PM-D..... 15
 PM-E..... 15
 PM-F..... 15
 PO-23..... 268, 274
 POA-10..... 274
 PP-89..... 141
 PRA-14..... 135
 PS-3..... 45
 PS-3F..... 45
 PS-4..... 45

PS-4F..... 45
 PSA-114..... 45, 52, 53, 54, 55
 PSA-301..... 46, 47
 PSA-312..... 45
 PSA-326A..... 46, 47
 PSA-336..... 46, 47
 PSA-356..... 45
 PSA-367..... 45
 PT-6A..... 127
 PT-6AF..... 127
 PT-53..... 127
 PT-53F..... 127
 PT-61..... 127
 PT-61F..... 127
 PT-62..... 127
 PT-62F..... 127
 PT-82..... 126
 PT-82F..... 126
 PT-101..... 126
 PT-102..... 126
 PT-103..... 126
 PT-104..... 126
 PT-105..... 126
 PT-106..... 126
 PT-107..... 126
 PT-108..... 126
 PT-109..... 126
 PT-110..... 126
 PT-111..... 126
 PT-112..... 126
 PT-113..... 126
 PT-114..... 126
 PT-115..... 126
 PTA-61..... 127
 PTA-70..... 127
 PTA-100..... 126
 PTA-119..... 126
 PTA-162..... 126
 PTA-163..... 126
 PTA-165..... 126
 PTA-166..... 126
 PTA-168..... 126
 PTA-169..... 126
 PTA-176..... 126
 PTA-177..... 126
 PTA-178..... 126
 PTA-179..... 126
 PTA-180..... 126

S

SA-1..... 251
 SA-2..... 251
 SA-5..... 251
 SA-14..... 251, 252
 SA-14F..... 251, 252
 SA-16..... 251, 252
 SA-18..... 249
 SA-19..... 249
 SA-20..... 251
 SA-20C..... 251
 SA-25..... 251
 SA-25F..... 251
 SA-45..... 242
 SA-45F..... 242
 SA-55A..... 249
 SA-56..... 249
 SA-60..... 248

SA-60F..... 248
 SA-61..... 248
 SA-62..... 248
 SA-65..... 248
 SA-66..... 248
 SA-80..... 71, 247
 SA-80F..... 71, 247
 SAA-2..... 251, 252
 SAA-8..... 248
 SAA-9..... 249
 SAA-9C..... 249
 SAA-10..... 248
 SAA-10P..... 248
 SAA-11..... 248
 SAA-12..... 248
 SAA-15..... 249
 SAA-22..... 242
 SAA-23..... 242
 SAA-24..... 242
 SAA-30..... 71, 247
 SAA-31..... 71, 247
 SC-1..... 320
 SC-2..... 320
 SC-3..... 242, 320
 SC-4..... 75, 320
 SC-5..... 320
 SC-20..... 57
 SC-45..... 320
 SC-46..... 320
 SC-47..... 320
 SC-50..... 320
 SC-51..... 320
 SC-55..... 320
 SC-56..... 320
 SC-57..... 320
 SC-60..... 320
 SC-61..... 320
 SC-65..... 320
 SC-70..... 320
 SC-73..... 320
 SC-74..... 249, 320
 SC-77..... 248, 320
 SC-78..... 320
 SC-80..... 320
 SC-81..... 320
 SC-82..... 320
 SC-83..... 320
 SC-84..... 320
 SC-90..... 325
 SC-108..... 61
 SC-115..... 321
 SC-116..... 78, 260, 261, 321
 SC-117..... 321
 SC-118..... 321
 SC-119..... 321
 SC-149..... 320
 SC-150..... 320
 SC-151..... 320
 SC-152..... 320
 SC-163..... 320
 SC-165..... 320
 SC-250..... 321
 SC-251..... 321
 SC-252..... 321
 SC-253..... 321
 SC-258..... 321
 SC-259..... 321
 SC-270..... 321
 SC-272..... 321



SC-400	248, 250, 321	SG-57	252, 322	SM-6	63	SP-1017FX	59	SS-12R	24, 30, 31
SC-402	250, 321	SG-58	252, 322	SM-6L	62	SP-1018FX	59	SS-12RF	31
SC-404	250, 321	SG-62	81	SM-6LC	62	SP-1050	59	SS-14	24, 26, 27
SC-406	250, 321	SG-63	81	SM-6SL	62	SP-1050X	59	SS-14D	24, 26, 27
SC-498	250, 321	SG-70	82, 83	SM-6SLC	62	SP-1060	59	SS-14DF	27
SC-500	250, 321	SG-100	81, 322	SM-31	63	SP-1060X	59	SS-14F	27
SC-500-1	72	SG-250	81, 252, 322	SM-41	63	SP-1070	59	SS-15	24, 26, 27
SC-502	250, 321	SG-450	81	SM-51	63	SP-1070X	59	SS-15D	24, 25, 26, 27
SC-504	250, 321	SG-500	81, 82, 252, 322	SM-61	63			SS-15DF	27
SC-506	250, 321	SG-1000	81, 252, 322			SPA-7	52, 53, 54	SS-15F	27
SC-508	250, 321			SP-0	52, 53	SPA-21	56	SS-18	71
		SGA-5R	82, 83, 253	SP-1	52, 53, 54, 55, 328	SPA-22	56, 325	SS-18F	71
SE-2B	73	SGA-5RT	82	SP-1C	52, 53, 54	SPA-22C	56, 325	SS-20	24, 28, 29
SE-2BF	73	SGA-7	82, 83	SP-2	52, 53	SPA-22K	56, 325	SS-20F	29
SE-5	73	SGA-8	82, 83	SP-3	58, 53	SPA-23	56, 325	SS-21	24, 28, 29
SE-6	73	SGA-12	82	SP-6	55	SPA-24	56, 325	SS-21F	29
SE-20	327	SGA-15	81	SP-10	55	SPA-30	61	SS-22	24, 29
SE-24	327	SGA-16	81	SP-12CA	54	SPA-31	61	SS-22F	29
SE-26	327	SGA-91	75	SP-12CG	54	SPA-51	57	SS-23	24, 39
SE-28	327	SGA-92	75	SP-33	58	SPA-64	61	SS-25	24, 39
SE-30	327	SGA-93	75	SP-48R	61	SPA-100	53, 54, 55, 64, 320	SS-25F	39-40
SE-30L	327	SGA-94	75	SP-48RF	61	SPA-101	53, 64, 320	SS-28	24, 81, 253
SE-30LD	327	SGA-95	75	SP-50	57	SPA-102	52, 53, 54	SS-28F	81
SE-30M	327	SGA-105	83	SP-52	57	SPA-104	64, 320	SS-30	24, 25, 32, 33, 298
SE-30MD	327	SGA-106	83	SP-55	56	SPA-105	64, 320	SS-30F	33
SE-30X	327	SGA-117	252	SP-90	17	SPA-108	53	SS-30K	32, 33
SE-30XD	327	SGA-118	252	SP-92	325	SPA-109	52, 53	SS-30S	33
SE-33	327	SGA-119	80	SP-93	325	SPA-110	55	SS-31	24, 32, 33
SE-42	327	SGA-120	80	SP-96	325	SPA-111	55	SS-31F	33
		SGA-122	80	SP-97	325	SPA-114	52, 53, 54, 55	SS-31K	33
SEA-99	72	SGA-125	80	SP-138	265	SPA-115	57	SS-33	24, 32, 33
SEA-100	71, 72	SGA-126	99	SP-140	265	SPA-120	54, 320	SS-33F	33
SEA-100A	72	SGA-128	99	SP-171	59	SPA-122	54, 320	SS-34	24, 34
SEA-100B	72	SGA-130	80	SP-171X	59	SPA-124	56	SS-35	50
SEA-100C	72	SGA-135	80	SP-173	59	SPA-129	58	SS-36	24, 34
SEA-100E	72			SP-174	59	SPA-130	58	SS-82	24, 34
SEA-100F	72	SH-100	268, 273	SP-175	59	SPA-132	58	SS-82F	34
SEA-100G	72	SH-100F	268, 273	SP-177	59	SPA-151	59		
SEA-101	72, 73	SH-142	268, 273	SP-230	60	SPA-171	59	SSA-10	11, 17, 38, 40
SEA-102	72	SH-282	268, 273	SP-245	61	SPA-181	59	SSA-11	17
SEA-103	72	SH-300	268, 273	SP-245F	61	SPA-240X	59	SSA-12	29
		SH-300F	268, 273	SP-254	265	SPA-241	59	SSA-14	17
SF-10	256	SH-500	268, 273	SP-256	265	SPA-242	59	SSA-15	17, 36
SF-20	256	SH-500F	268, 273	SP-258	265	SPA-244	59	SSA-16	29
SFA-20	256			SP-259	265	SPA-245X	59	SSA-17	9, 36
SFA-21	256	SHA-21	273	SP-261	265	SPA-255	265	SSA-20	39, 325
SFA-22	256	SHA-23	273	SP-262	265	SPA-256	265	SSA-22	71
SFA-24	256	SHA-25	273	SP-264	265	SPA-257	265	SSA-39	298
SFA-25	256	SHA-31	273	SP-266	265	SPA-260	60	SSA-41	298
		SHA-33	273	SP-268	265	SPA-261	60	SSA-43	298
SG-1	81	SHA-35	273	SP-269	265	SPA-262	60	SSA-44	298
SG-2	81, 82	SHA-38	273	SP-271	265	SPA-263	60	SSA-58	18
SG-3	81	SHA-43	273	SP-272	265	SPA-264	60	SSA-58C	18
SG-6	81	SHA-45	273	SP-274	265	SPA-265	60	SSA-72	29
SG-7A	80, 81	SHA-47	273	SP-278	265	SPA-266	60	SSA-74	29
SG-8	81			SP-284	265	SPA-267	60	SSA-76	29
SG-15	82, 83	SM-1	63	SP-285	265	SPA-268	60	SSA-77	29
SG-16A	82, 83	SM-2	63	SP-286	265	SPA-301	58, 320	SSA-320A	32, 33
SG-18A	82, 83	SM-3	63	SP-287	265	SPA-302	58	SSA-321	33
SG-20	80	SM-3L	62	SP-288	265	SPA-303	58	SSA-325	32, 33
SG-24	81, 82	SM-3LC	62	SP-289	265	SPA-400	53, 64, 320	SSA-351	50
SG-26	81	SM-4	63	SP-290	265	SPA-450	52, 53	SSA-355	50
SG-27	81	SM-4L	62	SP-291	265	SPA-501	59	SSA-801	31
SG-28	81	SM-4LC	62	SP-292	265	SPA-501X	59	SSA-802	27, 31, 292
SG-35	99, 102	SM-4X	63	SP-293	265	SPA-502	59	SSA-803	14
SG-36	99, 102	SM-4XL	62	SP-300	58			SSA-804	14
SG-40	75	SM-4XLC	62	SP-302	58	SS-3	8, 9, 24, 36	SSA-805R	31
SG-40A	75	SM-5	63	SP-304	58	SS-8R	4, 24, 25, 30, 31	SSA-806	27
SG-42	75	SM-5L	62	SP-306	58	SS-8RF	31	SSA-807	31
SG-56	252, 322	SM-5LC	62	SP-1015FX	59	SS-10	24, 35	SSA-809	31

13 INDEX / MODEL NUMBER

SSA-820.....	14	TSA-125.....	46, 47, 50	TSA-190.....	318	UBA-121.....	23	WPA-3B.....	177
SSA-822.....	14	TSA-126A.....	46, 47, 50	TSA-191.....	318	UBA-123.....	23		
SSA-823.....	14	TSA-126B.....	46, 47, 50	TSA-193.....	16, 323				
		TSA-136.....	46, 47	TSA-198.....	16, 323				
SV8-2C.....	13	TSA-137.....	46, 47	TSA-200.....	43, 48, 50	V		WT-1.....	167
SV8-2F.....	13	TSA-150.....	27, 31	TSA-201.....	44, 48	V8SF #5.....	70	WT-1A.....	167
SV-125.....	13	TSA-153.....	44, 49	TSA-205.....	16, 323	V8SF #10.....	70	WT-3.....	17, 74
SV-126.....	13	TSA-154R.....	43, 49	TSA-206.....	16, 323	V8SF #70.....	70	WT-3S.....	17, 74
SV-135.....	14	TSA-155.....	42, 43, 49	TSA-207.....	16, 323	V8SH #70.....	70	WT-4.....	14, 17, 74, 324
SV-155.....	14	TSA-156.....	43, 44, 49	TSA-208.....	16, 323			WT-4B.....	83
SV-165.....	14	TSA-157.....	43, 48	TSA-222.....	18	W		WT-4R.....	17, 324
SV-185.....	14	TSA-157R.....	43, 48	TSA-232.....	16, 154, 292, 323	WC-3S.....	15	WT-5.....	17, 39
SV-205.....	14	TSA-159.....	42, 43, 49	TSA-233.....	16, 154, 292, 323	WC-5.....	15	WT-6.....	16, 323
SV-206.....	14	TSA-162.....	48, 64, 320	TSA-265.....	18	WC-5S.....	15	WT-7.....	17, 39
SV-215.....	14	TSA-163.....	64, 75, 320	TSA-268.....	18, 141, 175, 176	WC-200.....	15	WT-8.....	17, 74, 324
SV-216.....	14	TSA-167.....	43, 44, 48	TSA-270.....	18, 141, 176	WC-200S.....	15	WT-8R.....	17, 324
SV-217.....	14	TSA-168.....	16, 292, 323	TSA-271.....	18, 174, 175, 176	WC-230.....	15	WT-10.....	17, 74
SV-218.....	14	TSA-169R.....	42, 43, 49, 71, 318	TSA-275.....	154	WC-230S.....	15	WT-10S.....	17, 74
SV-800.....	70	TSA-169RF.....	49, 318	TSA-279.....	154	WC-270.....	15	WT-13.....	17
		TSA-170.....	16, 259, 292, 323	TSA-292.....	141, 176	WC-270S.....	15	WT-13S.....	17
T		TSA-171.....	16, 48, 292, 323	TSA-292.....	141, 176	WC-325.....	15	WT-23ESB.....	167
		TSA-172.....	16, 292, 323	TSA-1167.....	318	WC-325S.....	15	WT-34C.....	74
TM-5.....	43, 44, 49	TSA-173.....	16, 292, 323	TSA-1167F.....	318	WC-400.....	15	WT-34S.....	12, 74
TM-5F.....	44	TSA-174.....	16, 292, 323			WC-400S.....	15	WT-62.....	167
TM-6.....	43, 44, 49	TSA-175.....	18	U		WC-450S.....	15	WT-84C.....	12, 74
TM-6F.....	44	TSA-176.....	16, 323	UB-1.....	22	WC-500S.....	15	WT-84S.....	12, 74
		TSA-176A.....	323	UB-1A.....	22	WC-635S.....	15	WT-86S.....	12, 74
TR-502.....	36, 39, 300	TSA-177.....	16, 323	UB-5.....	22			WT-88C.....	12, 74
		TSA-178.....	16, 323	UB-5A.....	22	WCA-540.....	242	WT-88S.....	12, 74
TS-1.....	42, 43, 44, 48, 49, 50	TSA-178.....	16, 323	UB-8.....	23	WCA-541.....	242	WT-128C.....	12, 74
TS-2.....	42, 43, 44, 48, 49	TSA-179.....	16, 292, 323	UB-12.....	23	WCA-542.....	242	WT-128S.....	12, 74
TS-3.....	42, 43, 48, 49	TSA-180.....	43, 44, 45, 48	UB-12F.....	23			WT-204.....	13
TS-4.....	42, 43, 49	TSA-182.....	16, 323	UB-15.....	23			WT-206.....	12, 13
		TSA-183.....	16, 323	UB-18.....	22	WP-530.....	177	WT-324.....	13
TSA-112.....	46, 49, 50	TSA-184.....	16, 323	UB-18A.....	22	WP-532A.....	177	WT-326.....	13
TSA-112A.....	49	TSA-185.....	16, 323	UB-18B.....	22	WP-700.....	177		
TSA-112S.....	49	TSA-186.....	16, 323					WTA-49.....	167
TSA-114.....	49	TSA-187.....	16, 323	UBA-1.....	22			WTA-53.....	13
TSA-116.....	49	TSA-188.....	16, 154, 323	UBA-4.....	22	WPA-1.....	177	WTA-54.....	13
TSA-117.....	49	TSA-189.....	16, 154, 323	UBA-100.....	23	WPA-1B.....	177		
						WPA-3.....	177		

1,000mL Hydrometer Sedimentation Cylinder	251
1,500g Asphalt Extractor	107
1/16th Sample Reducer	57
100mL Copper Cylindrical Measure	75
10lb Modified Soil Compaction Hammer	240
20 – 30 Standard Tensile Test Sand	194
3,000g Asphalt Extractor	107
30qt Insulated Cooler	252
4in Marshall Mold	91
4in Soil Density Mold Set	238, 239, 241
5.5lb Standard Soil Compaction Hammer	240
6in Marshall Mold	91
6in Soil Density Mold Set	238, 239, 241

A

A&D FG-K Bench/Platform Scale	285
A&D GP Industrial High-Capacity Balance	281
A&D GP Smart-Range Industrial Balance	284
A&D Newton Compact Balance	287
AASHTO Grooving Tool	248
Abrasive Charge, LA Abrasion	68
Abrasive Charge, Micro-Deval	69
Accelerated Polishing Machine	79
Acidity and Moisture Tester	261
Acme Penetrometer	165
Adam CPW Plus Bench Scale	286
Adam Cruiser Bench Scale	285
Adam Eclipse High-Capacity Balance	284
Adam GBK Bench Scale	282
Adam Highland Portable Precision Balance	289
Adam Precision Balance	288
Adam SHS Crane Scale	291
Adapter Foot Attachment for HM-500	255, 257
Adhesive Paper for Plastic Limit Roller	249
Adjustable Soil Trimmers	217
Aggregate Durability	68, 69, 70, 71
Aggregate Specific Gravity Bench	80, 100
Aggregate Testing Equipment	68–80
Air Drying Oven	275
Air Indicator (Chace)	151
Air Jet Sieve System	40
Air Jet Sieves	11
Air Meter Calibrators	147
Air Meter Gauge	147
Air Meter Pump	146, 147
Air Permeability Apparatus (Blaine)	167
Air/Gas Dryer	83, 98, 102
Aluminum Air Meter Calibrator	147
Aluminum Pans	320
Aluminum Pycnometers	83, 98, 101
Aluminum Round Sample Containers	250, 321
Aluminum Scoops	16, 292, 323
Anton Paar Dynamic Shear Rheometers	124
Anton Paar Rotational Viscometer	122, 123
APA Jr. Wheel Tracker	96
APA Wheel Tracker	97

Aqua-Check 0 – 20% Pressure Gauge	78, 260, 261
Aqua-Check Moisture Tester	78, 260
AquaFog Curing Room Fogging Fans	172
Armored Mercury-Filled Thermometer	311
Armored Non-Mercury Thermometers	305
Asphalt Binder Book	328
Asphalt Bond Shear Strength	86, 87
Asphalt Content Furnace	106
Asphalt Core Bits	114, 196
Asphalt Core Puller	115, 197
Asphalt Depth Gauge	113
Asphalt Extraction Bowl	107, 108
Asphalt Extraction Solvents	109
Asphalt Furnace Sample Basket Assembly	105
Asphalt Ignition Furnace	106
Asphalt Institute Vacuum Viscometers	126
Asphalt Load Frames	86
Asphalt Melting Pots	125
Asphalt Mix Design Methods	328
Asphalt Pavement Analyzer (APA)	97
Asphalt Pavement Analyzer (APA) Jr	96
Asphalt Permeameter	112
Asphalt Quartermaster Splitter	56, 95
Asphalt Sample Ejector	91
Asphalt Sample Preparation Saw	87
Asphalt Saw	115, 197
Asphalt Saw Blades	115, 197
Asphalt Software	86, 88
Asphalt Specific Gravity Bench	80, 100
Asphalt Tack Coat/Interlayer Shear Strength	86, 87
Asphalt Testing Equipment	86–130
Asphalt Viscometer Test Equipment	120, 121, 122, 123
Asphalt Water Baths	88
ASTM 151H Soil Hydrometer	251
ASTM 152H Soil Hydrometer	251
ASTM Class 4 Calibration Weights	290
ASTM Digital Alternative Thermometers	306
ASTM E11 Test Sieves	4, 5, 6, 7, 8, 9
ASTM Equivalent Non-Mercury Thermometers	304
ASTM Grooving Tool, Metal	248
ASTM Grooving Tool, Plastic	248
ASTM Manual on Test Sieving	328
ASTM Mercury Thermometers	302
ASTM Non-Mercury Thermometers	303
ASTM Testing Screen Trays	46
ASTM/AASHTO Granular Permeameters	218
ATS Bending Beam Rheometers (BBR)	119
ATS Pressure Aging Vessel (PAV)	118
ATS Vacuum Degassing Oven (VDO)	118
Atterberg Limit Accessory Set	248
Atterberg Limit Machines	248
Atterberg Limit Roller Paper	249
Atterberg Plastic Limit Roller	249
Augers for Soil, Mud and Sand	265
Automatic Aggregate Washers	74

Automatic Concrete Compression Machines	132, 133, 134, 135
Automatic Marshall Compactor	90
Automatic Soil Processor	242
Automatic Universal Penetrometer	129
AutoRice, Asphalt Specific Gravity	99
Auxiliary Control Panel for Triax and Perm	207, 208, 212

B

B Parameter Transducer with Readout	207, 208, 212, 213
Back Pressure Consolidometer	234
Badger Jaw Crushers	294
Baffled Dispersion Cup	251
Balance Calibration Weights	290
Balance Selection Guide	280
Balance, A&D GP Smart-Range	284
Balance, A&D Newton	287
Balance, Adam Eclipse	284
Balance, Adam Highland	289
Balance, Ohaus Adventurer	288
Balance, Ohaus Explorer	281
Balance, Ohaus Pioneer	289
Ball Mills	300
Ballast Flatness and Elongation Ratio Gauge	76
Balloon Density Apparatus	259
Ball-Pan Hardness Test Set	298
Basic Swell Consolidometer	234
Bath, Constant Temperature	251
BBR Specimen Molds	119
BBR, Bending Beam Rheometers	119
Beakers, Glass	322
Beakers, Stainless Steel	322
Beam (Concrete Flexural) Test Set	134, 139
Bench Oven, Large Capacity	275
Bench Ovens	268, 269, 270, 271, 272, 273
Bench Scales	281, 282, 283, 284, 285
Benchtop Labmill	300
Bending Beam Rheometer Mylar Strips	119
Bending Beam Rheometer Specimen Molds	119
Bending Beam Rheometers (BBR)	119
Benkelman Beam	113
Bico Jaw Crushers	294
Bico Pulverizer	297
Binder Content Furnace	104
Biodegradable Plastic Cylinder Molds	158
Bituminous Materials Needle	129
Blaine Air Permeability Apparatus	167
Bottles, Wash	250
Bowls, Stainless Steel	320
Brass Air Meter Calibrator	147
Brass Cube Molds 2in	162, 163
Bristle Brush, Fine	260, 261
Bronze Cube Molds 2in	162, 163
Brovold Gyrotory Compactor	92, 93
Brush, Camel Hair (Set)	16, 323



Brushes16, 154, 292, 323
 Bucket Liner Sample Bags56, 95, 325
 Buffer Solution.....264
 Bulk Soil Processor242
 Bulk Splitters62, 63

C

Calcium Carbide Reagent78, 260, 261
 Calcium Carbonate Content Chamber.....246
 Calcium Chloride Solution.....72
 Calibration Weights for Balances290
 Calibrator Air Meter147
 California Bearing Ratio (CBR) Field Sets254
 California Bearing Ratio (CBR) Load Frames
200, 201
 California Fixed Chute Splitter54
 Camel Hair Brush Set.....16, 323
 Cap and Pedestal Sets
208, 209, 210, 211, 213, 214, 215
 Capping Compound Gray Iron144
 Capping Compound Melting Pots.....145
 Capping Neoprene Pads142
 Casagrande ASTM Metal Grooving Tool.....248
 Casagrande ASTM Plastic Grooving Tool248
 Cast Aluminum Slump Cone Base153
 Cast-Iron Concrete Cylinder Molds.....158
 CBR Cutting Edge202, 203
 CBR Field Jack, Three-Speed.....254
 CBR Field Jack, Two-Speed254
 CBR Load Frames200, 201
 CBR Molds202, 203, 238, 239, 241
 CBR Penetration Piston (Field)254
 CBR Penetration Pistons (Lab)202, 203
 CBR Soaking Tank202, 203
 CBR Spacer Discs.....202, 203
 CBR Support Rack.....202, 203
 CBR Surcharge Weights.....202, 203
 CBR Swell Plate202, 203
 CBR Swell Tripod with Dial Indicator.....202, 203
 CBR/LBR Component Set.....200, 201, 204
 CBR/LBR Data Acquisition Software 200, 201, 204
 Cement Autoclave.....164
 Cement Fineness Sieve.....168
 Centrifuge Bowl.....107, 108
 Centrifuge Extractors107
 Chace Air Indicator.....151
 Chapman Specific Gravity Flask81
 Chemical Resistant Vacuum Pump84, 98, 103
 Chipmunk Jaw Crushers294
 Chisel.....324
 Circular Paper Discs.....91, 94, 241
 Clamp-on Heater/Circulator171
 Clean-N-Weigh for Screen Trays48
 Cleveland Flash Tester127
 Closed-Head Coring Bits114, 196
 Coarse Aggregate Absorption81

Coarse Aggregate Angularity Apparatus.....75
 Coarse Aggregate Specific Gravity81
 Coarse Aggregate Void Content75
 Color Reference Chart.....77
 Color Reference Disk.....77
 Compact Field Scale150, 286
 Compaction Hammer for Granular Permeability 218
 Compaction Permeameters219
 Compaction Sample Extruder243
 Compaction Straightedge238, 239, 240
 Compression Machine Stand139
 Compressometer/Extensometers Test Set 134, 140
 Compressometers Test Set.....134, 140
 Concrete Air Meters146
Concrete and Cement Testing Equipment
132-196
 Concrete Beam Molds (Plastic).....160
 Concrete Beam Molds (Steel)160
 Concrete Beam Test Set134, 139
 Concrete Chace Indicator151
 Concrete Compression Machine Mounting Stand
139
 Concrete Compression Machines
136, 137, 138, 139, 140
 Concrete Compression Machines (Automatic)
132, 133, 134, 135
 Concrete Compression Steel Retainers142
 Concrete Compression Test Pads.....142
 Concrete Core Bits.....114, 196
 Concrete Core Puller115, 197
 Concrete Corrosion Mapping System.....183
 Concrete Crack Measurement Calipers176
 Concrete Crack Monitor.....174
 Concrete CTE System.....193
 Concrete Curing Box.....170
 Concrete Curing Room Controller.....172
 Concrete Curing Tanks.....171
 Concrete Cylinder Capping Stand143
 Concrete Cylinder Carrier.....159
 Concrete Cylinder End Grinders141
 Concrete Cylinder Molds (Cast-Iron).....158
 Concrete Cylinder Molds (Plastic).....158
 Concrete Cylinder Molds (Steel)158
 Concrete Cylinder Spacers134, 139
 Concrete Cylinder Wrap159
 Concrete Dial Penetrometer.....155
 Concrete Humidity Measurement Accessories...191
 Concrete Humidity Measurement Kits190
 Concrete Initial Set Penetrometer155
 Concrete Maturity Meters.....173
 Concrete Moisture and Humidity Meters193
 Concrete Pocket Penetrometer.....155
 Concrete Pressure Meter146
 Concrete Reference Thermometer.....311
 Concrete Resistivity Meter183
 Concrete Roll-A-Meter149
 Concrete Saw115, 197

Concrete Saw Blades.....115, 197
 Concrete Scoops16, 154, 292, 323
 Concrete Slump Equipment153, 154
 Concrete Test Hammers178, 179
 Concrete Thermal Expansion System193
 Concrete Vibrator for Consolidating Concrete....161
 Concrete Yield Field Scales.....150
 Consolidation Data Acquisition Software
230, 231, 232
 Consolidation Load Frame230
 Consolidation Table for Concrete.....161
 Consolidation Weight Sets226, 227, 232
 Consolidometers233
 Constant Head Permeameters218
 Constant Head Reservoir for Granular Permeability
218, 219
 Constant Temperature Viscosity Bath127
 Construction of Quality Asphalt Pavement Book
328
 Continuous Flow Screens50
 Continuous-Flow Filterless Centrifuge107
 Cool-Down Safety Cage for Asphalt Furnace105
 Core Drilling Machines114, 196
 Core Extractors115, 197
 Corrosion Mapping System.....183
 Crack Comparator, Economy174
 Crack Monitor Corner Adapter.....174
 Crack Monitor Plastic Measuring Pegs.....175
 Crack Monitor Plus.....174
 Crack Monitor Stainless Steel Discs175
 Crack Monitoring Kit175
 Crack Width Gauge.....174
 Crack Width Microscope.....176
 Crucibles, Porcelain321
 Crusher, Bico Badger294
 Crusher, Bico Chipmunk294
 Crusher, Hammermill.....296
 Crusher, Portable.....296
Crushers and Pulverizers.....294-300
 Cube & Prism Molds162, 163
 Cube Specimen Tamper163
 Cube Test Sets, 2in and 6in134, 139
 Curing Tank Circulator.....171
 Curing Tank Heater.....171
 Curing Tanks.....171
 Cylinder Capping Compound144
 Cylinder Carrier159
 Cylinder End Grinders141
 Cylinder Spacers for Compression Machines
134, 139
 Cylinder Test Sets.....134, 139
 Cylinder Transport Rack.....159
 Cylinder Wraps.....159

D

Data Logging Thermometer306, 315

Dead-Weight Consolidation Load Frame	232	Dual-Laser Infrared Thermometer	314	Flask, Iodine, Stopped	322	
Dead-Weight Direct Shear Machines	226	Dual-Mass Dynamic Cone Penetrometer	256	Flasks, Volumetric	252	
Deairing Tank	207, 208, 212, 216	Ductility Mold	128	Flexural Test Set	134, 139	
Deleterious Organic Test	77	Ductility Tester	128	Flex-Wall Permeability Cap and Pedestal Sets	213, 214, 215	
Deluxe Despatch Electric Bench Oven	272	Durability Index Agitator	71	Flex-Wall Permeability Control Panels	212	
Density Plate	259	Durability Index Washing Vessel	71	Flex-Wall Permeability Membranes	213, 214, 215	
Density Sand	259	Dynamic Cone Penetrometer (DCP)	256	Flex-Wall Permeability O-Rings	213, 214, 215	
Density Weighing Cradle	80, 100, 102	Dynamic Cone Penetrometer, Dual-Mass	256	Flex-Wall Permeability Porous Stones	213, 214, 215	
Density Weighing Hook	80, 100, 102	Dynamic Shear Rheometers (DSR)	124	Flex-Wall Permeability Test Cell Kits	213, 214, 215	
Desiccant Cartridges	324	E			Flex-Wall Permeability Test Cells	213, 214, 215, 216
Desiccator Plates	324	E11 Sieve Verification Services	19, 20, 21	FLIR Infrared Thermal Imaging Cameras	110, 111, 312, 313	
Desiccators	253	E11 Test Sieves	4, 5, 6, 7, 8, 9	Floating-Ring Consolidometers	233	
Desiccators, Scheibler	324	Electric Bench Oven	272	Floor Slab Concrete Humidity Measurement Kits	190	
Despatch Electric Bench Oven	272	Electric Core Drill	114, 196	Flow Cone (Grout)	166	
Dial Indicators	230, 231, 232, 237, 254	Electric Ranges	326	Flow Cone Orifice (Grout)	166	
Dial Support Bridge for CBR (Field)	254	Electroformed Sieves	11	Flow Cone Stand (Grout)	166	
Diamond Coring Bits	114, 196	Enclosed Splitters	55	Flow Tables	166	
Diamond Saw Blades	115, 197	Erlenmeyer Flask	322	Force Ductility Mold	128	
Digital Automatic Universal Penetrometer	129	Estwing Rock Hammer	324	Forced-Air Convection Bench Oven	269, 270, 271, 272, 273, 275	
Digital Caliper 12in	18, 141, 176	Evaporating Dishes, Porcelain	250, 324	Four-Channel Data Logging Maturity System	173	
Digital Caliper, 12in, Heavy-Duty	18, 141, 176	Excel Clean Extraction Solvents	109	Four-Channel Data Logging Thermometer	173, 306, 315	
Digital Caliper, 6in	18, 176	Expansion Index Consolidometer	234	Four-Channel Data Readout	204, 205, 225, 226, 230, 231, 232, 236	
Digital CBR/LBR Component Set	200, 201, 204	Extensions and Handles for Augers	265	Four-Channel Thermometer	307	
Digital Dead-Weight Direct Shear Machine	226	Eye Protection, Goggles	327	Four-Channel Traceable Alarm Timer	318	
Digital Dial Indicators	113, 230, 231, 232, 234, 237	EZ-Clean Slump Cone Base	153	Free Standing Manometer for Permeability	218, 219	
Digital Field Test Scale	287	F				
Digital Lab Timer	318	Face Shield	327			
Digital Manometer and Controller	99	Falling Head Permeameters	218			
Digital Pneumatic Direct Shear Machine	225	Field Curing Chest	159			
Digital Pressure Manometer	80, 100, 253	Field Jack, CBR, Three-Speed	254			
Digital Residual Pressure Manometer	80, 100, 253	Field Jack, CBR, Two-Speed	254			
Digital Soil Resistance Meter	263	Field Permeameter (Asphalt)	112			
Digital Soil-Cement Component Set	222, 223	Field Scale, Compact	286			
Digital Stopwatch	317	Field Scale, Digital	287			
Digital Thermometer	306, 307, 308, 309, 310	Field Scale, Surcharge Mass (Field CBR)	254			
Digital Thermometer/Timer	317	Field Scale, Surcharge Plate (Field CBR)	254			
Digital Timer	49	Filter Flask	322			
Digital Unconfined Compression Component Set	220, 221	Filter Paper	210, 211, 213, 214, 215			
Direct Shear Box Counterbalance	225, 226	Filter Paper Rings	107, 108			
Direct Shear Boxes	227	Filterless Centrifuge	107			
Direct Shear Weight Sets	226, 227, 232	Fine Aggregate Absorption	81			
Direct/Residual Shear Software	224, 225, 226	Fine Aggregate Angularity Apparatus	75			
Dispensing Melting Pot	125	Fine Aggregate Angularity Apparatus w/ Strike-Off	75			
Dispersion Cup, Baffled	251	Fine Aggregate Specific Gravity	81			
Disposable Cones for Penetrometer	256	Fine Aggregate Void Content	75			
Disposable Dust Masks	327	Finishing Trowel	154, 168			
Double Automatic Marshall Compactor	90	Fixed Chute Splitters	54			
Double Burner Propane Hot Plate	326	Fixed-Ring Consolidometers	233			
Double-Ring Infiltrometer	262	Flakiness Index Gauges	76			
Draindown Baskets	109	Flask Stoppers	252			
Drierite Granules	82, 83, 98, 101, 102	Flask, Erlenmeyer	322			
DSR Silicone Specimen Molds	124	Flask, Filter	322			
DSR, Dynamic Shear Rheometers	124	G				
Dual Range, Dial Surface Thermometer	308	Galvanized Iron Pans	320			
Dual Range, Large Dial Thermometer	308	Gardner Color Standards	77			
Dual Timer	318	Gasoline Crusher	296			
		Gasoline-Powered Core Drill	114, 196			
		Gauge Holder, Magnetic	254			
		Gauge Studs	164			
		General Lab Equipment	320-328			
		General Purpose Lab Thermometer	311			
		General Purpose Partial Immersion Thermometer	305			
		General Purpose Total Immersion Thermometer	305			
		Geosynthetic Direct Shear Machine	228			
		Geotechnical Classification Charts	258			
		Geotechnical Gauge	258			
		Geotechnical Software and Data Acquisition	235			
		Geotester	255			
		Gillmore Needle Apparatus	165			
		Gilson Aqua-Check Moisture Tester	78, 260			
		Gilson Automatic Concrete Compression Machines	132, 133, 134, 135			
		Gilson Concrete Air Meters	146			



Gilson Concrete Compression Machines
..... **132, 133, 136, 137**

Gilson Concrete Test Hammer **178, 179**

Gilson Enclosed Splitter **55**

Gilson Fixed Chute Splitters **54**

Gilson Gorilla Gauge **147**

Gilson Mechanical Soil Compactor..... **238**

Gilson Precision Splitters **58**

Gilson Quartermaster Splitter **56, 95**

Gilson Rice Shaker **82, 98**

Gilson Rolling Thin Film Oven (RTFO) **117**

Gilson Rotary Sifters **28, 29**

Gilson Silent Sifters **28, 29**

Gilson Silent Testing Screen **43**

Gilson Sonic Sifters **37, 38**

Gilson Spinning Riffles **60, 61**

Gilson Tapping Shakers **30-31**

Gilson Test Master **44**

Gilson Test Sieves **4-9**

Gilson Testing Screen..... **42-45**

Gilson Universal Splitters **52, 53, 55, 58**

Gilson Vibratory Shakers **35, 36**

Gilsonic Autosiever **37, 38**

Gilsonic Ultrasiever **37, 38**

Glass Bowls and Dish **321**

Glass Desiccators **253**

Glassware Cleaning Oven **116**

Gorilla Air Meter Gauge..... **147**

GP Industrial Balance..... **281**

Graded Standard Cube Test Sand **194**

Graduated Cylinder, Sand Equivalent **72**

Graduated Cylinders, Plastic..... **250**

Grain Size Chart **258**

Gralab Timer..... **318**

Granular Soil Permeameters **218**

Gravity Convection Lab Oven **271**

Gray Iron 9000 Capping Compound..... **144**

Grooving Tool, AASHTO..... **248**

Grooving Tool, Metal, Casagrande ASTM..... **248**

Grooving Tool, Plastic, Casagrande ASTM..... **248**

Ground Penetrating Radar (GPR)..... **185, 186**

Ground Penetrating Radar (GPR), Subsurface..... **187**

Grout Capping Compression Pads **169**

Grout Flow Cone **166**

Grout Flow Cone Orifices **166**

Grout Flow Cone Sets **166**

Grout Flow Cone Stand **166**

Grout Prism Capping Stand **169**

Grout Prism Steel Retainers..... **169**

Grout Prism Test Set **134**

Grout Sample Box (GSB)..... **168**

Grout Sample Box Fixture..... **168**

GSB, Grout Sample Box **168**

Gyratory Compactor..... **92, 93**

Gyratory Compactor Mold **92, 93, 94**

Gyratory Paper Discs **91, 94**

H

Hamburg Wheel Tracker..... **96, 97**

Hammermill Crusher..... **296**

Hand Penetrometer **255, 257**

Hand Trowel **154, 168**

Handbook, Aggregates **358**

Handbook, Asphalt..... **358**

Hand-Crank Disc Mill **299**

Hand-Operated Liquid Limit Machine..... **248**

Hard Rubber Tamper..... **163**

Hearing Protectors **327**

Heat Gun Driers..... **326**

Heat Resistant Gloves..... **105, 327**

Heavy-Duty Digital Caliper, 12in..... **141**

Heavy-Duty Masonry Saw..... **115, 197**

Heavy-Duty Oven Shelf..... **270**

Heavy-Duty Portable Mixer **130, 195**

Heavy-Duty Soil Pin for Soil Resistivity **263**

High Performance Rotational Viscometer
..... **120-123**

High-Capacity Balance **281, 284**

High-Capacity Direct Shear Bed of Screws..... **229**

High-Capacity Direct Shear Machine..... **228**

High-Capacity Direct Shear Porous Stone..... **229**

High-Capacity Ovens **274, 275**

High-Capacity Shear Box Adapters..... **229**

Hisol Plus Extraction Solvents **109**

Holmes Splitters **59**

Hot Plates..... **253, 326**

Hubbard-Carmick Specific Gravity Bottles... **81, 101**

Husqvarna Masonry Saws **115, 197**

Hybrid Max/Min Thermometer **305**

Hydraulic Fracturing Strength Test **134**

Hydraulic Sample Extruder..... **217**

Hydrometer Bath..... **251**

Hydrometer Test Components **251**

Hydrometer, Soil, ASTM 151H **251**

Hydrometer, Soil, ASTM 152H **251**

I

IDT Lottman Load Frame **86**

Ignition Furnace..... **104**

Ignition Furnace Sample Basket Assembly **105**

Ignition Furnace Starter Kit **105**

Impurities Test Bottle..... **77**

Indiana Flakiness Index Gauge **76**

Indicating Drierite Granules..... **83, 98, 102**

Indicator / Transducer Mounting Brackets..... **237**

Indirect Tensile Strength Breaking Head **86, 87**

Industrial Balance..... **284**

Industrial High-Capacity Balance..... **281**

Infiltrometer Field Set **262**

Infiltrometer, Double-Ring..... **262**

Infrared Thermal Imaging Cameras
..... **110, 111, 312, 313**

Infrared Thermometer..... **314**

Infrared/ Thermocouple Thermometer **314**

Infrared/ Thermocouple Traceable Thermometer **314**

Initial Set Penetrometer **155**

In-line Desiccant Dryer for air lines **83, 98, 102**

In-Place Density Accessory Kit **259**

Insulated Cooler for SG Pycnometer, 30qt..... **252**

Interlayer Shear Strength Fixture **86, 87**

Iodine Flasks, Stoppered..... **252**

ISO Sieve Verification Services **19-21**

ISO Test Sieves **10**

ISO Testing Screen Trays **47**

J

Jar Mill **300**

Jones Splitters **59**

J-Ring Slump-Flow Base Plate (SCC) **156**

J-Ring Slump-Flow Test (SCC) **156**

K

Kelway Soil Acidity and Moisture Tester **261**

Kelway Soil pH Acid Meter **261**

Kestrel 5200 Professional Environmental Meters
..... **315**

K-Slump Tester..... **155**

L

LA Abrasion Machine **68**

LA Abrasive Charge..... **68**

Lab Furnace **276**

Lab Oven..... **269, 270, 271, 272, 273, 275**

Lab Permeameter **112**

Lab Spoon and Spatula..... **325**

Labmill, Benchtop **300**

Laboratory Asphalt Permeameters..... **112**

Laboratory Disc Mill..... **299**

Laboratory Jaw Crusher..... **295**

Laboratory Mixers **130, 195**

Laboratory Muffle Furnaces **276**

Large Automatic Aggregate Washer **74**

Large Capacity Bench Oven **275**

Large Density Weighing Cradle **80, 100, 102**

Large Display Digital Stopwatch **317**

Large Display Thermometer **310**

Large Pycnometer **83, 98, 101**

Large Shelf Ovens **274**

Large Soil Box for Soil Resistivity **263**

Latex Membranes **208-211, 213, 214, 215**

L-Box for Self-Consolidating Concrete (SCC) **157**

LBR Cutting Edge..... **202, 203**

LBR Load Frames **200, 201**

LBR Molds..... **202, 203, 238, 239, 241**

LBR Penetration Pistons **202, 203**

LBR Soaking Tank **202, 203**

LBR Spacer Discs	202, 203	Marshall Software	86, 88	Neoprene Pads	142
LBR Support Rack	202, 203	Marshall Stability Digital Component Test Set	86, 88	Neoprene Stoppers	251, 322
LBR Surcharge Weights	202, 203	Marshall Stability Load and Flow Set	86, 88	NIST Class F Calibration Weights	290
LBR Swell Plate	202, 203	Mary Ann Sifter	39	NIST Portland Cement No.114q.....	168
LBR Swell Tripod with Dial Indicator	202, 203	Masonry Blades	115, 197	NIST Portland Cement, No. 46h.....	168
LBR/CBR Component Set, Analog	200, 201	Masonry Block Caps.....	169	NIST Reference Materials.....	20
LBR/CBR Component Set, Digital	200, 201, 204	Masonry Saw.....	115, 197	Nitrile Rubber Gloves	327
LBR/CBR Data Acquisition Software	200, 201, 204	Masonry Saw Blades	115, 197	Nold Deairing Tank	207, 208, 212
LeChatelier Specific Gravity Flask.....	81	Master Control Panel	207, 208, 212	Non-Mercury Concrete Reference Thermometer	305
Length Comparators	164	Material Handling Chute.....	64	Non-Mercury Thermometer.....	303, 304, 305
Length Gauge.....	76	Max/Min Memory Thermometer.....	305, 310, 311		
Light-Duty Stationary Mixer	130, 195	Max/Min Registering Thermometer.....	305, 311	O	
Lightweight Concrete Roll-A-Meter.....	149	Mechanical Agitators.....	81, 82, 98, 253	Odometer, Consolidation Frame	230
Limerock Bearing Ratio (LBR) Load Frames	200, 201	Mechanical Dial Indicator	230, 231, 232, 237	Ohaus Adventurer Precision Balance.....	288
Limit Roller	249	Mechanical Soil Compactor	238, 239	Ohaus Defender 5000 Bench Scale	282
Limit Roller Paper.....	249	Mega Density Weighing Cradle	80, 100, 102	Ohaus Digital Field Scale	287
Linear Variable Displacement Transducer	230, 231, 232, 236	Melting Pot	249	Ohaus Explorer Precision High-Capacity Balance	281
Liquid Limit Accessory Set.....	248	Melting Pot (Dispensing)	125	Ohaus Pioneer Precision Balance	289
Liquid Limit Machines	248	Melting Pots (Capping Compound)	145	Ohaus Ranger 7000 Compact Bench Scale	283
Liquid-in-Glass Mercury Thermometer	302	Membrane Stretchers.....	210, 211, 213, 214, 215	One-Piece Soil Sampler	265
Liquid-in-Glass Non-Mercury Thermometer	303, 304	Membranes	208, 209, 210, 211, 213, 214, 215	Open-Head Coring Bits.....	114, 196
Load and Displacement Readout Kits.....	236	Metal Can	78, 260, 261	Organic Impurities Test.....	77
Load Cell Buttons.....	236	Metal Grooving Tool	248	Original Schmidt Concrete Test Hammer....	178, 179
Load Frames	200, 206, 221, 222, 230, 232	Metal Sample Pans and Containers	64, 250, 320, 321	O-Ring Placing Tool.....	210, 211, 213, 214, 215
Load Rings	237, 254	Metal Traceable Thermometer.....	309	O-Rings	208, 209, 210, 211, 213, 214, 215
Loaded Wheel Tester.....	96, 97	Methylene Blue Reagent Solution	77	Oven Selection Guide	268
Long Soil Pin for Soil Resistivity	263	Methylene Blue Value Test.....	77	Ovens	268-276
Los Angeles Abrasion Machine.....	68	Microcrystalline Wax	249		
Los Angeles Abrasive Charge	68	Micro-Deval	69	P	
Lottman Breaking Head	86, 87	Micro-Deval Abrasive Charge.....	69	Pan, Stainless Steel.....	249
Low-Temp Lab Ovens	269	Micro-Deval Jar	69	PAV Specimen Pans.....	118
LVDT	230, 231, 232, 236	Mikro Air Jet Siever	40	PAV, Pressure Aging Vessel	118
		Mikro Air Jet Sieves	11	Peerless Gas Oven.....	274
		Mini-Crusher.....	299	Peltier Temperature Control Device for Viscosity	120, 121, 122, 123
		Mini-Pulverizer.....	299	Pendulum Skid Tester	79
M		Modified Soil Compaction Hammer, 10lb	240	Penetrometer, Static Cone	257
Magnesium Sulfate Soundness.....	70	Modified Vicat for False Set	165	Penetrometers.....	254, 255, 257
Magnetic Gauge Holder	254	Modulus of Elasticity (MOE) Test Set	134, 140	Permeability Cap and Pedestal Sets	213, 214, 215
Mallet, Rubber.....	149, 259, 324	MOE, Modulus of Elasticity Test Set	134, 140	Permeability Compaction Hammer	218
Manometer, Residual Pressure, Digital	80, 100, 253	Moisture Emission Test Kits	192	Permeability Membranes	213, 214, 215
Manual Compaction Hammers	240	Moisture Room Control Panel	172	Permeability O-Rings	213, 214, 215
Manual Concrete Compression Machines ..	136-140	Monel Shrinkage Dish	249	Permeability Porous Stones	213, 214, 215
Manual Flow Table.....	166	Morse Jaw Crusher	295	Permeability Test Cell Kits.....	213, 214, 215
Manual Marshall Compactor	90	Mortar and Pestle.....	250, 325	Permeability Test Cells	213, 214, 215
Manual Mortar Penetrometer	165	Motorized Disc Mill	299	Perpendicularity Verification Devices (PVD) 134, 140	
Manual Universal Penetrometer	129	Motorized Flow Tables	166	Pestle and Mortar.....	250
Mariotte Tube for Infiltrometer Test	262	Motorized Liquid Limit Machine.....	248	pH Acidity Meter.....	261
Marshall Breaking Head	86, 87	Muffle Furnaces.....	276, 277	pH Meters.....	264
Marshall Compactor.....	90	Munsell Soil Color Book.....	258	Phunque Specific Gravity Flasks.....	81
Marshall Data Acquisition Software	86, 88	Mylar Strips, Bending Beam Rheometer.....	119	Pi Measuring Tape.....	141
Marshall Load Frames.....	86			Pin Hole Dispersion Device	246
Marshall Molds.....	91				
Marshall Paper Discs.....	91, 94	N			
Marshall Sample Ejector	91	NCAT Asphalt Content Furnace	104		
		NCAT Asphalt Field Permeameter.....	112		



Pine Gyrotory Compactor.....**92, 93**

Plastic Air Meter Calibrator**147**

Plastic Cube Molds 2in**162, 163**

Plastic Cube Molds 6in**168**

Plastic Graduated Cylinders.....**250, 322**

Plastic Grooving Tool.....**248**

Plastic Limit Roller.....**249**

Plastic Round Sample Jars**260, 321**

Plastic Scoops**323**

Plastic Slump Cone**153**

Plastic Slump Cone Base**153**

Platinum RTD Data Logging Thermometer
.....**252, 306, 315**

Platinum RTD Thermometer.....**310**

Pneumatic Consolidation Load Frame.....**230**

Pneumatic Direct Shear Machines**225**

Pocket Copper-Plated Thermometer**305**

Pocket Dial Thermometer.....**308**

Pocket Digital Thermometer.....**308**

Pocket Geotester**255**

Pocket Penetrometer**255, 257**

Pocket Shear Vane Set.....**255**

Poisson's Ratio Test Set**134, 140**

Porcelain Crucibles**321**

Porcelain Evaporating Dish**250**

Pore Pressure Transducer w/ Deairing Block.....**216**

Pore Pressure Transducer w/ Digital Readout
.....**207, 208, 212, 213, 216**

Porous Stones**208, 209, 210, 211, 213, 214, 215**

Porta Screen Trays**46**

Porta Screen, Testing Screen**45**

Portable Balances**285, 286, 287, 289**

Portable Jaw Crusher.....**296**

Portable Masonry Saw**115, 197**

Portable Mixers**130, 195**

Portable pH Meter.....**264**

Portable Turbidity Meter.....**264**

Power-Solv Extraction Solvents.....**109**

Precision Balance.....**288, 289**

Precision Electroformed Sieves**11**

Precision High-Capacity Balance.....**281**

Precision Splitters**58**

Pressure Aging Vessel (PAV).....**118**

Pressure Control Panel for Triax and Permeability ...
.....**207, 208, 212**

Pressure Gauge, Aqua-Check.....**260, 261**

Pressure Manometer**80, 100, 253**

Pressure Meter for Concrete**146**

Prism Molds**164**

Proceq GP8000 Ground Penetrating Radar
.....**185, 186, 187**

Proceq Profometer Corrosion Meter**182**

Proceq Profometer Cover Meter**181**

Proceq Pundit Ultrasonic Pulse Velocity Testers
.....**184**

Proceq Rebar Locator and Covermeter**179, 180**

Proceq Resipod Concrete Resistivity Meter**183**

Proctor Density**238-245**

Proctor Molds**238, 239, 241**

Proctor Penetrometer Set.....**243**

Proctor Sample Ejector**91**

Proctor Sample Soil Processor**242**

Profometer Corrosion Meter.....**182**

Profometer Cover Meter**181**

Profoscope**179, 180**

Profoscope Plus**179, 180**

Propane Hot Plates**326**

Proportional Calipers.....**76**

Proppant Crush Testing Set**134**

Proving Rings**237**

Puck Mill.....**298**

Pull-Off Tester.....**188**

Pulp Density/Specific Gravity Scale.....**291**

Pulverizers**297, 298, 299**

Pumps, Vacuum**84, 98, 103, 253**

PumpSaver.....**99, 102**

Pundit Ultrasonic Pulse Velocity Testers**184**

PVD, Perpendicularity Verification Devices **134, 140**

Pycnometer**81, 83, 98, 101**

Pyro-Clean.....**116**

Pyrolytic Oven**116**

Q

Quadri Splitter**55**

Quartering Cloth**64**

Quartermaster Asphalt Bags**56, 95**

Quartermaster Buckets**56, 95**

Quartermaster Splitter**56, 95**

Quincy Lab Ovens.....**269, 270, 271**

R

Rapid Angle Measurement (RAM) Device **92, 93, 94**

Rapid Chloride Permeability Measuring Cell.....**189**

Rapid Chloride Permeability Tester.....**189**

Rebar Locator and Covermeter.....**179, 180**

Recalibration of Pressure Gauge.....**260**

Reference Library**328**

Reflux Extractors.....**109**

Relative Compaction Test Set.....**244**

Relative Density Apparatus**244**

Relative Density Mold Set**244**

Replaceable Mesh Wet Wash Sieves**13**

Replacement Plastic Sand Cone Jar**259**

Residual Pressure Manometer**80, 100, 253**

Resipod Concrete Resistivity Meter.....**183**

Reusable Cast-Iron Concrete Cylinder Molds.....**158**

Reusable Plastic Cylinder Molds.....**158**

Reusable Steel Concrete Cylinder Molds.....**158**

Rice Pycnometer**83, 98, 101**

Rice Shaker Agitator, Mechanical**82, 98, 253**

Rice Vacuum Pump**84, 98, 103, 253**

Ring & Ball Softening Point Apparatus.....**125**

Rock Schmidt Test Hammer**178, 179**

Rocker Screen set**50**

Roll-A-Meter.....**149**

Rolling Thin Film Oven (RTFO)**117**

Ro-Tap Sieve Shaker**32, 33**

Rotary Sifters**28, 29**

Rotational Viscometers**120, 121, 122, 123**

Round Sample Containers, Metal**250**

Round Shear Boxes**227**

RTD Thermometer.....**252, 306, 315**

RTFO Bottle Cooling Rack**117**

RTFO Bottle Scraper**117**

RTFO Bottle Tongs**117**

RTFO Bottle, Serial-Numbered**117**

RTFO, Rolling Thin Film Oven**117**

Rubber Mallet.....**149, 259, 324**

Rubber Stoppers.....**252**

Rubber Tip Pestle.....**250, 325**

S

Safety Equipment.....**327**

Safety Goggles.....**327**

SAM, Super Air Meter.....**148**

Sample Basket Assembly for NCAT Furnace**105**

Sample Bucket, Plastic, Square.....**321**

Sample Cans, Tinned, Round**321**

Sample Containers, Aluminum, Round**321**

Sample Containers, Round, Metal**250**

Sample Cup.....**260, 261**

Sample Ejectors**91, 243**

Sample Jars, Plastic, Round**260, 321**

Sample Pans and Containers.....**320, 321**

Sample Probes**65**

Sample Reducer 1/16th**57**

Sample Splitting Accessories**64**

Sample Splitting Pans**53, 54, 55, 56, 57, 58, 59**

Sample Tins.....**118**

Sampling Probes**65**

Sand Cone Density Apparatus**259**

Sand Cone Density Sand**194**

Sand Equivalent**72, 73**

Sand Equivalent Shakers**73**

Sand Gauge**258**

Saybolt Viscometer Bath.....**126**

Scale, A&D FG-K.....**285**

Scale, Adam CPW Plus.....**286**

Scale, Adam Cruiser.....**285**

Scale, Adam GBK.....**282**

Scale, Field.....**286**

Scale, Ohaus**287**

Scale, Ohaus Defender**282**

Scale, Ohaus Ranger 7000.....**283**

Scale, Pulp Density/ Specific Gravity.....**291**

Scale / Balance Selection Guide**280**

Scales and Balances.....**280-292**

SCB Load Frames**86**

SCB, Sample Preparation Saw	87	Slump Cone Base	153	Spinning Riffles	60, 61
SCB, Semi-Circular Bend Test Fixture	86, 87	Slump Cone Filling Funnel.....	154	Splitter Pans	53, 54, 55, 56, 57, 58, 59
SCC, L-Box for Self-Consolidating Concrete	157	Slump Cone Kits	152	Square Direct Shear Boxes	227
SCC, Passing Ability Set (J-Ring).....	156	Slump Tamping Rod	153, 161	Stainless Cube Molds, 2in.....	162, 163
SCC, Penetration Apparatus	155	Slump Test Set	152	Stainless Steel Air Meter Gauge.....	147
SCC, Slump-Flow Base Plate	156	Small Automatic Aggregate Washer.....	74	Stainless Steel Beakers.....	322
SCC, Static Segregation Column.....	157	Small Soil Box for Resistivity	263	Stainless Steel Measure for Coarse Aggregate.....	75
Schmidt Calibration Anvil	178	Small, Fine Bristle Brush	260, 261	Stainless Steel Pans.....	249, 320
Schmidt Hammer	178, 179	SmartPave DSR.....	124	Stainless Steel PAV Specimen Pans	118
Scoops	154, 291, 292	Sodium Hexametaphosphate.....	251	Stainless Steel Scoops.....	16, 292, 323
Scratch-A-Track Motion Monitor.....	176	Sodium Hydroxide (NaOH).....	77	Stainless Steel Straightedges	238, 239, 240
Screen Tray Brush	323	Sodium Sulfate Soundness	70	Standard Crack Monitor	174
Screening equipment	42-50	Softening Point Apparatus	125	Standard Ductility Mold.....	128
Screen Tray Storage Rack	49	Soil Box Test Leads.....	263	Standard Soil Compaction Hammer, 5.5lb.....	240
Screen Tray Verification Services	19, 20, 21	Soil Box, Large	263	Standard Test Sands.....	194
Screen Trays	46	Soil Box, Small	263	Standard Vicat.....	165
Scrub Brushes.....	16, 154, 292, 323	Soil Classification Kit.....	257	Starter Kit for NCAT Asphalt Content Furnace....	105
Sedimentation Cylinder	251	Soil Compaction Molds	238, 239, 241	Static Cone Penetrometer.....	257
Self-Consolidating Concrete Penetration (SCC)	155	Soil Density Volumeter	257	Static Segregation Column (SCC)	157
Semi-Circular Bend (SCB) Test Fixture	86, 87	Soil Dispersion Mixer.....	252	Steel Concrete Cylinder Molds.....	158
Seven Day Programmable Timer.....	270	Soil Grinder	242	Steel Cube Molds, 6in	168
Shear Box Counterbalance	225, 226	Soil Hydrometer, ASTM 151H	251	Steel Retainers for Neoprene Pads	142
Shear Vane Set.....	255	Soil Hydrometer, ASTM 152H	251	Steel Slump Cone	153
Shel Lab Oven.....	273	Soil Pin, Heavy-Duty for Resistivity	263	Step-Up/Step-Down Transformers	325
Shelby Tube Extruder	217	Soil Pin, Long for Resistivity	263	Stirring Apparatus Set	251, 252
Shelby Tube Permeameter	219	Soil Processor for Proctor Samples	242	Stirring Hot Plate	326
Shrinkage Limit Test Set.....	249	Soil Resistance Meter, Digital.....	263	Stock Solution	72
Shut-Down Timer	274, 275	Soil Resistivity Kit	263	Stoppered Iodine Flasks.....	252, 322
Sieve & Screen Tray Verification Services	19, 20, 21	Soil Resistivity Reel	263	Stopwatch, Digital	317
Sieve Cleaning Brushes	16, 292, 323	Soil Sample Ejector	91	Storage Racks For Sieves	14
Sieve Measurement Accessories	18	Soil Sampler, One-Piece.....	265	Straight Edge Trowel	163
Sieve Shaker Selection Guide	24, 25	Soil Specific Gravity	252, 253	S-Type Load Cells	236
Sieve Shakers.....	24 - 40	Soil Testing Equipment	200-254	Submersible Temperature Data Logger.....	316
Sieve Storage Racks	14	Soil Trimmer Top Platens.....	217	Sulfate Soundness Test.....	70
Sieve Verification Services	19-21	Soil Trimmers.....	217	Super Air Meter (SAM).....	148
Sieve Wet-Washing Accessories	17	Soil Unconfined Compression	220, 221	Super Pump Air Meter Pump for HM-30.....	147
Sieve, ASTM Testing Grade Wire Cloth	15	Soil-Cement Compaction Apparatus	245	Superpave Gyrotory Compactor	92, 93
Sieve, Polyester and Nylon Fabric	15	Soil-Cement Component Set.....	222, 223	Swiss Hammer	178, 179
Sieves.....	2-23	Soil-Cement Compressive Strength	222, 223	Swiss Hammer Calibration Anvil	178
Sieves, Nonmetallic Polycarbonate Frames	14	Soil-Cement Data Acquisition Software.....	222, 223	Swivel Platen, Soil-Cement	222
Sieving Accessories	18	Soil-Cement Dropping-Weight Compactor	245		
Sifters (Rotary)	28-29, 39	Soil-Cement Load Frames	222	T	
Silent Sifter	28-29	Soil-Cement Mold Set.....	245	Table Brush.....	16, 292, 323
Silent Sifter II	28-29	Sonic Sievers	37, 38	Tamping Rods, 3/8in and 5/8in	153, 161
Silicone Specimen Molds DSR.....	124	Sonic Sifter	37, 38	Tank and Drum for Slake Durability Device.....	247
Silver Schmidt Concrete Test Hammer	178, 179	Spatulas	75, 248, 249, 250, 325	Tank Circulator for Specific Gravity Tanks	80, 100, 102
Single Burner Heavy-Duty Propane Hot Plate	326	Specific Gravity & Absorption, Coarse Aggregate	81	Tank Heater for Specific Gravity Tanks	80, 100, 102
Single Cube Mold.....	168	Specific Gravity & Absorption, Fine Aggregate.....	81	Tapping Sieve Shakers	30, 31, 32, 33
Single Range, Large Dial Thermometer.....	308	Specific Gravity Bench.....	80, 100	Temperature and Humidity Data Logger	316
Single-Use Plastic Cylinder Molds.....	158	Specific Gravity Mold and Tamper	81	Temperature Chart Recorders	315
Sink Aspirator with Coupling.....	324	Specific Gravity Pycnometer	81	Temperature Data Logger.....	316
Skid Resistance	79	Specific Gravity Scales	291	Temperature, Timer Alarm	317
Slake Durability.....	71, 247	Specific Gravity Vacuum Pump	84, 98, 103, 253	Tensile Cylinder Splitting Sets.....	134, 139
Slake Durability Tank and Drum	247	Specimen Height Indicator.....	213	Test Cell Kits for Triax and Perm Cells	208, 209, 210, 211, 213, 214, 215
Slake Durability Wire Mesh Drums.....	247	Speedy 2000 Moisture Testers.....	261		
Slump Cone	152, 153	Speedy Moisture Aqua-Check	78, 260, 261		
		Splitters	52-66		



Test Hammer Calibration Anvil178

Test Master44

Test Sieves4, 5, 6, 7, 8, 9

Testing Screen42, 43, 44, 45

Testing Screen Accessories48, 49

Testing Screen Door Enclosure48

Testing Screen Hydraulic Conversion Kit49

Testing Screen Sound Enclosure48

Testing Screen Trays46

The Aggregates Handbook81, 328

The Asphalt Handbook.....328

Thermal Imaging Cameras110, 111, 312, 313

Thermocouple Probe.....307

Thermocouple Temperature Data Logger 307, 316

Thermocouple/ Infrared Thermometer310, 314

Thermolyne NCAT Asphalt Content Furnace104

Thermometers and Timers302–317

Thermometer Storage Rack304, 311

Thermometer Well311

Thermometer/Timer, Digital317

Thin Film Oven (RTFO)117

Three-Speed Field CBR Jack.....254

Timer, 12 Hour270

Timer/Temperature Alarm317

Timer/Thermometer, Digital317

Tinned Round Sample Containers321

Tongs.....324

Touch Screen Bending Beam Rheometer119

Touchscreen RTFO.....117

Toxic Interface Units.....216

Transformer325

Triaxial Cap and Pedestal Sets ...208, 209, 210, 211

Triaxial Control Panels.....207, 208

Triaxial Data Acquisition Software.....205, 206

Triaxial Load Frames206

Triaxial Membranes208, 209, 210, 211

Triaxial O-Rings208, 209, 210, 211

Triaxial Porous Stones208, 209, 210, 211

Triaxial Test Cell Kits.....208, 209, 210, 211

Triaxial Test Cells208, 209, 210, 211

Triple Automatic Marshall Compactor.....90

TSR Breaking Head86, 87

TSR Load Frames86

Turbidity Meter, Portable264

Two-Channel Data Readout
.....204, 205, 225, 226, 230, 231, 232, 236

Two-Channel Digital Readout Kits.....205, 206

Two-Part Compaction Molds
.....210, 211, 213, 214, 215

Two-Part Miter Boxes.....210, 211, 213, 214, 215

Two-Part Replaceable Mesh Sieves13

Two-Speed Field CBR Jack254

Tyler Rotap32–33

Type B Air Meter146

Type K or J Thermometers306

Type L Original Schmidt Concrete Test Hammer
.....178, 179

Type N Original Schmidt Concrete Test Hammer
.....178, 179

U

Ultra Class Calibration Weights.....290

Ultrasonic Pulse Velocity Testers.....184

Ultrasonic Sieve Cleaners22, 23

Unbonded Capping Pads142

Unconfined Component Set.....221

Unconfined Compressive Software.....220, 221

Unconfined Compressive Strength Load Frames
.....221

Unit Weight Measures151

Universal Penetrometer.....129

Universal Splitter52, 53, 55, 58

USB Temperature Data Loggers316

V

Vacuum Degassing Oven (VDO).....118

Vacuum Degassing Oven Sample Tins118

Vacuum Extractor.....108

Vacuum Lid for Small Aggregate Washer.....75

Vacuum Pump84, 98, 103, 253

Vacuum Pump Saver99, 102

Vacuum Regulators127

VDO, Sample Tins118

VDO, Vacuum Degassing Oven118

Vertical Cylinder Cappers.....143

Vibra-Pad Agitator, Mechanical.....81, 253

Vibrating Cup Pulverizer.....298

Vibrating Table.....161

Vibratory Sieve Shaker34, 35, 36, 39

Vicat165

Viscosity Chambers120, 121, 122, 123

Viscosity Spindles120, 121, 122, 123

Viscosity Systems (Asphalt)120, 121, 122, 123

Vitrobond Ingot Capping Compound.....144

Volumetair Air Meter149

Volumeter, Soil Density.....257

Volumetric Flasks81, 98, 101, 252, 322

W

Wall Mounted Manometer for Permeability 218, 219

Wash Bottles250, 325

Wash Drum for Large Aggregate Washer.....74

Wash Drum for Small Aggregate Washer.....74

Wash Sieves11, 12, 13

Water Tank and Drum Assembly247

Water Tank for Specific Gravity Bench 80, 100, 102

Waterproof Thermometer307, 310

Wax Melting Pot249

Wax, Microcrystalline249

Weigh-Below Hook.....281, 284, 285, 287, 288

Weighing/Handling Scoops.....292

Weight Sets226, 227, 232

Weighted Foot Assembly72

Weights, Balance Calibration290

Wet/Dry Sieve Vibrator39

Wet-Wash Sieves12

Wheel Tracker Molds96, 97

Wheel Tracker Wheels96, 97

Whitehouse Sieve Standards20

Windsor Pin Gold Probes.....177

Windsor Pin Silver Probes.....177

Windsor Probe Test System177

Wire Loop Brush.....16, 292, 323

Wire Mesh Drums for Slake Durability Device.....247

Wire Saw for Trimming Soil217

Wire Scratch Brush16, 323

Wireless Concrete Crack Data Logging174

Y

Yield Field Scales150

Yield Unit Weight Measures151

Z

Zeitfuchs® Cross-Arm Viscometers126

TERMS & CONDITIONS

Terms



These Terms and Conditions and the Confirmation of Order (collectively, "Terms") apply to all Gilson Company, Inc. ("Gilson") sales and shall take precedence over and supersede any terms and conditions which appear in Purchaser's order or in any documents incorporated by reference in Purchaser's order. No term or condition of Purchaser's order additional to or different from these Terms shall become part of the contract unless explicitly agreed to in writing by Gilson.

Domestic Orders: Net 30 days, FOB shipping point, subject to prior credit approval.

Export Orders: All payments shall be in US dollars by an acceptable irrevocable Letter of Credit, or wire transfer.

Interest will accrue on overdue amounts at 2% per month (or, if lower, the maximum amount permitted by law). We accept MasterCard, Visa, and American Express for all orders. Purchaser shall be responsible for all costs of collection including reasonable attorney's fees and court costs.

Pricing



Price lists are available on our website at globalgilson.com. All illustrations, specifications, and prices in our catalog and on our website are based on the latest information available at the time of publication and subject to change without notice. Models may be changed, improved, or discontinued at any time at Gilson's sole discretion. Prices are exclusive of, and Purchaser shall pay, all applicable federal, state, and local taxes, duties, and levies including sales, use, excise, value-added, and similar taxes and charges imposed by any taxing authority (other than taxes imposed on Gilson's income) related to Purchaser's order. For international orders, Purchaser shall pay all import and export and customs taxes, fees, and other similar charges.

Shipping/Delivery



Unless specified, Gilson will determine means of shipment. Shipping and handling fees are applied to all orders to compensate for packaging, shipping costs, and insurance. International orders require special handling fees to be calculated at the time of a quote or order. If Purchaser designates the carrier, title to and risk of loss for product passes to the Purchaser upon tender to the carrier at the shipping point. Shipping dates are approximate and are based upon receiving all necessary information from Purchaser. Gilson shall not be liable for failure or delays in manufacture or delivery due to causes beyond Gilson's control. In the event of such a delay, the delivery dates shall be deferred for a period equal to the time lost by reason of such delay. Gilson shall, where feasible, promptly advise Purchaser of the occurrence of such cause of its delay, and of its effect upon delivery. Title and right of possession to the products or shipments sold hereunder shall remain with Gilson until all payments hereunder (including deferred payments) shall have been made in full. Purchaser agrees to do all acts necessary to reflect and record such interest.

Claims



Items are shipped in new condition and packed to withstand normal shipping risks. The Purchaser is responsible to check all packages for damage or loss before accepting any shipment. Any damage or loss apparent from the shipping container must be noted on the bill of lading and Gilson must be notified by the Purchaser of the loss or damage within 5 business days of delivery. After 5 business days and in the absence of such notice, Purchaser is deemed to have accepted any shipment. Gilson is not responsible for damaged or lost items that have been accepted by the Purchaser. Concealed damage, where the box is in good condition but the product is missing or damaged, is an exception.

Returns



Equipment may not be returned to Gilson without a Return Goods Authorization (RGA) number which may be obtained by contacting our returns department at (800) 444-1508 or (740) 548-7298. RGAs must be requested within 30 days of delivery date. All returns are subject to a minimum 15% restocking fee. Items must be in new, unused condition and must be sent back in the original packaging including all manuals, power cords, software, and options to be eligible for return. Customers are responsible for all shipping charges when returning an item. Returns sent COD will not be accepted. After your return has

been received, inspected, and approved for a refund, a credit will be issued minus any applicable restocking fees, freight charges, and handling fees. Damage resulting from improper packing of returned items is solely the customer's responsibility. Please Note: Certain items such as cut-to-size screen cloth and other special order products are nonreturnable.

Liability and Purchaser Indemnity



Use of Gilson products may involve hazardous procedures and materials. Our descriptions of items do not proclaim to address all of the safety issues involved with their use. The user is solely responsible for using these products in a safe and responsible manner as outlined in the appropriate published test procedures, operating instructions, warning labels, and applicable regulatory requirements. Gilson shall not be liable for and Purchaser assumes all risk of any advice or failure to provide advice by Gilson regarding the products or Purchaser's use of the same. Gilson shall have no responsibility for any particular application made of any product. Purchaser agrees to indemnify and hold Gilson harmless from and against any costs, losses, liabilities, and expenses (including reasonable attorney's fees) arising out of third-party claims related to Purchaser's use of Gilson products.

Warranty



Gilson warrants that the products supplied are suitable for the standard purpose for which they are designed. These products are warranted to be free of defects in materials and workmanship for a period of one (1) year from the date of original shipment and any claim must be submitted within such period. This warranty excludes damage from or repairs necessitated by neglect, abuse, normal wear and tear, use of the equipment for other than its intended purpose or other than under normal operating conditions, alterations or modifications, repairs attempted by anyone other than Gilson, and any failure to comply with installation, maintenance, or operating instructions. Also excluded are damages caused by lightning strikes, floods, electrical supply irregularities, or other occurrences beyond our control. Purchaser may be required to establish that the product has not been altered or modified and has been properly installed, maintained, and operated within the limits of rated and normal use. Products may not be returned to Gilson for warranty repair or replacement without obtaining a Returns Goods Authorization (RGA) number. If Gilson determines in its sole discretion that the product is defective and is covered by this warranty, Gilson's sole obligation, and Purchaser's sole and exclusive remedy, is the repair or replacement of the product by Gilson in Gilson's discretion. Gilson will not be responsible for labor charges or other expenses associated with a repair of a defective item (e.g., to reinstall a repaired or replaced part). Additional Third Party Manufacturer warranties are honored and passed through when applicable. Purchaser's sole and exclusive remedy for any defect covered by the warranty shall be as set forth in this section. This exclusive remedy shall not have failed of its essential purpose (as that term is used in the Uniform Commercial Code). Purchaser specifically acknowledges that Gilson's price for the products is based upon the limitations of Gilson's liability as set forth in these terms. These limitations of liability shall survive any finding that the exclusive remedy failed of its essential purpose.

DISCLAIMER. THE FOREGOING WARRANTY IS IN LIEU OF ALL OTHER REPRESENTATIONS AND WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. GILSON'S LIABILITY WHETHER UNDER THESE TERMS OR OTHERWISE RELATING TO THE SALE OR USE OF THE PRODUCTS IS LIMITED TO THE AMOUNT RECEIVED FROM CUSTOMER. UNDER NO CIRCUMSTANCES SHALL GILSON BE LIABLE FOR CONSEQUENTIAL, SPECIAL, INDIRECT, INCIDENTAL, LIQUIDATED, OR PUNITIVE DAMAGES.

Governing Law



This sale and these Terms are governed by Ohio law without regard to choice of law rules. The parties agree that certain material events, occurrences, and transactions relating to the sale of the products bear a reasonable relationship to the State of Ohio. The State and Federal district courts located in Columbus, Ohio shall have exclusive jurisdiction and venue in any action or proceeding arising out of or relating to this sale or these Terms. The parties hereto irrevocably consent to the exclusive personal jurisdiction of such courts and to such venue and expressly waive any right to a trial by jury. For international sales, the parties hereby agree that the United Nations Convention on the International Sale of Goods does not apply to this sale or these Terms. Gilson shall be entitled to recover its fees and costs (including attorney's fees) in collecting any amounts due from Purchaser.



Gilson Company, Inc. boasts more than 80 years **EXPERIENCE** in developing and manufacturing materials testing equipment. Our **EXPERTISE** in the industry and **EXCELLENCE** in customer service and technical support make us stand out above the rest.

Check out our website at globalgilson.com for our complete line of products. Find detailed descriptions, prices, and high-res product images. Easily place an order with just a few clicks.



BLOG POST



Each month Gilson offers an in-depth look at a specific topic with commentary from the experts on testing methods, techniques, and equipment that you use every day.

CONNECT



Follow Gilson Company, Inc. on your favorite social media or subscribe to our newsletter to stay connected and up to date. Find our pages on Facebook, Twitter, YouTube, Instagram, and LinkedIn.

VIDEOS



Our video library houses over 250 videos and is another resource to help you adjust, calibrate, maintain, troubleshoot, or repair your equipment. You can also find videos focusing on product demonstrations or side-by-side comparisons.

RESOURCES



You have questions, we have answers. View 360° photos, download product manuals, live chat with our Technical Support and Customer Service teams, and much more at globalgilson.com.

Ask the Experts at globalgilson.com